

HIGH-SPEED AND HIGH OPERATING VOLTAGE OPERATIONAL AMPLIFIER


■ GENERAL DESCRIPTION

The NJM2727 is a high-speed, high operating voltage single operational amplifier.


With 300V/μs slew rate, 40MHz unity gain bandwidth and 4mV input offset voltage the NJM2727 offers high performance.

The NJM2727 operates on ±15V power supply for systems requiring large voltage swings, such as industrial equipment.

■ PACKAGE OUTLINE



NJM2727D



NJM2727E


■ FEATURES

•Operating Voltage	± 4.5V to ± 18V
•Input Offset Voltage	$V_{IO}=4\text{mV max.}$
•Output Voltage	± 12V typ. (at $R_L=500\Omega$ $V^+/V^-=\pm 15\text{V}$)
•Unity Gain Bandwidth	40MHz typ.
•High Slew Rate	300V/μs typ. (at $R_L=500\Omega$ $V^+/V^-=\pm 15\text{V}$)
•Bipolar Technology	
•Package Outline	NJM2727D DIP14 NJM2727E EMP14

■ Application

- Active Filters
- ADC/DAC Buffers
- Line Drivers, Cable Drivers
- Pulse Amplifiers
- Ultrasound Amplifiers

■ PIN CONFIGURATION

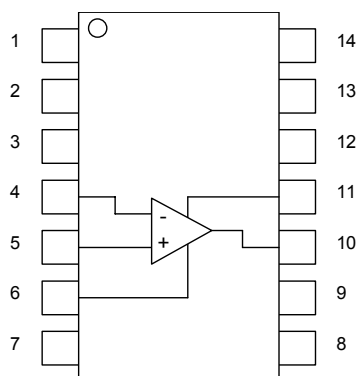

NJM2727D
NJM2727E

PIN FUNCTION

1. NC	8. NC
2. NC	9. NC
3. NC	10. OUTPUT
4. -INPUT	11. V^+
5. +INPUT	12. NC
6. V^-	13. NC
7. NC	14. NC

■ABSOLUTE MAXIMUM RATINGS


PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V^+ / V^-	± 20	V
Differential Input Voltage Range	V_{ID}	± 6	V
Common Mode Input Voltage Range	V_{ICM}	± 20 (Note 1)	V
Power Dissipation	P_D	1300 [DIP8] 900 [EMP8] (Note 2)	mW
Operating Temperature Range	T_{opr}	$-40 \sim +75$	$^{\circ}\text{C}$
Storage Temperature Range	T_{stg}	$-50 \sim +150$	$^{\circ}\text{C}$

(Note 1) For supply Voltages less than $\pm 20\text{V}$, the maximum input voltage is equal to the Supply Voltage.

(Note 2) On a PCB (76.2×114×31.6mm, two layers, FR-4)

(Note 3) Do not exceed "Power dissipation: P_D " in which power dissipation in IC is shown by the absolute maximum rating. Refer to following Figure 1 for a permissible loss when ambient temperature (T_a) is $T_a \geq 25^{\circ}\text{C}$.

Figure1 : Power Dissipation vs. Ambient Temperature

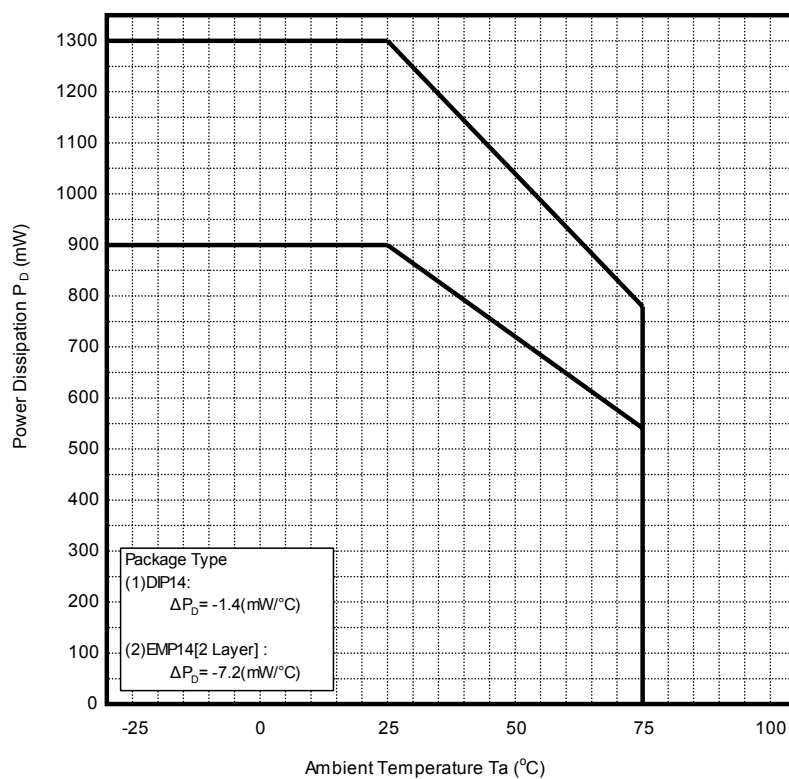

■RECOMMENDED OPERATING CONDITION ($T_a = 25^{\circ}\text{C}$)

PARAMETER	SYMBOL	RATING	Min.	Typ.	Max.	UNIT
Operating Voltage	V^+ / V^-		± 4.5	± 15	± 18	V

■ELECTRIC CHARACTERISTICS

●DC CHARACTERISTICS ($V^+/V^- = \pm 15V$, $T_a = 25^\circ C$)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Supply Current	I_{CC}	No Signal	-	10	13	mA
Input Offset Voltage	V_{IO}	$R_s = 50\Omega$, $R_F = 50k\Omega$	-	1	4	mV
Input Bias Current	I_B	$R_B = 500\Omega$	-	10	30	μA
Input Offset Current	I_{IO}	$R_B = 500\Omega$	-	0.2	1.2	μA
Large Signal Voltage Gain	A_V	$R_L = 2k\Omega$, $V_O = \pm 5V$	60	66	-	dB
Common Mode Rejection Ratio	CMR	$-11V \leq V_{ICM} \leq +11V$	80	100	-	dB
Supply Voltage Rejection Ratio	SVR	$V^+ / V^- = \pm 4.5V \sim \pm 18V$	70	80	-	dB
Maximum Output Voltage1	V_{OM1}	$R_L = 500\Omega$ (Note 3)	± 11	± 12	-	V
Maximum Output Voltage2	V_{OM2}	$R_L = 150\Omega$ (Note 3)	-	± 3	-	V
Input Common Mode Voltage Range	V_{ICM}	CMR $\geq 80dB$	± 11	± 12	-	V

●AC CHARACTERISTICS ($V^+/V^- = \pm 15V$, $T_a = 25^\circ C$)


PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Unity Gain Frequency	f_T	$A_V = 40dB$, $R_F = 1.98k\Omega$, $R_G = 20\Omega$ $R_L = \infty$, $C_L = 5pF$	-	40	-	MHz
Phase Margin	ϕ_M	$A_V = 40dB$, $R_F = 1.98k\Omega$, $R_G = 20\Omega$ $R_L = \infty$, $C_L = 5pF$	-	60	-	deg
Equivalent Input Noise Voltage	V_{NI}	$A_V = 40dB$, $R_F = 1.98k\Omega$, $R_G = 20\Omega$ $R_L = \infty$, $C_L = 5pF$, $f = 100kHz$	-	14	-	nV/ $\sqrt{Hz}$

●TRANSIENT CHARACTERISTICS ($V^+/V^- = \pm 15V$, $T_a = 25^\circ C$)


PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Slew Rate1	SR1P	Gain = +1, $R_F = 0\Omega$, $R_G = \infty$ $R_L = 500\Omega$, $C_L = 5pF$, $V_{IN} = 10V_{pp}$	-	300	-	V/ μs
	SR1N	Gain = -1, $R_F = 1k\Omega$, $R_G = 1k\Omega$ $R_L = \infty$, $C_L = 5pF$, $V_{IN} = 10V_{pp}$	-	300	-	V/ μs
Slew Rate2	SR2P	Gain = +1, $R_F = 0\Omega$, $R_G = \infty$ $R_L = 500\Omega$, $C_L = 5pF$, $V_{IN} = 1V_{pp}$	-	100	-	V/ μs
	SR2N	Gain = -1, $R_F = 1k\Omega$, $R_G = 1k\Omega$ $R_L = \infty$, $C_L = 5pF$, $V_{IN} = 1V_{pp}$	-	100	-	V/ μs
Differential Gain	DG	$A_V = 6dB$, $R_F = 2k\Omega$, $R_G = 2k\Omega$, $R_L = 150\Omega$, $C_L = 5pF$, $V_{IN} = 1V_{pp}(NTSC)$	-	0.09	-	%
Differential Phase	DP		-	0.64	-	deg

■ TYPICAL CHARACTERISTICS


Supply Current vs. Supply Voltage
 $V_{IN}=0V$, $T_a=25^\circ C$

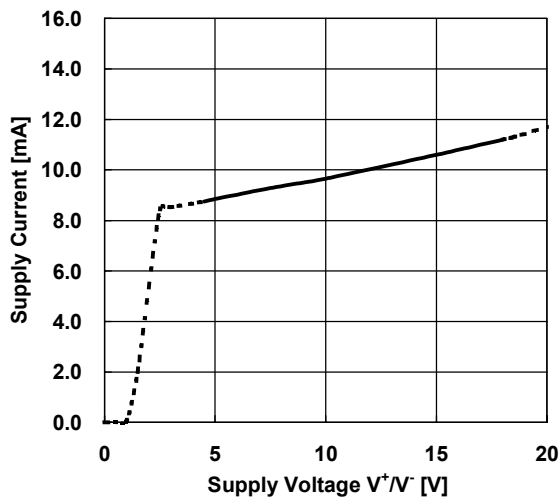


Supply Current vs. Ambient Temperature
 $V_{IN}=0V$

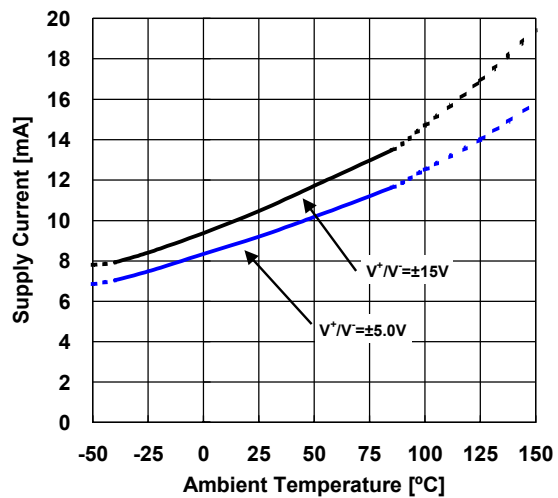


Input Offset Voltage
vs. Common Mode Input Voltage
 $V^+/V^- = \pm 15V$, $T_a = 25^\circ C$

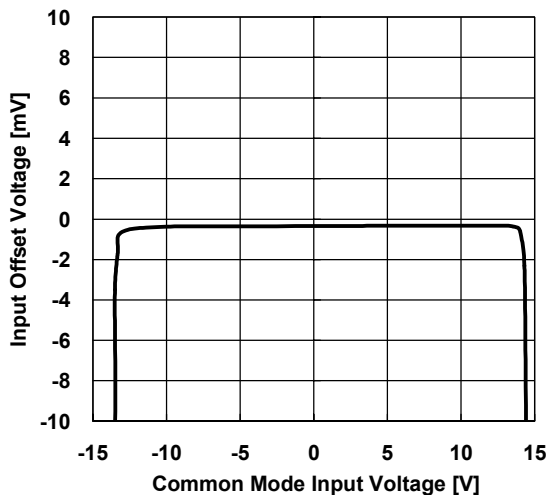

Input Offset Voltage
vs. Common Mode Input Voltage
 $V^+/V^- = \pm 5V$, $T_a = 25^\circ C$

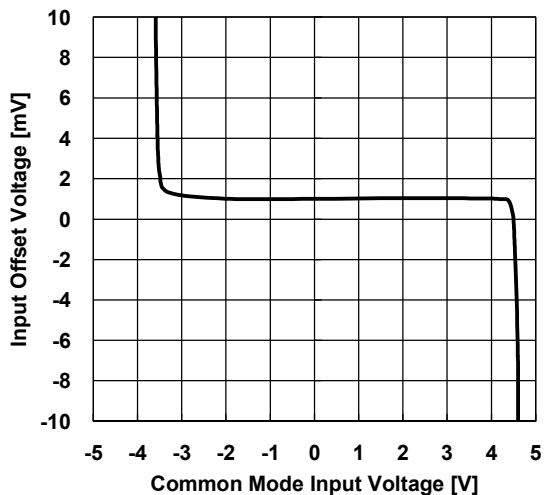


Input Offset Voltage vs. Ambient Temperature
 $V^+/V^- = \pm 5/\pm 15V$

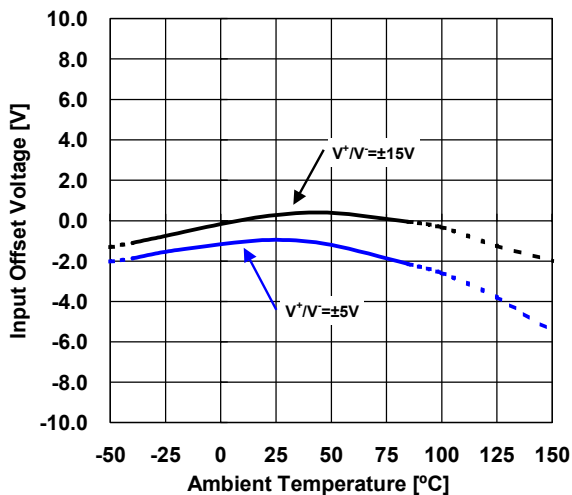


TYPICAL CHARACTERISTICS


Input Offset Current vs. Ambient Temperature
 $V^+ / V^- = \pm 15V$

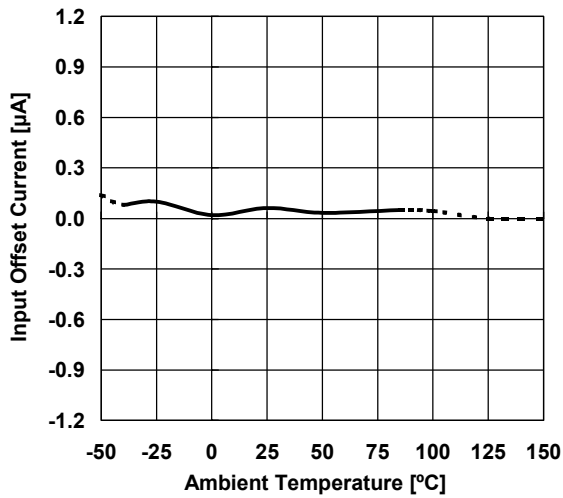


Input Bias Current vs. Ambient Temperature
 $V^+ / V^- = \pm 15V$

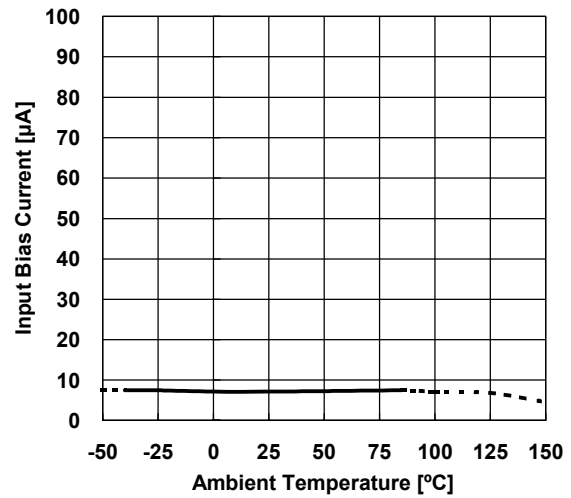


Common Mode Input Voltage vs. Supply Voltage
 $CMR \geq 80dB$, $T_a = 25^\circ C$

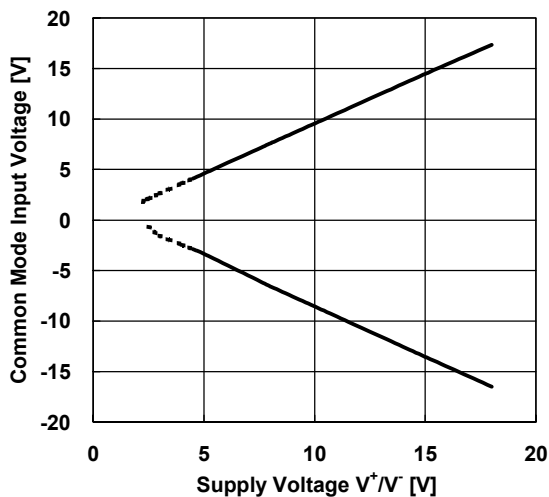


Voltage Gain vs. Ambient Temperature
 $V^+ / V^- = \pm 15V$, $R_L = 2k\Omega$

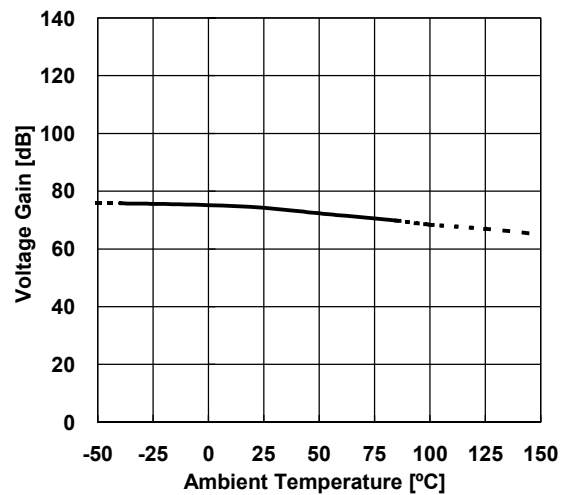

Common Mode Rejection Ratio vs. Ambient Temperature
 $V^+ / V^- = \pm 15V$, $-15V \leq V_{ICM} \leq +12.5V$

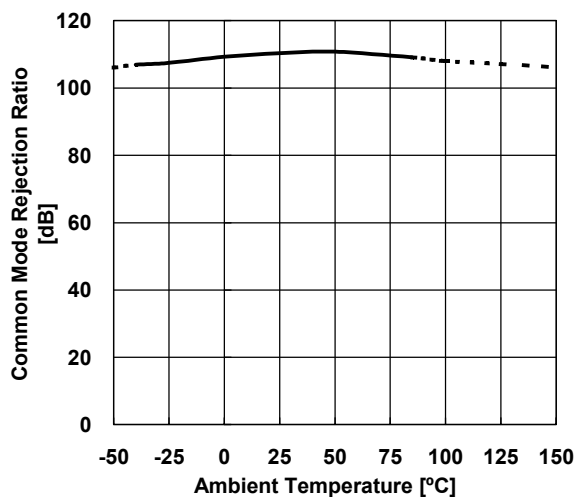


Supply Voltage Rejection Ratio vs. Ambient Temperature
 $V^+ / V^- = \pm 2.5V$ to $\pm 15V$

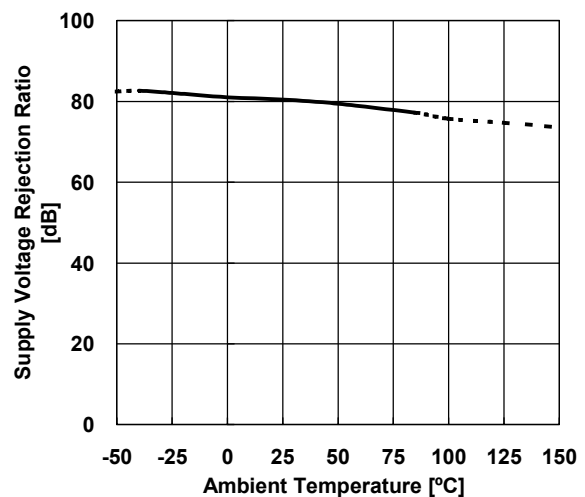


■ TYPICAL CHARACTERISTICS


Maximum Output Voltage vs. Supply Voltage
 $T_a=25^\circ\text{C}$

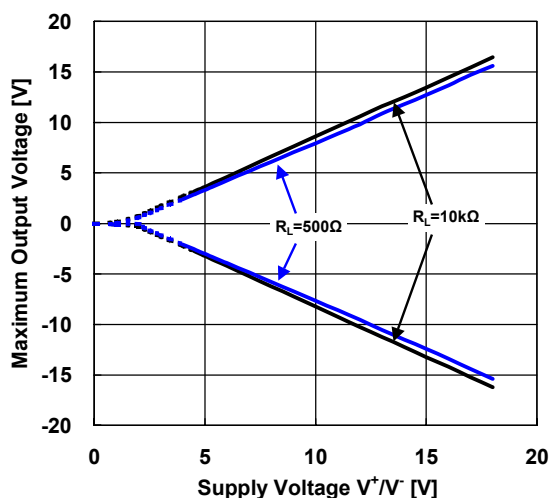


Maximum Output Voltage vs. Ambient Temperature
 $V^+/V^-=\pm 15\text{V}$, $G_v=\text{open}$, $V_{IN}=\pm 1\text{V}$, $R_L=10\text{k}\Omega$

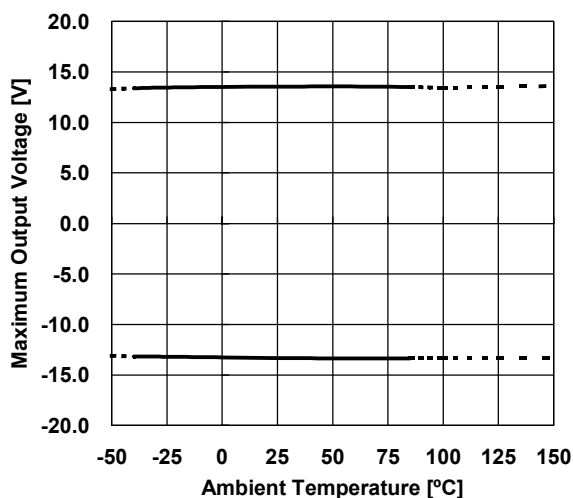


Maximum Output Voltage vs. Load Resistance
 $V^+/V^-=\pm 15\text{V}$, $T_a=25^\circ\text{C}$

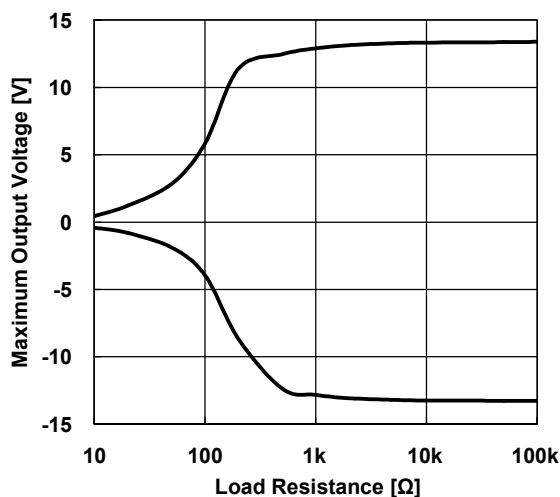


Maximum Output Voltage vs. Load Resistance
 $V^+/V^-=\pm 5\text{V}$, $T_a=25^\circ\text{C}$

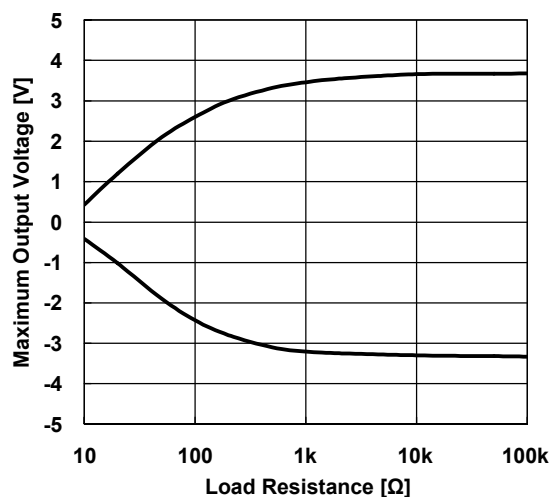

Gain/Phase vs. Frequency (Load Capacitance)
 $V^+/V^-=\pm 15\text{V}$, $V_{IN}=0.02\text{V}_{pp}$, $G_v=40\text{dB}$, $R_I=50\Omega$,
 $R_F=1.98\text{k}\Omega$, $R_G=20\Omega$, $C_F=0\text{F}$, $R_L=500\Omega$, $T_a=+25^\circ\text{C}$

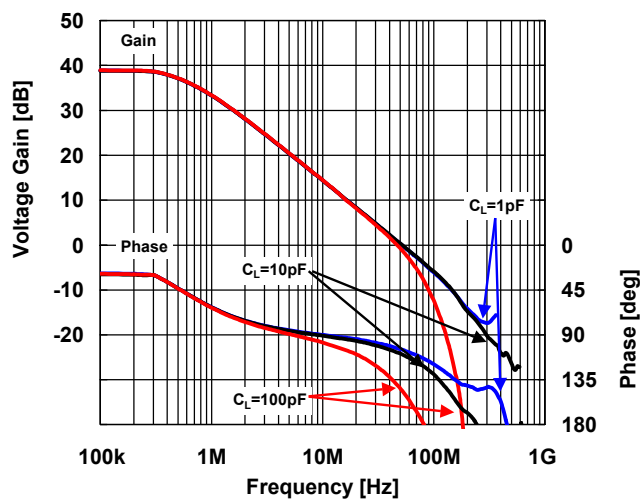


Gain/Phase vs. Frequency (Ambient Temperature)
 $V^+/V^-=\pm 15\text{V}$, $V_{IN}=0.02\text{V}_{pp}$, $G_v=40\text{dB}$, $R_I=50\Omega$,
 $R_F=1.98\text{k}\Omega$, $R_G=20\Omega$, $C_F=0\text{F}$, $C_L=10\text{pF}$, $R_L=500\Omega$

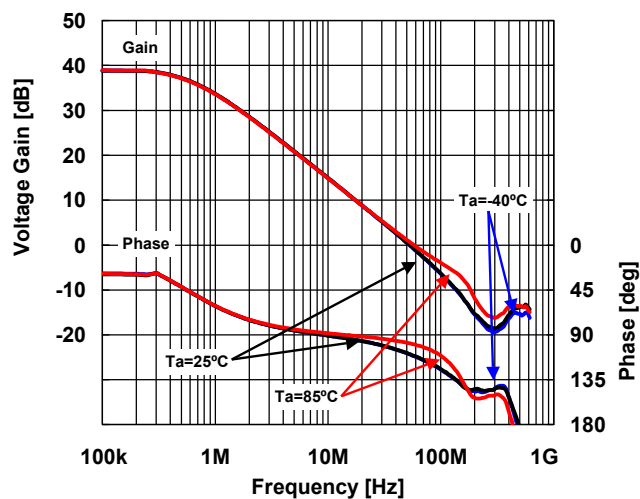

TYPICAL CHARACTERISTICS


V.F. Peak vs. Frequency (Load Capacitance)

$V^+ / V^- = \pm 15V$, $V_{IN} = 0.02V_{pp}$, $G_V = 0dB$, $R_I = 50\Omega$,
 $R_F = 0\Omega$, $R_G = \text{open}$, $C_F = 0F$, $R_L = 500\Omega$, $T_a = +25^\circ C$

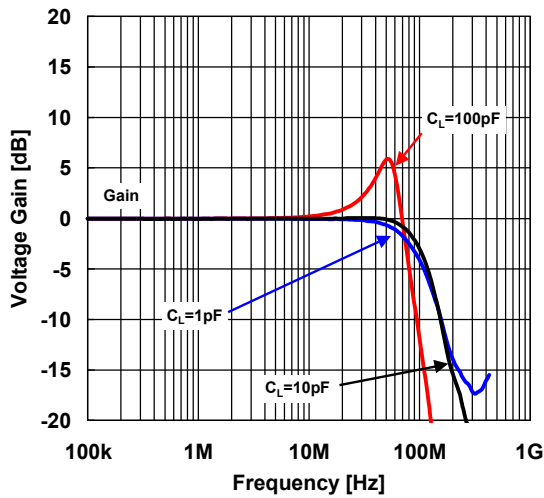


V.F. Peak vs. Frequency (Ambient Temperature)

$V^+ / V^- = \pm 15V$, $V_{IN} = 0.02V_{pp}$, $G_V = 0dB$, $R_I = 50\Omega$,
 $R_F = 0\Omega$, $R_G = \text{open}$, $C_F = 0F$, $C_L = 10pF$, $R_L = 500\Omega$

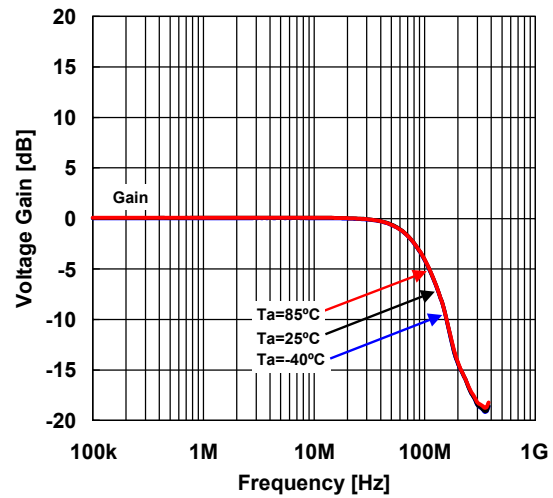


Pulse Response

(Non Inverting Configuration, Large Signal)
 $V^+ / V^- = \pm 15V$, $f = 2.5MHz$, $V_O = 10V_{pp}$, $G_V = 0dB$, $R_I = 50\Omega$,
 $R_F = 0\Omega$, $R_G = \infty$, $R_L = 500\Omega$, $C_L = 10pF$, $T_a = +25^\circ C$

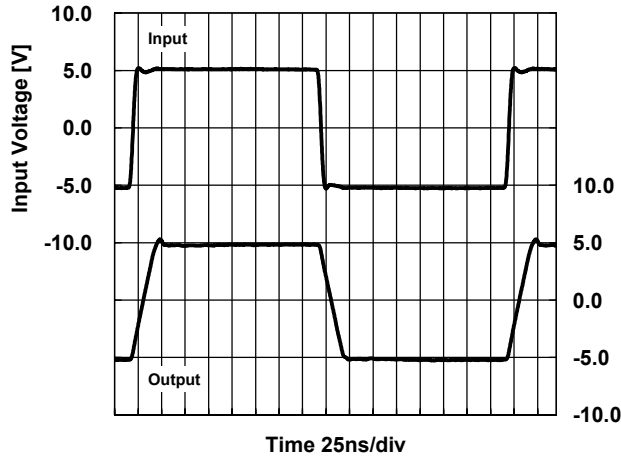


Pulse Response

(Inverting Configuration, Large Signal)
 $V^+ / V^- = \pm 15V$, $f = 2.5MHz$, $V_O = 10V_{pp}$, $G_V = 0dB$, $R_I = 56\Omega$,
 $R_F = 1k\Omega$, $R_G = 1k\Omega$, $R_L = 1k\Omega$, $C_L = 10pF$, $T_a = +25^\circ C$

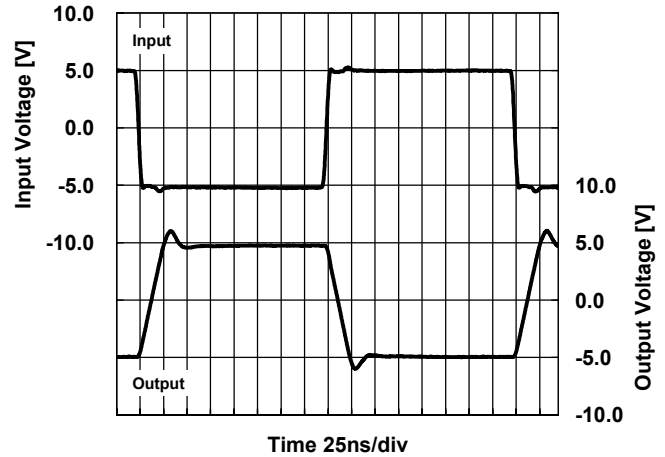


Pulse Response

(Non Inverting Configuration, Small Signal)
 $V^+ / V^- = \pm 15V$, $f = 2.5MHz$, $V_O = 1V_{pp}$, $G_V = 0dB$, $R_I = 50\Omega$,
 $R_F = 0\Omega$, $R_G = \infty$, $R_L = 500\Omega$, $C_L = 10pF$, $T_a = +25^\circ C$

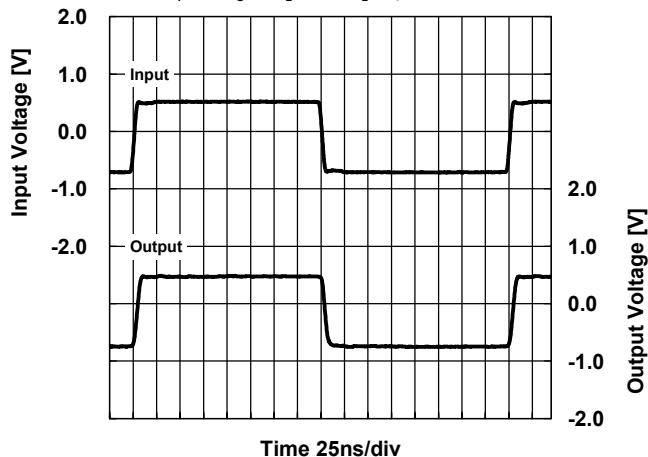

Pulse Response


(Inverting Configuration, Small Signal)
 $V^+ / V^- = \pm 15V$, $f = 2.5MHz$, $V_O = 1V_{pp}$, $G_V = 0dB$, $R_I = 56\Omega$,
 $R_F = 1k\Omega$, $R_G = 1k\Omega$, $R_L = 1k\Omega$, $C_L = 10pF$, $T_a = +25^\circ C$

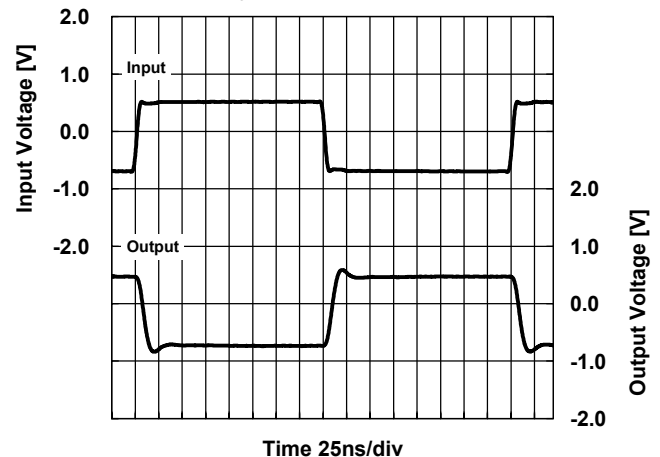

TYPICAL CHARACTERISTICS

Equivalent Input Noise Voltage vs. Frequency

$V^+/V^- = \pm 15V$, $V_{IN} = 50\Omega$ to GND, $G_V = 40dB$, $R_S = 50\Omega$,
 $R_F = 1.98k$, $R_G = 20\Omega$, $R_L = \infty$, $C_L = 0pF$, $T_a = 25^\circ C$

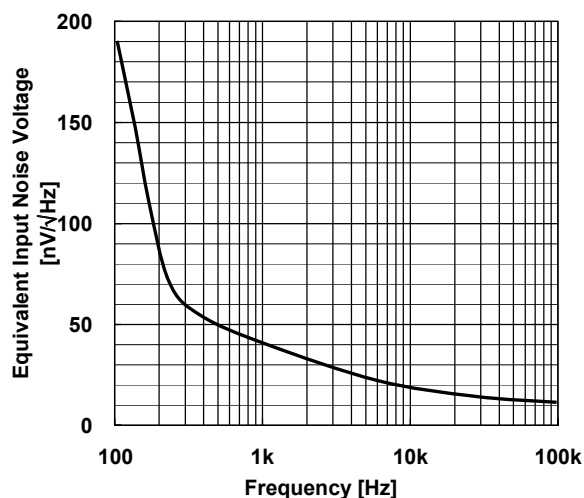

TEST CIRCUITS

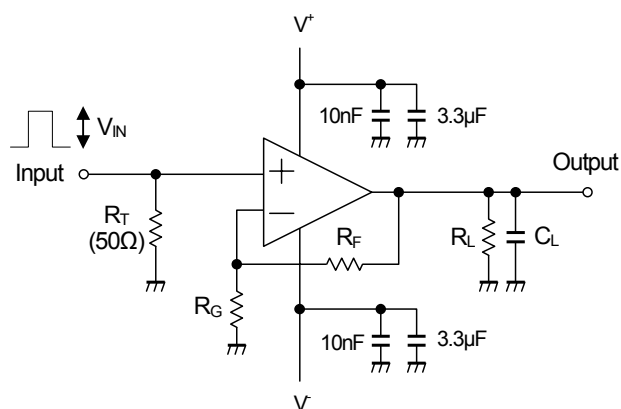


Figure 2 - 1: Slew Rate Test Circuit (Non Inverting)

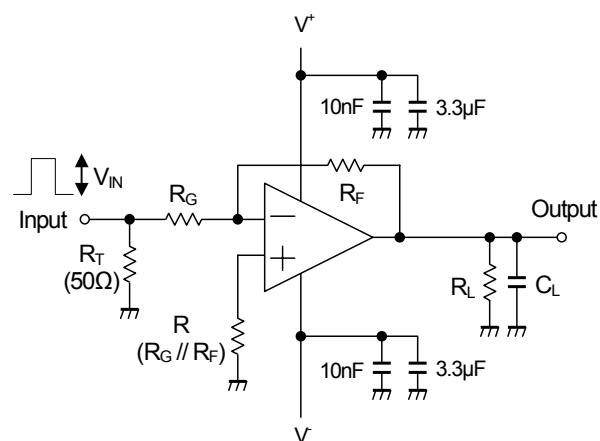


Figure 2 - 2: Slew Rate Test Circuit (Inverting)

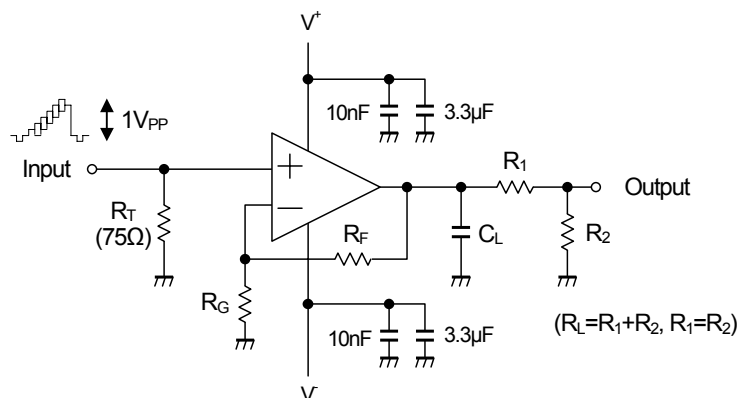


Figure 2 - 3: DG / DP Test Circuit

[CAUTION]

The specifications on this data book are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this data book are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NJR:](#)

[NJM2727D](#)