



SAW Components

Data Sheet B4542

Data Sheet



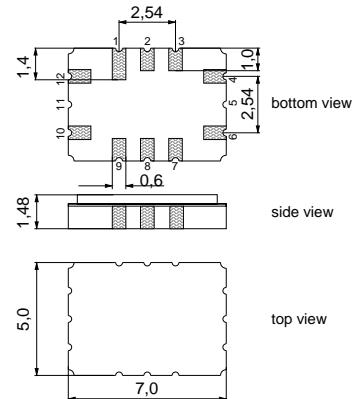
SAW Components
B4542
Low-Loss Filter
110,59 MHz
Data Sheet

Ceramic package QCC12C
Features

- Low-loss IF filter for cordless application
- Channel selection in DECT system
- Ceramic package for **Surface Mounted Technology (SMT)**

Terminals

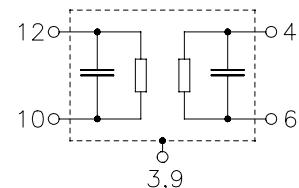
- Ni, gold-plated



Dimensions in mm, approx. weight 0,23 g

Pin configuration

12	Input
10	Input ground or balanced input
6	Output
4	Output ground or balanced output
3, 9	Case – ground
1, 2, 7, 8	To be grounded



Type	Ordering code	Marking and Package according to	Packing according to
B4542	B39111-B4542-H310	C61157-A7-A95	F61074-V8170-Z000

Electrostatic Sensitive Device (ESD)
Maximum ratings

Operable temperature range	T	- 40/+ 85	°C	
Storage temperature range	T_{stg}	- 40/+ 85	°C	
DC voltage	V_{DC}	0	V	
Source power	P_s	10	dBm	

SAW Components
B4542
Low-Loss Filter
110,59 MHz
Data Sheet

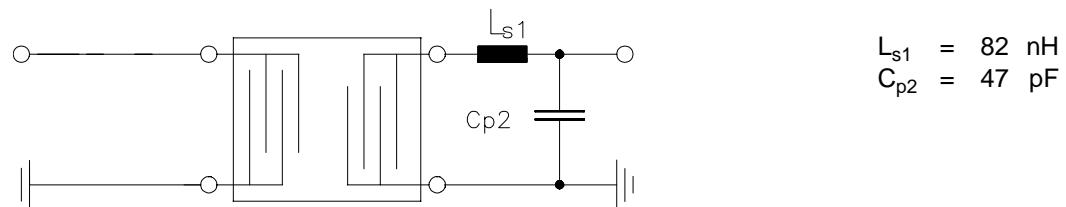
Characteristics

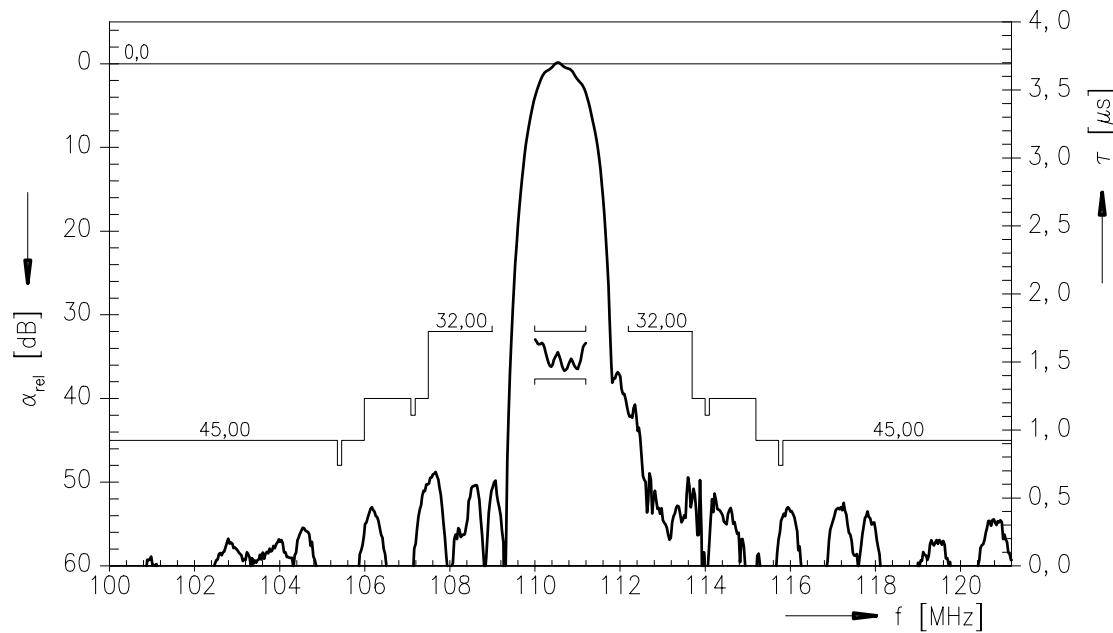
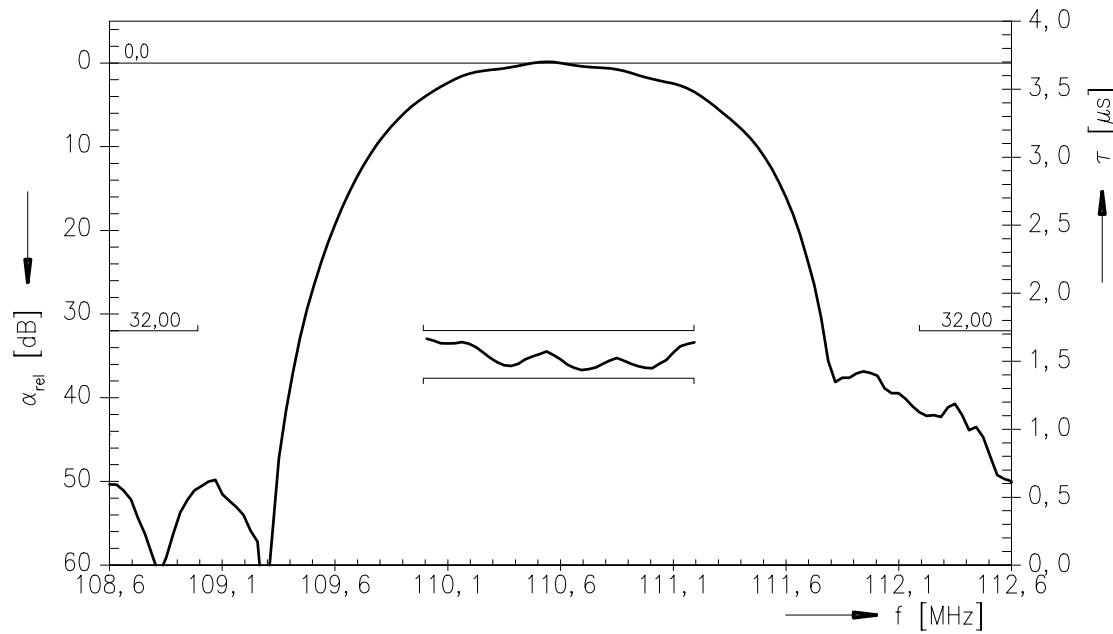
 Operating temperature range: $T = +25^\circ\text{C}$

 Terminating source impedance: $Z_S = 50\Omega$

 Terminating load impedance: $Z_L = 130\Omega \parallel 62\text{ nH}$

		min.	typ.	max.	
Nominal frequency	f_N	—	110,59	—	MHz
Center frequency (center frequency between 10 dB points)	f_c	110,48	110,59	110,70	MHz
Minimum insertion attenuation (including loss in matching coils)	α_{\min}	—	12,2	13,5	dB
Passband width	$B_{3\text{dB}}$		1,1		MHz
	$B_{30\text{dB}}$		2,3		MHz
Group delay ripple (p-p) $f_N - 600\text{ kHz} \dots f_N + 600\text{ kHz}$	$\Delta\tau$	—	270	350	ns
Relative attenuation (relative to α_{\min})	α_{rel}				
$f_N \pm 1,6\text{ MHz} \dots f_N \pm 3,1\text{ MHz}$		32	44	—	dB
$f_N \pm 3,1\text{ MHz} \dots f_N \pm 4,6\text{ MHz}$		40	49	—	dB
$f_N \pm 4,6\text{ MHz} \dots f_N \pm 20\text{ MHz}$		45	52	—	dB
$f_N \pm 1,728\text{ MHz}$		32	44	—	dB
$f_N \pm 2 \times 1,728\text{ MHz}$		42	53	—	dB
$f_N \pm 3 \times 1,728\text{ MHz}$		48	55	—	dB
Impedance at f_N					
Input: $Z_{\text{IN}} = R_{\text{IN}} \parallel C_{\text{IN}}$		—	170 \parallel 30	—	$\Omega \parallel \text{pF}$
Output: $Z_{\text{OUT}} = R_{\text{OUT}} \parallel C_{\text{OUT}}$		—	170 \parallel 30	—	$\Omega \parallel \text{pF}$
Temperature coefficient of frequency	TC_f	—	-18	—	ppm/K

Matching network to 50Ω (element values depend on PCB layout):


Transfer function:

Transfer function (pass band):




SAW Components

B4542

Low-Loss Filter

110,59 MHz

Data Sheet



Published by EPCOS AG
Surface Acoustic Wave Components Division, SAW MC WT
P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2003. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.