


# Data Sheet

Rev. 2.00 / January 2013

# ZSPM4141

Ultra-Low-Power Linear Regulator with  
Minimal Quiescent Current Technology



**Power Management**



**Power and Precision**

# ZSPM4141

Ultra-Low-Power Linear Regulator w/ Minimal Quiescent Current Technology



The Analog Mixed Signal Company



## Brief Description

The ZSPM4141 is an ultra-low-power linear regulator optimized for minimal quiescent current losses via advanced, proprietary technology. It can improve energy efficiency and reduce heat due to power dissipation because it draws low nA-level quiescent current for light loads, yet it can regulate current loads as high as 200mA. The linear regulated output voltage is factory-configured to an option from 1.2V to 4.2V in 100mV steps. The ZSPM4141 also provides over-current protection.

## Features

- Low operating voltage range: 2.5V to 5.5V
- Power-Down Mode for 100pA quiescent current
- Over-current protection: 250mA
- Output voltage options of 1.2V to 4.2V in 100mV steps (programmed at manufacturing)

## Benefits

- Ultra-low 100pA quiescent current in power down mode
- Best-in-class quiescent current of 20nA at  $I_{LOAD}=0$
- 0.5% DC line regulation (typical)
- Extends battery life
- Enables power harvesting applications
- High level of integration minimizes board space

## Related ZMDI Smart Power Products

- ZSPM4121 Under-Voltage Load Switch for Smart Battery Management

## Available Support


- ZSPM4141W12KIT Evaluation Kit
- Support Documentation

## Physical Characteristics


- Package: 8-pin DFN (2mm x2mm)

## Typical ZSPM4141 Application Circuits

### ZSPM4141 Basic (Fixed Output) Application

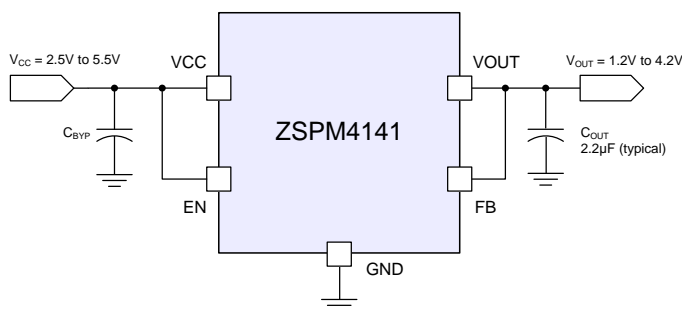

### ZSPM4141A1W12 Variable VOUT via Resistor Divider

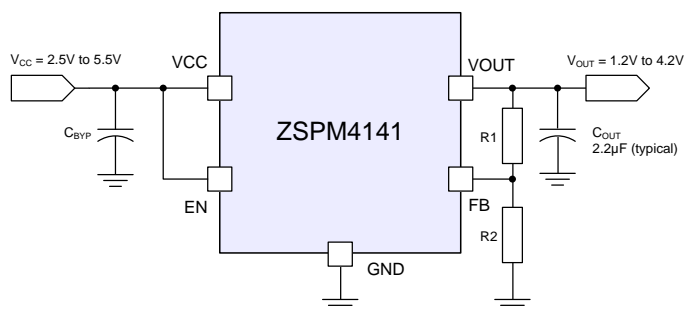

For more information, contact ZMDI via [Analog@zmdi.com](mailto:Analog@zmdi.com).

# ZSPM4141

Ultra-Low-Power Linear Regulator w/ Minimal Quiescent Current Technology




The Analog Mixed Signal Company



## ZSPM4141 Block Diagram

### Typical Applications

- Portable Electronics
- Industrial
- Medical
- Smart Cards
- RFID
- Energy-Harvesting Systems

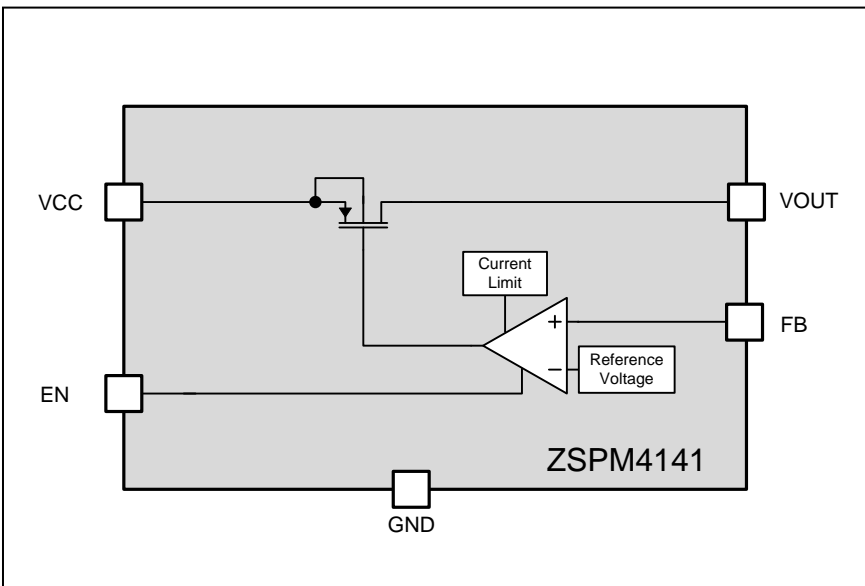

## Ordering Information

Ordering Code*	Description	Package
ZSPM4141AI1W12	ZSPM4141 Ultra-Low Power Line Regulator —V <sub>OUT</sub> factory set to 1.2V	8-pin DFN / Reel
ZSPM4141AI1W18	ZSPM4141 Ultra-Low Power Line Regulator —V <sub>OUT</sub> factory set to 1.8V	8-pin DFN / Reel
ZSPM4141AI1W25	ZSPM4141 Ultra-Low Power Line Regulator —V <sub>OUT</sub> factory set to 2.5V	8-pin DFN / Reel
ZSPM4141AI1W30	ZSPM4141 Ultra-Low Power Line Regulator —V <sub>OUT</sub> factory set to 3.0V	8-pin DFN / Reel
ZSPM4141AI1W31	ZSPM4141 Ultra-Low Power Line Regulator —V <sub>OUT</sub> factory set to 3.1V	8-pin DFN / Reel
ZSPM4141AI1W33	ZSPM4141 Ultra-Low Power Line Regulator —V <sub>OUT</sub> factory set to 3.3V	8-pin DFN / Reel
ZSPM4141AI1W42	ZSPM4141 Ultra-Low Power Line Regulator —V <sub>OUT</sub> factory set to 4.2V	8-pin DFN / Reel
ZSPM4141W12KIT	ZSPM4141 Evaluation Kit w/Vout adjusting resistors (default 1.2 Vout)	

\* W for 7" reel with 2500 parts. Custom V<sub>OUT</sub> values are also available: 1.2V to 4.2V (typical) in 100mV increments.

## Sales and Further Information

[www.zmdi.com](http://www.zmdi.com)

[Analog@zmdi.com](mailto:Analog@zmdi.com)

### Zentrum Mikroelektronik Dresden AG

Global Headquarters  
Grenzstrasse 28  
01109 Dresden, Germany

Central Office:  
Phone +49.351.8822.306  
Fax +49.351.8822.337

### ZMD America, Inc.

1525 McCarthy Blvd., #212  
Milpitas, CA 95035-7453  
USA

USA Phone 1.855.275.9634  
Phone +1.408.883.6310  
Fax +1.408.883.6358

### Zentrum Mikroelektronik Dresden AG, Japan Office

2nd Floor, Shinbashi Tokyu Bldg.  
4-21-3, Shinbashi, Minato-ku  
Tokyo, 105-0004  
Japan

Phone +81.3.6895.7410  
Fax +81.3.6895.7301

### ZMD FAR EAST, Ltd.

3F, No. 51, Sec. 2,  
Keelung Road  
11052 Taipei  
Taiwan

Phone +886.2.2377.8189  
Fax +886.2.2377.8199

### Zentrum Mikroelektronik Dresden AG, Korea Office

U-space 1 Building  
11th Floor, Unit JA-1102  
670 Sampyeong-dong  
Bundang-gu, Seongnam-si  
Gyeonggi-do, 463-400  
Korea

Phone +82.31.950.7679  
Fax +82.504.841.3026

### European Technical Support

Phone +49.351.8822.7.772  
Fax +49.351.8822.87.772

### European Sales (Stuttgart)

Phone +49.711.674517.55  
Fax +49.711.674517.87955

**DISCLAIMER:** This information applies to a product under development. Its characteristics and specifications are subject to change without notice. Zentrum Mikroelektronik Dresden AG (ZMD AG) assumes no obligation regarding future manufacture unless otherwise agreed to in writing. The information furnished hereby is believed to be true and accurate. However, under no circumstances shall ZMD AG be liable to any customer, licensee, or any other third party for any special, indirect, incidental, or consequential damages of any kind or nature whatsoever arising out of or in any way related to the furnishing, performance, or use of this technical data. ZMD AG hereby expressly disclaims any liability of ZMD AG to any customer, licensee or any other third party, and any such customer, licensee and any other third party hereby waives any liability of ZMD AG for any damages in connection with or arising out of the furnishing, performance or use of this technical data, whether based on contract, warranty, tort (including negligence), strict liability, or otherwise.

# ZSPM4141

Ultra-Low-Power Linear Regulator w/ Minimal Quiescent Current Technology



The Analog Mixed Signal Company



## Contents

1	ZSPM4141 Characteristics.....	6
1.1.	Absolute Maximum Ratings.....	6
1.2.	Thermal Characteristics.....	6
1.3.	Recommended Operating Conditions .....	7
1.4.	Electrical Characteristics .....	7
2	Typical Performance Characteristics .....	8
3	Description of Circuit .....	10
4	Application Circuits.....	11
4.1.	Selection of External Components .....	11
4.1.1.	Output Bypass Capacitor $C_{OUT}$ .....	11
4.1.2.	Input Bypass Capacitor $C_{BYP}$ .....	11
4.1.3.	Output Voltage Adjustment Resistors R1 and R2.....	11
4.2.	Typical Application Circuit .....	12
5	Pin Configuration and Package.....	13
5.1.	ZSPM4141 Package Dimensions and Marking Diagram .....	13
5.2.	Pin Assignments .....	14
6	Layout and Soldering Requirements.....	15
6.1.	Recommended Landing Pattern for PCBs .....	15
6.2.	Multi-Layer PCB Layout.....	16
6.3.	Single-Layer PCB Layout .....	17
7	Ordering Information .....	18
8	Related Documents.....	18
9	Document Revision History .....	19

## List of Figures

Figure 2.1	$I_{QQ}$ Performance vs. $V_{CC}$ .....	8
Figure 2.2	$I_{QQ}$ Performance vs. Temperature .....	8
Figure 2.3	$I_{QQ}$ Performance vs. Load Current.....	8
Figure 2.4	$I_{QQ}$ Performance vs. Load Current in % .....	8
Figure 2.5	Line Regulation Performance .....	8
Figure 2.6	$V_{OUT}$ Performance vs. Temperature.....	8
Figure 2.7	Dropout Voltage When $V_{OUT}$ Drops By 3%.....	9
Figure 2.8	Load Regulation Performance .....	9
Figure 2.9	Load Step Response— $I_{OUT} = 0$ to 30mA .....	9
Figure 2.10	Load Step Response— $I_{OUT} = 30mA$ to 0 .....	9
Figure 2.11	Load Step Response— $I_{OUT} = 1mA$ to 30mA.....	9
Figure 2.12	Line Step Response .....	9
Figure 2.13	Output Enable Timing .....	10

# ZSPM4141

Ultra-Low-Power Linear Regulator w/ Minimal Quiescent Current Technology



The Analog Mixed Signal Company



Figure 3.1	ZSPM4141 Block Diagram .....	10
Figure 4.1	Basic ZSPM4141 Application Circuit—Fixed Output.....	12
Figure 4.2	ZSPM4141A1W12 Application Circuit—Variable Output .....	12
Figure 5.1	ZSPM4141 Package Drawing.....	13
Figure 5.2	ZSPM4141 Pin Assignments (top view) .....	14
Figure 6.1	Recommended Landing Pattern for 8-Pin DFN.....	15
Figure 6.2	Package and PCB Land Configuration for Multi-Layer PCB .....	16
Figure 6.3	JEDEC Standard FR4 Multi-Layer Board – Cross-Sectional View.....	16
Figure 6.4	Conducting Heat Away from the Die using an Exposed Pad Package .....	17
Figure 6.5	Application Using a Single-Layer PCB .....	17

## List of Tables

Table 1.1	Absolute Maximum Ratings .....	6
Table 1.2	Thermal Characteristics for 8-pin DFN (2x2) Package.....	6
Table 1.3	Recommended Operating Conditions .....	7
Table 1.4	Electrical Characteristics .....	7
Table 4.1	Output Voltage Adjustment Resistors and Resulting $I_{QQ}$ Increase .....	11
Table 5.1	Pin Description, 8-Pin DFN (2mmx2mm) .....	14

# ZSPM4141

Ultra-Low-Power Linear Regulator w/ Minimal Quiescent Current Technology



The Analog Mixed Signal Company



## 1 ZSPM4141 Characteristics

Important: Stresses beyond those listed under “Absolute Maximum Ratings” (section 1.1) may cause permanent damage to the device. These are stress ratings only. Functional operation of the device at these or any other conditions beyond those indicated under “Recommended Operating Conditions” (section 1.3) is not implied. Exposure to absolute–maximum–rated conditions for extended periods could affect device reliability.

### 1.1. Absolute Maximum Ratings

Over operating free–air temperature range unless otherwise noted. All voltage values are with respect to network ground terminal.

**Table 1.1 Absolute Maximum Ratings**

Parameter	Symbol	Value	Unit
Maximum input/output on VCC, VOUT, EN, and FB pins		-0.3 to 6.0	V
Electrostatic Discharge – Human Body Model, according to the respective JESD22 JEDEC standard		2	kV
Electrostatic Discharge – Charged Device Model, according to the respective JESD22-C101 JEDEC standard		500	V
Operating Junction Temperature Range	$T_J$	-20 to 85	°C
Storage Temperature Range	$T_{stg}$	-65 to 150	°C
Lead Temperature (soldering, 10 seconds)		260	°C

### 1.2. Thermal Characteristics

**Table 1.2 Thermal Characteristics for 8-pin DFN (2x2) Package**

$\theta_{JA}$ (°C/W) <sup>1)</sup>	$\theta_{JC}$ (°C/W) <sup>2)</sup>
73.1	10.7
1) This assumes a FR4 board only.	
2) This assumes a 1oz. copper JEDEC standard board with thermal vias. See section 6.1 for more information.	

# ZSPM4141

Ultra-Low-Power Linear Regulator w/ Minimal Quiescent Current Technology



The Analog Mixed Signal Company



## 1.3. Recommended Operating Conditions

**Table 1.3 Recommended Operating Conditions**

Parameter	Symbol	Min	Typ	Max	Unit
Unregulated Supply Input at VCC pin	V <sub>CC</sub>	2.5		5.5	V
Enable Input (EN pin)	V <sub>EN</sub>	0		5.0	V
Typical Regulated Supply Output Voltage	V <sub>OUT</sub>	1.2		4.2	V
Operating Ambient Temperature <sup>1)</sup>	T <sub>A</sub>	-20		55	°C
Operating Junction Temperature	T <sub>J</sub>	-20		85	°C
1) Operating ambient temperature is only intended as a guideline. The operating junction temperature requirements must not be exceeded.					

## 1.4. Electrical Characteristics

Electrical characteristics, V<sub>CC</sub> = 2.5V to 5V (unless otherwise noted). Minimum and maximum characteristics tested at T<sub>J</sub> = 25°C.

**Table 1.4 Electrical Characteristics**


Parameter	Symbol	Condition	Min	Typ	Max	Unit
Input Supply Voltage	V <sub>CC</sub>		2.5		5.5	V
Input Low Logic Level	V <sub>IL</sub> EN				0.3*V <sub>CC</sub>	V
Input High Logic Level	V <sub>IH</sub> EN		0.7*V <sub>CC</sub>			V
Output Bypass Capacitor	C <sub>OUT</sub>		1	2.2	4.7	μF
Input Bypass Capacitor	C <sub>BYP</sub>			0.1		μF
Quiescent Current:	I <sub>QQ</sub>	V <sub>CC</sub> = 4.2V, I <sub>OUT</sub> =0		20		nA
Quiescent Current: Power-Down Mode	I <sub>QQpd</sub>	I <sub>OUT</sub> =0, EN = 0		100		pA
Operating Current	I <sub>OP-GND</sub>	V <sub>CC</sub> = 2.5V, I <sub>OUT</sub> = 200mA		200		μA
		V <sub>CC</sub> = 3.3V, I <sub>OUT</sub> = 200mA		200		μA
		V <sub>CC</sub> = 5.5V, I <sub>OUT</sub> = 200mA		200		μA
Load Capability	I <sub>OUT</sub>		0		200	mA
DC Line Regulation	V <sub>LINE</sub>	V <sub>CC</sub> = 2.5V to 5V, V <sub>OUT</sub> = 1.8V, I <sub>OUT</sub> = 50mA		0.5	1	%
DC Load Regulation	V <sub>LOAD</sub>	V <sub>CC</sub> = 4.2V, I <sub>OUT</sub> = 0.02mA to 200mA, V <sub>OUT</sub> = V <sub>OUT,nominal</sub> +300mV		1	2	%
Current Limit	I <sub>LIMIT</sub>	I <sub>OUT</sub> measured at V <sub>OUT</sub> = 0.9*V <sub>OUT,nominal</sub>		250		mA




## 2 Typical Performance Characteristics

$C_{IN} = 10\mu F$  and  $T = 25^\circ C$  (unless otherwise noted)


**Figure 2.1  $I_{QQ}$  Performance vs.  $V_{CC}$**

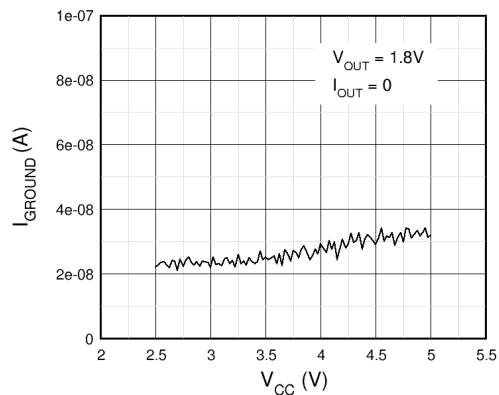


**Figure 2.2  $I_{QQ}$  Performance vs. Temperature**

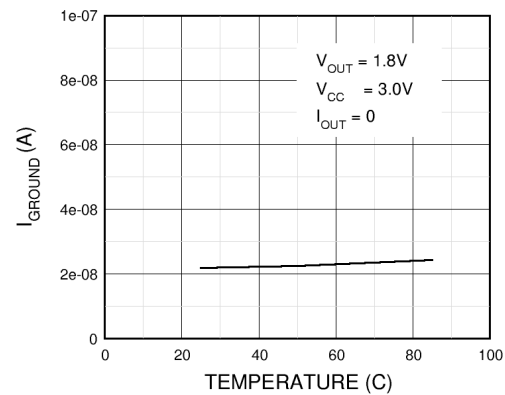


**Figure 2.3  $I_{QQ}$  Performance vs. Load Current**

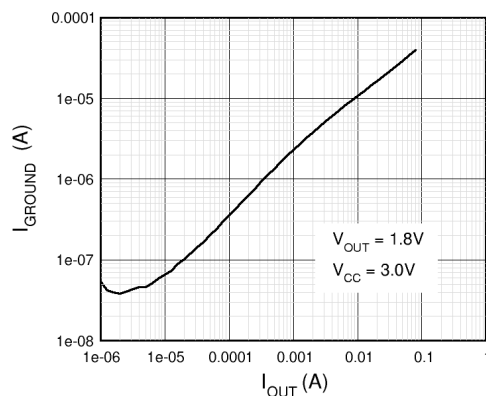


**Figure 2.4  $I_{QQ}$  Performance vs. Load Current in %**

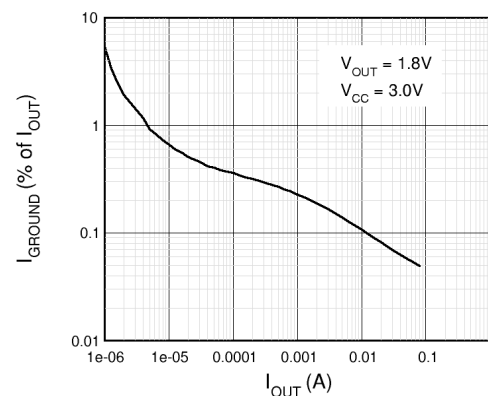

**Figure 2.5 Line Regulation Performance**

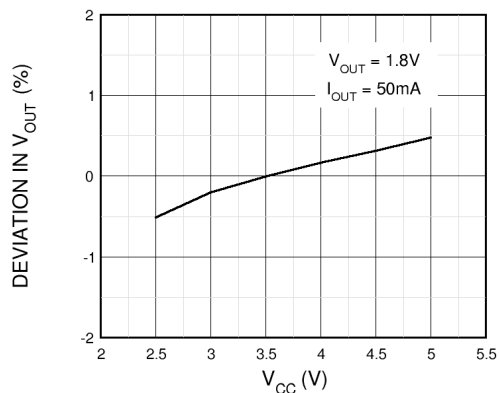

**Figure 2.6  $V_{OUT}$  Performance vs. Temperature**

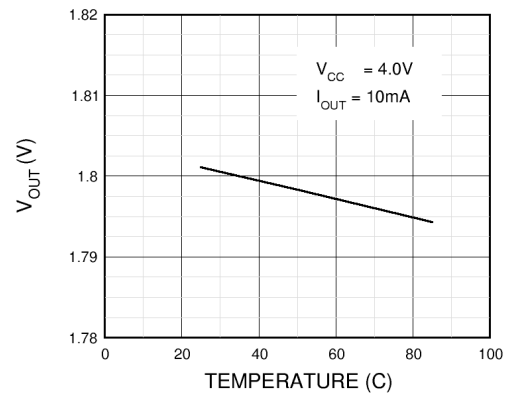



# ZSPM4141


Ultra-Low-Power Linear Regulator w/ Minimal Quiescent Current Technology



The Analog Mixed Signal Company




**Figure 2.7 Dropout Voltage When  $V_{OUT}$  Drops By 3%**

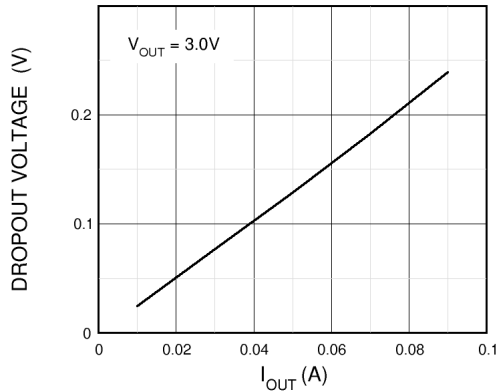


Note: Dropout voltage is defined as  $V_{CC} - V_{OUT}$  when  $V_{OUT}$  drops 3% below its nominal value.


**Figure 2.8 Load Regulation Performance**

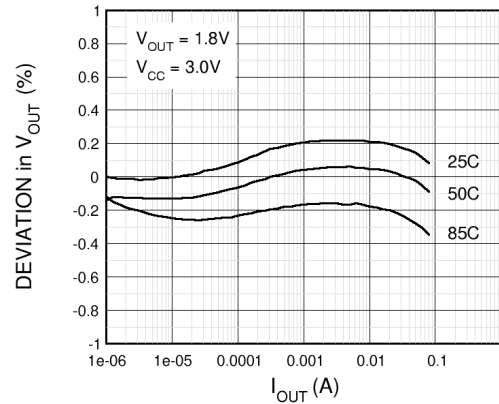


**Figure 2.9 Load Step Response— $I_{OUT} = 0$  to 30mA**

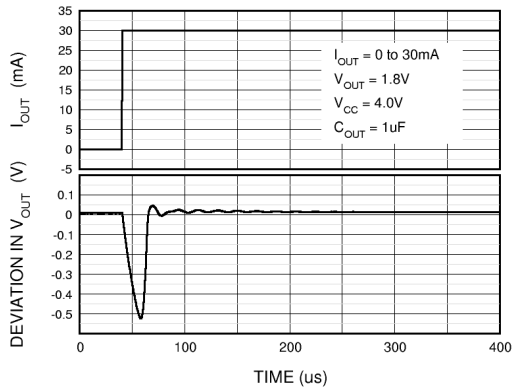


**Figure 2.10 Load Step Response— $I_{OUT} = 30mA$  to 0**

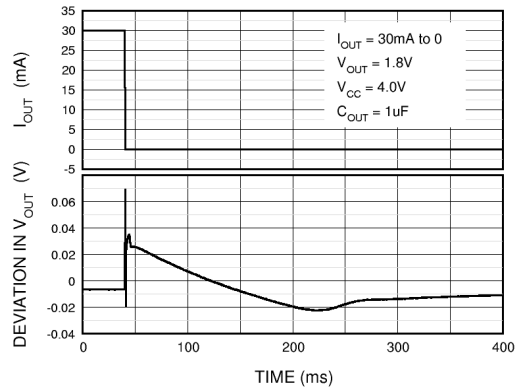

**Figure 2.11 Load Step Response— $I_{OUT} = 1mA$  to 30mA**

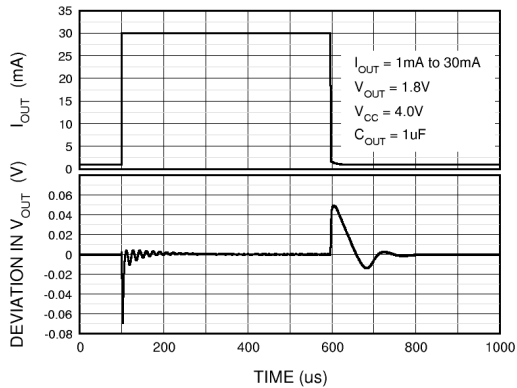

**Figure 2.12 Line Step Response**

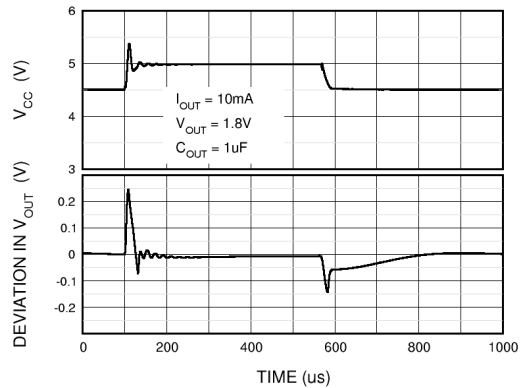

# ZSPM4141


Ultra-Low-Power Linear Regulator w/ Minimal Quiescent Current Technology



The Analog Mixed Signal Company




**Figure 2.13 Output Enable Timing**

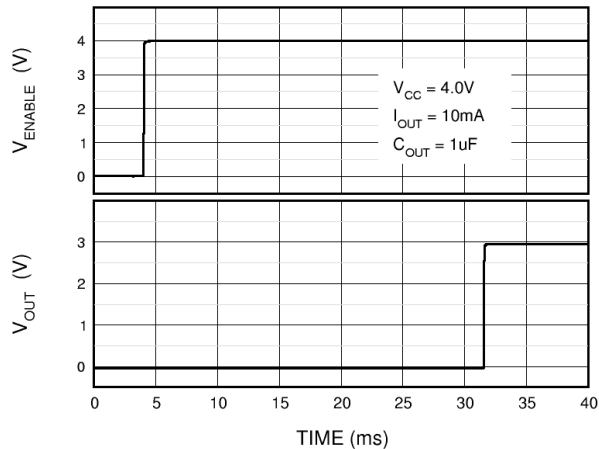

## 3 Description of Circuit

The ZSPM4141 is an ultra-low-power linear regulator optimized for minimal quiescent current losses via advanced, proprietary technology. It draws low nA-level quiescent current for light loads, yet it can regulate current loads as high as 200mA. The linear regulated output voltage is factory-configured to an option from 1.2V to 4.2V in 100mV steps. The ZSPM4141 also provides over-current protection (see Table 1.4).

**Figure 3.1 ZSPM4141 Block Diagram**

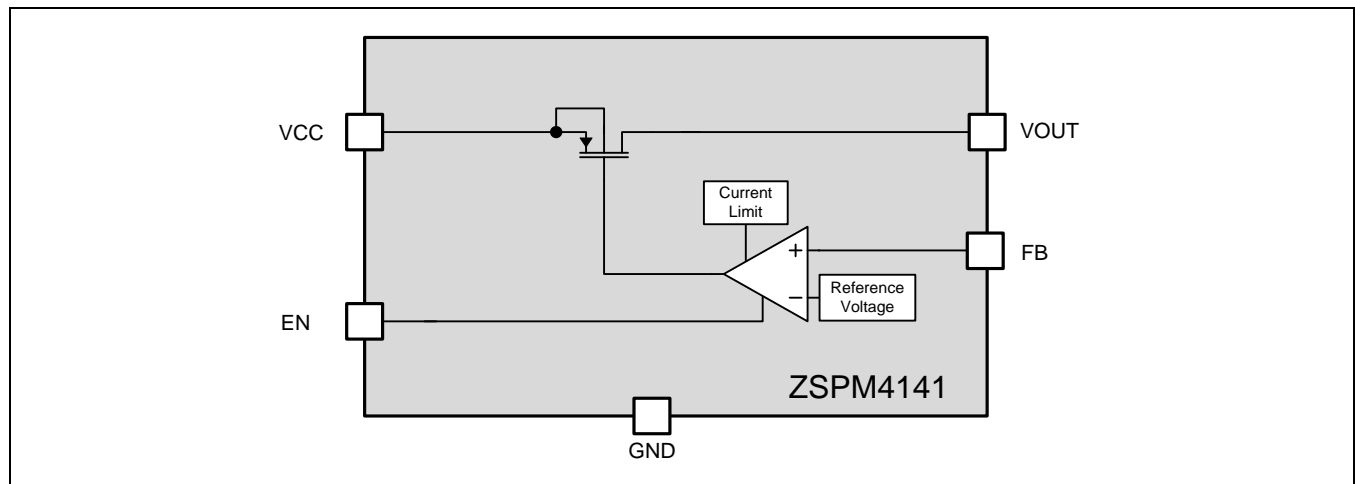



## 4 Application Circuits

### 4.1. Selection of External Components

#### 4.1.1. Output Bypass Capacitor $C_{OUT}$

Connect a bypass capacitor ( $C_{OUT}$ ) from the VOUT pin to ground. The typical value for  $C_{OUT}$  is 2.2 $\mu$ F.

See Table 1.4 for further specifications.

#### 4.1.2. Input Bypass Capacitor $C_{BYP}$

Connect a bypass capacitor ( $C_{BYP}$ ) from the VCC pin to ground. The typical value for  $C_{OUT}$  is 0.1 $\mu$ F.

#### 4.1.3. Output Voltage Adjustment Resistors R1 and R2

The ZSPM4141W12KIT includes a set of output adjustment resistors for R1 and R2 shown in the variable output circuit on page 2. Refer to Table 4.1 for the effect of different combinations of the resistors on the output voltage and the resulting increase in  $I_{QQ}$  current.

**Table 4.1** Output Voltage Adjustment Resistors and Resulting  $I_{QQ}$  Increase

Vout	R1 (+/-0.1%)	R2 (+/-1%)	$I_{QQ}$ increase
1.2	0		
1.5	1.00M $\Omega$	4.02M $\Omega$	0.30 $\mu$ A
1.8	1.00M $\Omega$	2M $\Omega$	0.60 $\mu$ A
3	1.00M $\Omega$	665k $\Omega$	1.80 $\mu$ A
3.3	1.00M $\Omega$	576k $\Omega$	2.10 $\mu$ A
4.2	1.00M $\Omega$	402k $\Omega$	3.00 $\mu$ A

# ZSPM4141

Ultra-Low-Power Linear Regulator w/ Minimal Quiescent Current Technology




The Analog Mixed Signal Company




## 4.2. Typical Application Circuit

**Figure 4.1 Basic ZSPM4141 Application Circuit—Fixed Output**

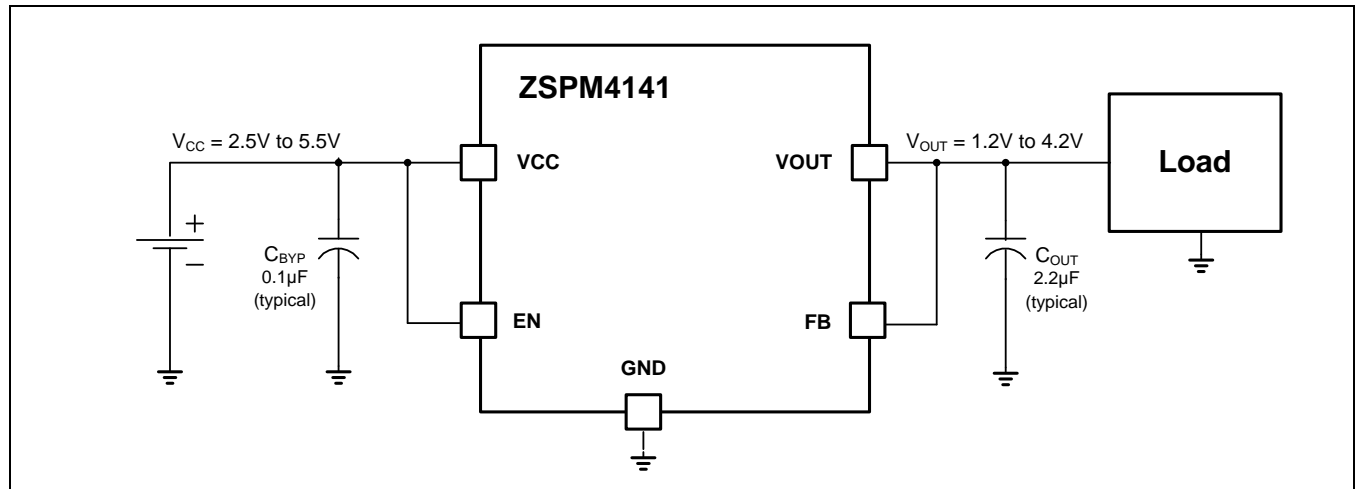

**Figure 4.2 ZSPM4141A1W12 Application Circuit—Variable Output**

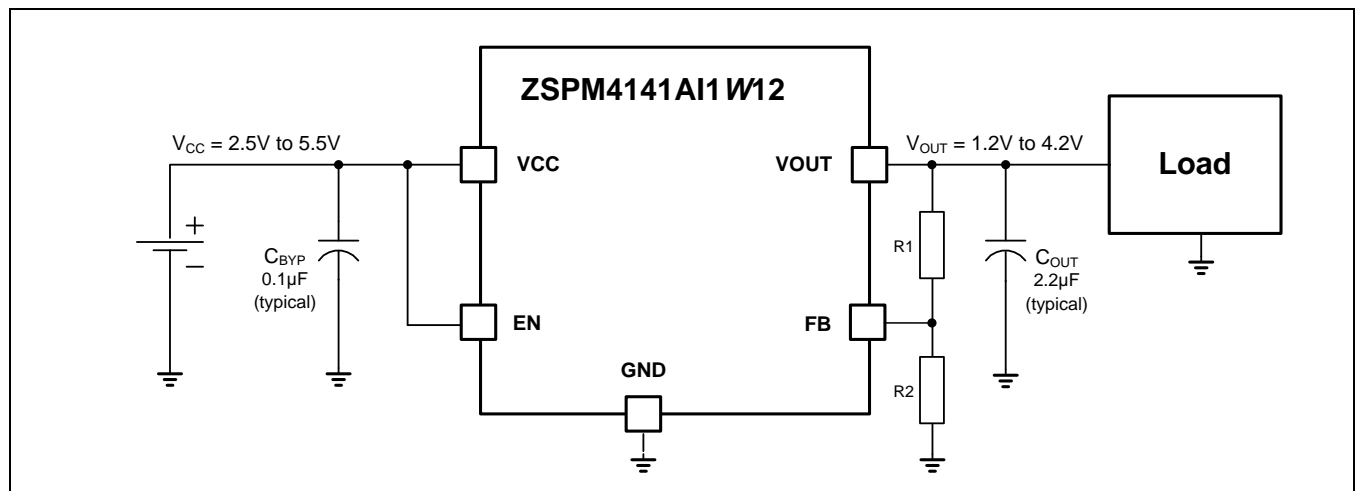

# ZSPM4141

Ultra-Low-Power Linear Regulator w/ Minimal Quiescent Current Technology




The Analog Mixed Signal Company



## 5 Pin Configuration and Package

### 5.1. ZSPM4141 Package Dimensions and Marking Diagram

Figure 5.1 ZSPM4141 Package Drawing

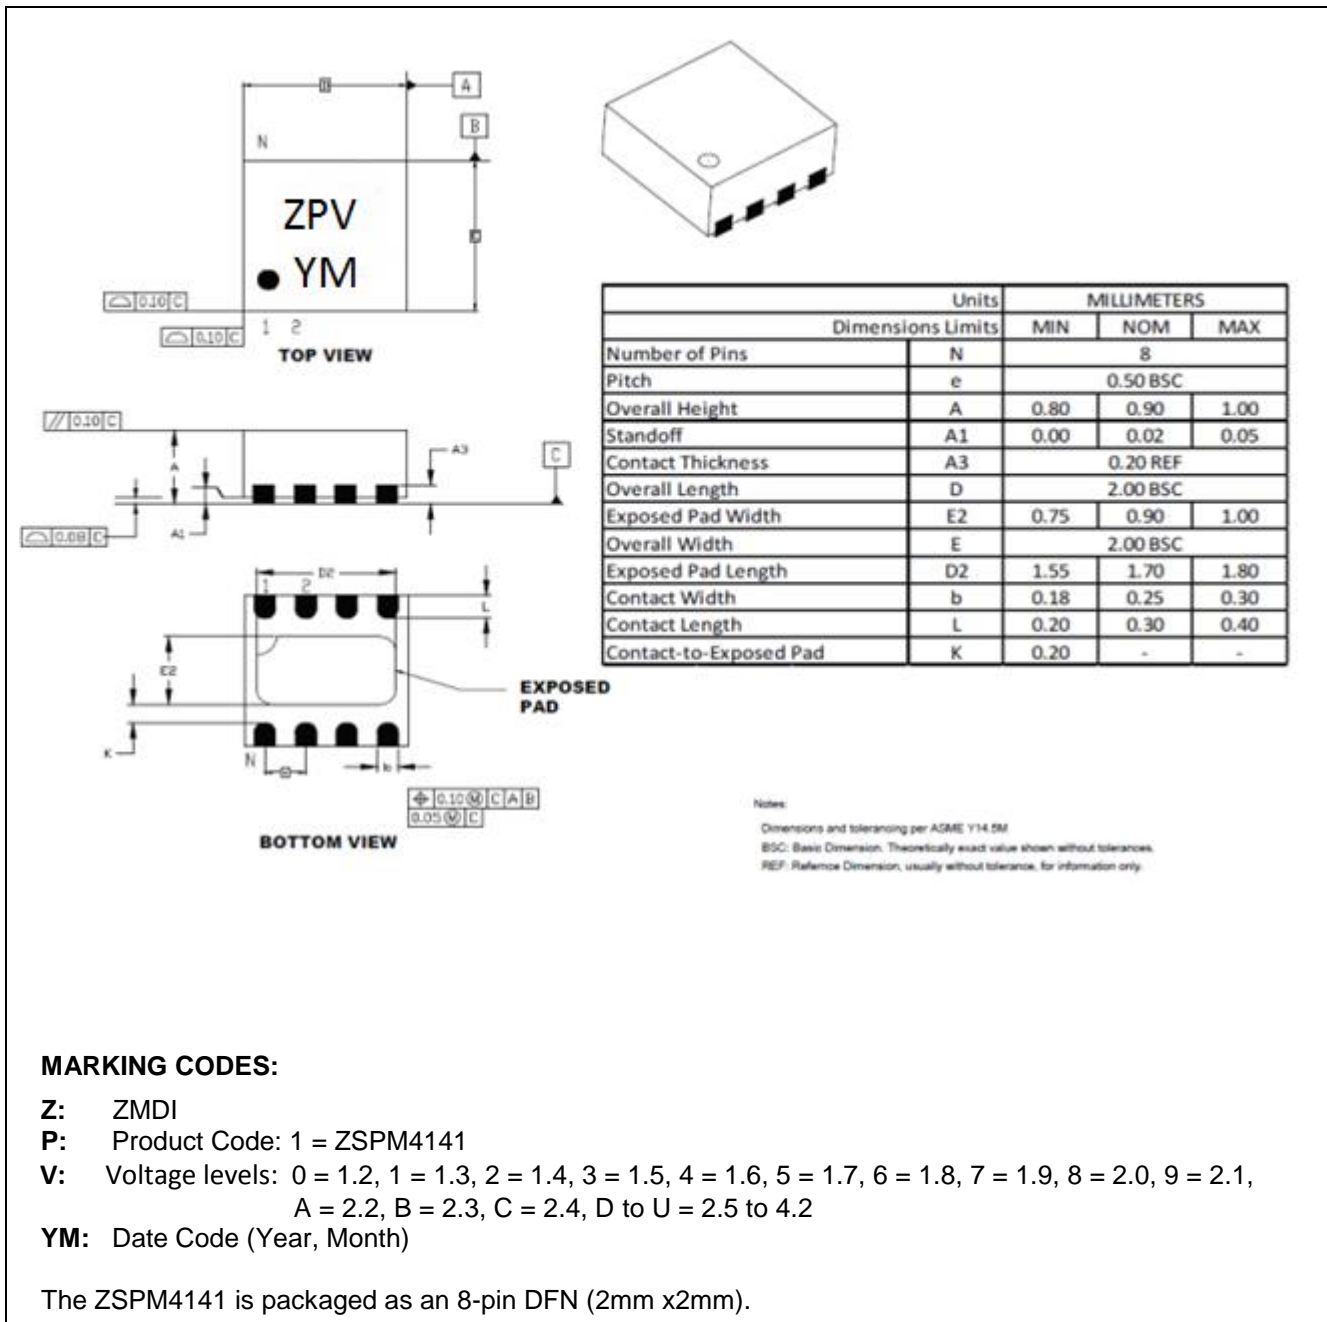


# ZSPM4141

Ultra-Low-Power Linear Regulator w/ Minimal Quiescent Current Technology



## 5.2. Pin Assignments

**Figure 5.2 ZSPM4141 Pin Assignments (top view)**

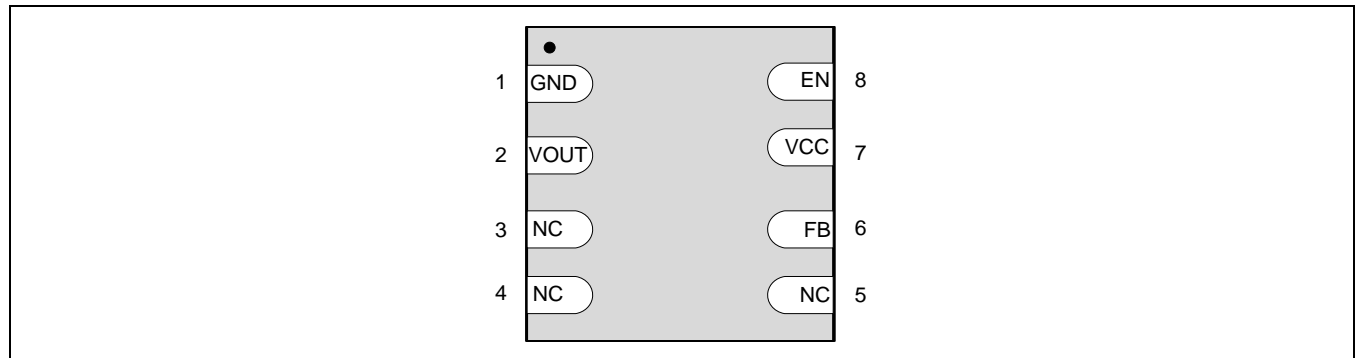

**Table 5.1 Pin Description, 8-Pin DFN (2mmx2mm)**

Pin #	Name	Function	Description
1	GND	Ground	GND
2	VOUT	Output	Regulated Output Voltage
3	NC		No Connection (connect to GND or float)
4	NC		No Connection (connect to GND or float)
5	NC		No Connection (connect to GND or float)
6	FB	Input	Feedback Input
7	VCC	Supply	Input Power
8	EN	Input	Enable Input

# ZSPM4141

Ultra-Low-Power Linear Regulator w/ Minimal Quiescent Current Technology



The Analog Mixed Signal Company




## 6 Layout and Soldering Requirements

To maximize the efficiency of this package for applications on a single layer or multi-layer printed circuit board (PCB), certain guidelines must be followed when laying out this part on the PCB.

### 6.1 Recommended Landing Pattern for PCBs

**Figure 6.1 Recommended Landing Pattern for 8-Pin DFN**

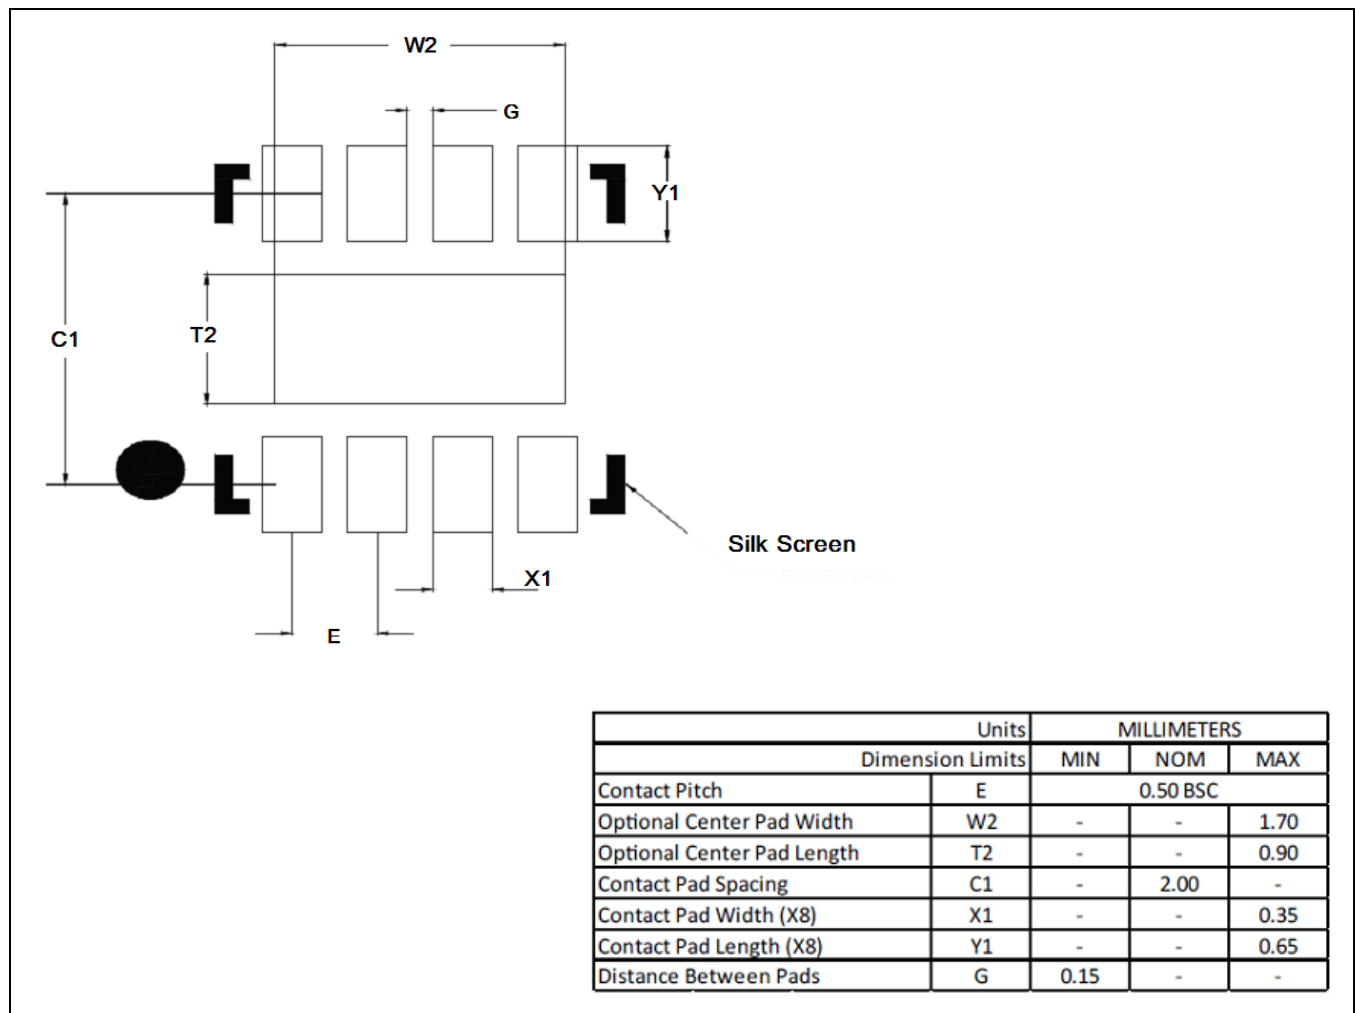

# ZSPM4141

Ultra-Low-Power Linear Regulator w/ Minimal Quiescent Current Technology




The Analog Mixed Signal Company



## 6.2. Multi-Layer PCB Layout

The following are guidelines for mounting the exposed pad ZSPM4141 on a multi-layer PCB with ground a plane. In a multi-layer board application, the thermal vias are the primary method of heat transfer from the package thermal pad to the internal ground plane. The efficiency of this method depends on several factors, including die area, number of thermal vias, and thickness of copper, etc.

**Figure 6.2 Package and PCB Land Configuration for Multi-Layer PCB**

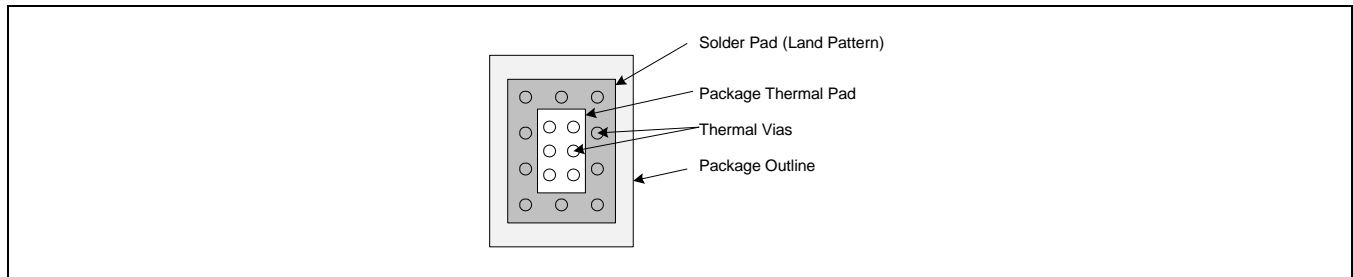

**Figure 6.3 JEDEC Standard FR4 Multi-Layer Board – Cross-Sectional View**

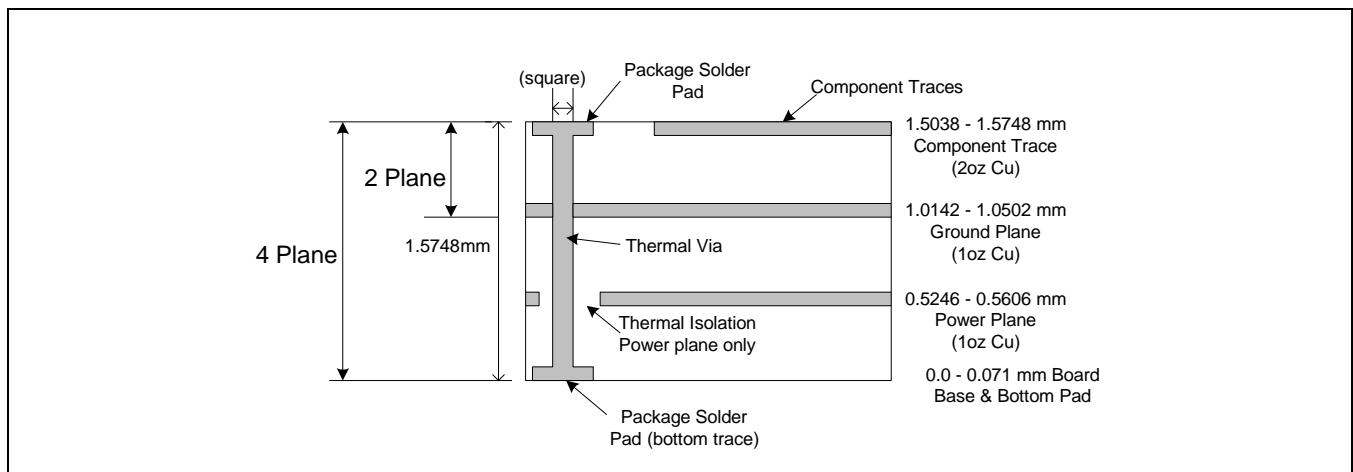


Figure 6.4 is a representation of how the heat can be conducted away from the die using an exposed pad package. Each application will have different requirements and limitations, and therefore the user should use sufficient copper to dissipate the power in the system. The output current rating for the linear regulators might need to be de-rated for ambient temperatures above 85°C. The de-rated value will depend on calculated worst-case power dissipation and the thermal management implementation in the application.



# ZSPM4141


Ultra-Low-Power Linear Regulator w/ Minimal Quiescent Current Technology

**ZMDI**

The Analog Mixed Signal Company



**Figure 6.4** Conducting Heat Away from the Die using an Exposed Pad Package

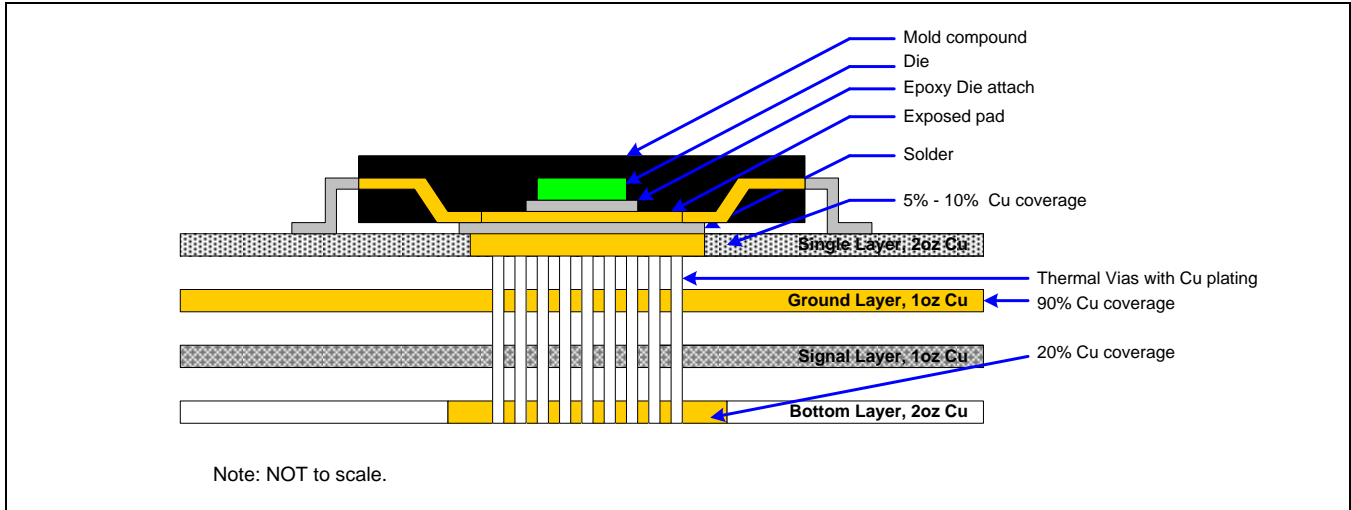


## 6.3. Single-Layer PCB Layout

Layout recommendation for a single-layer PCB: utilize as much copper area for power management as possible. In a single-layer board application, the thermal pad is attached to a heat spreader (copper areas) by using a low thermal impedance attachment method (solder paste or thermal conductive epoxy).

In both of the methods mentioned above, it is advisable to use as much copper trace as possible to dissipate the heat.

**Figure 6.5** Application Using a Single-Layer PCB

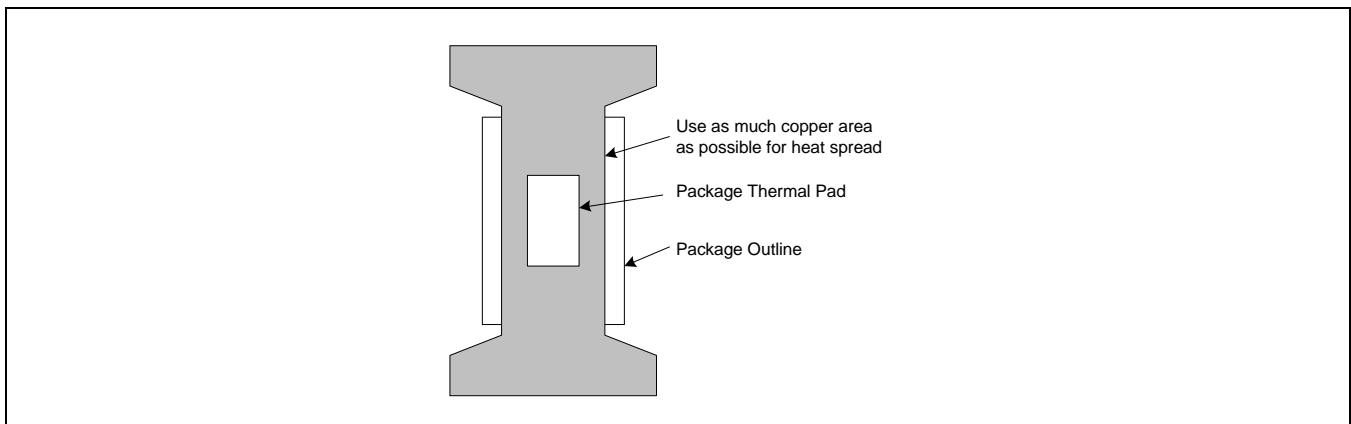

**Important:** If the attachment method is NOT implemented correctly, the functionality of the product is not guaranteed. Power dissipation capability will be adversely affected if the device is incorrectly mounted onto the circuit board.

# ZSPM4141

Ultra-Low-Power Linear Regulator w/ Minimal Quiescent Current Technology



The Analog Mixed Signal Company



## 7 Ordering Information

Ordering Code*	Description	Package
ZSPM4141AI1W12	ZSPM4141 Ultra-Low Power Line Regulator —V <sub>OUT</sub> factory set to 1.2V	8-pin DFN / Reel
ZSPM4141AI1W18	ZSPM4141 Ultra-Low Power Line Regulator —V <sub>OUT</sub> factory set to 1.8V	8-pin DFN / Reel
ZSPM4141AI1W25	ZSPM4141 Ultra-Low Power Line Regulator —V <sub>OUT</sub> factory set to 2.5V	8-pin DFN / Reel
ZSPM4141AI1W30	ZSPM4141 Ultra-Low Power Line Regulator —V <sub>OUT</sub> factory set to 3.0V	8-pin DFN / Reel
ZSPM4141AI1W31	ZSPM4141 Ultra-Low Power Line Regulator —V <sub>OUT</sub> factory set to 3.1V	8-pin DFN / Reel
ZSPM4141AI1W33	ZSPM4141 Ultra-Low Power Line Regulator —V <sub>OUT</sub> factory set to 3.3V	8-pin DFN / Reel
ZSPM4141AI1W42	ZSPM4141 Ultra-Low Power Line Regulator —V <sub>OUT</sub> factory set to 4.2V	8-pin DFN / Reel
ZSPM4141W12KIT	ZSPM4141 Evaluation Kit w/Vout adjusting resistors (default 1.2 Vout)	

Custom V<sub>OUT</sub> values are also available: 1.2V to 4.2V (typical) in 100mV increments.

## 8 Related Documents

Document	File Name
ZSPM4141 Feature Sheet	ZSPM4141_Feature_Sheet_revX_xy.pdf
ZSPM4141 Evaluation Kit Description	ZSPM4141_Eval_Kit_Description_revX_xy.pdf
ZSPM4141 Application Note—Low Power Battery Control and Voltage Regulator Solutions for Remote Sensor Networks	ZSPM4141_App_Note_LP-Batt-Contr-VReg-Remote-Sensor-Net_X_xy.pdf

Note: X\_xy refers to the current revision of the document.

Visit ZMDI's website [www.zmdi.com](http://www.zmdi.com) or contact your nearest sales office for the latest version of these documents.

# ZSPM4141

Ultra-Low-Power Linear Regulator w/ Minimal Quiescent Current Technology



The Analog Mixed Signal Company



## 9 Document Revision History

Revision	Date	Description
1.00	August 6, 2012	First release.
2.00	January 11, 2013	Addition of variable output illustration and Table 4.1. Update for ordering codes and contact information. Update for "Electrostatic Discharge" specification in Table 1.1.

Sales and Further Information		<a href="http://www.zmdi.com">www.zmdi.com</a>	<a href="mailto:Analog@zmdi.com">Analog@zmdi.com</a>	
<b>Zentrum Mikroelektronik Dresden AG</b> Global Headquarters Grenzstrasse 28 01109 Dresden, Germany  Central Office: Phone +49.351.8822.306 Fax +49.351.8822.337	<b>ZMD America, Inc.</b> 1525 McCarthy Blvd., #212 Milpitas, CA 95035-7453 USA  USA Phone 1.855.275.9634 Phone +1.408.883.6310 Fax +1.408.883.6358	<b>Zentrum Mikroelektronik Dresden AG, Japan Office</b> 2nd Floor, Shinbashi Tokyo Bldg. 4-21-3, Shinbashi, Minato-ku Tokyo, 105-0004 Japan  Phone +81.3.6895.7410 Fax +81.3.6895.7301	<b>ZMD FAR EAST, Ltd.</b> 3F, No. 51, Sec. 2, Keelung Road 11052 Taipei Taiwan  Phone +886.2.2377.8189 Fax +886.2.2377.8199	<b>Zentrum Mikroelektronik Dresden AG, Korea Office</b> U-space 1 Building 11th Floor, Unit JA-1102 670 Sampyeong-dong Bundang-gu, Seongnam-si Gyeonggi-do, 463-400 Korea  Phone +82.31.950.7679 Fax +82.504.841.3026
<b>European Technical Support</b> Phone +49.351.8822.7.772 Fax +49.351.8822.87.772	<b>DISCLAIMER:</b> This information applies to a product under development. Its characteristics and specifications are subject to change without notice. Zentrum Mikroelektronik Dresden AG (ZMD AG) assumes no obligation regarding future manufacture unless otherwise agreed to in writing. The information furnished hereby is believed to be true and accurate. However, under no circumstances shall ZMD AG be liable to any customer, licensee, or any other third party for any special, indirect, incidental, or consequential damages of any kind or nature whatsoever arising out of or in any way related to the furnishing, performance, or use of this technical data. ZMD AG hereby expressly disclaims any liability of ZMD AG to any customer, licensee or any other third party, and any such customer, licensee and any other third party hereby waives any liability of ZMD AG for any damages in connection with or arising out of the furnishing, performance or use of this technical data, whether based on contract, warranty, tort (including negligence), strict liability, or otherwise.			
<b>European Sales (Stuttgart)</b> Phone +49.711.674517.55 Fax +49.711.674517.87955				

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ZMDI:](#)

[ZSPM4141KIT](#) [ZSPM4141W33KIT](#) [ZSPM4141W42KIT](#)