

# Unidirectional Measurement Current-Shunt Monitor with Dual Comparators

## FEATURES

- **COMPLETE CURRENT SENSE SOLUTION**
- **DUAL COMPARATORS:**
  - Comparator 1 with Latch
  - Comparator 2 with Optional Delay
- **COMMON-MODE RANGE: –16V to +80V**
- **HIGH ACCURACY: 3.5% (max) OVER TEMP**
- **BANDWIDTH: 500kHz**
- **QUIESCENT CURRENT: 1.8mA**
- **PACKAGES: SO-14, TSSOP-14, MSOP-10**

## APPLICATIONS


- **NOTEBOOK COMPUTERS**
- **CELL PHONES**
- **TELECOM EQUIPMENT**
- **AUTOMOTIVE**
- **POWER MANAGEMENT**
- **BATTERY CHARGERS**
- **WELDING EQUIPMENT**

## DESCRIPTION


The INA206, INA207, and INA208 are a family of unidirectional current-shunt monitors with voltage output, dual comparators, and voltage reference. The INA206, INA207, and INA208 can sense drops across shunts at common-mode voltages from –16V to +80V. The INA206, INA207, and INA208 are available with three output voltage scales: 20V/V, 50V/V, and 100V/V, with up to 500kHz bandwidth.

The INA206, INA207, and INA208 also incorporate two open-drain comparators with internal 0.6V references. On 14-pin versions, the comparator references can be overridden by external inputs. Comparator 1 includes a latching capability, and Comparator 2 has a user-programmable delay on 14-pin versions. 14-pin versions also provide a 1.2V reference output.

The INA206, INA207, and INA208 operate from a single +2.7V to +18V supply. They are specified over the extended operating temperature range of –40°C to +125°C.

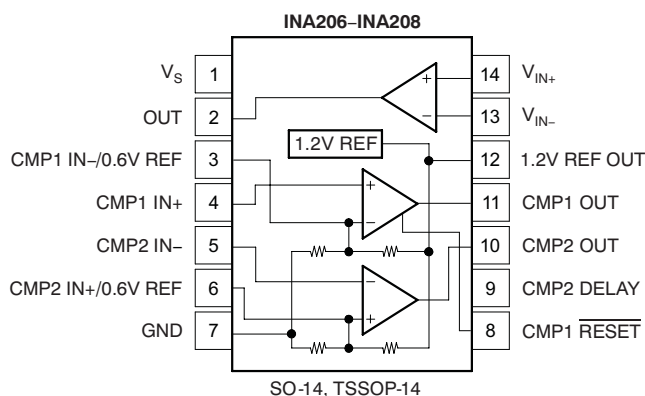

| DEVICE | GAIN   |
|--------|--------|
| INA206 | 20V/V  |
| INA207 | 50V/V  |
| INA208 | 100V/V |

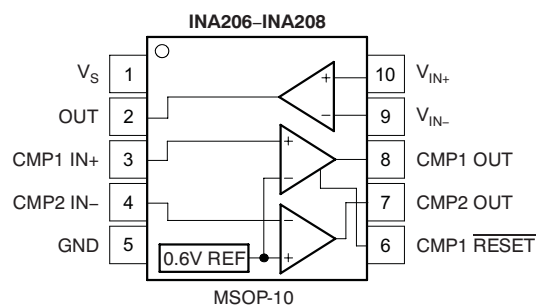

## RELATED PRODUCTS

| FEATURES                                                   | PRODUCT                       |
|------------------------------------------------------------|-------------------------------|
| Variant of INA206–INA208 Comparator 2 polarity             | <a href="#">INA203–INA205</a> |
| Current-shunt monitor with single comparator and $V_{REF}$ | <a href="#">INA200–INA202</a> |
| Current-shunt monitor only                                 | <a href="#">INA193–INA198</a> |
| Current-shunt monitor with split stages for filter options | <a href="#">INA270–INA271</a> |



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

All trademarks are the property of their respective owners.



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

## ORDERING INFORMATION<sup>(1)</sup>

| PRODUCT | GAIN   | PACKAGE-LEAD | PACKAGE DESIGNATOR | PACKAGE MARKING | 1.2V REF OUT | EXTERNAL COMP1 AND COMP2 REF INPUTS | INTERNAL COMP1 AND COMP2 0.6V REF | COMP2 DELAY PIN |
|---------|--------|--------------|--------------------|-----------------|--------------|-------------------------------------|-----------------------------------|-----------------|
| INA206  | 20V/V  | SO-14        | D                  | INA206A         | X            | X                                   | X                                 | X               |
|         |        | MSOP-10      | DGS                | BQQ             |              |                                     | X                                 |                 |
|         |        | TSSOP-14     | PW                 | INA206A         | X            | X                                   | X                                 | X               |
| INA207  | 50V/V  | SO-14        | D                  | INA207A         | X            | X                                   | X                                 | X               |
|         |        | MSOP-10      | DGS                | BQR             |              |                                     | X                                 |                 |
|         |        | TSSOP-14     | PW                 | INA207A         | X            | X                                   | X                                 | X               |
| INA208  | 100V/V | SO-14        | D                  | INA208A         | X            | X                                   | X                                 | X               |
|         |        | MSOP-10      | DGS                | BQS             |              |                                     | X                                 |                 |
|         |        | TSSOP-14     | PW                 | INA208A         | X            | X                                   | X                                 | X               |

(1) For the most current package and ordering information see the Package Option Addendum at the end of this document, or see the TI web site at [www.ti.com](http://www.ti.com).

## ABSOLUTE MAXIMUM RATINGS<sup>(1)</sup>

|                                                                            |                                                        | INA206, INA207, INA208  | UNIT |
|----------------------------------------------------------------------------|--------------------------------------------------------|-------------------------|------|
| Supply Voltage, V+                                                         |                                                        | 18                      | V    |
| Current-Shunt Monitor Analog Inputs, V <sub>IN+</sub> and V <sub>IN-</sub> | Differential (V <sub>IN+</sub> ) – (V <sub>IN-</sub> ) | –18 to +18              | V    |
|                                                                            | Common-Mode                                            | –16 to +80              | V    |
| Comparator Analog Input and Reset Pins                                     |                                                        | GND – 0.3 to (V+) + 0.3 | V    |
| Analog Output, Out Pin                                                     |                                                        | GND – 0.3 to (V+) + 0.3 | V    |
| Comparator Output, Out Pin                                                 |                                                        | GND – 0.3 to 18         | V    |
| V <sub>REF</sub> and CMP2 Delay Pin                                        |                                                        | GND – 0.3 to 10         | V    |
| Input Current Into Any Pin                                                 |                                                        | 5                       | mA   |
| Operating Temperature                                                      |                                                        | –55 to +150             | °C   |
| Storage Temperature                                                        |                                                        | –65 to +150             | °C   |
| Junction Temperature                                                       |                                                        | +150                    | °C   |
| ESD Ratings                                                                | Human Body Model (HBM)                                 | 4000                    | V    |
|                                                                            | Charged Device Model (CDM)                             | 500                     | V    |

(1) Stresses above these ratings may cause permanent damage. Exposure to absolute maximum conditions for extended periods may degrade device reliability. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those specified is not supported.

## ELECTRICAL CHARACTERISTICS: CURRENT-SHUNT MONITOR

**Boldface** limits apply over the specified temperature range,  $T_A = -40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ .

At  $T_A = +25^{\circ}\text{C}$ ,  $V_S = +12\text{V}$ ,  $V_{IN+} = 12\text{V}$ ,  $V_{SENSE} = 100\text{mV}$ ,  $R_L = 10\text{k}\Omega$  to GND,  $R_{PULL-UP} = 5.1\text{k}\Omega$  each connected from CMP1 OUT and CMP2 OUT to  $V_S$ , and CMP1 IN+ = 1V and CMP2 IN– = GND, unless otherwise noted.

| CURRENT-SHUNT MONITOR<br>PARAMETERS               |                      | TEST CONDITIONS                                                                             | INA206, INA207, INA208 |                             |                              | UNIT    |
|---------------------------------------------------|----------------------|---------------------------------------------------------------------------------------------|------------------------|-----------------------------|------------------------------|---------|
|                                                   |                      |                                                                                             | MIN                    | TYP                         | MAX                          |         |
| INPUT                                             |                      |                                                                                             |                        |                             |                              |         |
| Full-Scale Sense Input Voltage                    | V <sub>SENSE</sub>   | V <sub>SENSE</sub> = V <sub>IN+</sub> – V <sub>IN–</sub>                                    |                        | 0.15                        | (V <sub>S</sub> – 0.25)/Gain | V       |
| Common-Mode Input Range                           | V <sub>CM</sub>      |                                                                                             | –16                    |                             | 80                           | V       |
| Common-Mode Rejection Ratio                       | CMRR                 | V <sub>IN+</sub> = –16V to +80V                                                             | 80                     | 100                         |                              | dB      |
| over Temperature                                  |                      | V <sub>IN+</sub> = +12V to +80V                                                             | 100                    | 123                         |                              | dB      |
| Offset Voltage RTI <sup>(1)</sup>                 | V <sub>OS</sub>      |                                                                                             |                        | ±0.5                        | ±2.5                         | mV      |
| +25°C to +125°C                                   |                      |                                                                                             |                        |                             | ±3                           | mV      |
| –40°C to +25°C                                    |                      |                                                                                             |                        |                             | ±3.5                         | mV      |
| vs Temperature                                    | dV <sub>OS</sub> /dT | –40°C to +125°C                                                                             |                        | 5                           |                              | μV/°C   |
| vs Power-Supply                                   | PSR                  | V <sub>OUT</sub> = 2V, V <sub>IN+</sub> = 18V, 2.7V                                         |                        | 2.5                         | 100                          | μV/V    |
| Input Bias Current, V <sub>IN–</sub> Pin          | I <sub>B</sub>       |                                                                                             |                        | ±9                          | ±16                          | μA      |
| OUTPUT (V <sub>SENSE</sub> ≥ 20mV)                |                      |                                                                                             |                        |                             |                              |         |
| Gain: INA206                                      | G                    |                                                                                             |                        | 20                          |                              | V/V     |
| Gain: INA207                                      |                      |                                                                                             |                        | 50                          |                              | V/V     |
| Gain: INA208                                      |                      |                                                                                             |                        | 100                         |                              | V/V     |
| Gain Error                                        |                      | V <sub>SENSE</sub> = 20mV to 100mV                                                          |                        | ±0.2                        | ±1                           | %       |
| over Temperature                                  |                      | V <sub>SENSE</sub> = 20mV to 100mV                                                          |                        |                             | ±2                           | %       |
| Total Output Error <sup>(2)</sup>                 |                      | V <sub>SENSE</sub> = 120mV, V <sub>S</sub> = +16V                                           |                        | ±0.75                       | ±2.2                         | %       |
| over Temperature                                  |                      | V <sub>SENSE</sub> = 120mV, V <sub>S</sub> = +16V                                           |                        |                             | ±3.5                         | %       |
| Nonlinearity Error <sup>(3)</sup>                 |                      | V <sub>SENSE</sub> = 20mV to 100mV                                                          |                        | ±0.002                      |                              | %       |
| Output Impedance                                  | R <sub>O</sub>       |                                                                                             |                        | 1.5                         |                              | Ω       |
| Maximum Capacitive Load                           |                      | No Sustained Oscillation                                                                    |                        | 10                          |                              | nF      |
| OUTPUT (V <sub>SENSE</sub> < 20mV) <sup>(4)</sup> |                      |                                                                                             |                        |                             |                              |         |
| INA206, INA207, INA208                            |                      | –16V ≤ V <sub>CM</sub> < 0V                                                                 |                        | 300                         |                              | mV      |
| INA206                                            |                      | 0V ≤ V <sub>CM</sub> ≤ V <sub>S</sub> , V <sub>S</sub> = 5V                                 |                        |                             | 0.4                          | V       |
| INA207                                            |                      | 0V ≤ V <sub>CM</sub> ≤ V <sub>S</sub> , V <sub>S</sub> = 5V                                 |                        |                             | 1                            | V       |
| INA208                                            |                      | 0V ≤ V <sub>CM</sub> ≤ V <sub>S</sub> , V <sub>S</sub> = 5V                                 |                        |                             | 2                            | V       |
| INA206, INA207, INA208                            |                      | V <sub>S</sub> < V <sub>CM</sub> ≤ 80V                                                      |                        | 300                         |                              | mV      |
| VOLTAGE OUTPUT <sup>(5)</sup>                     |                      |                                                                                             |                        |                             |                              |         |
| Output Swing to the Positive Rail                 |                      | V <sub>IN–</sub> = 11V, V <sub>IN+</sub> = 12V                                              |                        | (V+) – 0.15                 | (V+) – 0.25                  | V       |
| Output Swing to GND <sup>(6)</sup>                |                      | V <sub>IN–</sub> = 0V, V <sub>IN+</sub> = –0.5V                                             |                        | (V <sub>GND</sub> ) + 0.004 | (V <sub>GND</sub> ) + 0.05   | V       |
| FREQUENCY RESPONSE                                |                      |                                                                                             |                        |                             |                              |         |
| Bandwidth: INA206                                 | BW                   | C <sub>LOAD</sub> = 5pF                                                                     |                        | 500                         |                              | kHz     |
| Bandwidth: INA207                                 |                      | C <sub>LOAD</sub> = 5pF                                                                     |                        | 300                         |                              | kHz     |
| Bandwidth: INA208                                 |                      | C <sub>LOAD</sub> = 5pF                                                                     |                        | 200                         |                              | kHz     |
| Phase Margin                                      |                      | C <sub>LOAD</sub> < 10pF                                                                    |                        | 40                          |                              | Degrees |
| Slew Rate                                         |                      |                                                                                             |                        | 1                           |                              | V/μs    |
| Settling Time (1%)                                |                      | V <sub>SENSE</sub> = 10mV <sub>PP</sub> to 100mV <sub>PP</sub> ,<br>C <sub>LOAD</sub> = 5pF |                        | 2                           |                              | μs      |
| NOISE, RTI                                        |                      |                                                                                             |                        |                             |                              |         |
| Output Voltage Noise Density                      |                      |                                                                                             |                        | 40                          |                              | nV/√Hz  |

(1) Offset is extrapolated from measurements of the output at 20mV and 100mV  $V_{SENSE}$ .

(2) Total output error includes effects of gain error and  $V_{OS}$ .

(3) Linearity is best fit to a straight line.

(4) For details on this region of operation, see the *Accuracy Variations as a Result of  $V_{SENSE}$  and Common-Mode Voltage* section in the [Applications Information](#).

(5) See Typical Characteristics curve *Output Swing vs Output Current*.

(6) Specified by design.

## ELECTRICAL CHARACTERISTICS: COMPARATOR

**Boldface** limits apply over the specified temperature range,  $T_A = -40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ .

At  $T_A = +25^{\circ}\text{C}$ ,  $V_S = +12\text{V}$ ,  $V_{\text{IN}+} = 12\text{V}$ ,  $V_{\text{SENSE}} = 100\text{mV}$ ,  $R_L = 10\text{k}\Omega$  to GND,  $R_{\text{PULL-UP}} = 5.1\text{k}\Omega$  each connected from CMP1 OUT and CMP2 OUT to  $V_S$ , unless otherwise noted.

| COMPARATOR PARAMETERS                              | TEST CONDITIONS                                                                                     | INA206, INA207, INA208 |                            |            | UNIT                           |
|----------------------------------------------------|-----------------------------------------------------------------------------------------------------|------------------------|----------------------------|------------|--------------------------------|
|                                                    |                                                                                                     | MIN                    | TYP                        | MAX        |                                |
| <b>OFFSET VOLTAGE</b>                              |                                                                                                     |                        |                            |            |                                |
| Offset Voltage                                     | Comparator Common-Mode Voltage = Threshold Voltage                                                  |                        | 2                          |            | mV                             |
| Offset Voltage Drift, Comparator 1                 |                                                                                                     |                        | <b><math>\pm 2</math></b>  |            | $\mu\text{V}/^{\circ}\text{C}$ |
| Offset Voltage Drift, Comparator 2                 |                                                                                                     |                        | <b>+5.4</b>                |            | $\mu\text{V}/^{\circ}\text{C}$ |
| Threshold                                          | $T_A = +25^{\circ}\text{C}$                                                                         | 590                    | 608                        | 620        | mV                             |
| over Temperature                                   |                                                                                                     | <b>586</b>             |                            | <b>625</b> | <b>mV</b>                      |
| Hysteresis <sup>(1)</sup> , CMP1                   | $T_A = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$                                                |                        | –8                         |            | mV                             |
| Hysteresis <sup>(1)</sup> , CMP2                   | $T_A = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$                                                |                        | 8                          |            | mV                             |
| <b>INPUT BIAS CURRENT<sup>(2)</sup></b>            |                                                                                                     |                        |                            |            |                                |
| CMP1 IN+, CMP2 IN–                                 |                                                                                                     |                        | 0.005                      | 10         | nA                             |
| vs Temperature                                     |                                                                                                     |                        |                            | <b>15</b>  | <b>nA</b>                      |
| <b>INPUT IMPEDANCE</b>                             |                                                                                                     |                        |                            |            |                                |
| Pins 3 and 6 (14-pin packages only)                |                                                                                                     |                        | 10                         |            | k $\Omega$                     |
| <b>INPUT RANGE</b>                                 |                                                                                                     |                        |                            |            |                                |
| CMP1 IN+ and CMP2 IN–                              |                                                                                                     |                        | 0V to $V_S - 1.5\text{V}$  |            | V                              |
| Pins 3 and 6 (14-pin packages only) <sup>(3)</sup> |                                                                                                     |                        | 0V to $V_S - 1.5\text{V}$  |            | V                              |
| <b>OUTPUT</b>                                      |                                                                                                     |                        |                            |            |                                |
| Large-Signal Differential Voltage Gain             | CMP $V_{\text{OUT}}$ 1V to 4V, $R_L \geq 15\text{k}\Omega$ connected to 5V                          |                        | 200                        |            | V/mV                           |
| High-Level Output Current                          | $V_{\text{ID}} = 0.4\text{V}$ , $V_{\text{OH}} = V_S$                                               |                        | 0.0001                     | 1          | $\mu\text{A}$                  |
| Low-Level Output Voltage                           | $V_{\text{ID}} = -0.6\text{V}$ , $I_{\text{OL}} = 2.35\text{mA}$                                    |                        | 220                        | 300        | mV                             |
| <b>RESPONSE TIME<sup>(4)</sup></b>                 |                                                                                                     |                        |                            |            |                                |
| Comparator 1                                       | $R_L$ to 5V, $C_L = 15\text{pF}$ , 100mV Input Step with 5mV Overdrive                              |                        | 1.3                        |            | $\mu\text{s}$                  |
| Comparator 2                                       | $R_L$ to 5V, $C_L = 15\text{pF}$ , 100mV Input Step with 5mV Overdrive, $C_{\text{DELAY}}$ Pin Open |                        | 1.3                        |            | $\mu\text{s}$                  |
| <b>RESET</b>                                       |                                                                                                     |                        |                            |            |                                |
| RESET Threshold <sup>(5)</sup>                     |                                                                                                     |                        | 1.1                        |            | V                              |
| Logic Input Impedance                              |                                                                                                     |                        | 2                          |            | M $\Omega$                     |
| Minimum RESET Pulse Width                          |                                                                                                     |                        | 1.5                        |            | $\mu\text{s}$                  |
| RESET Propagation Delay                            |                                                                                                     |                        | 3                          |            | $\mu\text{s}$                  |
| Comparator 2 Delay Equation <sup>(6)</sup>         |                                                                                                     |                        | $C_{\text{DELAY}} = t_D/5$ |            | $\mu\text{F}$                  |
| Comparator 2 Delay                                 | $t_D$                                                                                               |                        | 0.5                        |            | s                              |

(1) Hysteresis refers to the threshold (the threshold specification applies to a rising edge of a noninverting input) of a falling edge on the noninverting input of the comparator. Refer to [Figure 1](#).


(2) Specified by design.

(3) See the [Comparator Maximum Input Voltage Range](#) section in the [Applications Information](#).

(4) The comparator response time specified is the interval between the input step function and the instant when the output crosses 1.4 V.

(5) RESET input has an internal 2M $\Omega$  (typical) pull-down. Leaving RESET open results in a LOW state, with transparent comparator operation.

(6) The Comparator 2 delay applies to both rising and falling edges of the comparator output.

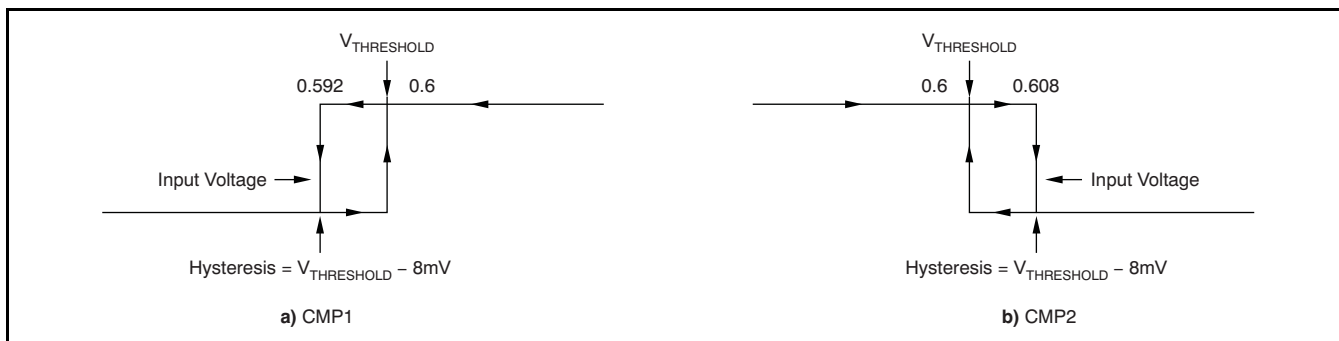

**Figure 1. Comparator Hysteresis**

## ELECTRICAL CHARACTERISTICS: REFERENCE

**Boldface** limits apply over the specified temperature range,  $T_A = -40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ .

At  $T_A = +25^{\circ}\text{C}$ ,  $V_S = +12\text{V}$ ,  $V_{IN+} = 12\text{V}$ ,  $V_{SENSE} = 100\text{mV}$ ,  $R_L = 10\text{k}\Omega$  to GND,  $R_{PULL-UP} = 5.1\text{k}\Omega$  each connected from CMP1 OUT and CMP2 OUT to  $V_S$ , unless otherwise noted.

| REFERENCE PARAMETERS                                                         | TEST CONDITIONS                                      | INA206, INA207, INA208 |     |       | UNIT                    |
|------------------------------------------------------------------------------|------------------------------------------------------|------------------------|-----|-------|-------------------------|
|                                                                              |                                                      | MIN                    | TYP | MAX   |                         |
| <b>REFERENCE VOLTAGE</b>                                                     |                                                      |                        |     |       |                         |
| 1.2V <sub>REFOUT</sub> Output Voltage                                        |                                                      | 1.188                  | 1.2 | 1.212 | V                       |
| Reference Drift $dV_{OUT}/dT$                                                | $T_A = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$ |                        | 40  | 100   | ppm/ $^{\circ}\text{C}$ |
| 0.6V <sub>REF</sub> Output Voltage<br>(Pins 3 and 6 of 14-pin packages only) |                                                      |                        | 0.6 |       | V                       |
| Reference Drift $dV_{OUT}/dT$                                                | $T_A = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$ |                        | 40  | 100   | ppm/ $^{\circ}\text{C}$ |
| <b>LOAD REGULATION</b> $dV_{OUT}/dI_{LOAD}$                                  |                                                      |                        |     |       |                         |
| Sourcing                                                                     | $0\text{mA} < I_{SOURCE} < 0.5\text{mA}$             |                        | 0.4 | 2     | mV/mA                   |
| Sinking                                                                      | $0\text{mA} < I_{SINK} < 0.5\text{mA}$               |                        | 0.4 |       | mV/mA                   |
| <b>LOAD CURRENT</b> $I_{LOAD}$                                               |                                                      |                        | 1   |       | mA                      |
| <b>LINE REGULATION</b> $dV_{OUT}/dV_S$                                       | $2.7\text{V} < V_S < 18\text{V}$                     |                        | 30  |       | $\mu\text{V/V}$         |
| <b>CAPACITIVE LOAD</b>                                                       |                                                      |                        |     |       |                         |
| Reference Output Max. Capacitive Load                                        | No Sustained Oscillations                            |                        | 10  |       | nF                      |
| <b>OUTPUT IMPEDANCE</b>                                                      |                                                      |                        |     |       |                         |
| Pins 3 and 6 of 14-Pin Packages Only                                         |                                                      |                        | 10  |       | k $\Omega$              |

## ELECTRICAL CHARACTERISTICS: GENERAL

**Boldface** limits apply over the specified temperature range,  $T_A = -40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ .

At  $T_A = +25^{\circ}\text{C}$ ,  $V_S = +12\text{V}$ ,  $V_{IN+} = 12\text{V}$ ,  $V_{SENSE} = 100\text{mV}$ ,  $R_L = 10\text{k}\Omega$  to GND,  $R_{PULL-UP} = 5.1\text{k}\Omega$  each connected from CMP1 OUT and CMP2 OUT to  $V_S$ , and CMP1 IN+ = 1V and CMP2 IN– = GND, unless otherwise noted.

| GENERAL PARAMETERS                                 | TEST CONDITIONS          | INA206, INA207, INA208 |     |            | UNIT                 |
|----------------------------------------------------|--------------------------|------------------------|-----|------------|----------------------|
|                                                    |                          | MIN                    | TYP | MAX        |                      |
| <b>POWER SUPPLY</b>                                |                          |                        |     |            |                      |
| Operating Power Supply $V_S$                       |                          | <b>+2.7</b>            |     | <b>+18</b> | <b>V</b>             |
| Quiescent Current $I_Q$                            | $V_{OUT} = 2\text{V}$    |                        | 1.8 | 2.2        | mA                   |
| over Temperature                                   | $V_{SENSE} = 0\text{mV}$ |                        |     | <b>2.8</b> | <b>mA</b>            |
| Comparator Power-On Reset Threshold <sup>(1)</sup> |                          |                        | 1.5 |            | V                    |
| <b>TEMPERATURE</b>                                 |                          |                        |     |            |                      |
| Specified Temperature Range                        |                          | –40                    |     | +125       | $^{\circ}\text{C}$   |
| Operating Temperature Range                        |                          | –55                    |     | +150       | $^{\circ}\text{C}$   |
| Storage Temperature Range                          |                          | –65                    |     | +150       | $^{\circ}\text{C}$   |
| Thermal Resistance $\theta_{JA}$                   |                          |                        |     |            |                      |
| MSOP-10 Surface-Mount                              |                          |                        | 200 |            | $^{\circ}\text{C/W}$ |
| SO-14, TSSOP-14 Surface-Mount                      |                          |                        | 150 |            | $^{\circ}\text{C/W}$ |

- (1) The INA206, INA207, and INA208 are designed to power-up with the comparator in a defined reset state as long as CMP1  $\overline{\text{RESET}}$  is open or grounded. The comparator will be in reset as long as the power supply is below the voltage shown here. The comparator will assume a state based on the comparator input above this supply voltage. If CMP1  $\overline{\text{RESET}}$  is high at power-up, the comparator output comes up high and requires a reset to assume a low state, if appropriate.

## TYPICAL CHARACTERISTICS

All specifications at  $T_A = +25^\circ\text{C}$ ,  $V_S = +12\text{V}$ ,  $V_{IN+} = 12\text{V}$ , and  $V_{SENSE} = 100\text{mV}$ , unless otherwise noted.

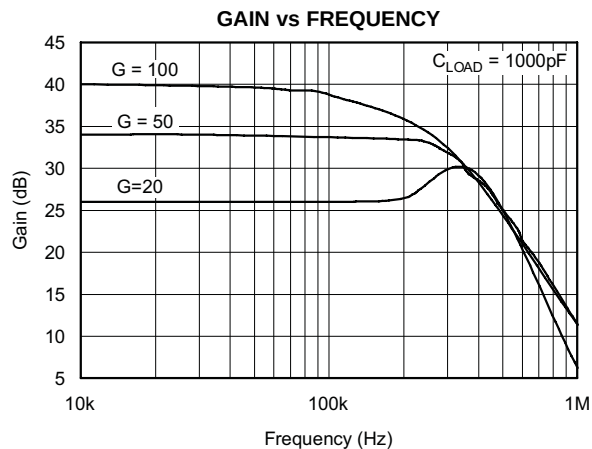


Figure 2.

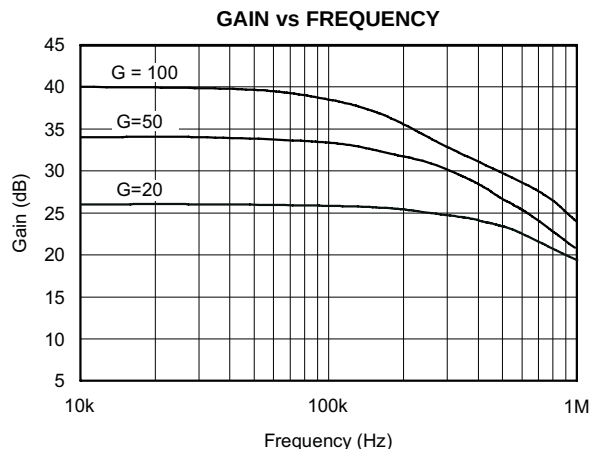


Figure 3.

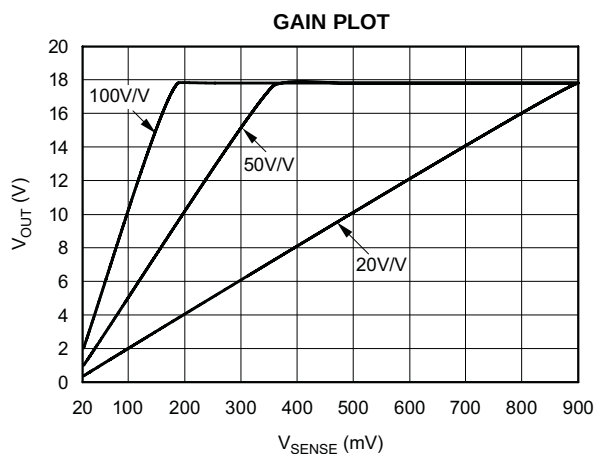


Figure 4.

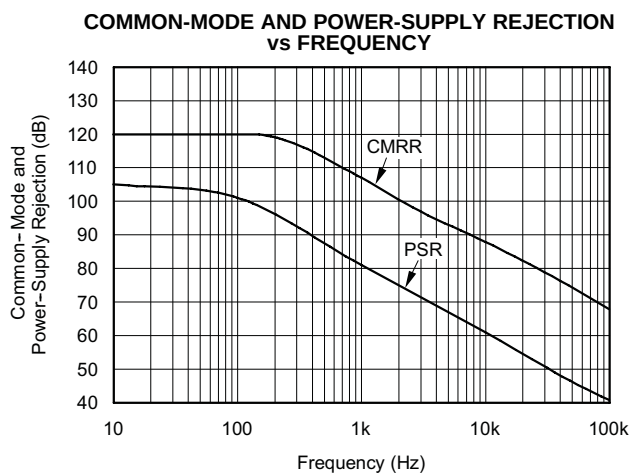


Figure 5.

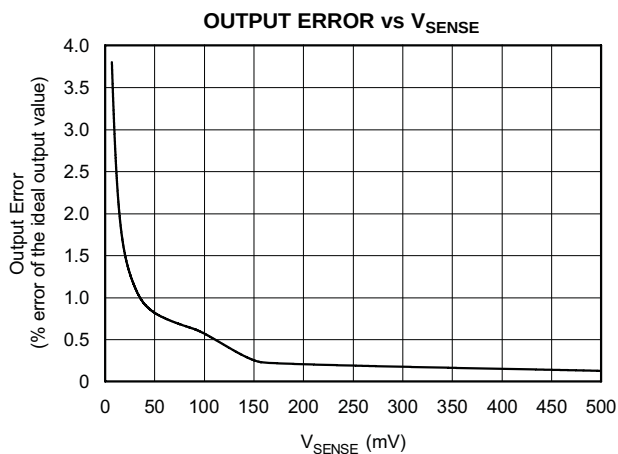


Figure 6.

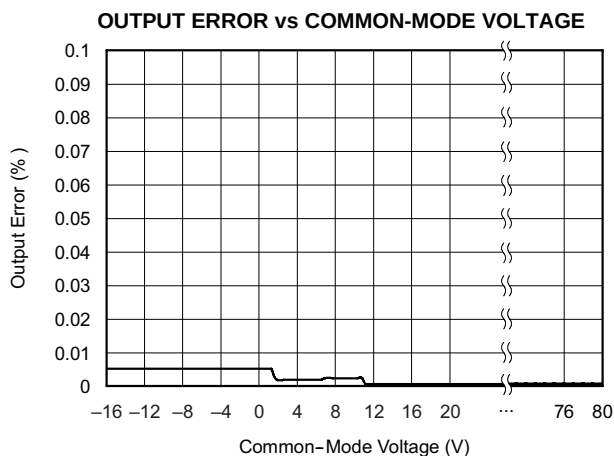


Figure 7.

## TYPICAL CHARACTERISTICS (continued)

All specifications at  $T_A = +25^\circ\text{C}$ ,  $V_S = +12\text{V}$ ,  $V_{IN+} = 12\text{V}$ , and  $V_{SENSE} = 100\text{mV}$ , unless otherwise noted.

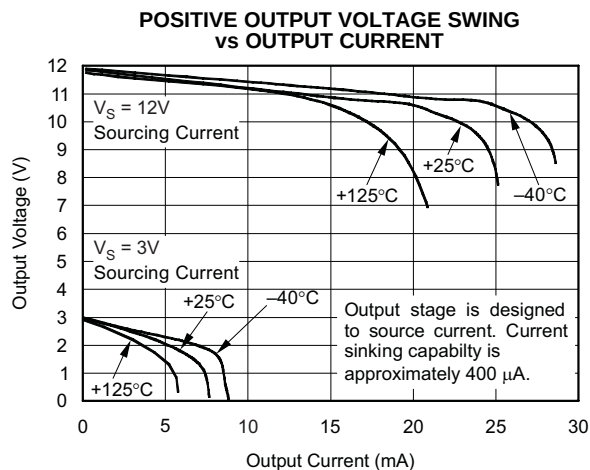


Figure 8.

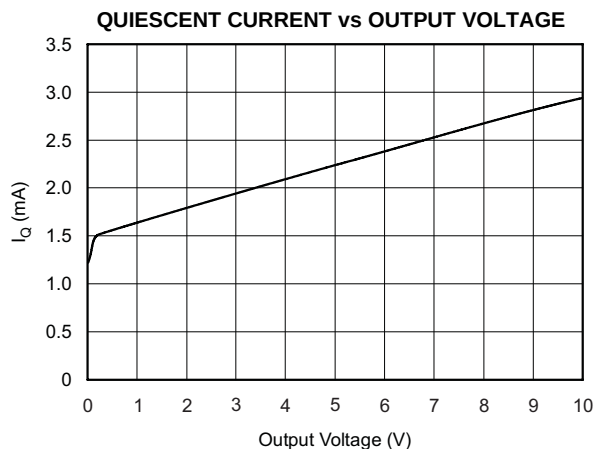


Figure 9.

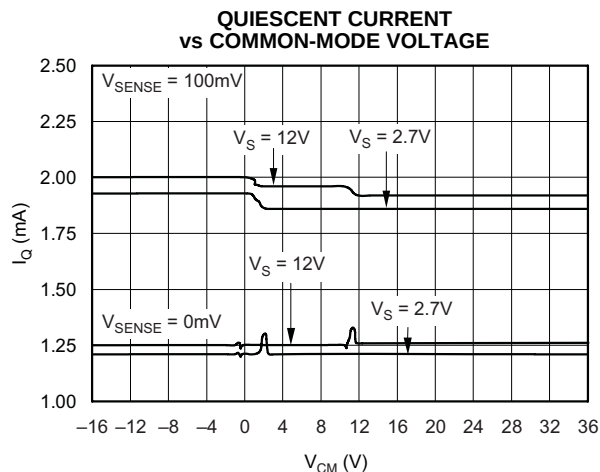


Figure 10.

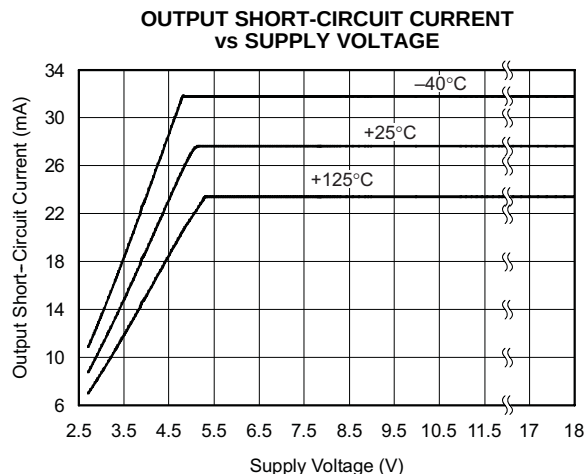


Figure 11.

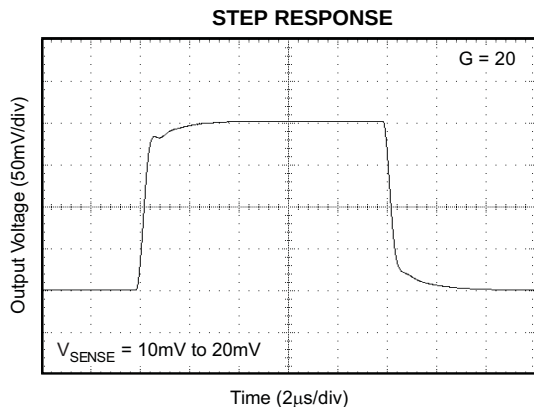


Figure 12.







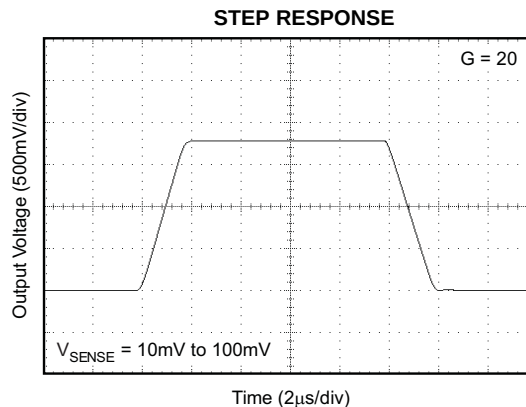


Figure 13.

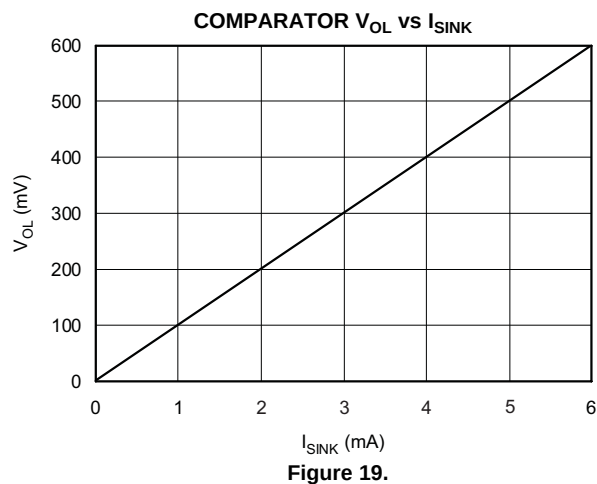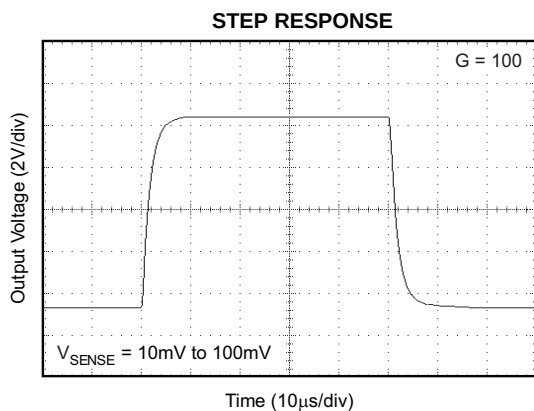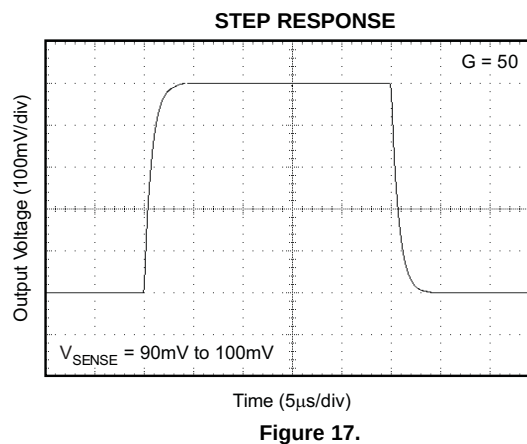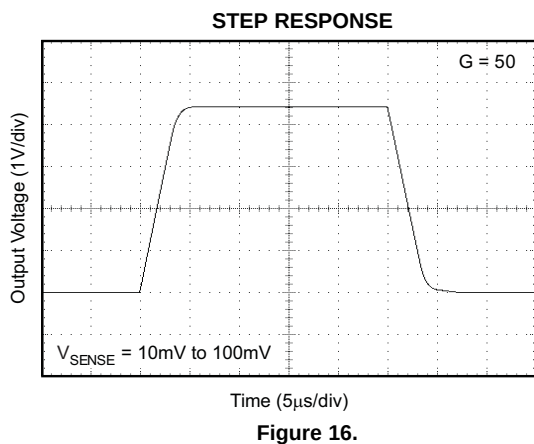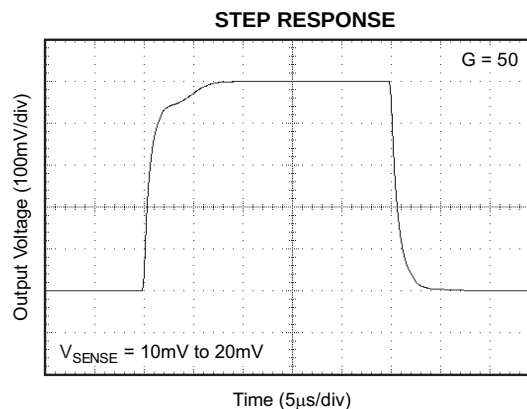

## TYPICAL CHARACTERISTICS (continued)

All specifications at  $T_A = +25^\circ\text{C}$ ,  $V_S = +12\text{V}$ ,  $V_{IN+} = 12\text{V}$ , and  $V_{SENSE} = 100\text{mV}$ , unless otherwise noted.

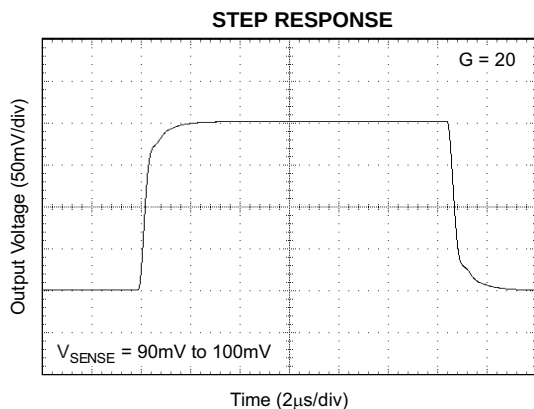

## TYPICAL CHARACTERISTICS (continued)

All specifications at  $T_A = +25^\circ\text{C}$ ,  $V_S = +12\text{V}$ ,  $V_{IN+} = 12\text{V}$ , and  $V_{SENSE} = 100\text{mV}$ , unless otherwise noted.

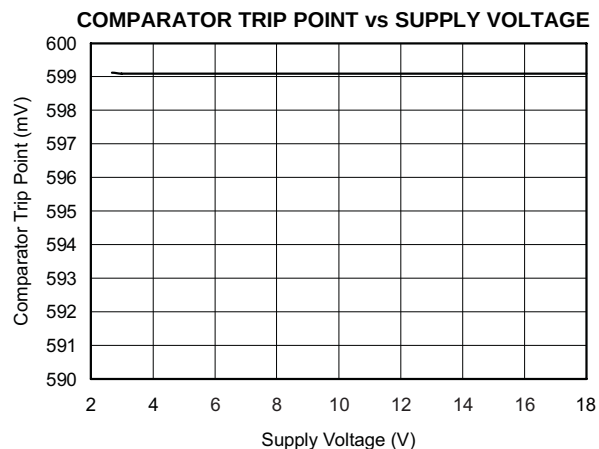


Figure 20.

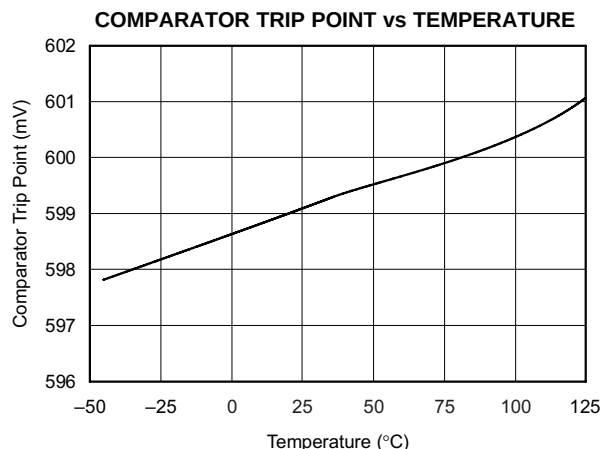


Figure 21.

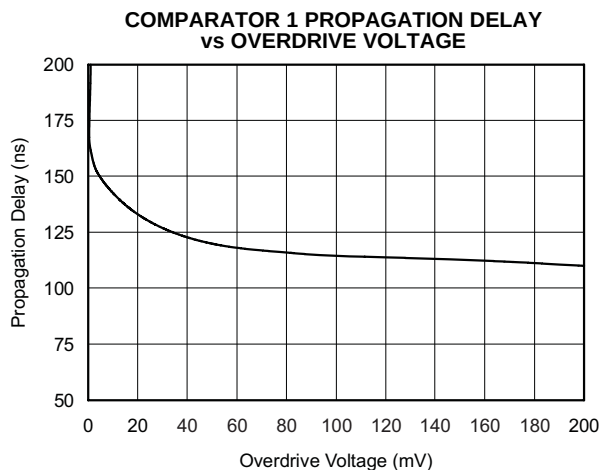


Figure 22.

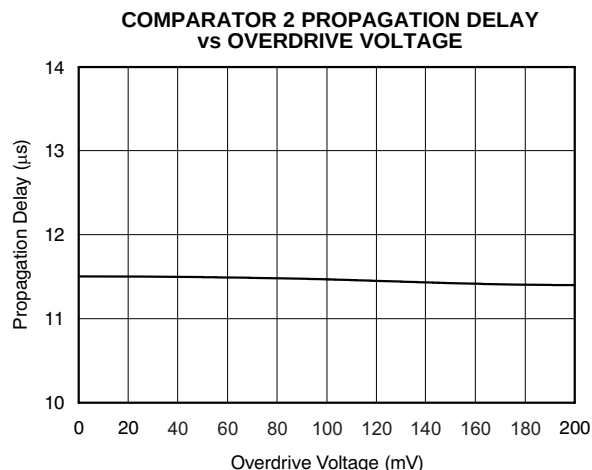


Figure 23.

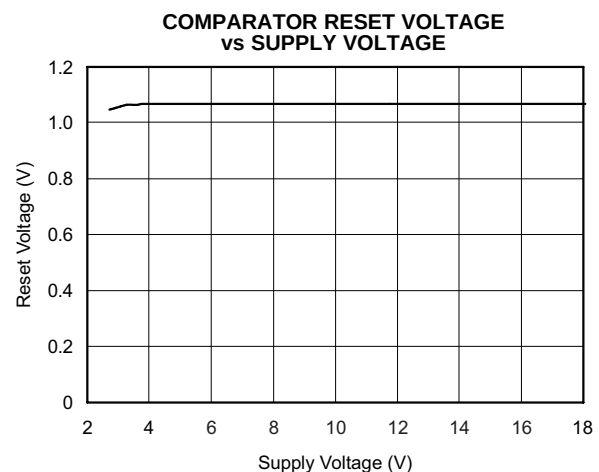


Figure 24.

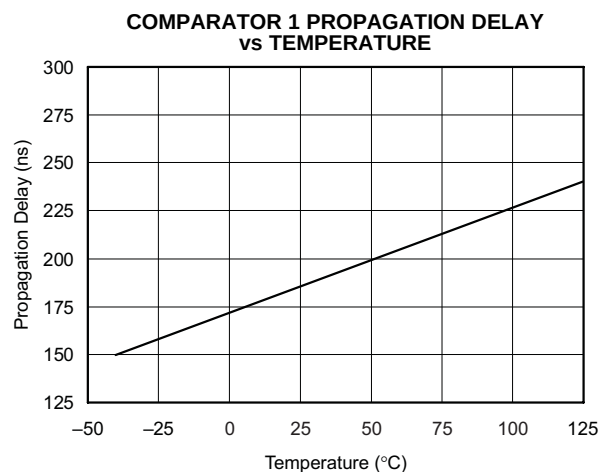


Figure 25.

## TYPICAL CHARACTERISTICS (continued)

All specifications at  $T_A = +25^\circ\text{C}$ ,  $V_S = +12\text{V}$ ,  $V_{IN+} = 12\text{V}$ , and  $V_{SENSE} = 100\text{mV}$ , unless otherwise noted.

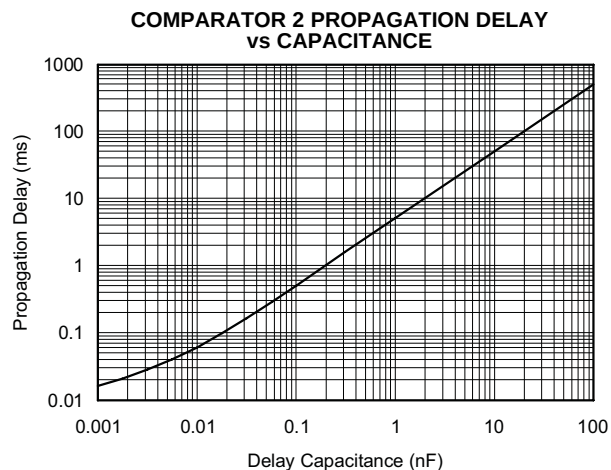


Figure 26.

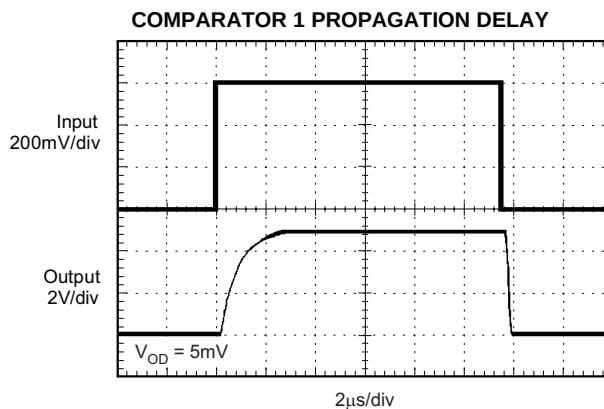


Figure 27.

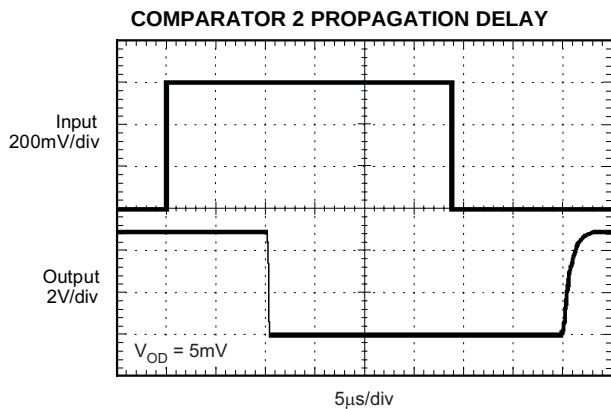


Figure 28.

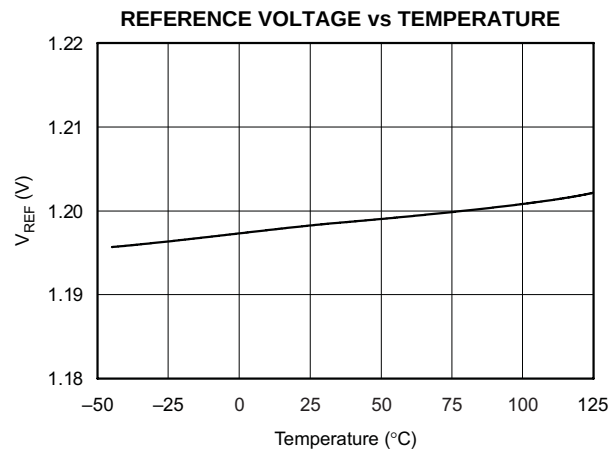


Figure 29.

## APPLICATIONS INFORMATION

### BASIC CONNECTION

Figure 30 shows the basic connection of the INA206, INA207, and INA208. The input pins,  $V_{IN+}$  and  $V_{IN-}$ , should be connected as closely as possible to the shunt resistor to minimize any resistance in series with the shunt resistance.

Power-supply bypass capacitors are required for stability. Applications with noisy or high impedance power supplies may require additional decoupling capacitors to reject power-supply noise. Connect bypass capacitors close to the device pins.

### POWER SUPPLY

The input circuitry of the INA206, INA207, and INA208 can accurately measure beyond the power-supply voltage,  $V_+$ . For example, the  $V_+$  power supply can be 5V, whereas the load power-supply voltage is up to +80V. The output voltage range of the OUT terminal, however, is limited by the voltages on the power-supply pin.

### ACCURACY VARIATIONS AS A RESULT OF $V_{SENSE}$ AND COMMON-MODE VOLTAGE

The accuracy of the INA206, INA207, and INA208 current-shunt monitors is a function of two main variables:  $V_{SENSE}$  ( $V_{IN+} - V_{IN-}$ ) and common-mode voltage,  $V_{CM}$ , relative to the supply voltage,  $V_S$ .  $V_{CM}$  is expressed as  $(V_{IN+} + V_{IN-})/2$ ; however, in practice,  $V_{CM}$  is seen as the voltage at  $V_{IN+}$  because the voltage drop across  $V_{SENSE}$  is usually small.

This section addresses the accuracy of these specific operating regions:

Normal Case 1:

$$V_{SENSE} \geq 20\text{mV}, V_{CM} \geq V_S$$

Normal Case 2:

$$V_{SENSE} \geq 20\text{mV}, V_{CM} < V_S$$

Low  $V_{SENSE}$  Case 1:

$$V_{SENSE} < 20\text{mV}, -16\text{V} \leq V_{CM} < 0$$

Low  $V_{SENSE}$  Case 2:

$$V_{SENSE} < 20\text{mV}, 0\text{V} \leq V_{CM} \leq V_S$$

Low  $V_{SENSE}$  Case 3:

$$V_{SENSE} < 20\text{mV}, V_S < V_{CM} \leq 80\text{V}$$

**Normal Case 1:  $V_{SENSE} \geq 20\text{mV}, V_{CM} \geq V_S$**

This region of operation provides the highest accuracy. Here, the input offset voltage is characterized and measured using a two-step method. First, the gain is determined by Equation 1.

$$G = \frac{V_{OUT1} - V_{OUT2}}{100\text{mV} - 20\text{mV}} \quad (1)$$

where:

$V_{OUT1}$  = Output Voltage with  $V_{SENSE} = 100\text{mV}$

$V_{OUT2}$  = Output Voltage with  $V_{SENSE} = 20\text{mV}$

Then the offset voltage is measured at  $V_{SENSE} = 100\text{mV}$  and referred to the input (RTI) of the current-shunt monitor, as shown in Equation 2.

$$V_{OS\text{RTI}} (\text{Referred-To-Input}) = \left( \frac{V_{OUT1}}{G} \right) - 100\text{mV} \quad (2)$$

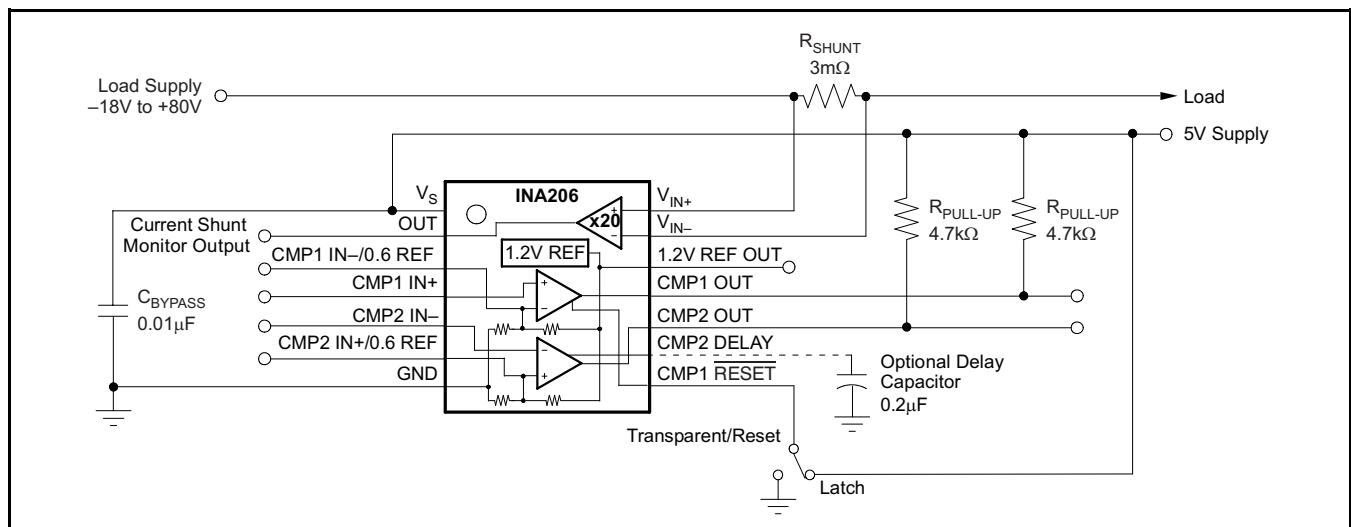


Figure 30. INA20x Basic Connection

In the Typical Characteristics, the [Output Error vs Common-Mode Voltage](#) curve shows the highest accuracy for the this region of operation. In this plot,  $V_S = 12\text{V}$ ; for  $V_{CM} \geq 12\text{V}$ , the output error is at its minimum. This case is also used to create the  $V_{SENSE} \geq 20\text{mV}$  output specifications in the [Electrical Characteristics](#) table.

#### Normal Case 2: $V_{SENSE} \geq 20\text{mV}$ , $V_{CM} < V_S$

This region of operation has slightly less accuracy than Normal Case 1 as a result of the common-mode operating area in which the part functions, as seen in the [Output Error vs Common-Mode Voltage](#) curve. As noted, for this graph  $V_S = 12\text{V}$ ; for  $V_{CM} < 12\text{V}$ , the Output Error increases as  $V_{CM}$  becomes less than  $12\text{V}$ , with a typical maximum error of  $0.005\%$  at the most negative  $V_{CM} = -16\text{V}$ .

#### Low $V_{SENSE}$ Case 1:


$V_{SENSE} < 20\text{mV}$ ,  $-16\text{V} \leq V_{CM} < 0$ ; and

#### Low $V_{SENSE}$ Case 3:

$V_{SENSE} < 20\text{mV}$ ,  $V_S < V_{CM} \leq 80\text{V}$

Although the INA206 family of devices are not designed for accurate operation in either of these regions, some applications are exposed to these conditions; for example, when monitoring power supplies that are switched on and off while  $V_S$  is still applied to the INA206, INA207, or INA208. It is important to know what the behavior of the devices will be in these regions.


As  $V_{SENSE}$  approaches  $0\text{mV}$ , in these  $V_{CM}$  regions, the device output accuracy degrades. A larger-than-normal offset can appear at the current-shunt monitor output with a typical maximum value of  $V_{OUT} = 300\text{mV}$  for  $V_{SENSE} = 0\text{mV}$ . As  $V_{SENSE}$  approaches  $20\text{mV}$ ,  $V_{OUT}$  returns to the expected output value with accuracy as specified in the Electrical Characteristics. [Figure 31](#) illustrates this effect using the INA208 (Gain = 100).

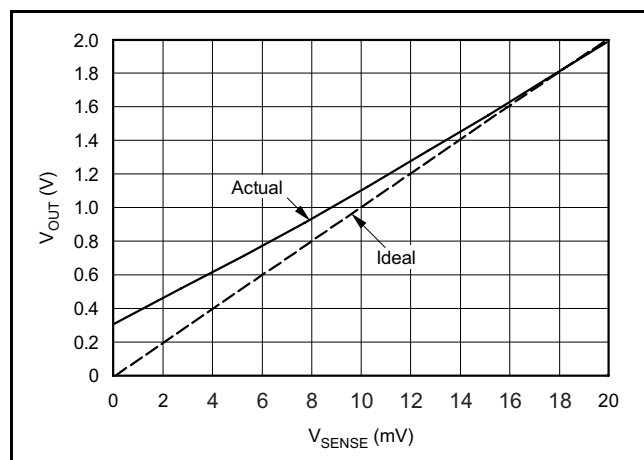

**Figure 31. Example for Low  $V_{SENSE}$  Cases 1 and 3 (INA208, Gain = 100)**

#### Low $V_{SENSE}$ Case 2: $V_{SENSE} < 20\text{mV}$ , $0\text{V} \leq V_{CM} \leq V_S$

This region of operation is the least accurate for the INA206 family. To achieve the wide input common-mode voltage range, these devices use two op amp front ends in parallel. One op amp front end operates in the positive input common-mode voltage range, and the other in the negative input region. For this case, neither of these two internal amplifiers dominates and overall loop gain is very low. Within this region,  $V_{OUT}$  approaches voltages close to linear operation levels for Normal Case 2. This deviation from linear operation becomes greatest the closer  $V_{SENSE}$  approaches  $0\text{V}$ . Within this region, as  $V_{SENSE}$  approaches  $20\text{mV}$ , device operation is closer to that described by Normal Case 2. [Figure 32](#) illustrates this behavior for the INA208. The  $V_{OUT}$  maximum peak for this case is tested by maintaining a constant  $V_S$ , setting  $V_{SENSE} = 0\text{mV}$  and sweeping  $V_{CM}$  from  $0\text{V}$  to  $V_S$ . The exact  $V_{CM}$  at which  $V_{OUT}$  peaks during this test varies from part to part, but the  $V_{OUT}$  maximum peak is tested to be less than the specified  $V_{OUT}$  Tested Limit.

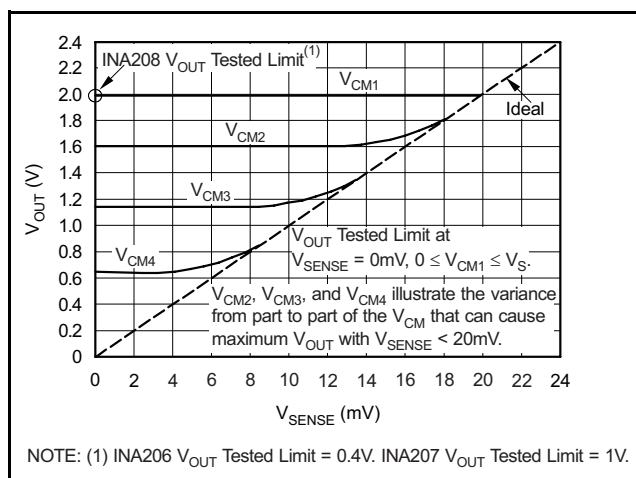

**Figure 32. Example for Low  $V_{SENSE}$  Case 2 (INA208, Gain = 100)**

#### SELECTING $R_S$

The value chosen for the shunt resistor,  $R_S$ , depends on the application and is a compromise between small-signal accuracy and maximum permissible voltage loss in the measurement line. High values of  $R_S$  provide better accuracy at lower currents by minimizing the effects of offset, while low values of  $R_S$  minimize voltage loss in the supply line. For most applications, best performance is attained with an  $R_S$  value that provides a full-scale shunt voltage range of  $50\text{mV}$  to  $100\text{mV}$ . Maximum input voltage for accurate measurements is  $(V_S - 0.2)/\text{Gain}$ .

## TRANSIENT PROTECTION

The –16V to +80V common-mode range of the INA206, INA207, and INA208 is ideal for withstanding automotive fault conditions ranging from 12V battery reversal up to +80V transients, since no additional protective components are needed up to those levels. In the event that the INA206, INA207, and INA208 are exposed to transients on the inputs in excess of their ratings, then external transient absorption with semiconductor transient absorbers (zeners or *Transzorbs*) will be necessary. Use of MOVs or VDRs is not recommended except when they are used in addition to a semiconductor transient absorber. Select the transient absorber such that it will never allow the INA206, INA207, and INA208 to be exposed to transients greater than +80V (that is, allow for transient absorber tolerance, as well as additional voltage due to transient absorber dynamic impedance). Despite the use of internal zener-type ESD protection, the INA206, INA207, and INA208 do not lend themselves to using external resistors in series with the inputs since the internal gain resistors can vary up to  $\pm 30\%$  but are closely matched. (If gain accuracy is not important, then resistors can be added in series with the INA206, INA207, and INA208 inputs with two equal resistors on each input.)

## OUTPUT VOLTAGE RANGE

The output of the INA206, INA207, and INA208 is accurate within the output voltage swing range set by the power supply pin, V+. This performance is best illustrated when using the INA208 (a gain of 100 version), where a 100mV full-scale input from the shunt resistor requires an output voltage swing of +10V, and a power-supply voltage sufficient to achieve +10V on the output.

## INPUT FILTERING

An obvious and straightforward location for filtering is at the output of the INA206, INA207, and INA208 series; however, this location negates the advantage of the low output impedance of the internal buffer. The only other option for filtering is at the input pins of the INA206, INA207, and INA208, which is complicated by the internal  $5k\Omega + 30\%$  input impedance; this is shown in Figure 33. Using the lowest possible resistor values minimizes both the initial shift in gain and effects of tolerance. The effect on initial gain is given by Equation 3:

$$\text{Gain Error\%} = 100 - \left( 100 \times \frac{5k\Omega}{5k\Omega + R_{\text{FILT}}} \right) \quad (3)$$

Total effect on gain error can be calculated by replacing the  $5k\Omega$  term with  $5k\Omega - 30\%$  (or  $3.5k\Omega$ ) or  $5k\Omega + 30\%$  (or  $6.5k\Omega$ ). The tolerance extremes of  $R_{\text{FILT}}$  can also be inserted into the equation. If a pair of  $100\Omega$  1% resistors are used on the inputs, the initial gain error will be 1.96%. Worst-case tolerance conditions will always occur at the lower excursion of the internal  $5k\Omega$  resistor ( $3.5k\Omega$ ), and the higher excursion of  $R_{\text{FILT}} - 3\%$  in this case.

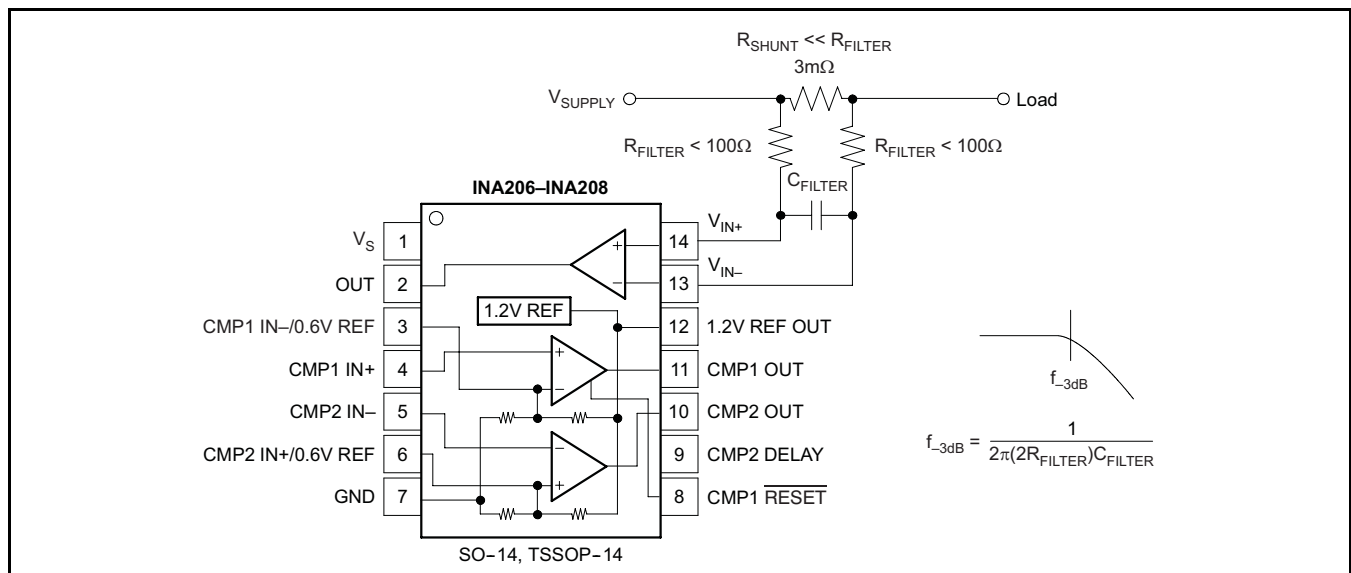


Figure 33. Input Filter (Gain Error –1.5% to –2.2%)

Note that the specified accuracy of the INA206, INA207, and INA208 must then be combined in addition to these tolerances. While this discussion treated accuracy worst-case conditions by combining the extremes of the resistor values, it is appropriate to use geometric mean or root sum square calculations to total the effects of accuracy variations.

## REFERENCE

The INA206, INA207, and INA208 include an internal voltage reference that has a load regulation of 0.4mV/mA (typical), and not more than 100ppm/°C of drift. Only the 14-pin package allows external access to reference voltages, where voltages of 1.2V and 0.6V are both available. Output current versus output voltage is illustrated in the [Typical Characteristics](#) section.

## COMPARATOR

The INA206, INA207, and INA208 devices incorporate two open-drain comparators. These comparators typically have 2mV of offset and a 1.3μs (typical) response time. The output of Comparator 1 latches and is reset through the CMP1 RESET pin, as shown in [Figure 35](#). This configuration applies to both the 10- and 14-pin versions. [Figure 34](#) illustrates the comparator delay.

The 14-pin versions of the INA206, INA207, and INA208 include additional features for comparator functions. The comparator reference voltage of both Comparator 1 and Comparator 2 can be overridden by external inputs for increased design flexibility. Comparator 2 has a programmable delay.

## COMPARATOR DELAY (14-Pin Version Only)

The Comparator 2 programmable delay is controlled by a capacitor connected to the CMP2 Delay Pin; see [Figure 30](#). The capacitor value (in μF) is selected by using [Equation 4](#):

$$C_{\text{DELAY}} \text{ (in } \mu\text{F)} = \frac{t_D}{5} \quad (4)$$

A simplified version of the delay circuit for Comparator 2 is shown in [Figure 34](#). The delay comparator consists of two comparator stages with the delay between them. Note that I1 and I2 cannot be turned on simultaneously; I1 corresponds to a U1 low output and I2 corresponds to a U1 high output. Using an initial assumption that the U1 output is low, I1 is on, then U2 +IN is zero. If U1 goes high, I2 supplies 120nA to C<sub>DELAY</sub>. The voltage at U2 +IN begins to ramp toward a 0.6V threshold. When the voltage crosses this threshold, the U2 output goes high while the voltage at U2 +IN continues to ramp up to a maximum of 1.2V when given sufficient time (twice the value of the delay specified for C<sub>DELAY</sub>). This entire sequence is reversed when the comparator outputs go low, so that returning to low exhibits the same delay.

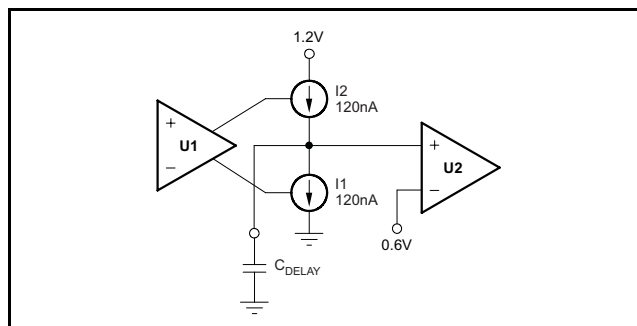


Figure 34. Simplified Model of the Comparator 2 Delay Circuit

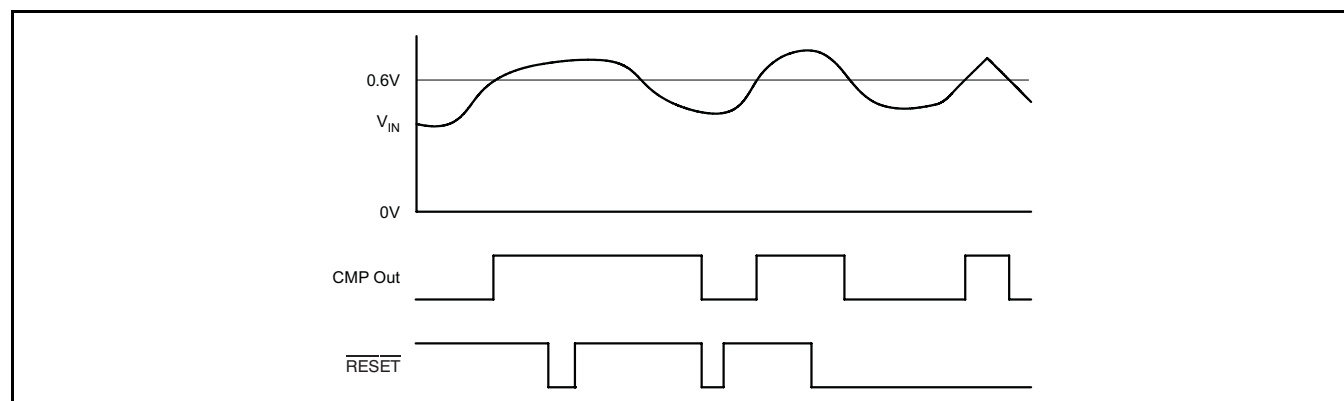


Figure 35. Comparator 1 Latching Capability



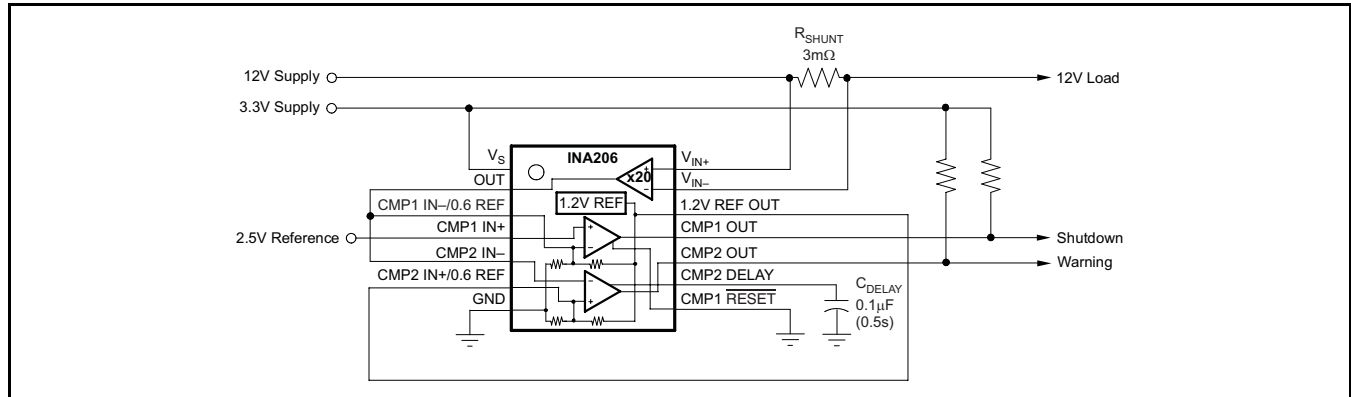


Figure 36. Server 12V Supply Current Monitor

It is important to note what will happen if events occur more rapidly than the delay timeout; for example, when the U1 output goes high (turning on I2), but returns low (turning I1 back on) prior to reaching the 0.6V transition for U2. The voltage at U2 +IN ramps back down at a rate determined by the value of  $C_{DELAY}$ , and only returns to zero if given sufficient time.

In essence, when analyzing Comparator 2 for behavior with events more rapid than its delay setting, use the model shown in Figure 34.

### COMPARATOR MAXIMUM INPUT VOLTAGE RANGE

The maximum voltage at the comparator input for normal operation is up to  $(V+) - 1.5V$ . There are special considerations when overdriving the reference inputs (pins 3 and 6). Driving either or both inputs high enough to drive 1mA back into the reference introduces errors into the reference. Figure 37 shows the basic input structure. A general guideline is to

limit the voltage on both inputs to a total of 20V. The exact limit depends on the available voltage and whether either or both inputs are subject to the large voltage. When making this determination, consider the 20kΩ from each input back to the comparator. Figure 38 shows the maximum input voltage that avoids creating a reference error when driving both inputs (an equivalent resistance back into the reference of 10kΩ).

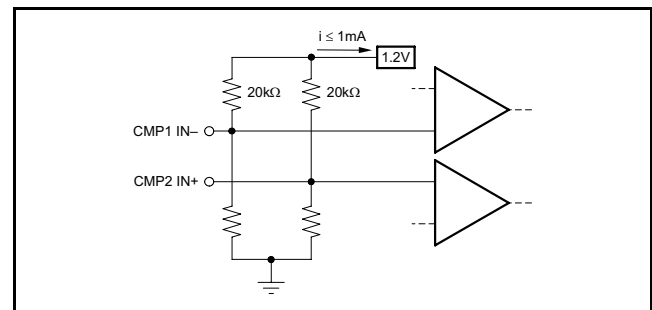


Figure 37. Limit Current Into Reference  $\leq 1mA$

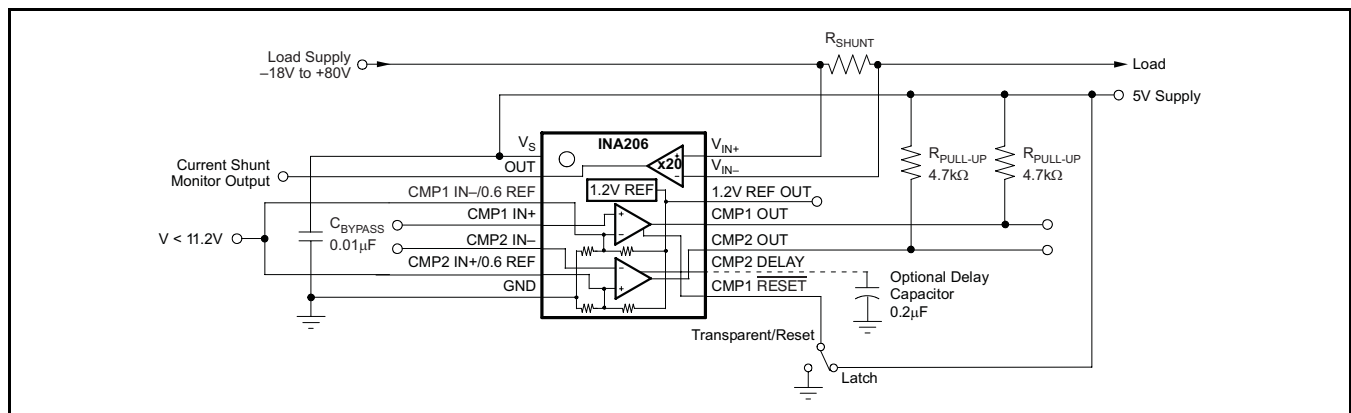


Figure 38. Overdriving Comparator Inputs Without Generating a Reference Error



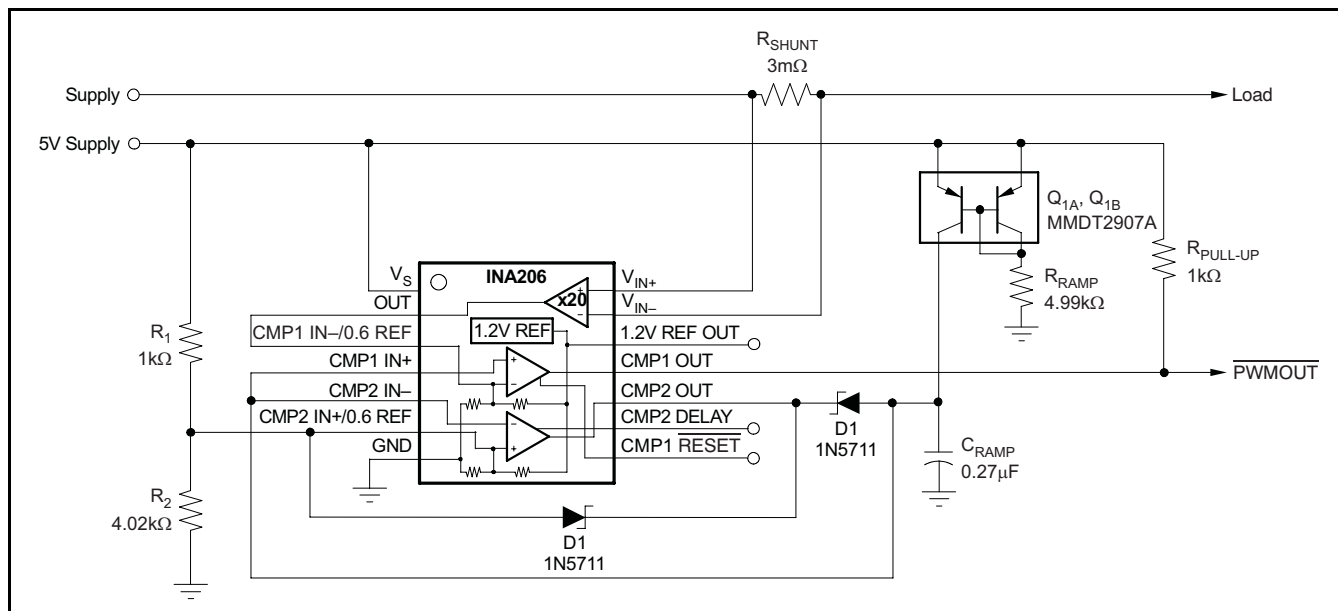


Figure 39. PWM Output Current-Shunt Monitor



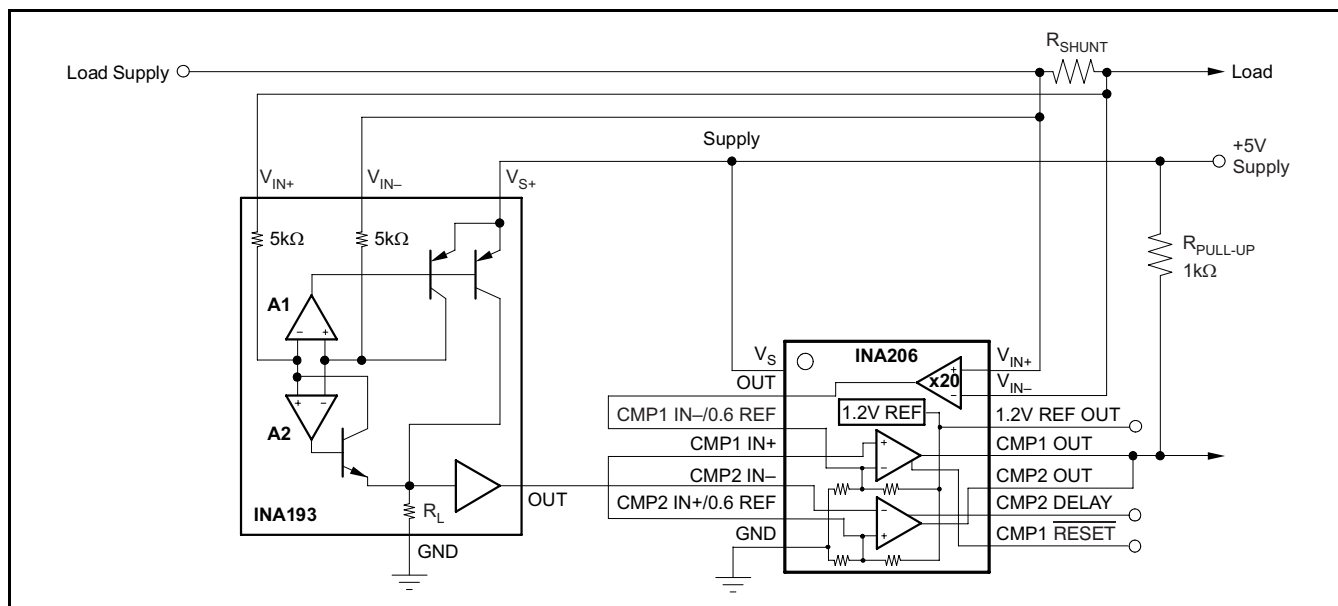



Figure 40. Bi-Directional Current Comparator

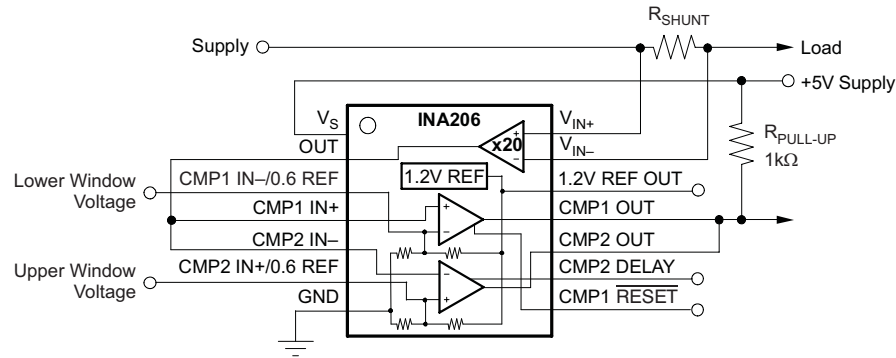

a) Generic Window Comparator

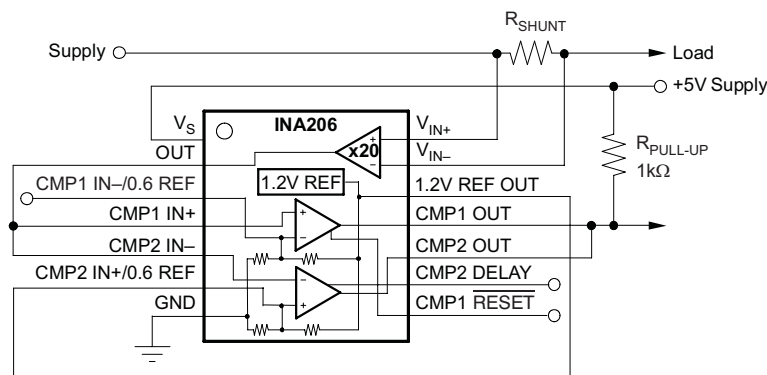


b) Window Comparator with +1.2V Upper Limit and +0.6V Lower Limit

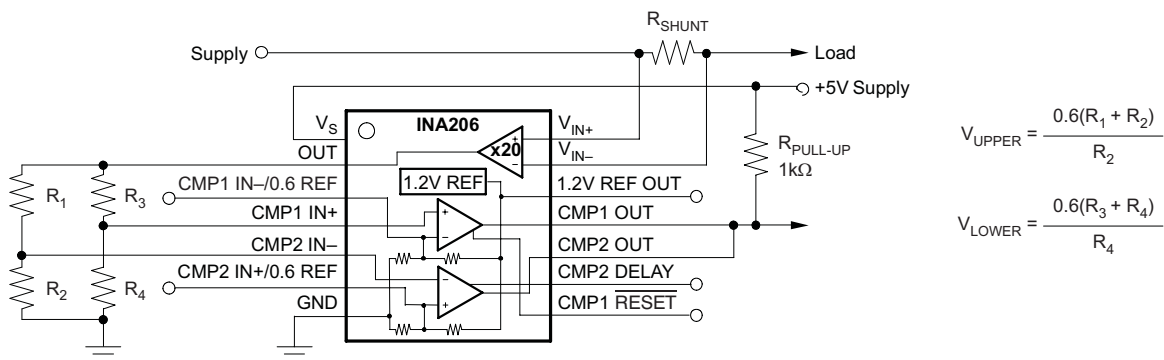

c) Window Comparator with Individual Dividers

Figure 41. Using the INA206, INA207, and INA208 as Window Comparators

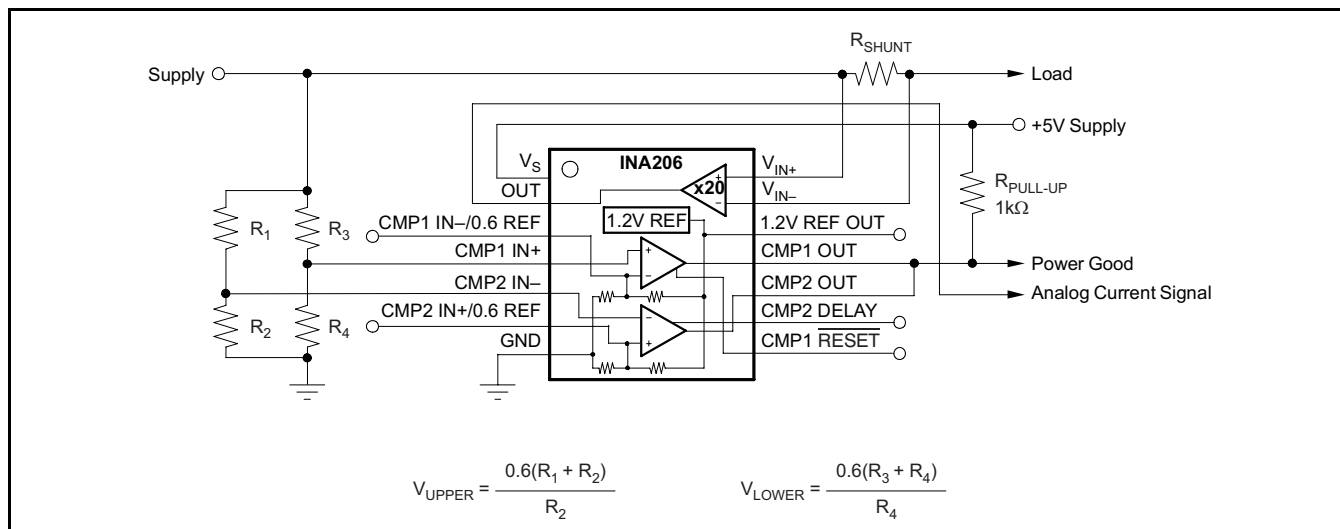

**Figure 42. Analog Output Current-Shunt Monitor with Comparators Used as Power-Supply Under-Limit/Over-Limit or Power-Good Detector**

**PACKAGING INFORMATION**

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2)            | Lead/Ball Finish<br>(6)    | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5) | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|----------------------------|----------------------------|----------------------|--------------|-------------------------|-------------------------|
| INA206AID        | ACTIVE        | SOIC         | D                  | 14   | 50             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU                  | Level-2-260C-1 YEAR  | -40 to 125   | INA206A                 | <a href="#">Samples</a> |
| INA206AIDG4      | ACTIVE        | SOIC         | D                  | 14   | 50             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU                  | Level-2-260C-1 YEAR  | -40 to 125   | INA206A                 | <a href="#">Samples</a> |
| INA206AIDGSR     | ACTIVE        | VSSOP        | DGS                | 10   | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAUAG                | Level-2-260C-1 YEAR  | -40 to 125   | BQQ                     | <a href="#">Samples</a> |
| INA206AIDGST     | ACTIVE        | VSSOP        | DGS                | 10   | 250            | Green (RoHS<br>& no Sb/Br) | CU NIPDAUAG                | Level-2-260C-1 YEAR  | -40 to 125   | BQQ                     | <a href="#">Samples</a> |
| INA206AIDGSTG4   | ACTIVE        | VSSOP        | DGS                | 10   | 250            | Green (RoHS<br>& no Sb/Br) | CU NIPDAUAG                | Level-2-260C-1 YEAR  | -40 to 125   | BQQ                     | <a href="#">Samples</a> |
| INA206AIDR       | ACTIVE        | SOIC         | D                  | 14   | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU                  | Level-2-260C-1 YEAR  | -40 to 125   | INA206A                 | <a href="#">Samples</a> |
| INA206AIDRG4     | ACTIVE        | SOIC         | D                  | 14   | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU                  | Level-2-260C-1 YEAR  | -40 to 125   | INA206A                 | <a href="#">Samples</a> |
| INA206AIPW       | ACTIVE        | TSSOP        | PW                 | 14   | 90             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU                  | Level-2-260C-1 YEAR  | -40 to 125   | INA206A                 | <a href="#">Samples</a> |
| INA206AIPWR      | ACTIVE        | TSSOP        | PW                 | 14   | 2000           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU                  | Level-2-260C-1 YEAR  | -40 to 125   | INA206A                 | <a href="#">Samples</a> |
| INA207AID        | ACTIVE        | SOIC         | D                  | 14   | 50             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU                  | Level-2-260C-1 YEAR  | -40 to 125   | INA207A                 | <a href="#">Samples</a> |
| INA207AIDG4      | ACTIVE        | SOIC         | D                  | 14   | 50             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU                  | Level-2-260C-1 YEAR  | -40 to 125   | INA207A                 | <a href="#">Samples</a> |
| INA207AIDGSR     | ACTIVE        | VSSOP        | DGS                | 10   | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU  <br>CU NIPDAUAG | Level-2-260C-1 YEAR  | -40 to 125   | BQR                     | <a href="#">Samples</a> |
| INA207AIDGSRG4   | ACTIVE        | VSSOP        | DGS                | 10   | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU                  | Level-2-260C-1 YEAR  | -40 to 125   | BQR                     | <a href="#">Samples</a> |
| INA207AIDGST     | ACTIVE        | VSSOP        | DGS                | 10   | 250            | Green (RoHS<br>& no Sb/Br) | CU NIPDAU  <br>CU NIPDAUAG | Level-2-260C-1 YEAR  | -40 to 125   | BQR                     | <a href="#">Samples</a> |
| INA207AIDGSTG4   | ACTIVE        | VSSOP        | DGS                | 10   | 250            | Green (RoHS<br>& no Sb/Br) | CU NIPDAU                  | Level-2-260C-1 YEAR  | -40 to 125   | BQR                     | <a href="#">Samples</a> |
| INA207AIPW       | ACTIVE        | TSSOP        | PW                 | 14   | 90             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU                  | Level-2-260C-1 YEAR  | -40 to 125   | INA207A                 | <a href="#">Samples</a> |
| INA207AIPWR      | ACTIVE        | TSSOP        | PW                 | 14   | 2000           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU                  | Level-2-260C-1 YEAR  | -40 to 125   | INA207A                 | <a href="#">Samples</a> |

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2)            | Lead/Ball Finish<br>(6)    | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5) | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|----------------------------|----------------------------|----------------------|--------------|-------------------------|-------------------------|
| INA208AID        | ACTIVE        | SOIC         | D                  | 14   | 50             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU                  | Level-2-260C-1 YEAR  | -40 to 125   | INA208A                 | <a href="#">Samples</a> |
| INA208AIDG4      | ACTIVE        | SOIC         | D                  | 14   | 50             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU                  | Level-2-260C-1 YEAR  | -40 to 125   | INA208A                 | <a href="#">Samples</a> |
| INA208AIDGSR     | ACTIVE        | VSSOP        | DGS                | 10   | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU  <br>CU NIPDAUAG | Level-2-260C-1 YEAR  | -40 to 125   | BQS                     | <a href="#">Samples</a> |
| INA208AIDGST     | ACTIVE        | VSSOP        | DGS                | 10   | 250            | Green (RoHS<br>& no Sb/Br) | CU NIPDAU  <br>CU NIPDAUAG | Level-2-260C-1 YEAR  | -40 to 125   | BQS                     | <a href="#">Samples</a> |
| INA208AIDGSTG4   | ACTIVE        | VSSOP        | DGS                | 10   | 250            | Green (RoHS<br>& no Sb/Br) | CU NIPDAU                  | Level-2-260C-1 YEAR  | -40 to 125   | BQS                     | <a href="#">Samples</a> |
| INA208AIDR       | ACTIVE        | SOIC         | D                  | 14   | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU                  | Level-2-260C-1 YEAR  | -40 to 125   | INA208A                 | <a href="#">Samples</a> |
| INA208AIPW       | ACTIVE        | TSSOP        | PW                 | 14   | 90             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU                  | Level-2-260C-1 YEAR  | -40 to 125   | INA208A                 | <a href="#">Samples</a> |
| INA208AIPWR      | ACTIVE        | TSSOP        | PW                 | 14   | 2000           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU                  | Level-2-260C-1 YEAR  | -40 to 125   | INA208A                 | <a href="#">Samples</a> |

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.


(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

<sup>(5)</sup> Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

<sup>(6)</sup> Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

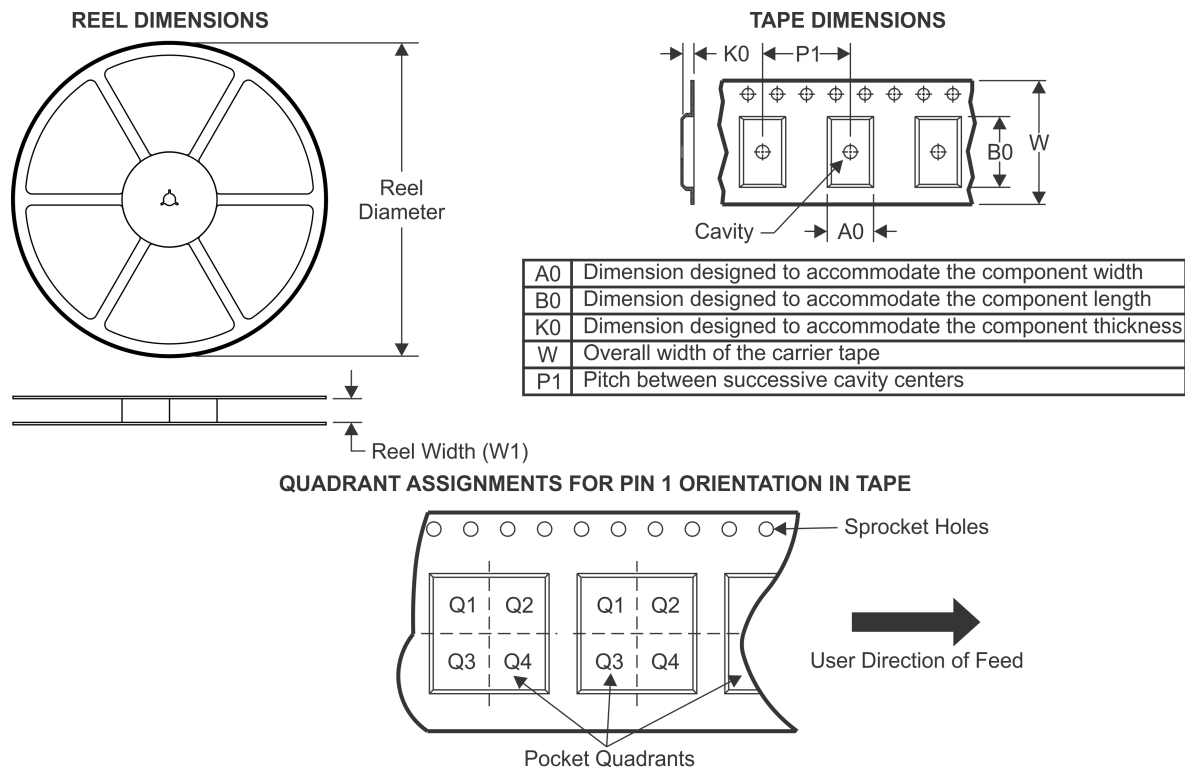**TAPE AND REEL INFORMATION**


\*All dimensions are nominal

| Device       | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| INA206AIDGSR | VSSOP        | DGS             | 10   | 2500 | 330.0              | 12.4               | 5.3     | 3.4     | 1.4     | 8.0     | 12.0   | Q1            |
| INA206AIDGST | VSSOP        | DGS             | 10   | 250  | 330.0              | 12.4               | 5.3     | 3.4     | 1.4     | 8.0     | 12.0   | Q1            |
| INA206AIDR   | SOIC         | D               | 14   | 2500 | 330.0              | 16.4               | 6.5     | 9.0     | 2.1     | 8.0     | 16.0   | Q1            |
| INA206AIPWR  | TSSOP        | PW              | 14   | 2000 | 330.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |
| INA207AIDGSR | VSSOP        | DGS             | 10   | 2500 | 330.0              | 12.4               | 5.3     | 3.4     | 1.4     | 8.0     | 12.0   | Q1            |
| INA207AIDGST | VSSOP        | DGS             | 10   | 250  | 180.0              | 12.4               | 5.3     | 3.4     | 1.4     | 8.0     | 12.0   | Q1            |
| INA207AIPWR  | TSSOP        | PW              | 14   | 2000 | 330.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |
| INA208AIDGSR | VSSOP        | DGS             | 10   | 2500 | 330.0              | 12.4               | 5.3     | 3.4     | 1.4     | 8.0     | 12.0   | Q1            |
| INA208AIDGST | VSSOP        | DGS             | 10   | 250  | 180.0              | 12.4               | 5.3     | 3.4     | 1.4     | 8.0     | 12.0   | Q1            |
| INA208AIDR   | SOIC         | D               | 14   | 2500 | 330.0              | 16.4               | 6.5     | 9.0     | 2.1     | 8.0     | 16.0   | Q1            |
| INA208AIPWR  | TSSOP        | PW              | 14   | 2000 | 330.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |

## TAPE AND REEL BOX DIMENSIONS

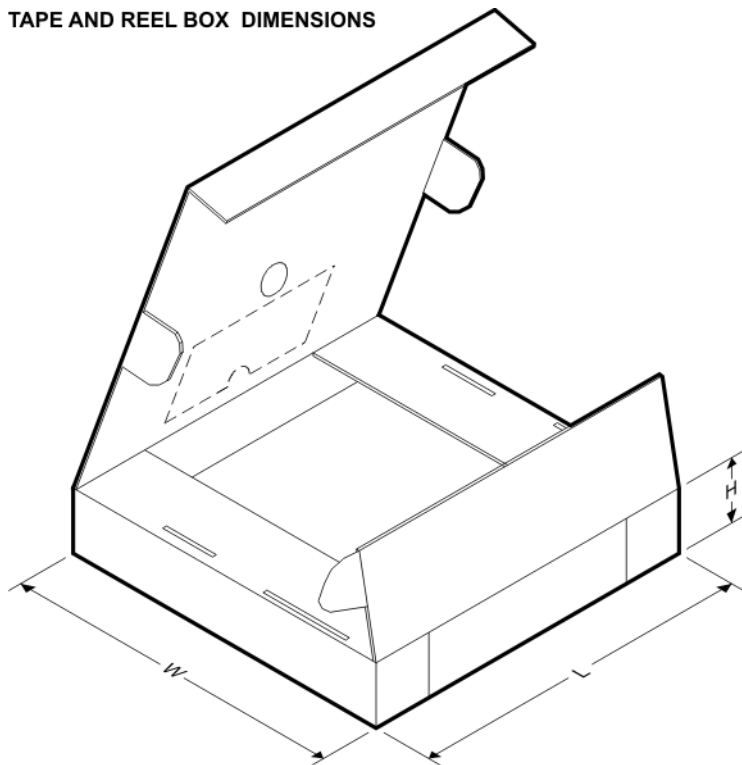


\*All dimensions are nominal

| Device       | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|--------------|--------------|-----------------|------|------|-------------|------------|-------------|
| INA206AIDGSR | VSSOP        | DGS             | 10   | 2500 | 366.0       | 364.0      | 50.0        |
| INA206AIDGST | VSSOP        | DGS             | 10   | 250  | 366.0       | 364.0      | 50.0        |
| INA206AIDR   | SOIC         | D               | 14   | 2500 | 367.0       | 367.0      | 38.0        |
| INA206AIPWR  | TSSOP        | PW              | 14   | 2000 | 367.0       | 367.0      | 35.0        |
| INA207AIDGSR | VSSOP        | DGS             | 10   | 2500 | 367.0       | 367.0      | 35.0        |
| INA207AIDGST | VSSOP        | DGS             | 10   | 250  | 210.0       | 185.0      | 35.0        |
| INA207AIPWR  | TSSOP        | PW              | 14   | 2000 | 367.0       | 367.0      | 35.0        |
| INA208AIDGSR | VSSOP        | DGS             | 10   | 2500 | 367.0       | 367.0      | 35.0        |
| INA208AIDGST | VSSOP        | DGS             | 10   | 250  | 210.0       | 185.0      | 35.0        |
| INA208AIDR   | SOIC         | D               | 14   | 2500 | 367.0       | 367.0      | 38.0        |
| INA208AIPWR  | TSSOP        | PW              | 14   | 2000 | 367.0       | 367.0      | 35.0        |



## DGS (S-PDSO-G10)


## PLASTIC SMALL-OUTLINE PACKAGE

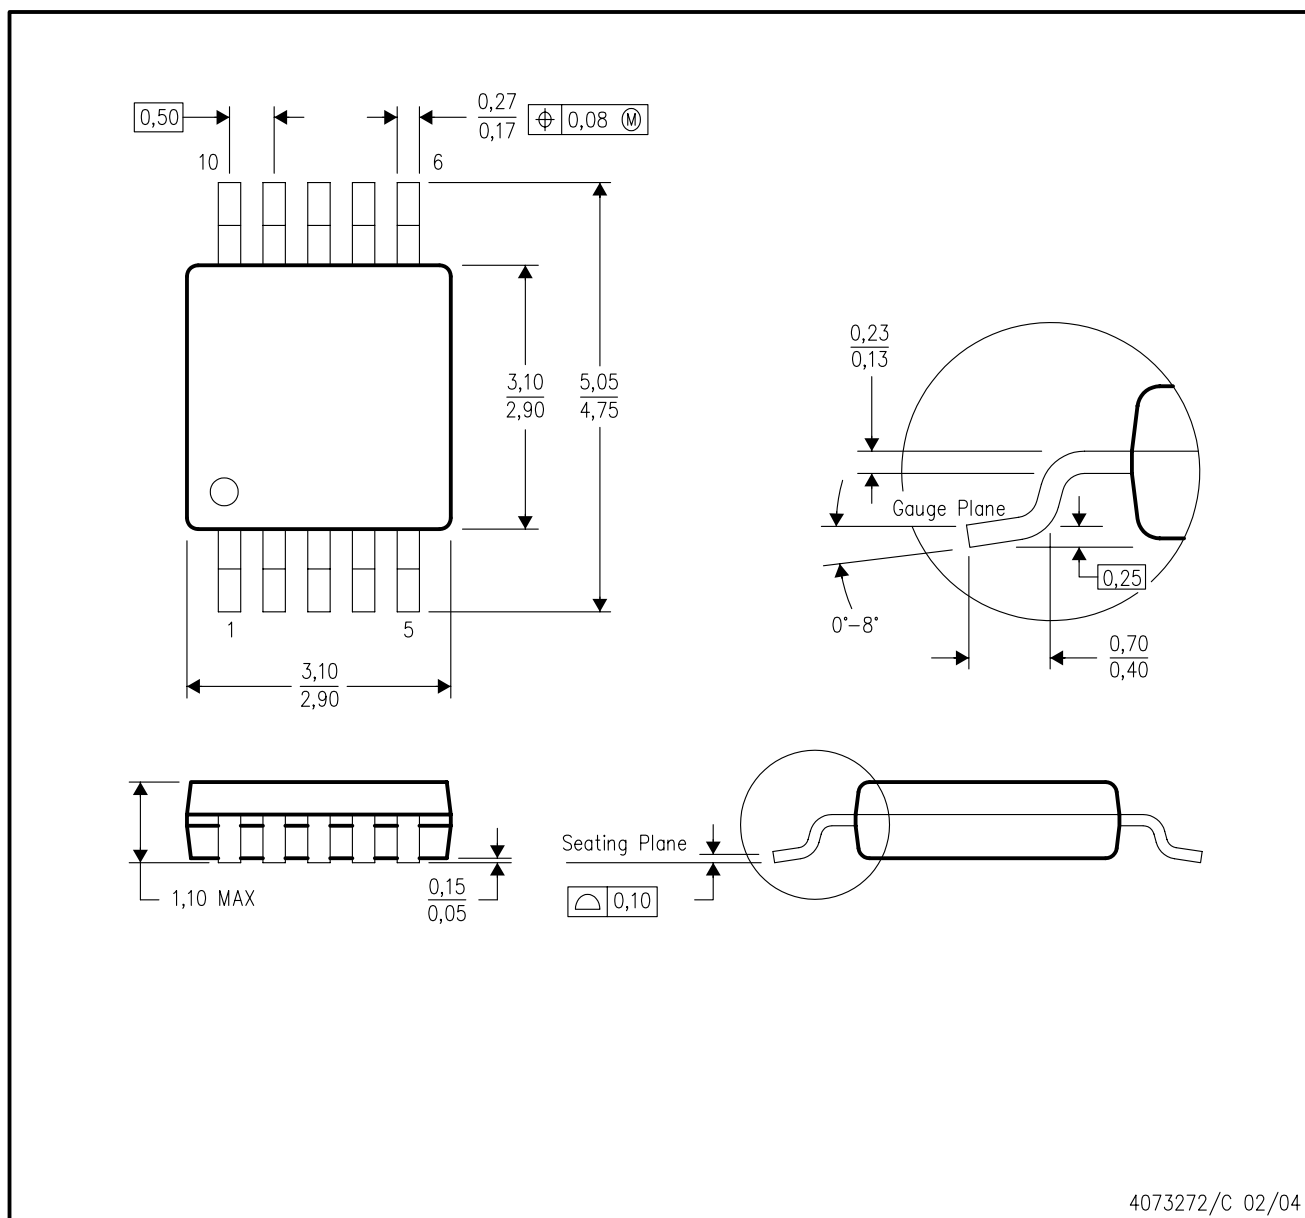

- NOTES:
- All linear dimensions are in millimeters.
  - This drawing is subject to change without notice.
  - Body dimensions do not include mold flash or protrusion.
  - Falls within JEDEC MO-187 variation BA.

DGS (S-PDSO-G10)


PLASTIC SMALL OUTLINE PACKAGE

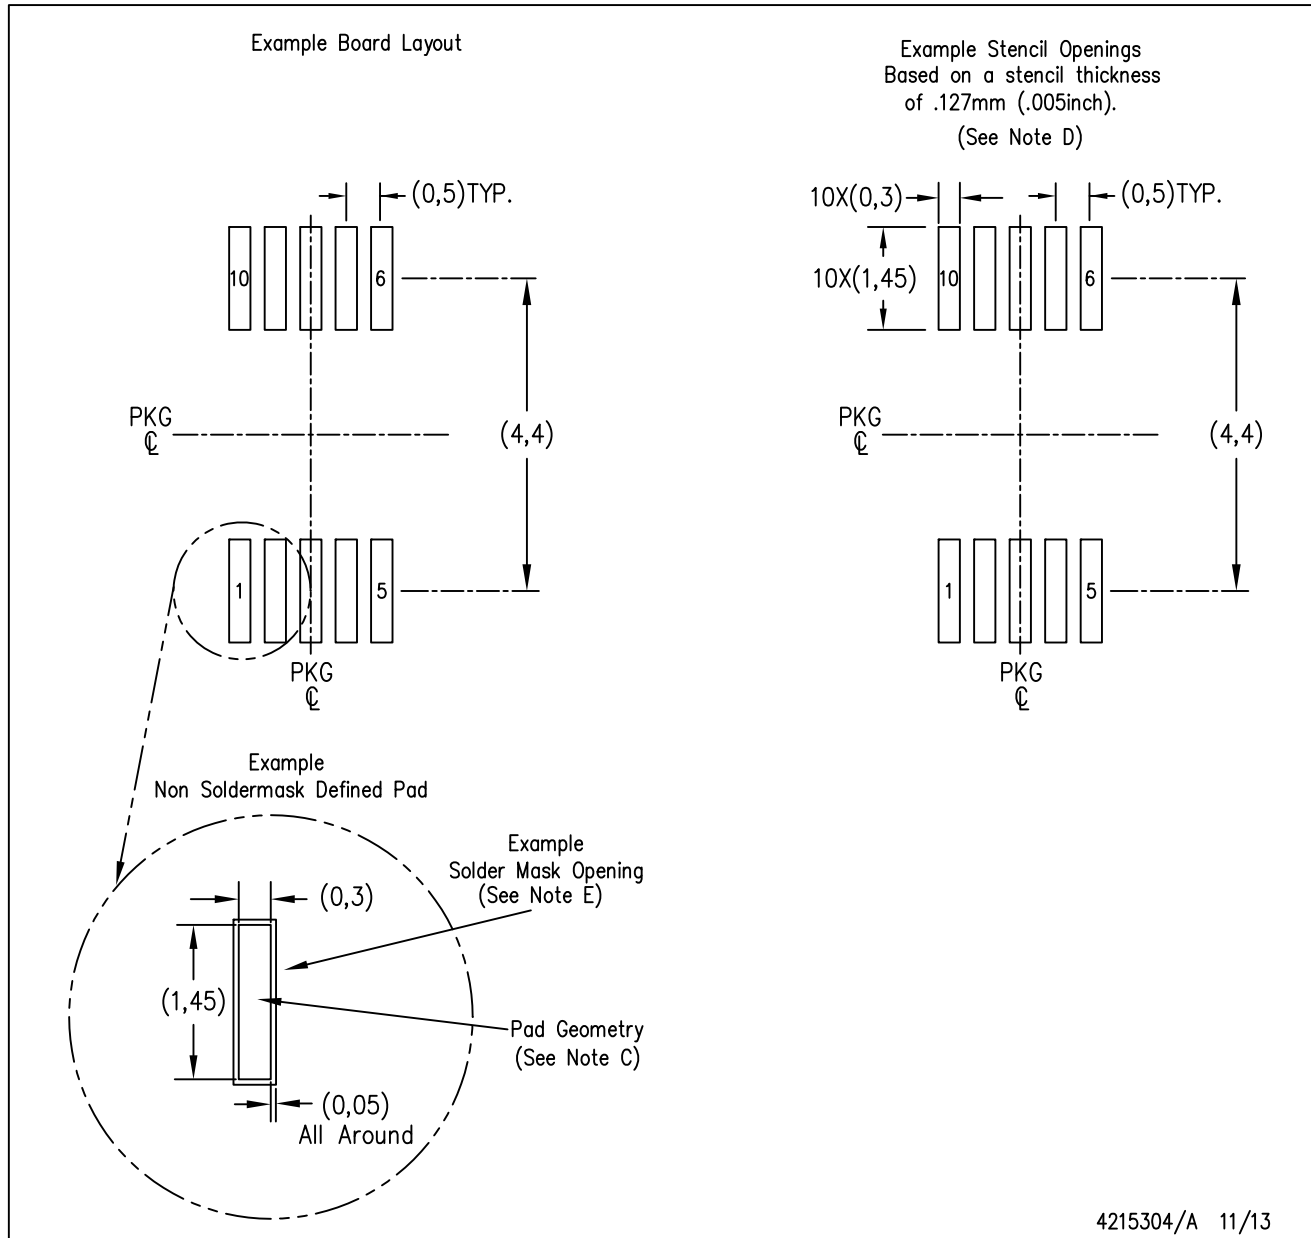

- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Publication IPC-7351 is recommended for alternate designs.
  - D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
  - E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

D (R-PDSO-G14)

PLASTIC SMALL OUTLINE

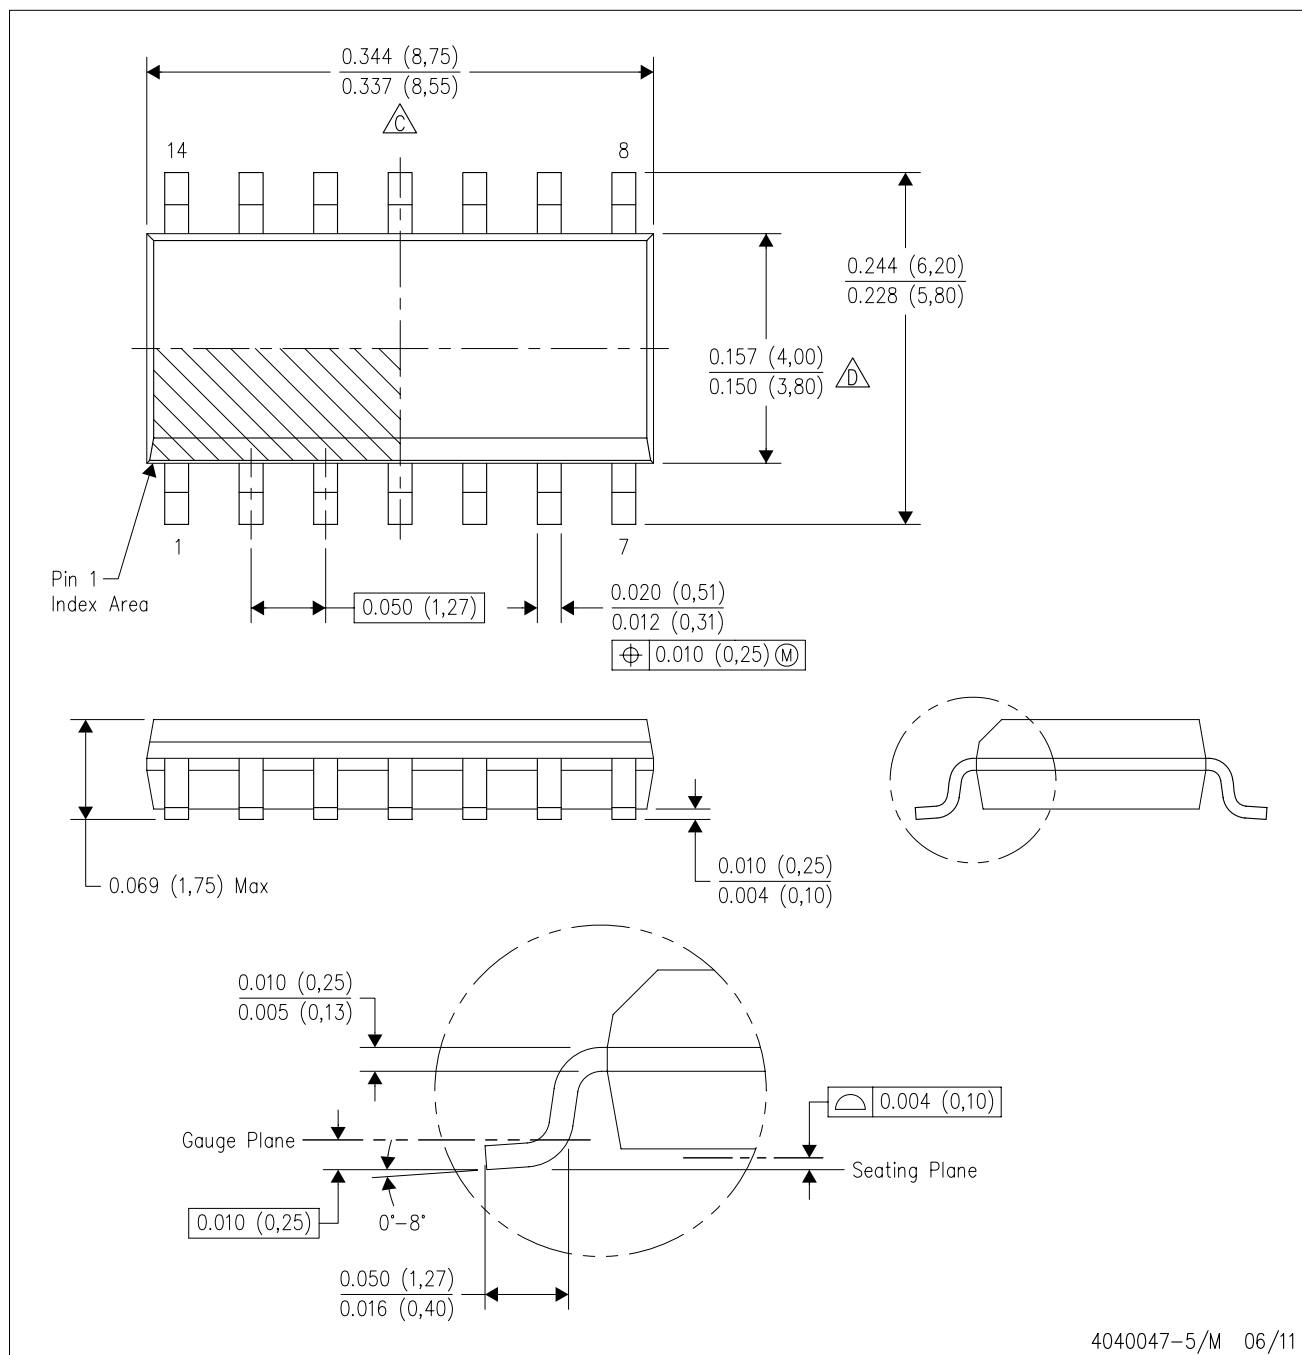


NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
- D. Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
- E. Reference JEDEC MS-012 variation AB.

D (R-PDSO-G14)


PLASTIC SMALL OUTLINE

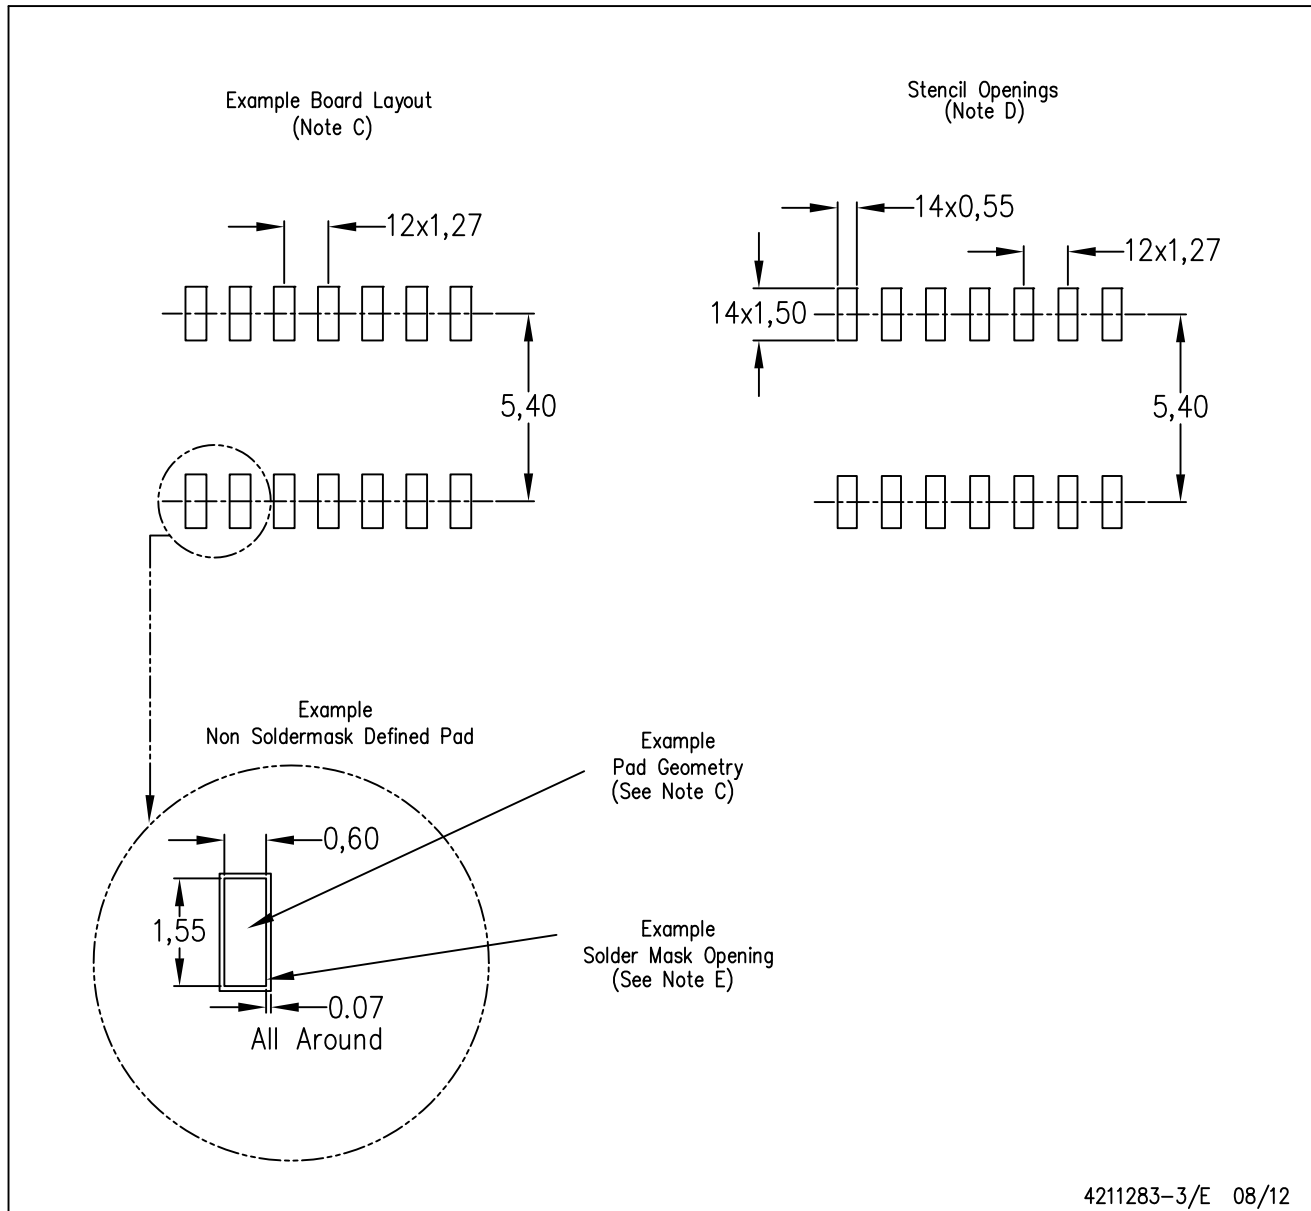

- NOTES:
- All linear dimensions are in millimeters.
  - This drawing is subject to change without notice.
  - Publication IPC-7351 is recommended for alternate designs.
  - Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
  - Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

PW (R-PDSO-G14)

PLASTIC SMALL OUTLINE

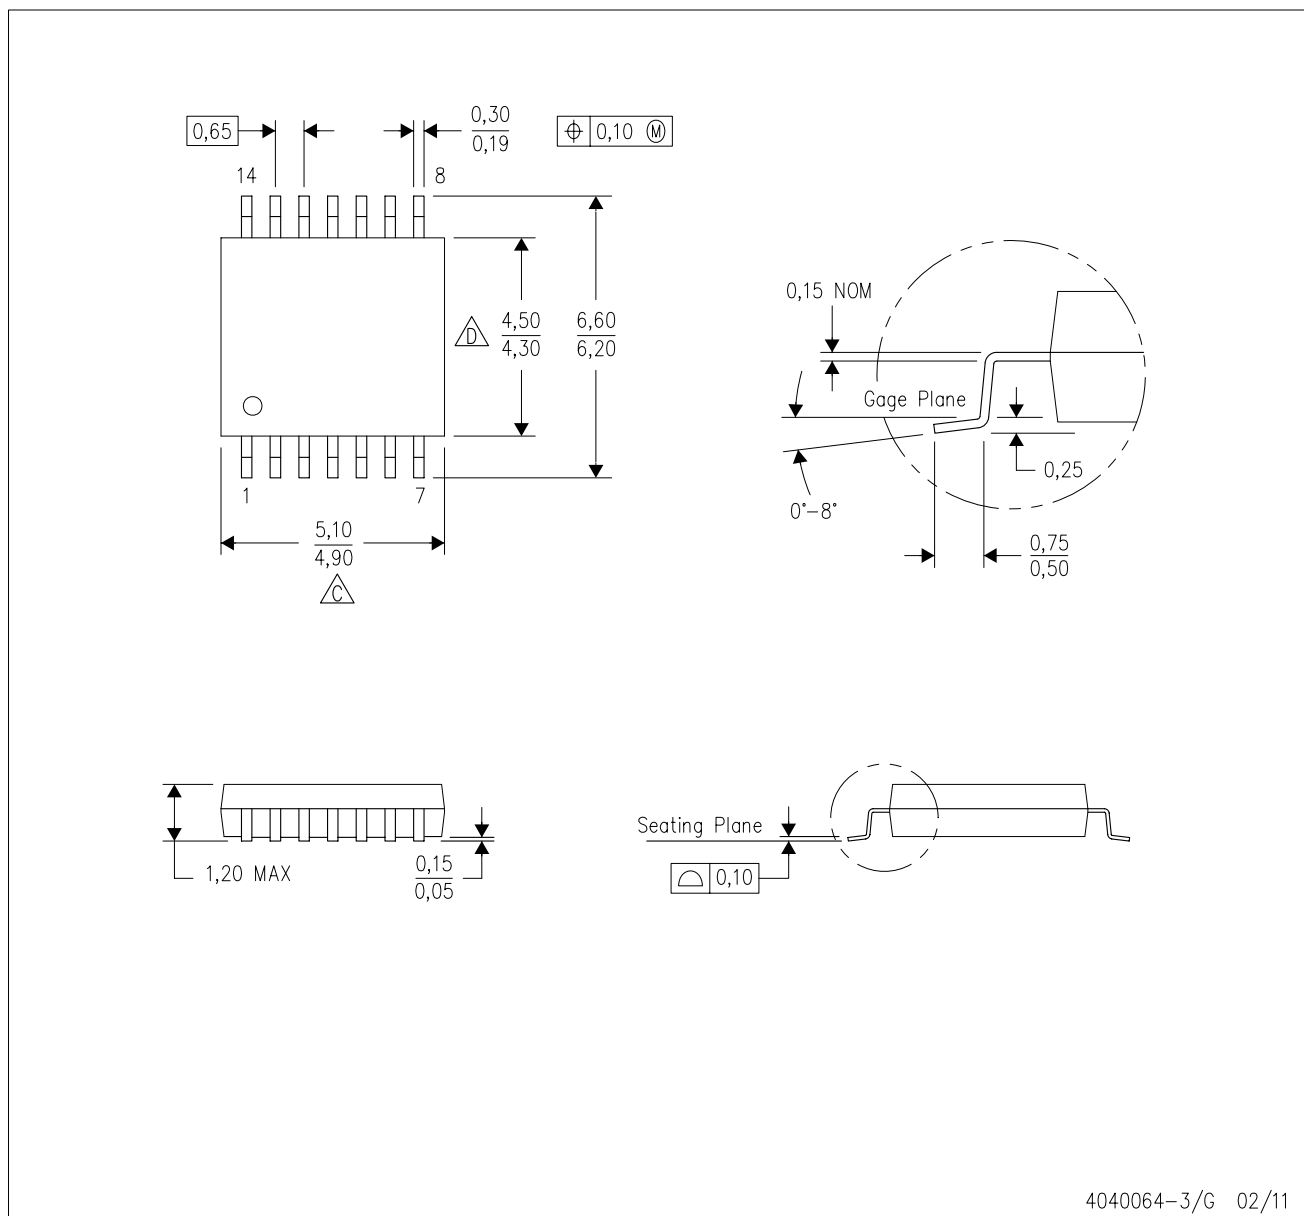


4040064-3/G 02/11

- NOTES:
- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
  - B. This drawing is subject to change without notice.
  - C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0,15 each side.
  - D. Body width does not include interlead flash. Interlead flash shall not exceed 0,25 each side.
  - E. Falls within JEDEC MO-153

PW (R-PDSO-G14)

PLASTIC SMALL OUTLINE

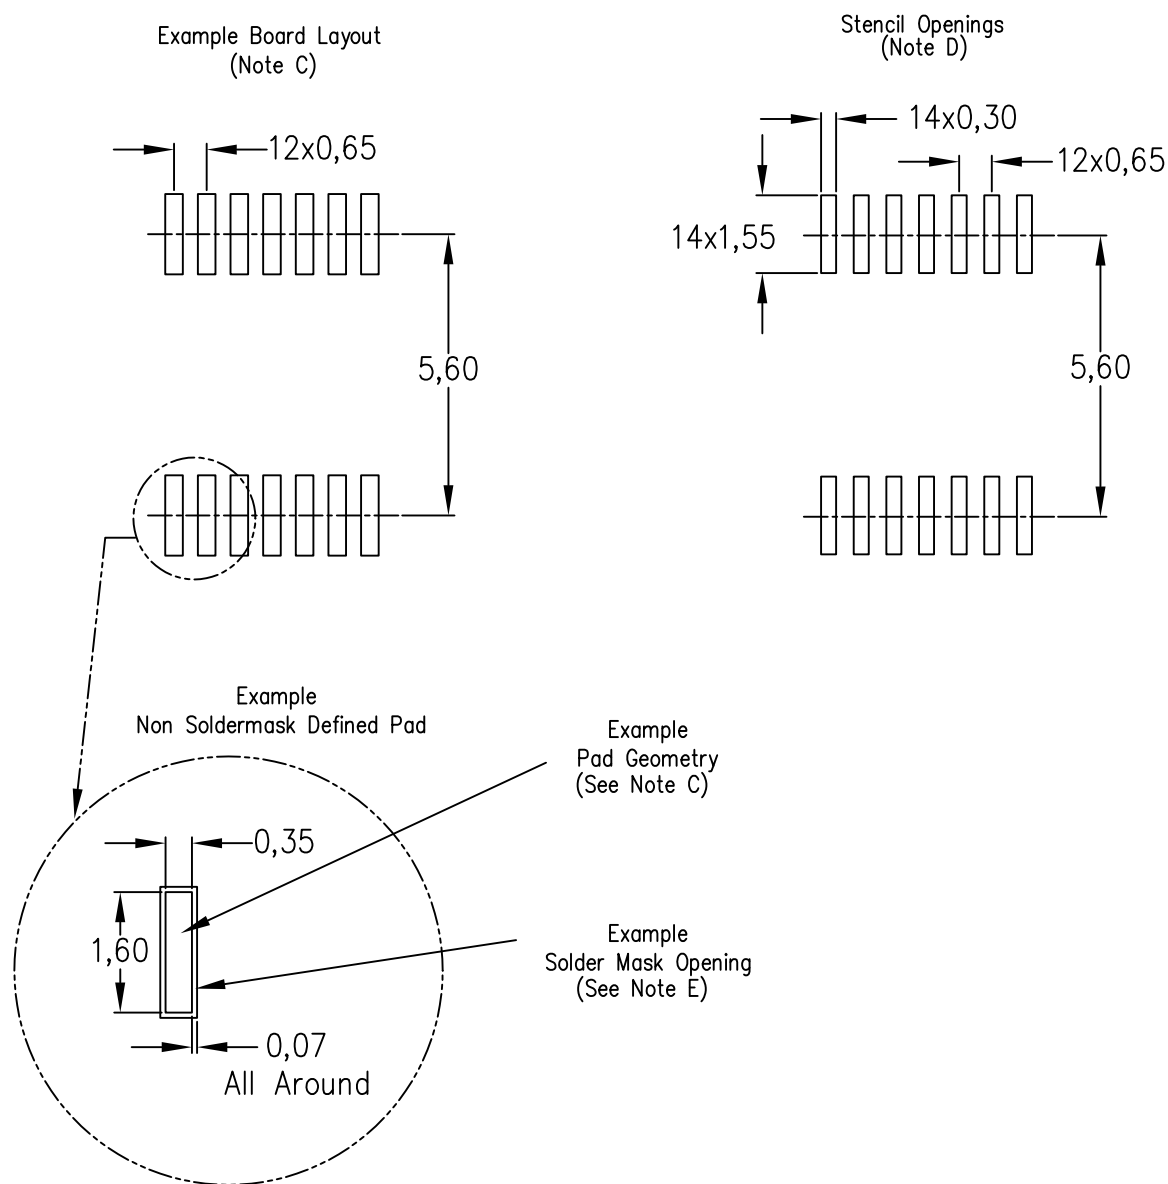

4211284-2/F 12/12

- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Publication IPC-7351 is recommended for alternate designs.
  - D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
  - E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

### Products

|                              |                                                                                      |
|------------------------------|--------------------------------------------------------------------------------------|
| Audio                        | <a href="http://www.ti.com/audio">www.ti.com/audio</a>                               |
| Amplifiers                   | <a href="http://amplifier.ti.com">amplifier.ti.com</a>                               |
| Data Converters              | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>                       |
| DLP® Products                | <a href="http://www.dlp.com">www.dlp.com</a>                                         |
| DSP                          | <a href="http://dsp.ti.com">dsp.ti.com</a>                                           |
| Clocks and Timers            | <a href="http://www.ti.com/clocks">www.ti.com/clocks</a>                             |
| Interface                    | <a href="http://interface.ti.com">interface.ti.com</a>                               |
| Logic                        | <a href="http://logic.ti.com">logic.ti.com</a>                                       |
| Power Mgmt                   | <a href="http://power.ti.com">power.ti.com</a>                                       |
| Microcontrollers             | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a>                   |
| RFID                         | <a href="http://www.ti-rfid.com">www.ti-rfid.com</a>                                 |
| OMAP Applications Processors | <a href="http://www.ti.com/omap">www.ti.com/omap</a>                                 |
| Wireless Connectivity        | <a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a> |

### Applications

|                               |                                                                                          |
|-------------------------------|------------------------------------------------------------------------------------------|
| Automotive and Transportation | <a href="http://www.ti.com/automotive">www.ti.com/automotive</a>                         |
| Communications and Telecom    | <a href="http://www.ti.com/communications">www.ti.com/communications</a>                 |
| Computers and Peripherals     | <a href="http://www.ti.com/computers">www.ti.com/computers</a>                           |
| Consumer Electronics          | <a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>                   |
| Energy and Lighting           | <a href="http://www.ti.com/energy">www.ti.com/energy</a>                                 |
| Industrial                    | <a href="http://www.ti.com/industrial">www.ti.com/industrial</a>                         |
| Medical                       | <a href="http://www.ti.com/medical">www.ti.com/medical</a>                               |
| Security                      | <a href="http://www.ti.com/security">www.ti.com/security</a>                             |
| Space, Avionics and Defense   | <a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a> |
| Video and Imaging             | <a href="http://www.ti.com/video">www.ti.com/video</a>                                   |

### TI E2E Community

[e2e.ti.com](http://e2e.ti.com)