



.085 (2.1)
DIA.(REF)

.580 (14.8)
MAX.



RED
COLOR CODE

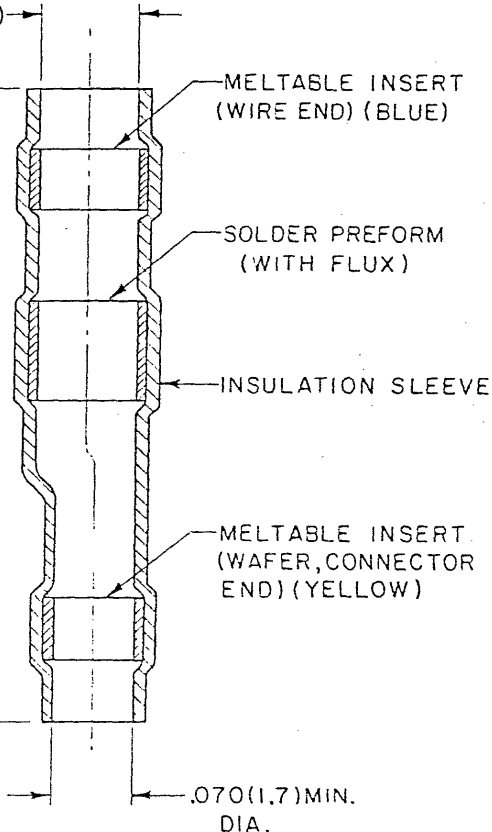

NOTES:

1. MATERIAL:

I-A INSULATION SLEEVE; HEAT SHRINKABLE, RADIATION CROSSLINKED MODIFIED POLYVINYLDENE FLUORIDE, TRANSPARENT BLUE.

I-B SOLDER PREFORM; SOLDER TYPE: Sn 63
FLUX TYPE: RA
PER QQ-S-571

I-C MELTABLE INSERTS; LOW OUTGASSING, IMMERSION RESISTANT THERMOPLASTIC.

2. THIS SLEEVE IS DESIGNED TO ATTACH 20 THROUGH 26 GAGE TIN, NICKEL OR SILVER PLATED CONDUCTORS TO TERMINALS OF A **Raychem** MTC100 SERIES WAFER. CONSULT FACTORY FOR 18 GAGE APPLICATIONS.

3 WEIGHT: .0001 lbs. [0.045g] MAX.

SPECIFICATION CONTROL DRAWING © Raychem Corporation 1983

DRAWN	CACELA	11-16-83	Raychem RAYCHEM CORPORATION 300 CONSTITUTION DRIVE MENLO PARK, CALIFORNIA 94025	
CHECKED	JB			
APPROVED	<i>giler</i>	11-29-83	TITLE SOLDERSLLEEVE [®] WIRE TERMINATOR WITH OVAL ENTRY TEMP. RATING 125°C MTC100 SERIES	
APPROVED	<i>Lawson</i>	12-2-83		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. METRIC DIMENSIONS ARE IN PARENTHESIS			SIZE	CODE IDENT. NO.
DO NOT SCALE THIS DRAWING			B	06090
			DWG. NO.	CTA-0068
			WEIGHT	1/3
			SHEET	1 OF 1

If this document is printed it becomes uncontrolled.
Check with the web for latest revision.

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
A	REVISED PER ECN T-17674	92 Aug 16	JB

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[CTA-0068](#)