

## R-Series




The R-Series Curvette single pole miniature snap-in rocker switches are available with momentary, rocker, paddle & Visi-Rocker type actuators. These aesthetically pleasing switches are compatible with a range of standard panel cutouts. Electrical ratings, with international approvals, are available up to 16 amps.

## Specifications

- Certifications\*: UL, CSA, VDE, TUV, SEMKO, DEMKO, NEMKO, FIMKO, SEV and BEAB
- Dielectric Strength: 1,000 V (minimum)
- Insulation Resistance: 100 Megohms (minimum)
- Base Material: Nylon
- Actuator Material: Polyester or Nylon

\* Due to ongoing technological advances, consult factory for certification specifics.

## Dimensional Specifications: in. [mm]

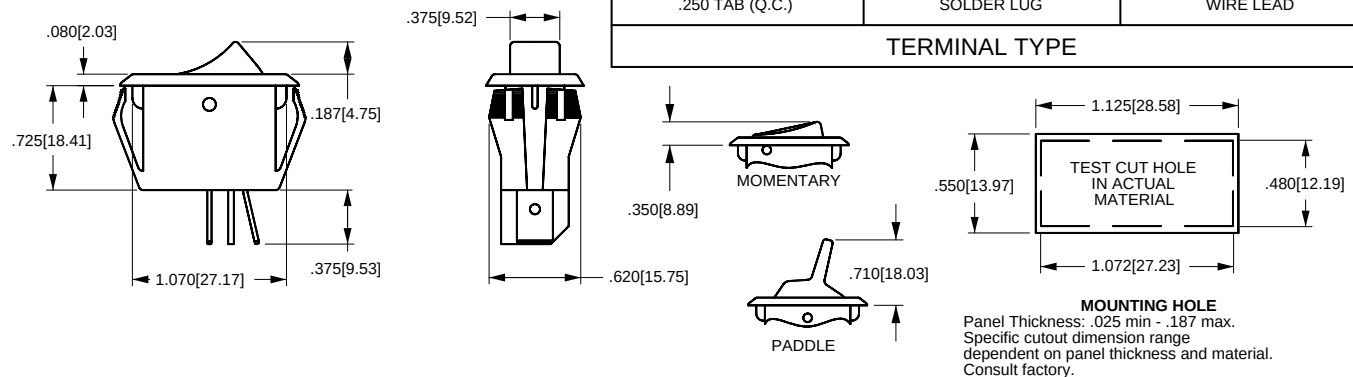

| SERIES                                                                                                                                                                                                                            | RATING <sup>1</sup>                                                                                                                                                                                           | TERMINATION                                                                                            | BASE COLOR <sup>2</sup>                                                                                                                                                                                                       | COLOR OF MOLDED-IN LEGEND AND/OR VISI-ROCKER END <sup>2</sup>                                |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|
| <b>R</b> SINGLE POLE                                                                                                                                                                                                              | <b>20</b> 10A 250VAC<br>16A 125VAC<br>3/4HP 125-250VAC                                                                                                                                                        | <b>0</b> SOLDER LUG<br><b>1</b> .250TAB (QC)<br><b>5</b> WIRE LEAD                                     | <b>B</b> BLACK<br><b>W</b> WHITE                                                                                                                                                                                              | <b>N</b> NOT APPLICABLE<br><b>B</b> BLACK<br><b>V</b> VISI-RED<br><b>W</b> WHITE             |
| CIRCUIT                                                                                                                                                                                                                           | ACTUATOR STYLE                                                                                                                                                                                                | ACTUATOR COLOR <sup>2</sup>                                                                            | ROCKER FACE LEGEND                                                                                                                                                                                                            |                                                                                              |
| <b>A</b> OFF-NONE-ON<br><b>B</b> ON-NONE-ON<br><b>C</b> ON-OFF-ON<br>Available w/ratings 21, 23, 58, & 91 only                                                                                                                    | <b>21</b> 10A 250 VAC<br>16A 125VAC<br><b>22</b> 8A 250VAC<br>12A 125VAC<br>1/2HP 125-250VAC<br><b>23</b> 10A 250VAC<br>16A 125VAC<br>1/2HP 125-250VAC                                                        | <b>M</b> MOMENTARY<br><b>P</b> PADDLE<br><b>R</b> ROCKER<br><b>V</b> TWO COLOR<br><b>V</b> VISI-ROCKER | <b>0</b> NO LEGEND<br><b>1</b> OFF-ON (VERTICAL)<br><b>2</b> OFF-ON (HORIZONTAL)<br><b>8</b> O-I (HORIZONTAL)<br><b>9</b> O-I (VERTICAL)<br>ON-OFF (VERTICAL)<br>ON-OFF (HORIZONTAL)<br>DUAL LEGEND:<br>OFF O-I ON (VERTICAL) | <b>0</b><br><b>A</b><br><b>B</b><br><b>D</b><br><b>E</b><br><b>F</b><br><b>G</b><br><b>H</b> |
| <b>D</b> OFF-NONE-(ON)<br>Available w/rating 22 only<br><b>AD</b> OFF-NONE-ON<br>Double Insulation<br><b>BD</b> ON-NONE-ON<br>Double Insulation<br><b>CD</b> ON-OFF-ON<br>Double Insulation<br>Available w/ratings 21 and 58 only | <b>58</b> 5A 277VAC<br>10A 125VAC<br>10A 30V<br>8A 14VT<br><b>90</b> 10A 250VAC<br>16A 125VAC<br>3/4HP 125-250VAC<br>10(4)A 250VAC $\mu$ T85<br><b>91</b> 10A 250VAC<br>16A 125VAC<br>10(4)A 250VAC $\mu$ T85 | <b>B</b> BLACK<br><b>W</b> WHITE                                                                       | <b>INK TRANSFER STAMP<sup>4</sup></b>                                                                                                                                                                                         |                                                                                              |

## NOTES:

Shading indicates standard configurations.

Panel Cut-Out Recommendations: For sheet metal panels, switch must enter panel in same direction as the punch. (Burr on bottom.) Test cut hole in actual material.

<sup>1</sup> Additional ratings are available. Consult factory.

Rating 22 must use circuit D only and momentary rocker.

<sup>2</sup> Matte finish is standard. Custom colors are available. Consult factory.

<sup>3</sup> Molded-in Legend available only with Visi-Rocker option.

<sup>4</sup> White is standard with dark actuators; black is standard with light actuators.