


LOW POWER CONSUMPTION

conga-QMX6




- Up to NXP i.MX6 Quad ARM Cortex A9
- Multimedia Performance with HDMI & LVDS
- Camera Interface MIPI CSI-2 on flat foil connector
- Extended longevity, min. 10 years
- Temperature range up to -40°C .. +85°C

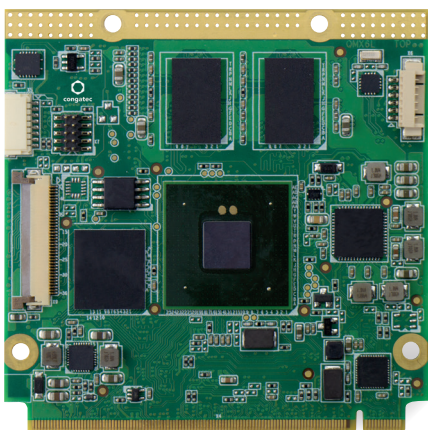

Formfactor	Qseven Rev. 2.0 70x70 mm		
CPU	NXP i.MX6 ARM Processors NXP i.MX6 Solo ARM Cortex A9 up to 1.0 GHz* L2 cache 512kB NXP i.MX6 Dual Lite ARM Cortex A9 up to 1.0 GHz* L2 cache 512kB NXP i.MX6 Dual ARM Cortex A9 up to 1.0 GHz* L2 cache 1MB NXP i.MX6 Quad ARM Cortex A9 up to 1.0 GHz* L2 cache 1MB * Core Frequency: 1.0 GHz for commercial grade 800 MHz for industrial grade		
DRAM	Up to 2 GByte onboard DDR3 memory 1066 MT/s		
Ethernet	1x 1 Gbit Ethernet		
I/O Interfaces	5x USB 2.0 (shared with 1x USB OTG client) 1x SATA II (optional) 1x SDIO 1x PCIe 2.0 I ² C Bus CAN Bus SPI		
Mass Storage	Onboard Solid State Drive (eMMC) up to 16 GByte (optional) Onboard MicroSD socket		
Sound	I ² S		
Graphics	Integrated in NXP i.MX6 Series Video (VPU) 2D Graphics (GPU2D) and 3D Graphics (GPU3D) 3D graphics with 4 shaders up to 200MT/s dual stream 1080p/720p decoder/encoder. OpenGL OpenCL and OpenVG 1.1		
Video Interfaces	HDMI v1.4 support supported by Qseven specification. 2x LVDS (2x 24 bit) 1x LVDS (1x 24 bit) up to WUXGA resolution 1920x1200 pixel and HD1080. Supports 18bit and 24bit dual channel up to WUXGA 1920x1200.		
Features	Watchdog Timer I ² C bus (fast mode 400 kHz multi-master) JTAG debug interface CAN interface Camera Interface MIPI CSI-2 on flat foil connector High Precision Real Time Clock		
Embedded BIOS Features	U-Boot boot loader		
Operating Systems	Android Windows Embedded Compact 7 Linux BSPs with OS drivers and tools		
Power Consumption	Typ. application ~3.5 Watt @ 5V		
Temperature	Operating: 0 to +60°C commercial grade -40 to +85°C industrial grade Storage: -40 to +85°C		
Humidity	Operating: 10 to 90% r. H. non cond. Storage: 5 to 95% r. H. non cond.		
Size	70 x 70 mm (2¾" x 2¾")		

conga-QMX6 | Block diagram

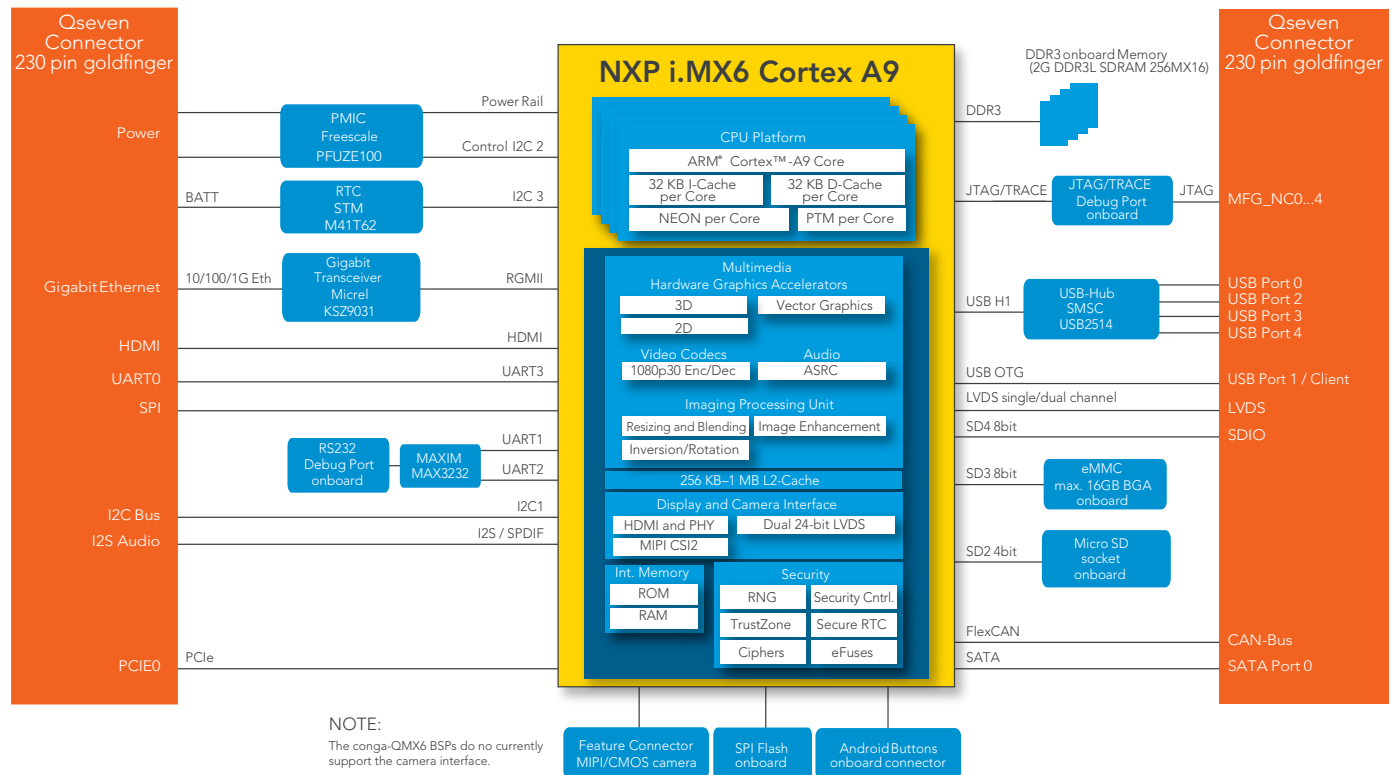

conga-QMX6 | Order Information

Article	PN	Cores	Clock speed	L2 cache	3D Graphics	2D Graphics	RAM	SATA	
conga-QMX6 Revision C.1	conga-QMX6/SC-1G eMMC4	016300	1	1 GHz (commercial temperature)	512 KB	1 shader	1 engine	1 GByte DDR3L 400 Mhz	-
	conga-QMX6/DCL-1G eMMC4	016301	2		512 KB	1 shader	1 engine	1 GByte DDR3L 400 Mhz	-
	conga-QMX6/DC-1G eMMC4	016302	2		1 MB	4 shader	2 engines	1 GByte DDR3L 533 Mhz	SATA II
	conga-QMX6/QC-1G eMMC4	016303	4	1 MB	4 shader	2 engines	1 GByte DDR3L 533 Mhz	SATA II	
	conga-QMX6/QC-2G eMMC4	016304	4	1 MB	4 shader	2 engines	2 GByte DDR3L 533 Mhz	SATA II	
	conga-QMX6/QC-2G eMMC8	016305	4	1 MB	4 shader	2 engines	2 GByte DDR3L 533 Mhz	SATA II	
	conga-QMX6/QC-1G eMMC8	016306	4	1 MB	4 shader	2 engines	1 GByte DDR3L 533 Mhz	SATA II	
	conga-QMX6/iSC-1G eMMC4	016310	1	512 KB	1 shader	1 engine	1 GByte DDR3 400MHz	-	
	conga-QMX6/iDCL-1G eMMC4	016311	2	800MHz (industrial temperature)	512 KB	1 shader	1 engine	1 GByte DDR3 400MHz	-
	conga-QMX6/iDC-1G eMMC4	016312	2		1 MB	4 shader	2 engines	1 GByte DDR3 533MHz	SATA II
	conga-QMX6/iQC-1G eMMC4	016313	4		1 MB	4 shader	2 engines	1 GByte DDR3 533MHz	SATA II

Cooling	PN	Compatible conga-QMX6 Variants (PN)				Description				
conga-QMX6/HSP1-T	016160	016112	016113	016312	016313	Standard heatspreader with 1mm gap pad for Qseven module conga-QMX6 for processors with LIDDED FCBGA package.				
conga-QMX6/HSP2-T	016161	016100	016101	016110	016111	016300	016301	016310	016311	Standard heatspreader with 2mm gap pad for Qseven module conga-QMX6 for processors with plastic MAP BGA package.
conga-QMX6/HSP3-T	016162	016102	016103	016104	016302	016303	016304	Standard heatspreader with heat stack solution for Qseven module conga-QMX6 for processors with open silicon FCBGA package.		

Accessories	PN	Description
conga-HDMI/ADD2 Card	500025	The conga-HDMI ADD2 Card is used to connect a HDMI Display directly to the SDVO ADD2-N Slot of the QEVAL
conga-LDVI/EPI	011115	LVDS to DVI converter board for digital flat panels with onboard EEPROM
conga-QKIT/ARM	077500	Starterkit for Qseven evaluation arrier boards including conga-QEVAL/ARM

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[congatec:](#)

[conga-QMX6/iQC-1G eMMC2](#) [conga-QMX6/DCLITE-1G eMMC2](#) [conga-QMX6/QC-1G eMMC2](#) [conga-QMX6/iDCLite-1G eMMC2](#) [conga-QMX6/iSC-1G eMMC2](#) [conga-QMX6/DCI-1G eMMC2](#) [conga-QMX6/iDC-1G eMMC2](#) [conga-QMX6/SC-1G eMMC2](#) [conga-QMX6/QC-2G eMMC4](#) [conga-QMX6/DCL-1G eMMC4](#) [conga-QMX6/QC-1G eMMC4](#) [conga-QMX6/iDCL-1G eMMC2](#) [conga-QMX6/DC-1G eMMC4](#) [conga-QMX6/SC-1G eMMC4](#) [conga-QMX6/DCLite-1G eMMC4](#) [conga-QMX6/DCI-1G eMMC4](#) [conga-QMX6/iSC-1G eMMC4](#) [conga-QMX6/iQC-1G eMMC4](#) [conga-QMX6/iDCLite-1G eMMC4](#) [conga-QMX6/iDC-1G eMMC4](#) [conga-QMX6/HSP2](#) [conga-QMX6/HSP3](#) [conga-QEVAL/Qseven 2.0 QKIT/ARM](#) [conga-QMX6/HSP1](#) [conga-QMX6/DC-1G eMMC4 Rev C.x](#) [conga-QMX6/QC-1G eMMC4 Rev C.x](#) [conga-QMX6/iDC-1G eMMC4 Rev C.x](#) [conga-QMX6/QC-1G eMMC8 Rev C.x](#) [conga-QMX6/QC-2G eMMC8](#) [conga-QMX6/DCL-1G eMMC4 Rev C.x](#) [conga-QMX6/iSC-1G eMMC4 Rev C.x](#) [conga-QMX6/QC-1G eMMC8](#) [conga-QMX6/iDCL-1G eMMC4 Rev C.x](#) [conga-QMX6/SC-1G eMMC4 Rev C.x](#) [conga-QMX6/iQC-1G eMMC4 Rev C.x](#) [conga-QMX6/QC-2G eMMC4 Rev C.x](#) [conga-QMX6/QC-2G eMMC8 Rev C.x](#) [conga-QMX6/iQC-4G eMMC4](#)