


SMD Power Inductor


CDRH58D18R



Dimension - [mm]

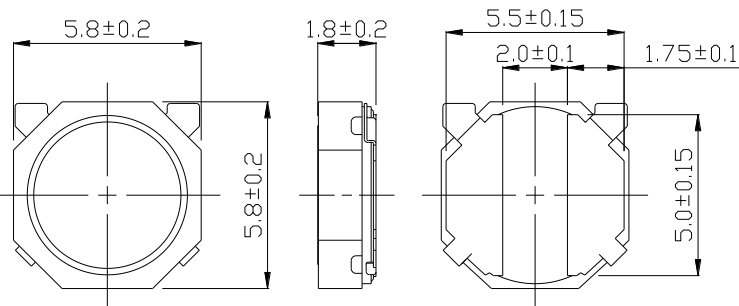

Land pattern and Schematics - [mm]

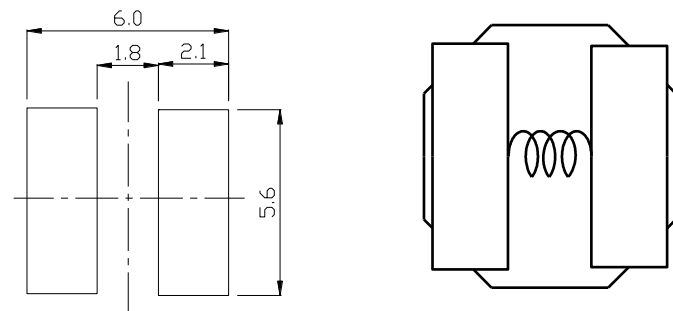

Description

- Ferrite drum core construction.
- Magnetically shielded.
- L × W × H: 6.0 × 6.0 × 2.0mm Max.
- Product weight: 0.24g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.

Environmental Data

- Operating temperature range: -40°C ~ +125°C (including coil's self temperature rise)
- Storage temperature range: -40°C ~ +125°C
- Solder reflow temperature: 260 °C peak.

Packaging

- Carrier tape and reel packaging.
- 13.0" diameter reel
- 3000pcs per reel

Applications

- Ideally used in DVD, camcorder, Single -lens reflex camera etc.

SMD Power Inductor

CDRH58D18R



Electrical Characteristics

Part No.	Stamp	Inductance (μH) [Within] ※1	D.C.R. (mΩ) [Within] (at 20℃)	Saturation current (A) ※2		Temperature rise current (A) ※3
				(at20℃)	(at105℃)	
CDRH58D18RNP-R90NC	A	0.9±30%	15±25%	3.74	2.80	5.35
CDRH58D18RNP-1R5NC	B	1.5±30%	18±25%	2.95	2.20	4.60
CDRH58D18RNP-2R0NC	C	2.0±30%	23±25%	2.66	1.93	4.42
CDRH58D18RNP-3R6NC	D	3.6±30%	29±25%	2.03	1.47	3.65
CDRH58D18RNP-4R7MC	E	4.7±20%	31±25%	1.74	1.30	3.45
CDRH58D18RNP-6R8MC	F	6.8±20%	50±25%	1.44	1.07	2.73
CDRH58D18RNP-100MC	G	10±20%	74±25%	1.17	0.87	2.12
CDRH58D18RNP-150MC	H	15±20%	110±20%	0.95	0.70	1.75
CDRH58D18RNP-220MC	J	22±20%	162±20%	0.79	0.60	1.42
CDRH58D18RNP-330MC	K	33±20%	224±20%	0.63	0.47	1.17
CDRH58D18RNP-470MC	L	47±20%	323±20%	0.55	0.40	0.95
CDRH58D18RNP-680MC	M	68±20%	495±20%	0.45	0.33	0.76
CDRH58D18RNP-101MC	N	100±20%	729±20%	0.37	0.27	0.66
CDRH58D18RNP-151MC	P	150±20%	1065±20%	0.30	0.23	0.51
CDRH58D18RNP-221MC	Q	220±20%	1675±20%	0.25	0.20	0.40
CDRH58D18RNP-331MC	R	330±20%	2660±20%	0.21	0.16	0.32


※1. Measuring condition: at 100kHz.

※2. Saturation current: The value of D.C. current when the inductance decreases to 70% of it's nominal value.

※3. Temperature rise current: The value of D.C. current when the temperature rise is $\Delta t=40^{\circ}\text{C}$ ($T_a=20^{\circ}\text{C}$).













SMD Power Inductor

CDRH58D18R



Saturation Current & Temperature Rise Graph

— L (20°C) — L (105°C) — ΔT

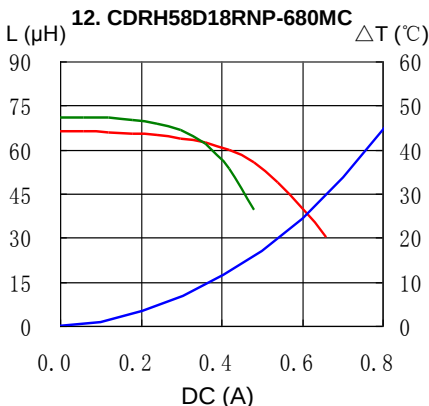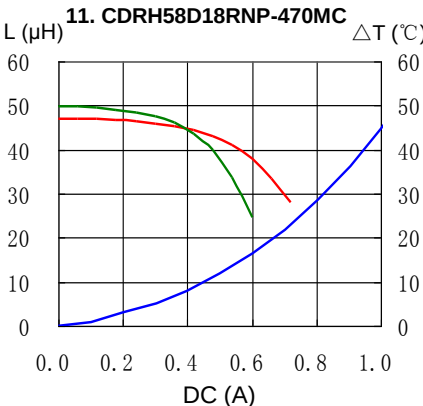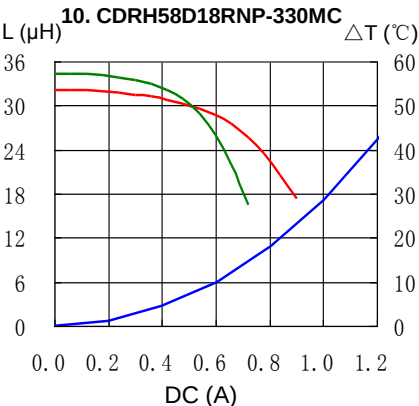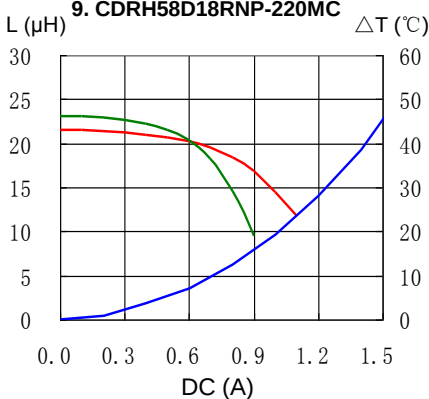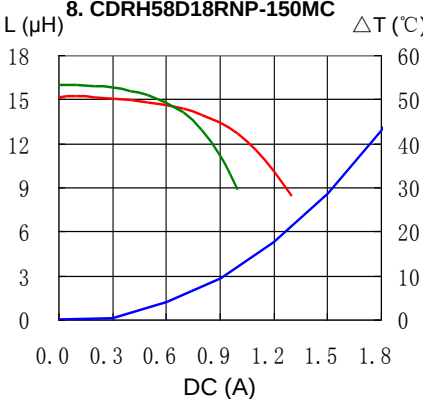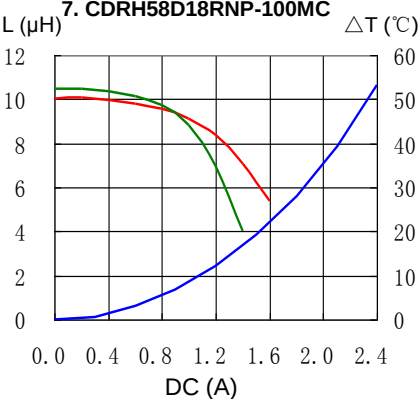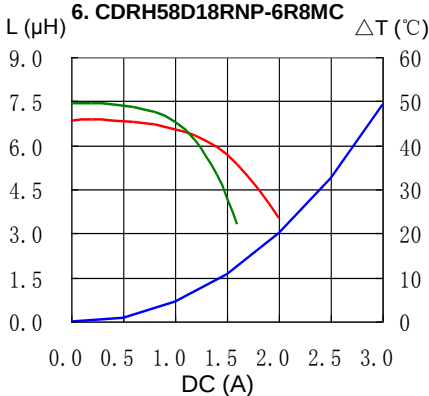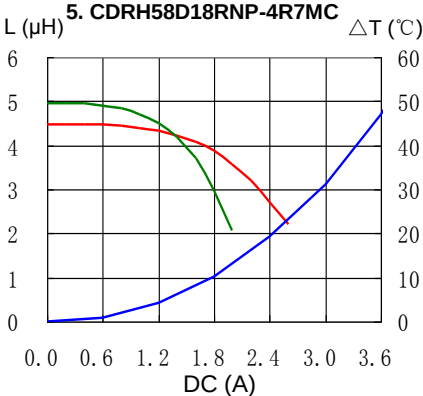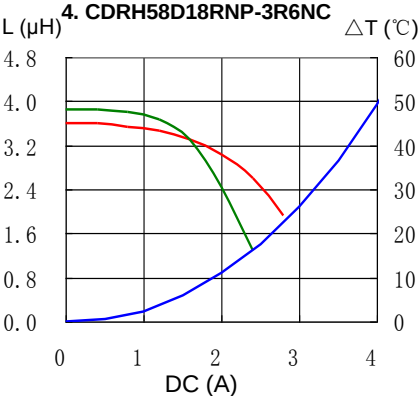
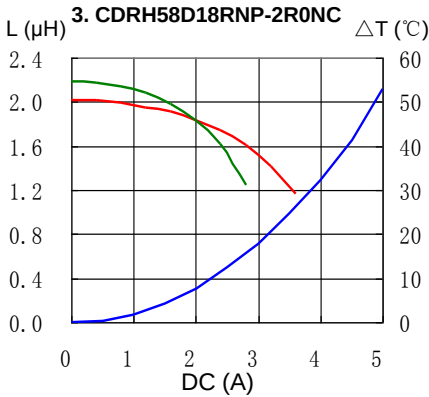
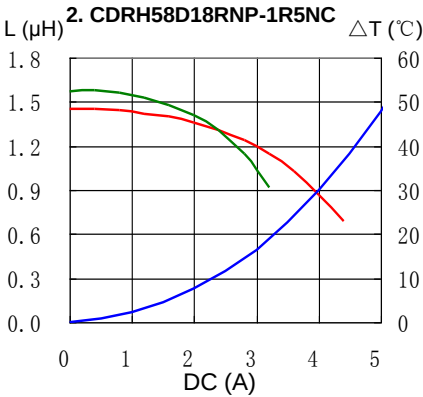
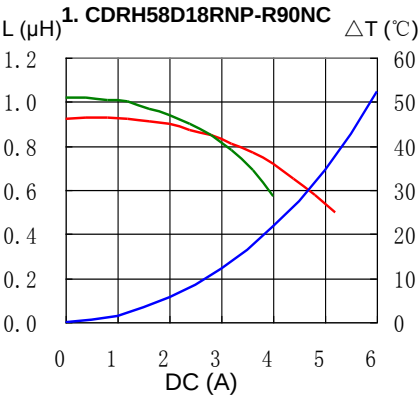


SMD Power Inductor CDRH58D18R




Saturation Current & Temperature Rise Graph

— L (20°C) — L (105°C) — ΔT

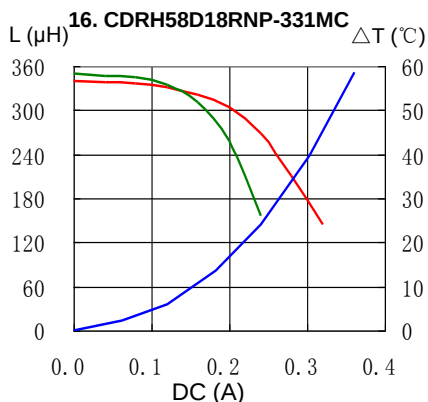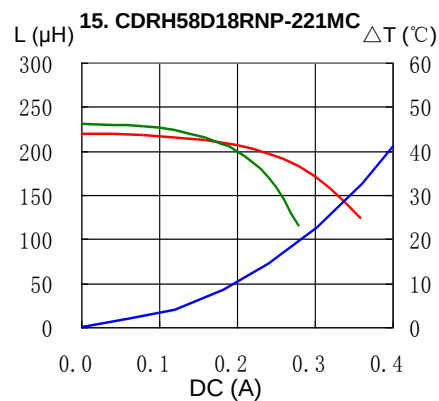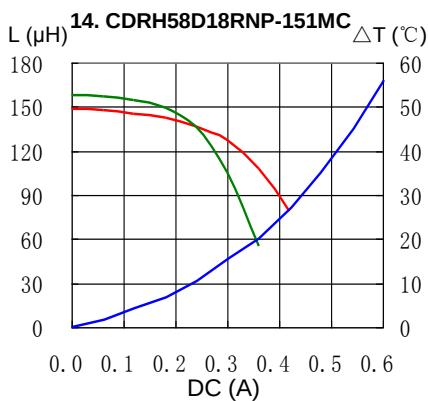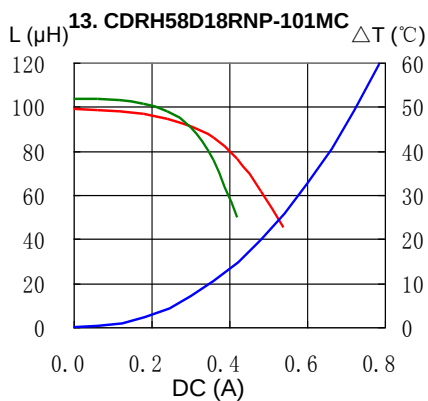


Solder Reflow Condition

Heat Endurance

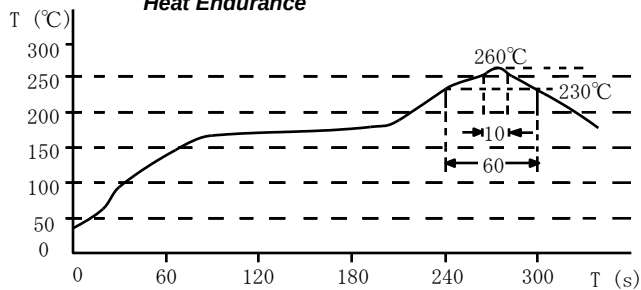

Temperature Chart

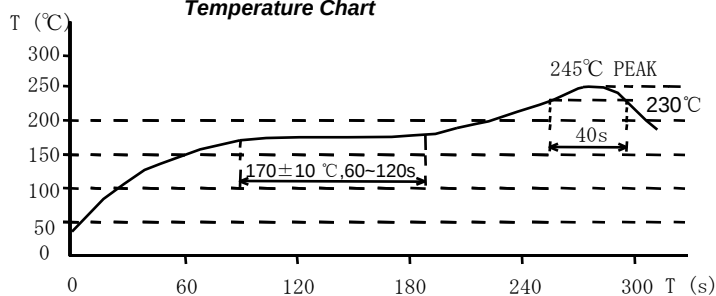

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong

Tel.+852-2880-6781
FAX.+852-2565-9600
sales@hk.sumida.com

Saitama(Japan)

Tel.+81-48-691-7300
FAX.+81-48-691-7340
sales@jp.sumida.com

Chicago

Tel.+1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai

Tel.+86-21-5836-3299
FAX.+86-21-5836-3266
shanghai.sales@cn.sumida.com

Seoul

Tel.+82-2-6237-0777
FAX.+82-2-6237-0778
sales@kr.sumida.com

Obernzell

Tel.+49-8591-937-0
FAX. +49-8591-937-103
contact@eu.sumida.com

Shenzhen

Tel.+86-755-8291-0228
FAX.+86-755-8291-0338
shenzhen.sales@cn.sumida.com

Singapore

Tel.+65-6296-3388
FAX.+65-6841-4426
sales@sg.sumida.com

Neumarkt

Tel.+49-9181-4509-110
FAX. +49-9181-4509-310
infocomp@eu.sumida.com

Taipei

Tel.+886-2-8751-2737
FAX.+886-2-8751-2738
sales@tw.sumida.com

San Jose

Tel.+1-408-321-9660
FAX.+1-408-321-9308
sales@us.sumida.com