



COUNT		DESCRIPTION OF REVISIONS		BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS		BY	CHKD	DATE



A - A

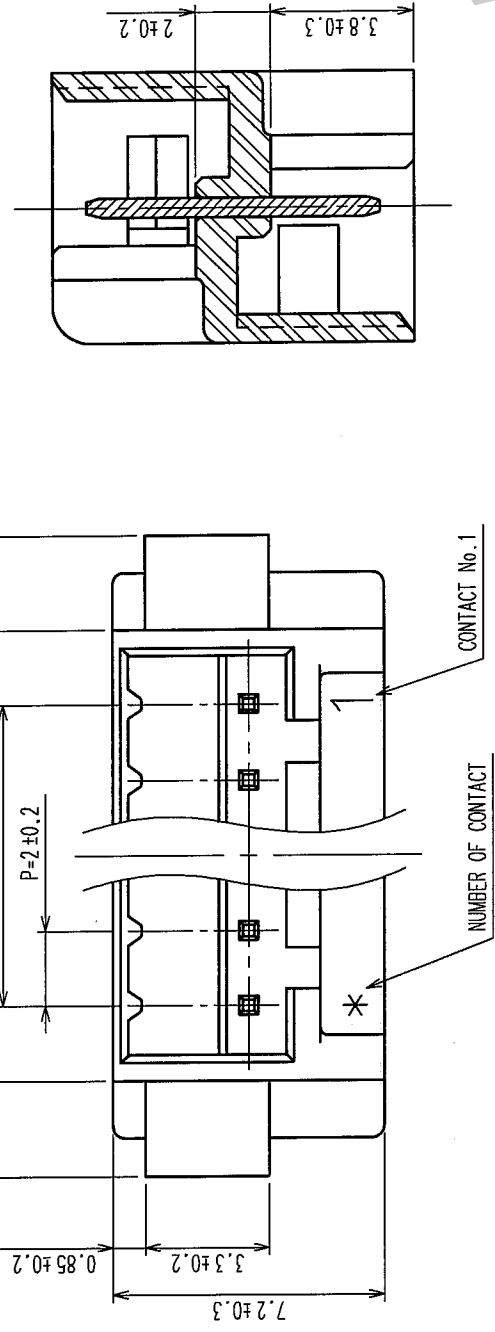


CODE No.	PART No.	CONTACTS	A	B	C	D	E
CL543-0267-0	DF3- 2EP-2A	2	11	6	2	9.4	6.3
CL543-0268-2	DF3- 3EP-2A	3	13	8	4	11.4	8.3
CL543-0269-5	DF3- 4EP-2A	4	15	10	6	13.4	10.3
CL543-0270-4	DF3- 5EP-2A	5	17	12	8	15.4	12.3
CL543-0271-7	DF3- 6EP-2A	6	19	14	10	17.4	14.3
CL543-0272-0	DF3- 7EP-2A	7	21	16	12	19.4	16.3
CL543-0273-2	DF3- 8EP-2A	8	23	18	14	21.4	18.3
CL543-0274-5	DF3- 9EP-2A	9	25	20	16	23.4	20.3
CL543-0275-8	DF3-10EP-2A	10	27	22	18	25.4	22.3
CL543-0276-0	DF3-11EP-2A	11	29	24	20	27.4	24.3
CL543-0277-3	DF3-12EP-2A	12	31	26	22	29.4	26.3
CL543-0278-6	DF3-13EP-2A	13	33	28	24	31.4	28.3
CL543-0279-9	DF3-14EP-2A	14	35	30	26	33.4	30.3
CL543-0280-8	DF3-15EP-2A	15	37	32	28	35.4	32.3

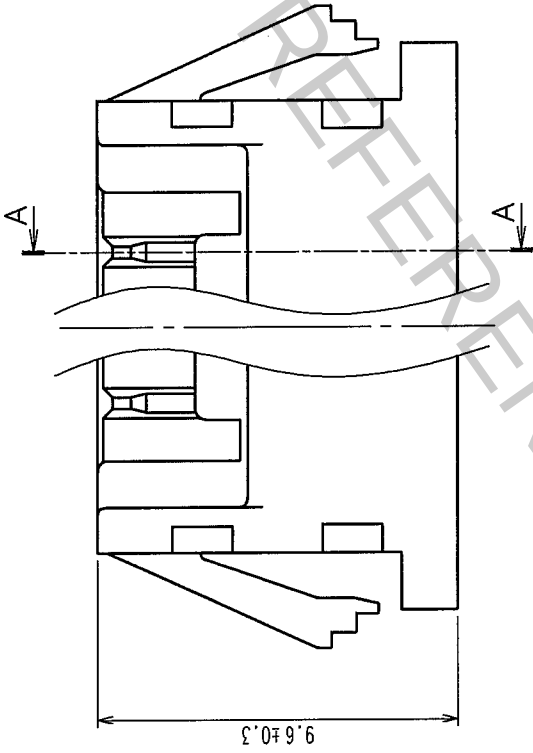

PANEL CUTOUT DIMENSIONS(2:1)

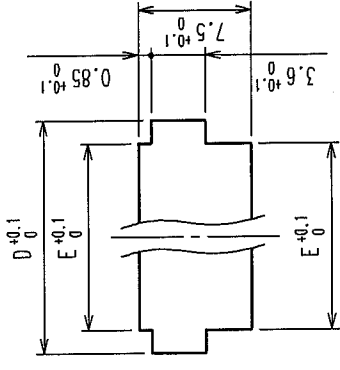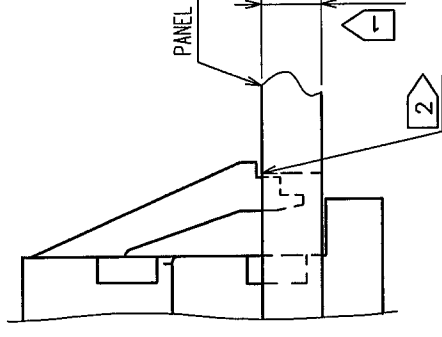

NOTE 1 > APPLICABLE PANEL THICKNESS : 1.6~0.8mm
(NOTE THAT SOME LOOSENESS IS UNAVOIDABLE WHEN THE PLUGS ARE MOUNTED ON A PANEL OF OTHER THAN 1.6 OR 2.2mm THICKNESS.)
2 > USE THE SHARP EDGE FOR ENGAGEMENT WITH THE PANEL.

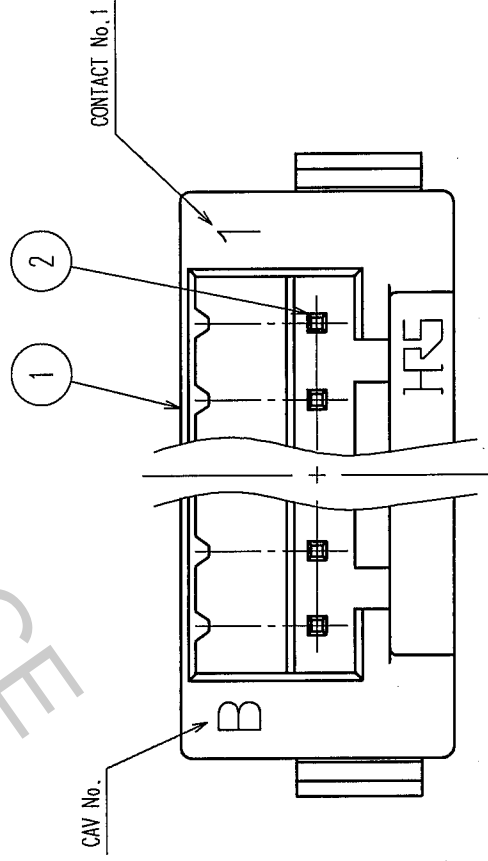

1		POLYAMIDE	UL94V-0, BLACK		2		BRASS	SURFACE: TIN PLATING 1μ m min UNDER PLATING: NICKEL PLATED 0.5μ m min	
NO.		MATERIAL	FINISH, REMARKS		NO.		MATERIAL	FINISH, REMARKS	
CODE NO. (OLD)					DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
CL					J. Sanyo	J. Sanyo	T. Miyagaki	Y. Awa	
					04.03.08	04.03.08	04.03.08	04.03.09	
			DRAWING NO.		PART NO.		DF3-*EP-2A		
SCALE			EDC3-306189-01						
5: 1									
UNITS									
ITEM			HRS		HIROSE ELECTRIC CO., LTD		CL543-1/1		

HR5

HIROSE ELECTRIC CO., LTD