



2in1 RF Filters for Cellular Phones

The following products presented in this data sheet are being withdrawn.

Ordering Code	Substitute Product	Date of Withdrawal	Deadline Last Orders	Last Shipments
B39192B7758E311	B39192B9014E910	2007-12-01	2007-02-28	2007-05-31

For further information please contact your nearest EPCOS sales office, which will also support you in selecting a suitable substitute. The addresses of our worldwide sales network are presented at www.epcos.com/sales.



SAW Components

Data Sheet B7758

Data Sheet

A large, stylized, italicized white text "EPCOS" is overlaid on a dark, textured background. The background features a faint, glowing globe and a series of concentric, light-colored bands that suggest motion or signal transmission. The overall aesthetic is high-tech and dynamic.


SAW Components
B7758
Low-Loss Filter for Mobile Communication
1865,0 & 1895,0 MHz
Data Sheet

Features

- Low-loss 2-in-1 RF filter for mobile telephone PCS systems, transmit path
- Device with two integrated Tx-filter
- Usable passband of Tx-filter 1 35 MHz
- Usable passband of Tx-filter 2 35 MHz
- No matching network required for operation at 50 Ω
- Package for **Surface Mounted Technology (SMT)**

Terminals


- Ni, gold-plated

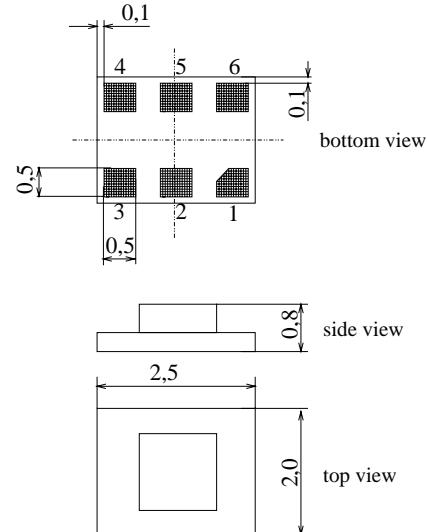Chip Sized SAW Package DCS6N


Dimensions in mm, approx. weight 0,015 g

Pin configuration

3	Input Tx-filter 1
1	Output Tx-filter 1
2,5	To be grounded
4	Input Tx-filter 2
6	Output Tx-filter 2

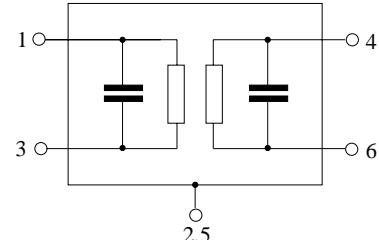

Type	Ordering code	Marking and Package according to	Packing according to
B7758	B39192-B7758-E311	C61157-Z7-C179	F61074-V8153-Z000

Electrostatic Sensitive Device (ESD)
Maximum ratings

Operable temperature range	T	-30 / + 85	°C	
Storage temperature range	T_{stg}	-40 / + 85	°C	
DC voltage	V_{DC}	3	V	
Input power max. 1850...1910 MHz	P_{IN}	12	dBm	source and load impedance 50 Ω CW signal

SAW Components	B7758
Low-Loss Filter for Mobile Communication	1865,0 & 1895,0 MHz
Data Sheet	

Characteristics of Tx-filter 1

Operating temperature range: $T = -30$ to $+85$ °C
 Terminating source impedance: $Z_S = 50 \Omega$
 Terminating load impedance: $Z_L = 50 \Omega$



			min.	typ.	max.	
Center frequency		f_c	—	1865,0	—	MHz
Maximum insertion attenuation		α_{max}				
1850,0 ... 1885,0	MHz		—	2,4	3,0	dB
1850,0 ... 1880,0	MHz		—	2,4	2,7	dB
Amplitude ripple (p-p)		$\Delta\alpha$				
1850,0 ... 1885,0	MHz		—	1,0	1,6	dB
1850,0 ... 1880,0	MHz		—	1,0	1,3	dB
Input return loss						
1850,0 ... 1885,0	MHz		12,0	13,5	—	dB
Output return loss						
1850,0 ... 1885,0	MHz		12,0	13,5	—	dB
Attenuation		α				
10,0 ... 1570,0	MHz		32,0	40,0	—	dB
1570,0 ... 1580,0	MHz		35,0	48,0	—	dB
1580,0 ... 1805,0	MHz		25,0	29,0	—	dB
1930,0 ... 1965,0	MHz		40,0	48,0	—	dB
1965,0 ... 2500,0	MHz		30,0	36,0	—	dB
2500,0 ... 3000,0	MHz		25,0	31,0	—	dB
3000,0 ... 3700,0	MHz		20,0	25,0	—	dB
3700,0 ... 3760,0	MHz		20,0	25,0	—	dB
3760,0 ... 6000,0	MHz		15,0	20,0	—	dB
Rx band suppression						
1930,0 ... 1965,0	MHz		40,0	48,0	—	dB
GPS band suppression						
1570,0 ... 1580,0	MHz		35,0	48,0	—	dB
LO suppression						
2113,0 ... 2174,0	MHz		37,0	42,0	—	dB

SAW Components	B7758
Low-Loss Filter for Mobile Communication	1865,0 & 1895,0 MHz
Data Sheet	

Characteristics of Tx-filter 2

Operating temperature range: $T = -30$ to $+85$ °C
 Terminating source impedance: $Z_S = 50 \Omega$
 Terminating load impedance: $Z_L = 50 \Omega$

			min.	typ.	max.	
Center frequency	f_c		—	1895,0	—	MHz
Maximum insertion attenuation	α_{max}					
1875,0 ... 1910,0	MHz		—	2,6	3,0	dB
1880,0 ... 1910,0	MHz		—	2,4	2,7	dB
Amplitude ripple (p-p)	$\Delta\alpha$					
1875,0 ... 1910,0	MHz		—	1,2	1,6	dB
1880,0 ... 1910,0	MHz		—	1,0	1,3	dB
Input return loss						
1875,0 ... 1910,0	MHz		12,0	13,5	—	dB
Output return loss						
1875,0 ... 1910,0	MHz		12,0	13,5	—	dB
Attenuation	α					
10,0 ... 1570,0	MHz		32,0	40,0	—	dB
1570,0 ... 1580,0	MHz		35,0	48,0	—	dB
1580,0 ... 1830,0	MHz		25,0	30,0	—	dB
1955,0 ... 1990,0	MHz		40,0	48,0	—	dB
1990,0 ... 2500,0	MHz		30,0	36,0	—	dB
2500,0 ... 3000,0	MHz		25,0	30,0	—	dB
3000,0 ... 3760,0	MHz		20,0	25,0	—	dB
3760,0 ... 3820,0	MHz		20,0	25,0	—	dB
3820,0 ... 6000,0	MHz		14,0	19,0	—	dB
Rx band suppression						
1955,0 ... 1990,0	MHz		40,0	48,0	—	dB
GPS band suppression						
1570,0 ... 1580,0	MHz		35,0	48,0	—	dB
LO suppression						
2113,0 ... 2174,0	MHz		37,0	42,0	—	dB

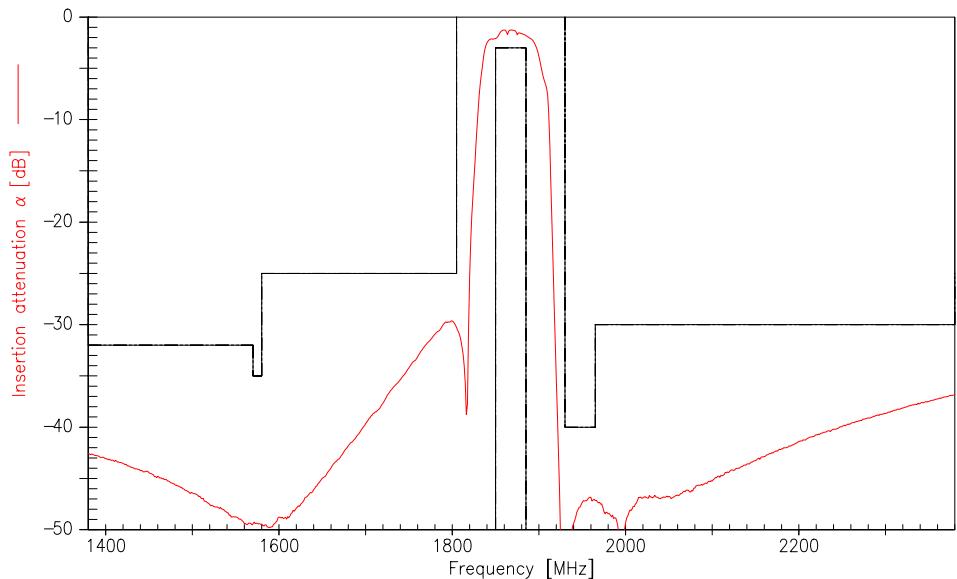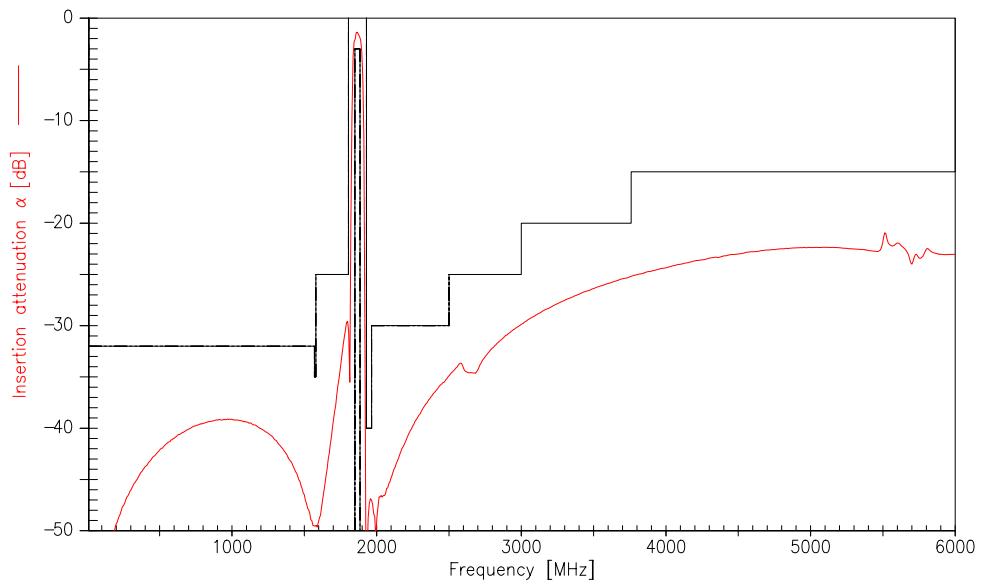Transfer function Tx-filter 1

Transfer function Tx-filter 1(wideband)


SAW Components

B7758


Low-Loss Filter for Mobile Communication

1865,0 & 1895,0 MHz


Data Sheet




Transfer function Tx-filter 2

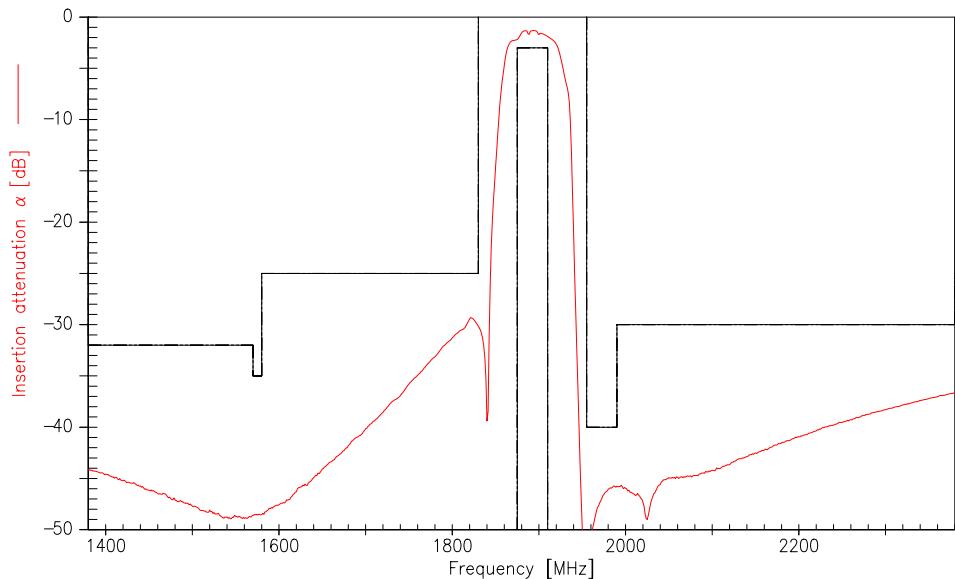

Transfer function Tx-filter 2(wideband)

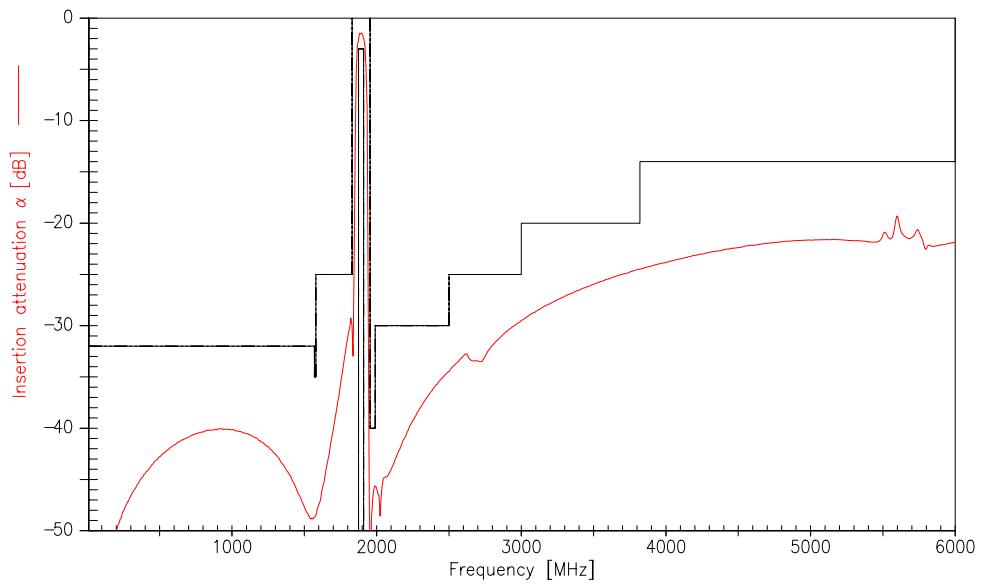



SAW Components
B7758
Low-Loss Filter for Mobile Communication
1865,0 & 1895,0 MHz
Data Sheet

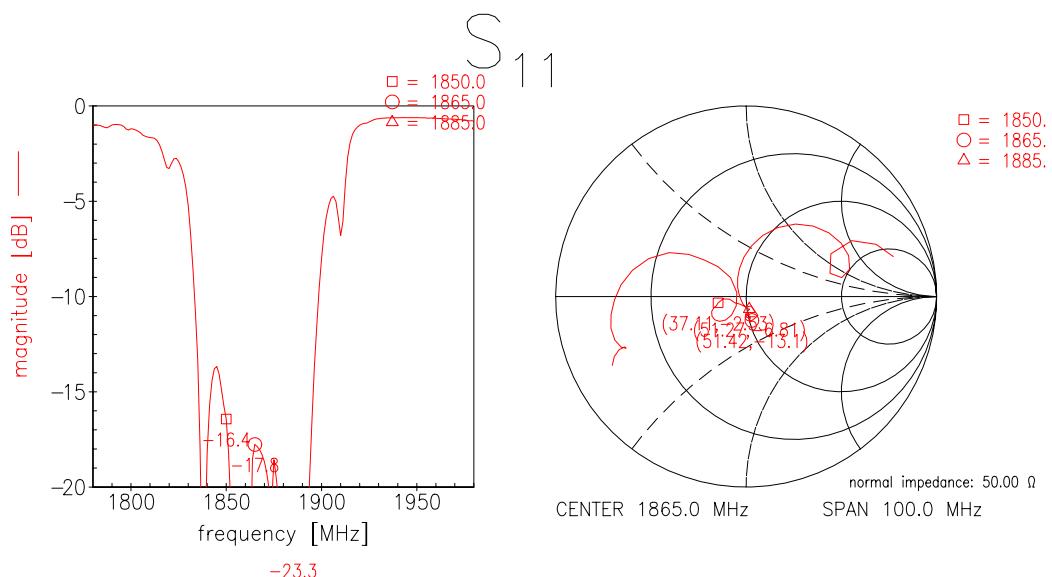Reflection functions of Tx-filter 1


□ = 1850.
○ = 1865.
△ = 1885.

□ = 1850.
○ = 1865.
△ = 1885.

SAW Components **B7758**
Low-Loss Filter for Mobile Communication **1865,0 & 1895,0 MHz**
Data Sheet 
Reflection functions of Tx-filter 2

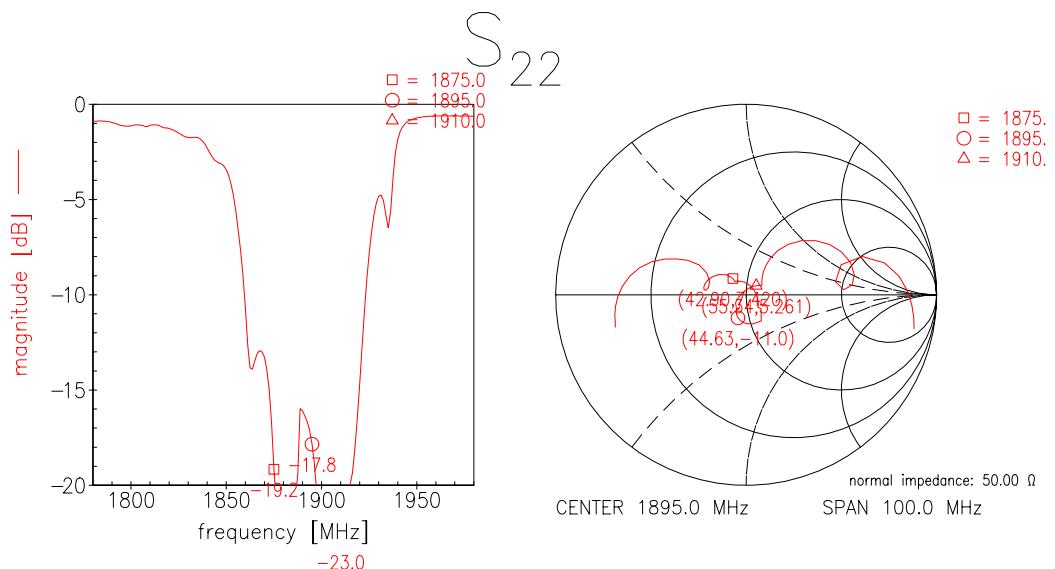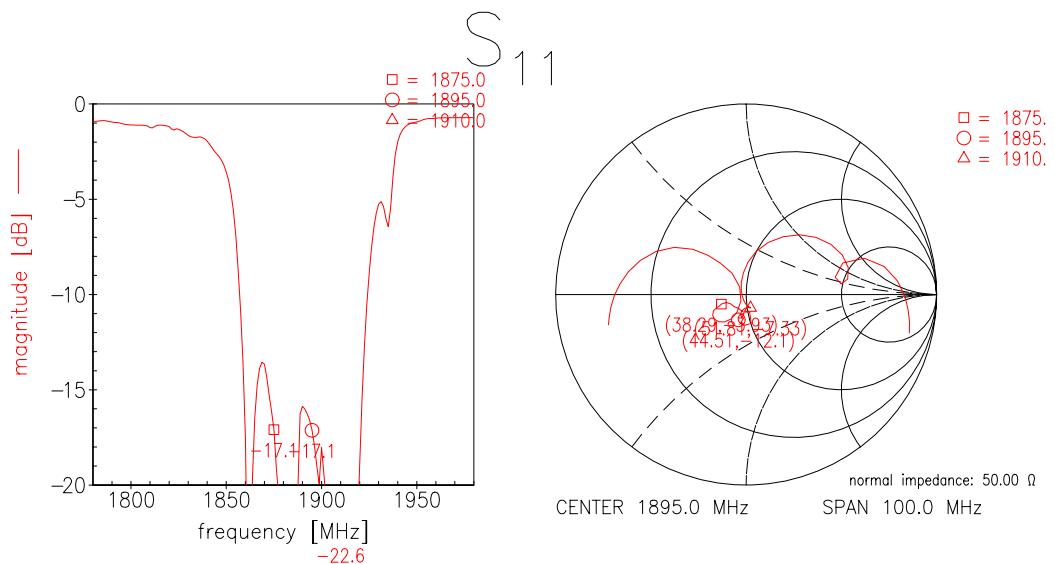



SAW Components

B7758

Low-Loss Filter for Mobile Communication

1865,0 & 1895,0 MHz

Data Sheet



Published by EPCOS AG

**Surface Acoustic Wave Components Division, SAW MC WT
P.O. Box 80 17 09, 81617 Munich, GERMANY**

© EPCOS AG 2002. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

EPCOS:

[B39192B7758E311](#)