



High-Speed 5.0 Mb/s Optocoupler Small Outline Surface Mount

FEATURES

- **Data Rate 5.0 Mb/s (2.5 Mb/s over Temperature)**
- **Buffer**
- **Isolation Test Voltage, 3000 V_{RMS} for 1.0 s**
- **TTL, LSTTL and CMOS Compatible**
- **Internal Shield for Very High Common Mode Transient Immunity**
- **Wide Supply Voltage Range (4.5 to 15 V)**
- **Low Input Current (1.6 mA to 5.0 mA)**
- **Specified from 0°C to 85°C**
-  **VDE 0884 Available with Option 1**

APPLICATIONS

- **Industrial Control**
- **Replace Pulse Transformers**
- **Routine Logic Interfacing**
- **Motion/Power Control**
- **High Speed Line Receiver**
- **Microprocessor System Interfaces**
- **Computer Peripheral Interfaces**


DESCRIPTION

The single channel 5.0 Mb/s SFH6720T and SFH6721T high speed optocoupler consists of a GaAlAs infrared emitting diode, optically coupled with an integrated photodetector. The detector incorporates a Schmitt-Trigger stage for improved noise immunity. A Faraday shield provides a common mode transient immunity of 1000 V/ μ s at $V_{CM}=50$ V for SFH6720T and 2500 V/ μ s at $V_{CM} = 400$ V for SFH6721T.

The SFH6720T and SFH6721T uses an industry standard SOIC-8A package.

Truth Table SFH6720T and SFH6721T (Positive Logic)

IR Diode	Output
on	H
off	L

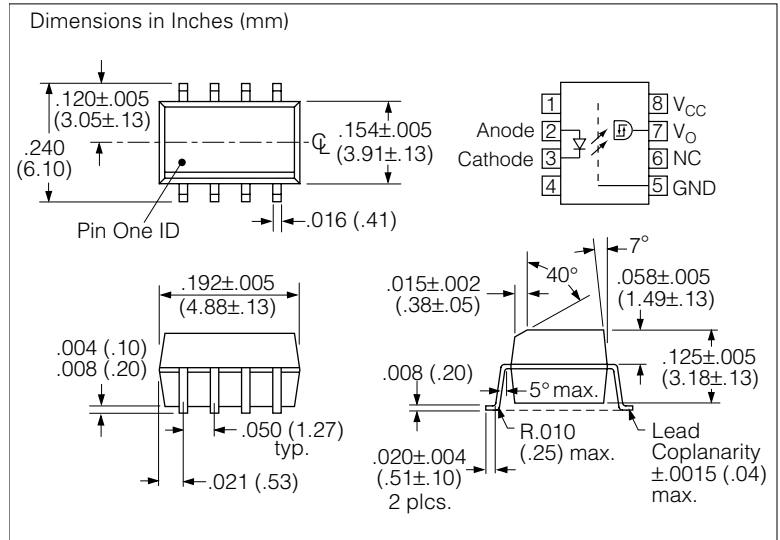

Maximum Ratings

Parameter	Sym.	Min.	Max.	Units
Emitter				
Reverse Voltage	V_R	—	3.0	V
DC Forward Current	I_F	—	10	mA
Surge Forward Current (tp≤1.0 μ s, 300 pulses/s)	I_{FSM}	—	1.0	A
Total Power Dissipation	P_{tot}	—	20	mW
Detector				
Supply Voltage	V_{CC}	-0.5	15	V
Output Voltage	V_O	-0.5	15	V
Average Output Current	I_O	—	25	mA
Total Power Dissipation	P_{tot}	—	100	mW
Package				
Storage Temperature Range	T_{stg}	-55	125	°C
Ambient Temperature Range	T_A	-40	100	°C
Lead Soldering Temperature (t=10 s)	T_S	—	260	°C
Isolation Test Voltage (t=1.0 s)	V_{ISO}	3000	—	V _{RMS}
Pollution Degree	—	—	2	—
Creepage Distance and Clearance	—	4.0	—	mm
Comparative Tracking Index per DIN IEC112/VDE 0303, part 1	—	175	400	—
Isolation Resistance	$V_{IO}=500$ V, $T_A=25^\circ$ C	R_{ISO}	10^{12}	Ω
	$V_{IO}=500$ V, $T_A=100^\circ$ C		10^{11}	

Recommended Operating Conditions

A 0.1 μF bypass capacitor connected between pins 5 and 8 must be used.

Parameter	Symbol	Min.	Max.	Unit
Supply Voltage	V_{CC}	4.5	15	V
Forward Input Current	I_{Fon}	1.6 ⁽¹⁾	5.0	mA
Forward Input Current	I_{Foff}	—	0.1	mA
Operating Temperature	T_A	−40	85	°C

1. We recommend using a 2.2 mA to permit at least 20% CTR degradation guard band.


Characteristics

$$-40^{\circ}\text{C} \leq T_A \leq 85^{\circ}\text{C}; 4.5\text{ V} \leq V_{CC} \leq 15\text{ V}; 1.6\text{ mA} \leq I_{Fon} \leq 5.0\text{ mA}; 2.0 \leq V_{EH} \leq 15\text{ V}; 0 \leq V_{EL} \leq 0.8\text{ V}; 0\text{ mA} \leq I_{Foff} \leq 0.1\text{ mA}$$

Typical values: $T_A=25^{\circ}\text{C}$; $V_{CC}=5.0\text{ V}$; $I_{FON}=3.0\text{ mA}$ unless otherwise specified

Parameter	Sym.	Min.	Typ.	Max.	Unit	Test Condition
Emitter						
Forward Voltage	V_F	—	1.6	1.75	V	$I_F=5.0\text{ mA}$, $T_A=25^\circ\text{C}$
		—	—	1.9	V	$I_F=5.0\text{ mA}$
Input Current Hysteresis	I_{HYS}	—	0.1	—	mA	$V_{CC}=5.0\text{ V}$, $I_{HYS}=I_{Fon}-I_{Foff}$
Reverse Current	I_R	—	0.5	10	μA	$V_R=3.0\text{ V}$, $T_A=25^\circ\text{C}$
Capacitance	C_O	—	60	—	pF	$V_R=0\text{ V}$, $f=1.0\text{ MHz}$, $T_A=25^\circ\text{C}$
Thermal Resistance	R_{thJA}	—	700	—	K/W	—
Detector						
Logic Low Output Voltage	V_{OL}	—	—	0.5	V	$I_{OL}=6.4\text{ mA}$
Logic High Output Voltage	V_{OH}	2.4	*	—	V	$I_{OH}=-2.6\text{ mA}$, * $V_{OH}=V_{CC}-1.8\text{ V}$
Output Leakage Current ($V_{OUT}>V_{CC}$)	I_{OHH}	—	0.5	100	μA	$V_O=5.5\text{ V}$, $V_{CC}=4.5\text{ V}$, $I_F=5.0\text{ mA}$
		—	1.0	500	μA	$V_O=15\text{ V}$, $V_{CC}=4.5\text{ V}$, $I_F=5.0\text{ mA}$
Logic Low Supply Current	I_{CCL}	—	3.7	6.0	mA	$V_{CC}=5.5\text{ V}$, $I_F=0$
		—	4.1	6.5	mA	$V_{CC}=15\text{ V}$, $I_F=0$
Logic High Supply Current	I_{CCH}	—	3.4	4.0	mA	$V_{CC}=5.5\text{ V}$, $I_F=5.0\text{ mA}$
		—	3.7	5.0	mA	$V_{CC}=15\text{ V}$, $I_F=5.0\text{ mA}$
Logic Low Short Circuit Output Current	$I_{OSL}^{(2)}$	25	—	—	mA	$V_O=V_{CC}=5.5\text{ V}$, $I_F=0$
		40	—	—	mA	$V_O=V_{CC}=15\text{ V}$, $I_F=0$
Logic High Short Circuit Output Current	$I_{OSH}^{(2)}$	—	—	-10	mA	$V_{CC}=5.5\text{ V}$, $V_O=0\text{ V}$, $I_F=5.0\text{ mA}$
		—	—	-25	mA	$V_{CC}=15\text{ V}$, $V_O=0\text{ V}$, $I_F=5.0\text{ mA}$
Thermal Resistance	R_{thJA}	—	300	—	K/W	—
Package						
Coupling Capacitance	C_{IO}	—	0.6	—	pF	$f=1.0\text{ MHz}$, pins 1-4 and 5-8 shorted together
Isolation Resistance	R_{ISO}	10^{12}	—	—	Ω	$V_{IO}=500\text{ V}$, $T_A=25^\circ\text{C}$
		10^{11}	—	—	Ω	$V_{IO}=500\text{ V}$, $T_A=100^\circ\text{C}$

2. Output short circuit time ≤ 10 ms.

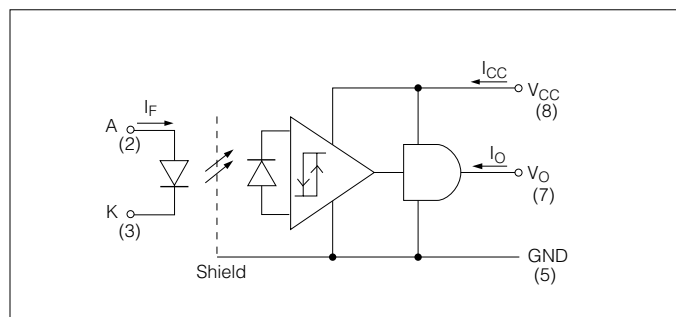

Switching Times⁽³⁾

0°C ≤ T_A ≤ 85°C; 4.5 V ≤ V_{CC} ≤ 15 V; 1.6 mA ≤ I_{Fon} ≤ 5.0 mA; 0 mA ≤ I_{Foff} ≤ 0.1 mA
Typical values: T_A = 25°C; V_{CC} = 5.0 V; I_{Fon} = 3.0 mA unless otherwise specified

Parameter, SFH6720T/21T	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Propagation Delay Time to Logic Low Output Level	t _{PHL}	—	120	—	ns	Without Peaking Capacitor
		—	115	300		With Peaking Capacitor
Propagation Delay Time to Logic High Output Level	t _{PLH}	—	125	—	ns	Without Peaking Capacitor
		—	90	300		With Peaking Capacitor
Output Rise Time	t _r	—	40	—	ns	10% to 90%
Output Fall Time	t _f	—	10	—	ns	90% to 10%

Common Mode Transient Immunity T_A = 25°C, V_{CC} = 5.0 V⁽⁴⁾

Parameter	Device	Symbol	Min.	Unit	Test Condition
Logic High Common Mode Transient Immunity	SFH6720T	CM _H ⁽⁴⁾	1000	V/μs	V _{CM} = 50 V, I _F = 1.6 mA
	SFH6721T		2500	V/μs	V _{CM} = 400 V, I _F = 1.6 mA
Logic Low Common Mode Transient Immunity	SFH6720T	CM _L ⁽⁴⁾	1000	V/μs	V _{CM} = 50 V, I _F = 0
	SFH6721T		2500	V/μs	V _{CM} = 400 V, I _F = 0

3. A 0.1 μF bypass capacitor connected between pins 5 and 8 must be used.
4. CM_H is the maximum slew rate of a common mode voltage V_{CM} at which the output voltage remains at logic high level (V_O > 2.0 V).
CM_L is the maximum slew rate of a common mode voltage V_{CM} at which the output voltage remains at logic low level (V_O < 0.8 V).

Figure 1. Permissible Total Power Dissipation vs. Temperature

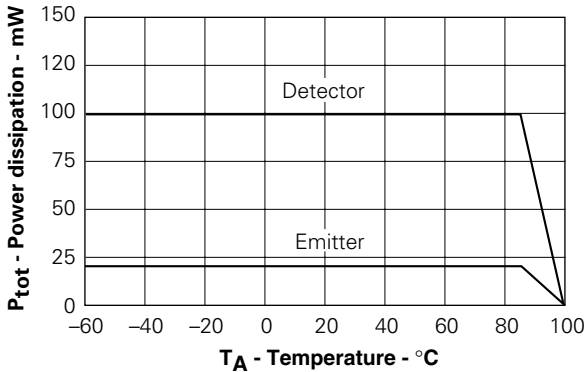


Figure 2. Typical Input Diode Forward Current vs. Forward Voltage

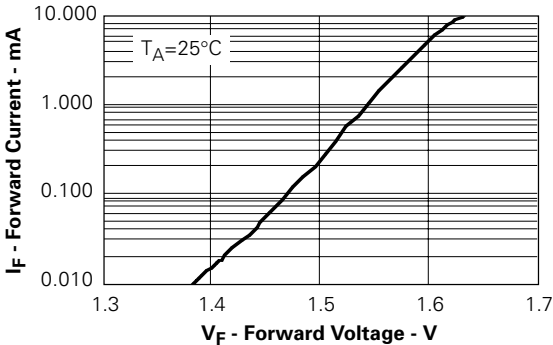


Figure 3. Typical Forward Input Voltage vs. Temperature

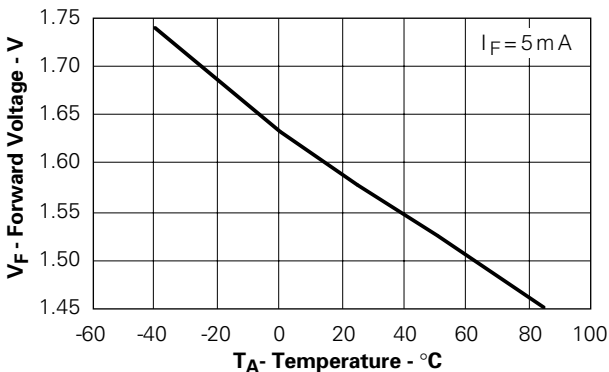


Figure 4. Typical Output Voltage vs. Forward Input Current

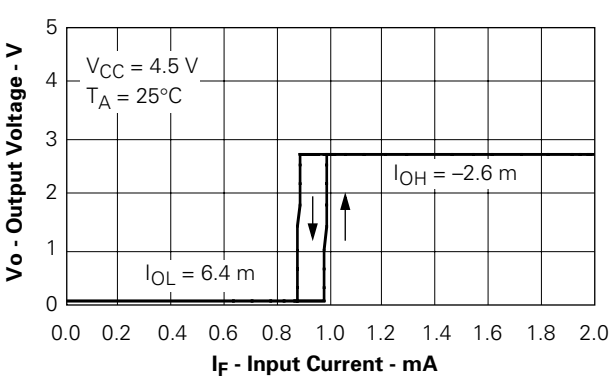


Figure 5. Typical Supply Current vs. Temperature

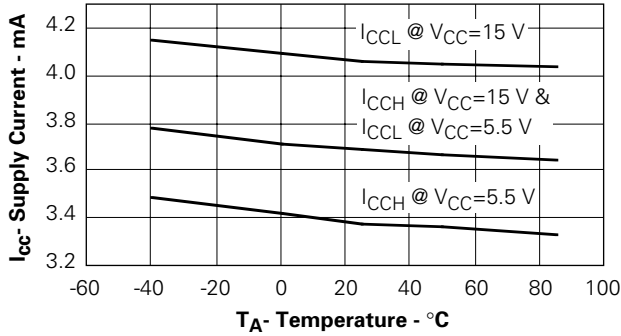


Figure 6. Typical Output Leakage Current vs. Temperature

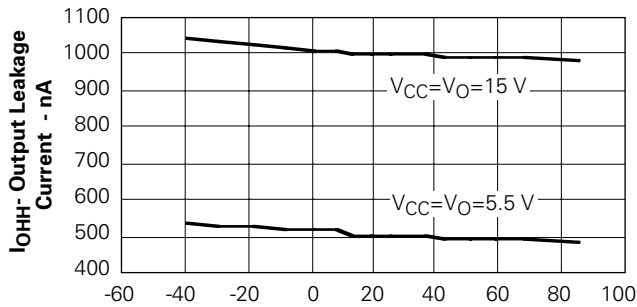


Figure 7. Typical Low Level Output Current vs. Temperature

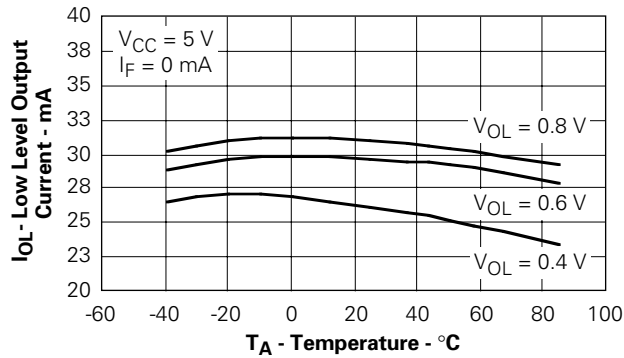


Figure 8. Typical Low Level Output Voltage vs. Temperature

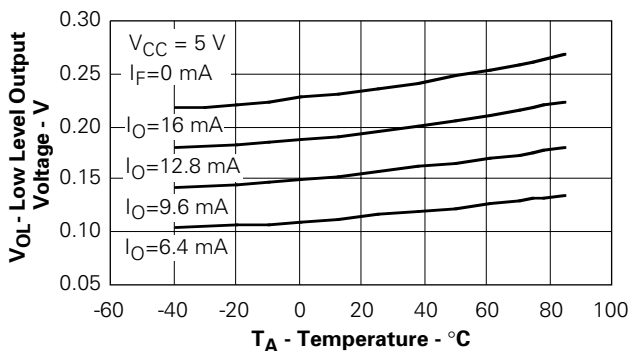


Figure 9. Typical High Level Output Current vs. Temperature

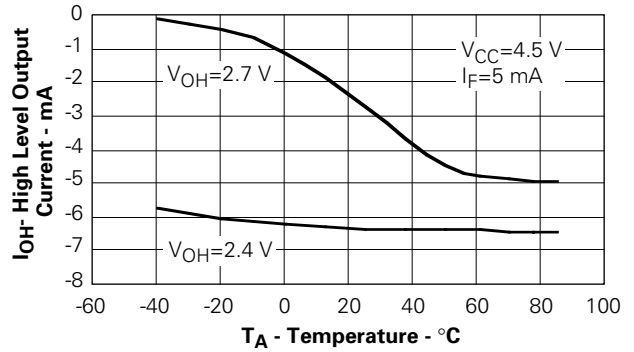


Figure 10. Typical Rise, Fall Time vs. Temperature

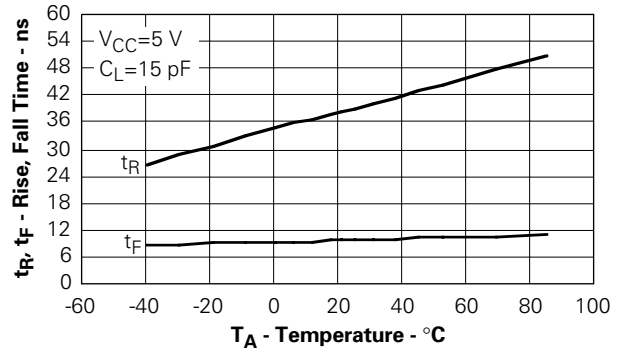


Figure 11. Typical Propagation Delays to Logic High vs. Temperature

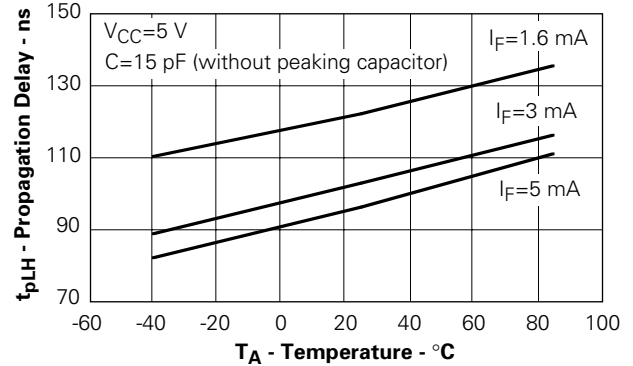


Figure 12. Typical Propagation Delays to Logic Low vs. Temperature

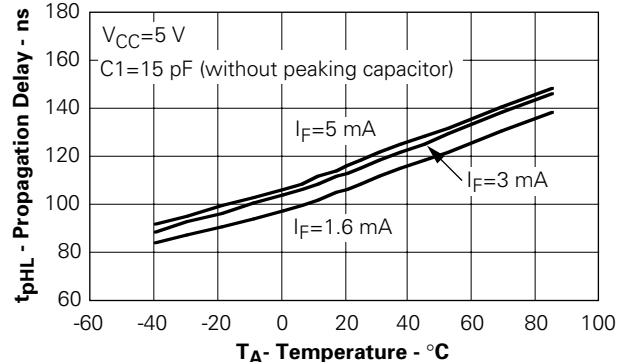


Figure 13. Typical Propagation Delays to Logic High vs. Temperature

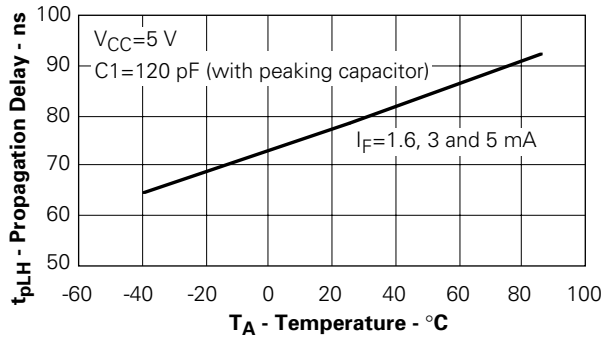


Figure 14. Typical Propagation Delays to Logic Low vs. Temperature

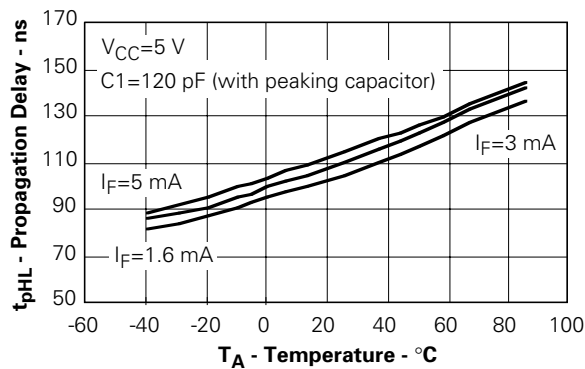


Figure 15. Typical Propagation Delays to Logic High vs. Temperature

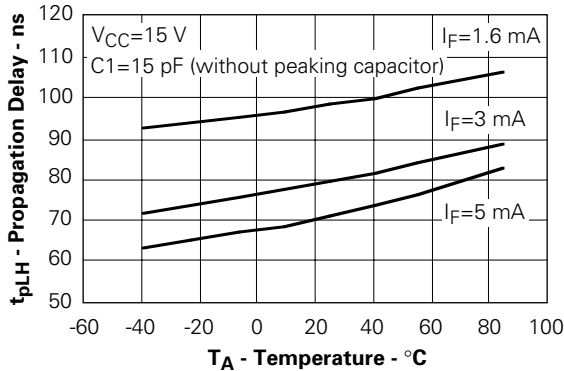


Figure 16. Typical Propagation Delays To Logic Low vs. Temperature

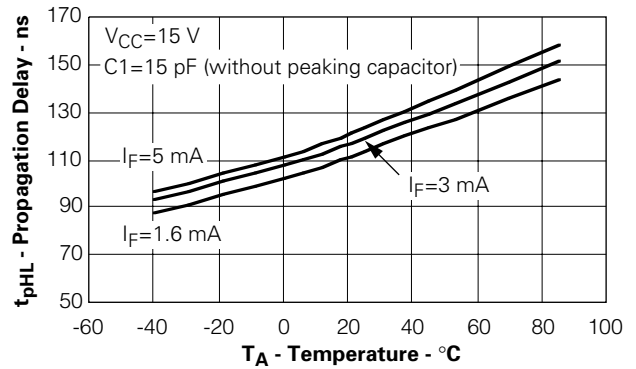


Figure 17. Typical Propagation Delays to Logic High vs. Temperature

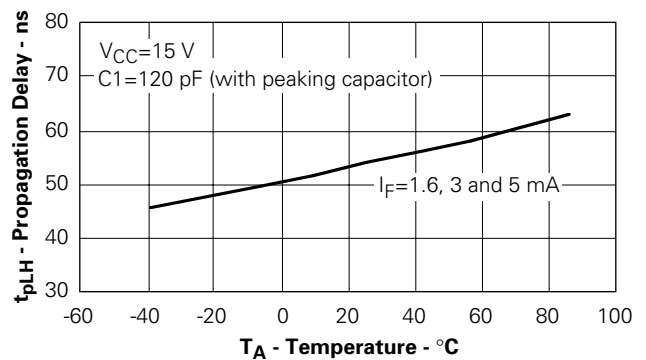


Figure 18. Typical Propagation Delays to Logic Low vs. Temperature


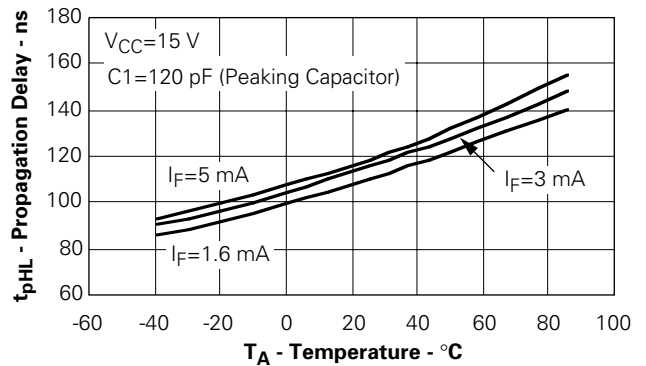


Figure 19. Test Circuit for t_{PLH} , t_{PHL} , t_r and t_f

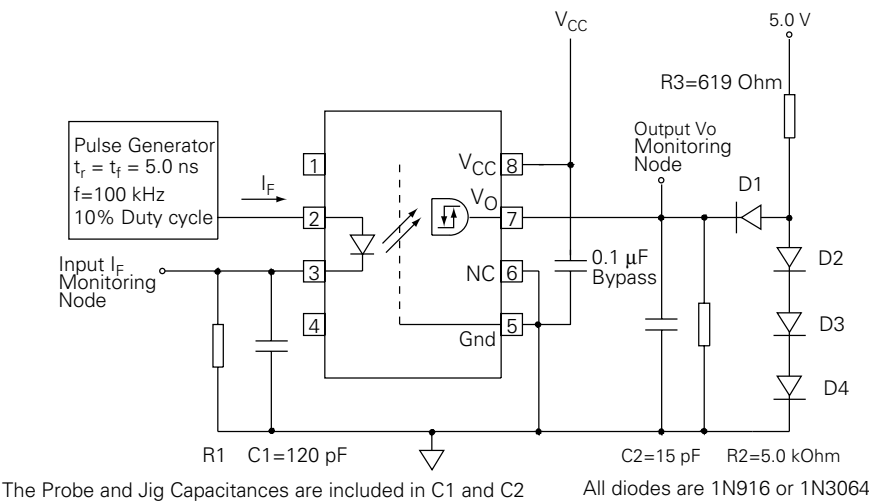

R_1	2.15 k Ω	1.1 k Ω	681 Ω
I_F (ON)	1.6 mA	3.0 mA	5.0 mA

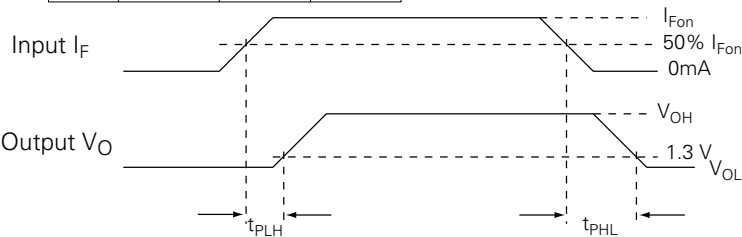


Figure 20. Test Circuit for Common Mode Transient Immunity and Typical Waveforms

