

MN101C61D, MN101C61G

Type	MN101C61D (under development)		MN101C61G
ROM (x8-bit)	64 K		128 K
RAM (x8-bit)	3 K		12 K
Package	TQFP080-P-1212D *Pb free		
Minimum Instruction Execution Time	Standard:	0.1 μs (at 2.5 V to 3.6 V, 20 MHz) 0.2 μs (at 2.1 V to 3.6 V, 10 MHz) 0.5 μs (at 1.8 V to 3.6 V, 4 MHz)* 125 μs (at 1.8 V to 3.6 V, 32 kHz)*	
	Double speed:	0.1 μs (at 2.5 V to 3.6 V, 10 MHz) 0.2 μs (at 2.1 V to 3.6 V, 5 MHz) 0.5 μs (at 1.8 V to 3.6 V, 2 MHz)* 62.5 μs (at 1.8 V to 3.6 V, 32 kHz)*	
* The operation guarantee range for flash memory built-in type is 2.2V to 3.0 V or 2.7V to 3.6 V.			
Interrupts	• RESET • Watchdog • External 0 • External 1 • External 2 • External 3 • External 4 • External 5 • Timer 0 • Timer 1 • Timer 2 • Timer 3 • Timer 4 • Timer 5 • Timer 6 • Time base • Serial 0 reception • Serial 0 transmission • Serial 1 reception • Serial 1 transmission • Serial 2 • Serial 3 • Automatic transfer finish • A/D conversion finish • Timer 7 (2 systems) • Key interrupts (8 lines)		
Timer Counter	Timer counter 0 : 8-bit × 1 (square-wave/8-bit PWM output, event count, generation of remote control carrier, pulse width measurement) Clock source 1/2, 1/4 of system clock frequency; 1/1, 1/4, 1/16, 1/32, 1/64 of OSC oscillation clock frequency; 1/1 of XI oscillation clock frequency; external clock input Interrupt source coincidence with compare register 0 Timer counter 1 : 8-bit × 1 (square-wave output, event count, synchronous output event) Clock source 1/2, 1/8 of system clock frequency; 1/1, 1/4, 1/16, 1/64, 1/128 of OSC oscillation clock frequency; 1/1 of XI oscillation clock frequency; external clock input Interrupt source coincidence with compare register 1 Timer counter 0, 1 can be cascade-connected. Timer counter 2 : 8-bit × 1 (square-wave/8-bit PWM output, event count, synchronous output event, pulse width measurement) Clock source 1/2, 1/4 of system clock frequency; 1/1, 1/4, 1/16, 1/32, 1/64 of OSC oscillation clock frequency; 1/1 of XI oscillation clock frequency; external clock input Interrupt source coincidence with compare register 2 Timer counter 3 : 8-bit × 1 (square-wave output, event count, generation of remote control carrier) Clock source 1/2, 1/8 of system clock frequency; 1/1, 1/4, 1/16, 1/64, 1/128 of OSC oscillation clock frequency; 1/1 of XI oscillation clock frequency; external clock input Interrupt source coincidence with compare register 3 Timer counter 2, 3 can be cascade-connected. Timer counter 4 : 8-bit × 1 (square-wave/8-bit PWM output, event count, pulse width measurement, serial 1 baud rate timer) Clock source 1/2, 1/4 of system clock frequency; 1/1, 1/4, 1/16, 1/32, 1/64 of OSC oscillation clock frequency; 1/1 of XI oscillation clock frequency; 1/1 of external clock input frequency Interrupt source coincidence with compare register 4 Timer counter 5 : 8-bit × 1 (square-wave/8-bit PWM output, event count, pulse width measurement, serial 0 baud rate timer) Clock source 1/2, 1/4 of system clock frequency; 1/1, 1/4, 1/16, 1/32, 1/64 of OSC oscillation clock frequency; 1/1 of XI oscillation clock frequency; 1/1 of external clock input frequency Interrupt source coincidence with compare register 5		

■ Timer Counter (Continue)

Timer counter 6 : 8-bit freerun timer

Clock source 1/1 of system clock frequency; 1/1, 1/4096, 1/8192 of OSC oscillation clock frequency; 1/1, 1/4096, 1/8192 of XI oscillation clock frequency

Interrupt source coincidence with compare register 6

Timer counter 7 : 16-bit × 1

(square-wave/16-bit PWM output, cycle / duty continuous variable, event count, synchronous output event, pulse width measurement, input capture)

Clock source 1/1, 1/2, 1/4, 1/16 of system clock frequency; 1/1, 1/2, 1/4, 1/16 of OSC oscillation clock frequency; 1/1, 1/2, 1/4, 1/16 of external clock input frequency

Interrupt source coincidence with compare register 7 (2 lines)

Time base timer (one-minute count setting)

Clock source 1/1 of OSC oscillation clock frequency; 1/1 of XI oscillation clock frequency

Interrupt source 1/128, 1/256, 1/512, 1/1024, 1/8192, 1/32768 of clock source frequency

Watchdog timer

Interrupt source 1/65536, 1/262144, 1/1048576 of system clock frequency

DMA controller (automatic data transfer)

Max. Transfer cycles 255

Starting factor external request, various types of interrupt, software

Transfer mode 1-byte transfer, word transfer, burst transfer

■ Serial Interface

Serial 0 : synchronous type / UART (full-duplex) × 1

Clock source 1/2, 1/4 of system clock frequency; pulse output of timer counter 5; 1/2, 1/4, 1/16, 1/64 of OSC oscillation clock frequency

Serial 1 : synchronous type / UART (full-duplex) × 1

Clock source 1/2, 1/4 of system clock frequency; pulse output of timer counter 4; 1/2, 1/4, 1/16, 1/64 of OSC oscillation clock frequency

Serial 2 : synchronous type × 1

Clock source 1/2, 1/4 of system clock frequency; pulse output of timer counter 3; 1/2, 1/4, 1/16, 1/32 of OSC oscillation clock frequency

Serial 3 : synchronous type/simple I²C × 1

Clock source 1/2, 1/4 of system clock frequency; pulse output of timer counter 3; 1/2, 1/4, 1/16, 1/32 of OSC oscillation clock frequency

■ I/O Pins

I/O

62

• Common use • Specified pull-up resistor available • Input/output selectable (bit unit)

Input

6

• Common use • Specified pull-up resistor available

■ A/D Inputs

10-Bit × 6-ch. (with S/H)

■ Special Ports

Buzzer output, remote control carrier signal output, high-current drive port

See the next page for electrical characteristics, pin assignment and support tool.

Electrical Characteristics


Supply current

Parameter	Symbol	Condition	Limit			Unit
			min	typ	max	
Operating supply current	IDD1	fosc = 20 MHz, VDD = 3 V, (fs = fosc/2)		5	12	mA
	IDD2	fosc = 8.39 MHz, VDD = 3 V, (fs = fosc/2)		2	5	mA
	IDD3	fx = 32.768 kHz, VDD = 3 V, (fs = fx/2)			40	μA
Supply current at HALT	IDD4	fx = 32.768 kHz, VDD = 3 V, Ta = 25°C		4	8	μA
	IDD5	fx = 32.768 kHz, VDD = 3 V			30	μA
Supply current at STOP	IDD6	VDD = 3 V, Ta = 25°C		0	2	μA
	IDD7	VDD = 3 V			20	μA

Ta = -40°C to +85°C, VDD = 1.8 V to 3.6 V, VSS = 0 V

Note) Ta = -20°C to +70°C for a flash memory built-in version. Supply voltage range and supply current ratings are also different from the values mentioned above. Refer to Chapter 18 “Flash EEPROM” for details

Pin Assignment

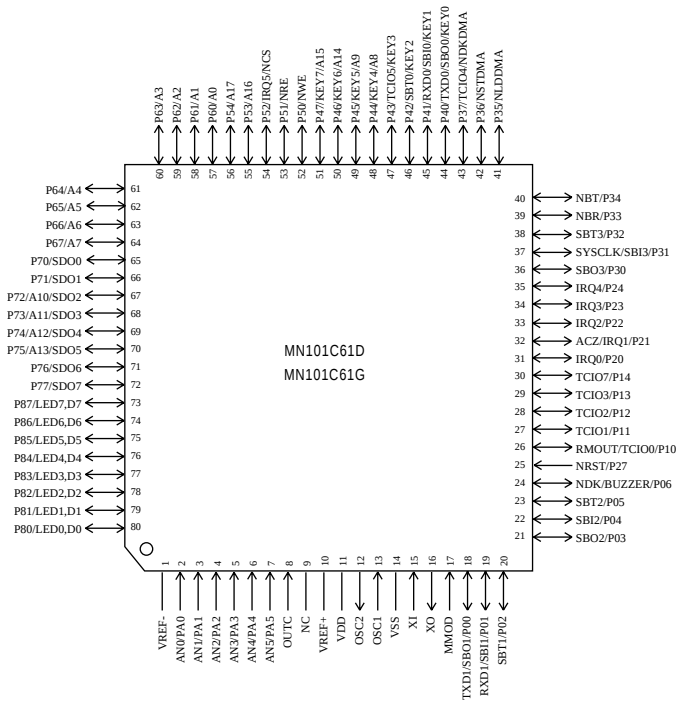

TQFP080-P-1212D *Pb free

NC serves as the VPP pin in the MN101CF61G, and cannot be used as a user pin.

Support Tool

■	In-circuit Emulator		PX-ICE101C / D + PX-PRB101C61-TQFP080-P-1212-M
■	Flash Memory Built-in Type		
	Type	MN101CF61G	
	ROM (× 8-bit)	128 K	
	RAM (× 8-bit)	12 K	
	Minimum instruction execution time	0.1 μs (at 2.7 V to 3.6 V, 20 MHz)	
		0.2 μs (at 2.7 V to 3.6 V, 10 MHz)	
		0.5 μs (at 2.7 V to 3.6 V, 4 MHz)	
		125 μs (at 2.7 V to 3.6 V, 32 kHz)	
	Package	TQFP080-P-1212D *Pb free	
	Type	MN101CF60G	
	ROM (× 8-bit)	128 K	
	RAM (× 8-bit)	12 K	
	Minimum instruction execution time	0.1 μs (at 2.5 V to 3.0 V, 20 MHz)	
		0.2 μs (at 2.2 V to 3.0 V, 10 MHz)	
		0.5 μs (at 2.2 V to 3.0 V, 4 MHz)	
		125 μs (at 2.2 V to 3.0 V, 32 kHz)	
	Package	TQFP080-P-1212D *Pb free	

Request for your special attention and precautions in using the technical information and semiconductors described in this material

- (1) An export permit needs to be obtained from the competent authorities of the Japanese Government if any of the products or technologies described in this material and controlled under the "Foreign Exchange and Foreign Trade Law" is to be exported or taken out of Japan.
- (2) The technical information described in this material is limited to showing representative characteristics and applied circuit examples of the products. It does not constitute the warranting of industrial property, the granting of relative rights, or the granting of any license.
- (3) The products described in this material are intended to be used for standard applications or general electronic equipment (such as office equipment, communications equipment, measuring instruments and household appliances).
Consult our sales staff in advance for information on the following applications:
 - Special applications (such as for airplanes, aerospace, automobiles, traffic control equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
 - Any applications other than the standard applications intended.
- (4) The products and product specifications described in this material are subject to change without notice for reasons of modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the guaranteed values, in particular those of maximum rating, the range of operating power supply voltage and heat radiation characteristics. Otherwise, we will not be liable for any defect which may arise later in your equipment.
Even when the products are used within the guaranteed values, redundant design is recommended, so that such equipment may not violate relevant laws or regulations because of the function of our products.
- (6) When using products for which dry packing is required, observe the conditions (including shelf life and after-unpacking standby time) agreed upon when specification sheets are individually exchanged.
- (7) No part of this material may be reprinted or reproduced by any means without written permission from our company.

Please read the following notes before using the datasheets

- A. These materials are intended as a reference to assist customers with the selection of Panasonic semiconductor products best suited to their applications.
Due to modification or other reasons, any information contained in this material, such as available product types, technical data, and so on, is subject to change without notice.
Customers are advised to contact our semiconductor sales office and obtain the latest information before starting precise technical research and/or purchasing activities.
- B. Panasonic is endeavoring to continually improve the quality and reliability of these materials but there is always the possibility that further rectifications will be required in the future. Therefore, Panasonic will not assume any liability for any damages arising from any errors etc. that may appear in this material.
- C. These materials are solely intended for a customer's individual use.
Therefore, without the prior written approval of Panasonic, any other use such as reproducing, selling, or distributing this material to a third party, via the Internet or in any other way, is prohibited.