



SAW Components

Data Sheet B9307

Data Sheet

A large, stylized, 3D-rendered graphic of the word "EPCOS" in a light gray, sans-serif font. The letters are slightly tilted and have a metallic, reflective appearance. In the background, there is a faint, circular pattern resembling a globe or a complex circuit board layout.



SAW Components

B9307

Low-Loss Dual Band Filter for Mobile Communication

942,5 / 1842,5 MHz


Data Sheet



Chip Sized Saw Package QCS10H

Features

- Low-loss 2in1 RF filter for mobile telephone GSM900/1800 systems, receive path
- Usable passband:
Filter 1 (GSM900): 35 MHz
Filter 2 (GSM1800): 75 MHz
- Unbalanced to balanced operation of both filters
- Impedance transformation from 50 Ω to 150 Ω for both filters
- Suitable for GPRS Class 1 to 12
- Ceramic package for Surface Mounted Technology (SMT)

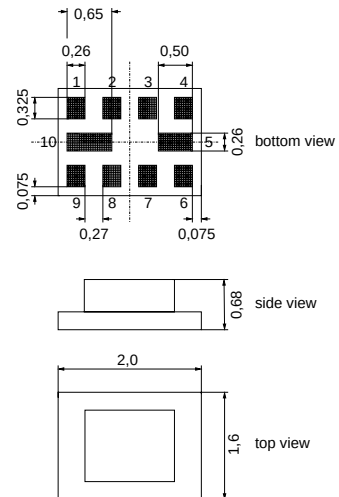


Dimensions in mm, approx. weight 0,008g.

Terminals

- Ni, gold-plated

Pin configuration

1	Input [Filter 1]
4	Input [Filter 2]
6, 7	Output, balanced [Filter 2]
8, 9	Output, balanced [Filter 1]
2, 3, 5, 10	Case ground



Type	Ordering code	Marking and Package according to	Packing according to
B9307	B39182-B9307-G110	C61157-A7-A141	F61074-V8152-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 40 / + 85	$^{\circ}\text{C}$	Machine Model, 10 pulses
Storage temperature range	T_{stg}	- 40 / + 85	$^{\circ}\text{C}$	
DC voltage	V_{DC}	5	V	
ESD voltage	V_{ESD}	50*	V	
Input power at GSM850, GSM900, GSM1800, GSM1900 Tx bands:				
Filter 1 (GSM900)	P_{IN}	15	dBm	effective power in the on-state, duty cycle 4:8
Filter 2 (GSM1800)	P_{IN}	15	dBm	

* - acc. to JESD22-A115A (Machine Model), 10 negative & 10 positive pulses



SAW Components

B9307

Low-Loss Dual Band Filter for Mobile Communication

942,5 / 1842,5 MHz

Data Sheet



Characteristics Filter 1 (GSM900)

Operating temperature range:

$T = -20$ to $+75^{\circ}\text{C}$

Terminating source impedance:

$Z_S = 50\ \Omega$

Terminating load impedance:

$Z_L = 150\ \Omega \parallel 82\text{nH}$ (balanced)

		min.	typ.	max.	
Center frequency	f_c	—	942,5	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$				
925,0 ... 960,0 MHz		—	1,5	2,0	dB
925,0 ... 960,0 MHz ¹⁾		—	1,4	1,7	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
925,0 ... 960,0 MHz		—	0,8	1,2	dB
Input VSWR					
925,0 ... 960,0 MHz		—	1,9	2,1	
Output VSWR					
925,0 ... 960,0 MHz		—	1,9	2,1	
Output amplitude balance (S_{31}/S_{21})					
925,0 ... 960,0 MHz		-1,0	-0,6/+0,7	1,0	dB
Output phase balance ($\phi(S_{31})-\phi(S_{21})+180^{\circ}$)					
925,0 ... 960,0 MHz		-10	-2/+2	10	degree
Attenuation	$\alpha_{\min}$				
10,0 ... 480,0 MHz		45	53	—	dB
480,0 ... 905,0 MHz		30	34	—	dB
905,0 ... 915,0 MHz		20	25	—	dB
980,0 ... 1000,0 MHz		25	28	—	dB
1000,0 ... 1850,0 MHz		28	38	—	dB
1850,0 ... 1920,0 MHz		40	59	—	dB
1920,0 ... 6000,0 MHz		35	48	—	dB

1) $T = +25 \pm 2^{\circ}\text{C}$



SAW Components

B9307


Low-Loss Dual Band Filter for Mobile Communication

942,5 / 1842,5 MHz


Data Sheet



Transfer Function Filter 1 (GSM900)

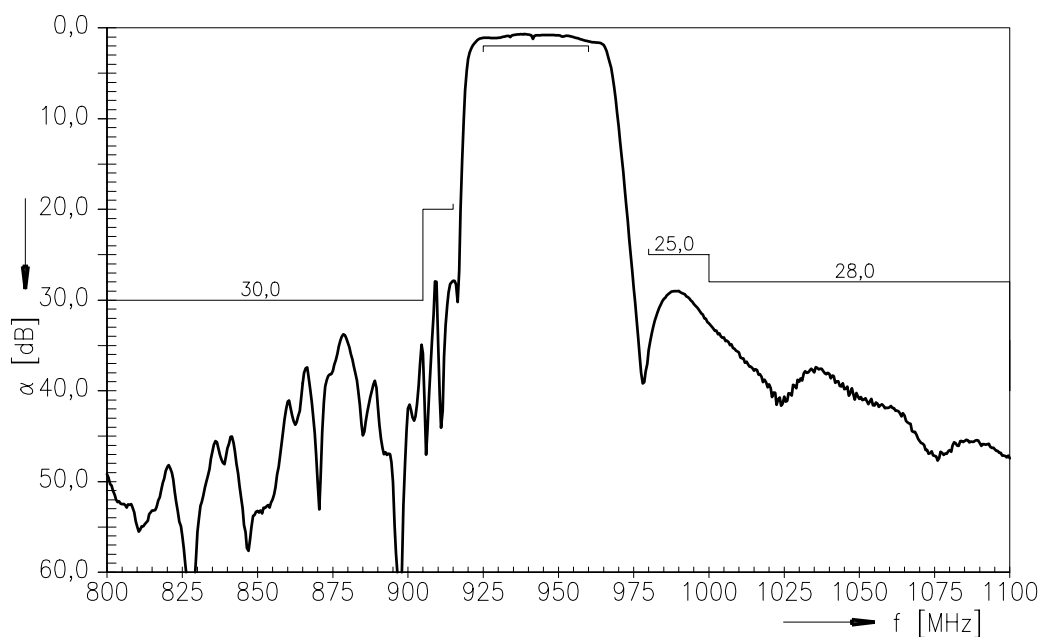

Transfer Function Filter 1 (GSM900) - wideband

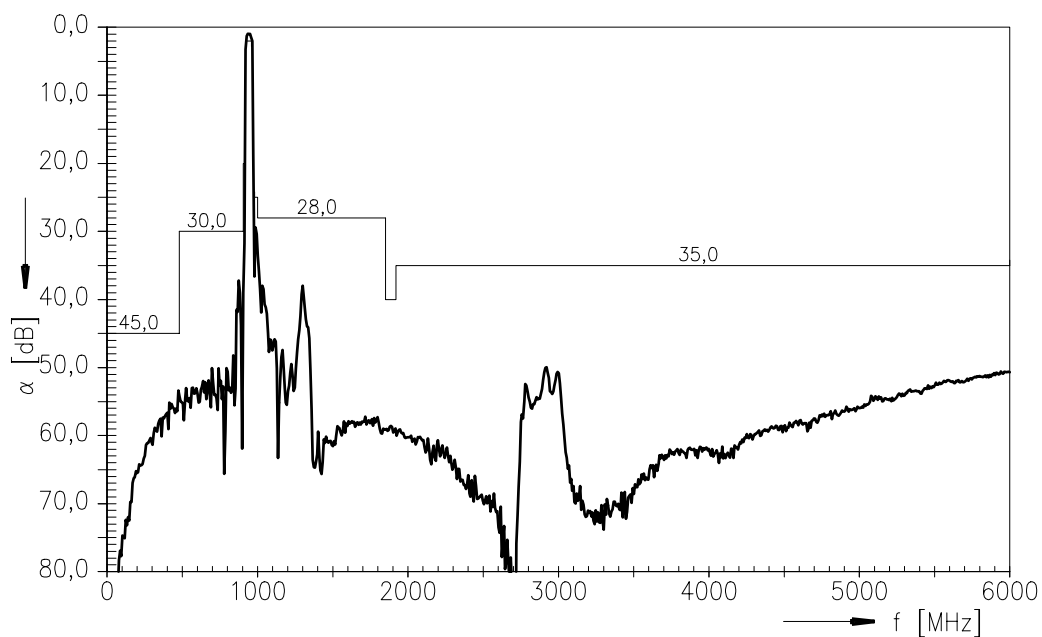



SAW Components

B9307

Low-Loss Dual Band Filter for Mobile Communication

942,5 / 1842,5 MHz

Data Sheet



Characteristics Filter 2 (GSM1800)

Operating temperature range:

$T = -20$ to $+75^{\circ}\text{C}$

Terminating source impedance:

$Z_S = 50\ \Omega$

Terminating load impedance:

$Z_L = 150\ \Omega \parallel 15\text{nH}$ (balanced)

		min.	typ.	max.	
Center frequency	f_C	—	1842,5	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$				
1805,0 ... 1880,0 MHz		—	1,8	2,3	dB
1805,0 ... 1880,0 MHz ¹⁾		—	1,6	2,1	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
1805,0 ... 1880,0 MHz		—	0,7	1,3	dB
Input VSWR					
1805,0 ... 1880,0 MHz		—	1,8	2,2	
Output VSWR					
1805,0 ... 1880,0 MHz		—	1,7	2,2	
Output amplitude balance (S_{31} / S_{21})					
1805,0 ... 1880,0 MHz		-1,0	-0,7/+0,5	+1,0	dB
Output phase balance ($\phi(S_{31})-\phi(S_{21})+180^{\circ}$)					
1805,0 ... 1880,0 MHz		-10	-3/+3	+10	°
Attenuation	α				
10,0 ... 940,0 MHz		40	52	—	dB
940,0 ... 1705,0 MHz		28	42	—	dB
1705,0 ... 1785,0 MHz		12	15	—	dB
1920,0 ... 1980,0 MHz		17	23	—	dB
1980,0 ... 2030,0 MHz		24	28	—	dB
2030,0 ... 2775,0 MHz		28	34	—	dB
2775,0 ... 5640,0 MHz		38	43	—	dB
5640,0 ... 6000,0 MHz		28	43	—	dB

1) $T = +25 \pm 2^{\circ}\text{C}$



SAW Components

B9307


Low-Loss Dual Band Filter for Mobile Communication

942,5 / 1842,5 MHz


Data Sheet



Transfer Function Filter 2 (GSM1800)

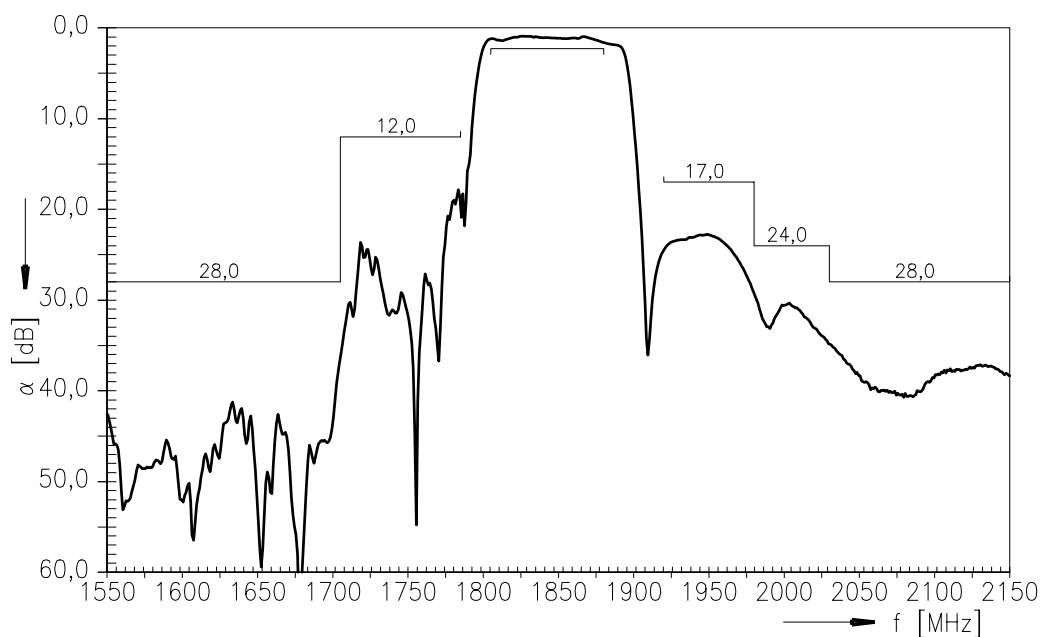

Transfer Function Filter 2 (GSM1800) - wideband

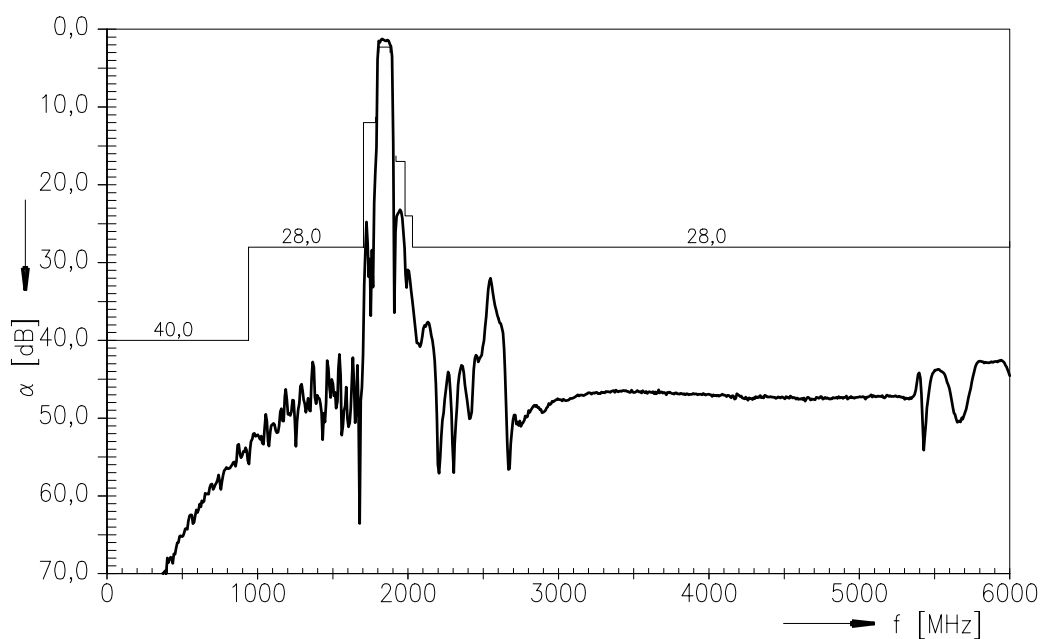



SAW Components		B9307
Low-Loss Dual Band Filter for Mobile Communication		942,5 / 1842,5 MHz
Data Sheet		

Published by EPCOS AG
Surface Acoustic Wave Components Division, SAW MC
P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2005. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.