



Is Now Part of



ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at
www.onsemi.com

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (_), the underscore (_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at www.onsemi.com. Please email any questions regarding the system integration to Fairchild_questions@onsemi.com.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

FQPF22P10

P-Channel QFET® MOSFET



-100 V, -13.2 A, 125 mΩ

Description

This P-Channel enhancement mode power MOSFET is produced using Fairchild Semiconductor®'s proprietary planar stripe and DMOS technology. This advanced MOSFET technology has been especially tailored to reduce on-state resistance, and to provide superior switching performance and high avalanche energy strength. These devices are suitable for switched mode power supplies, audio amplifier, DC motor control, and variable switching power applications.

Features

- -13.2 A, -100 V, $R_{DS(on)}=125\text{ m}\Omega(\text{Max.})$ @ $V_{GS}=-10\text{ V}$, $I_D=-6.6\text{ A}$
- Low Gate Charge (Typ. 40 nC)
- Low C_{rss} (Typ. 160 pF)
- 100% Avalanche Tested
- 175°C Maximum Junction Temperature Rating



Absolute Maximum Ratings

$T_C = 25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	FQPF22P10	Unit
V_{DSS}	Drain-Source Voltage	-100	V
I_D	Drain Current - Continuous ($T_C = 25^\circ\text{C}$)	-13.2	A
	- Continuous ($T_C = 100^\circ\text{C}$)	-9.3	A
I_{DM}	Drain Current - Pulsed (Note 1)	-52.8	A
V_{GSS}	Gate-Source Voltage	± 30	V
E_{AS}	Single Pulsed Avalanche Energy (Note 2)	710	mJ
I_{AR}	Avalanche Current (Note 1)	-13.2	A
E_{AR}	Repetitive Avalanche Energy (Note 1)	4.5	mJ
dv/dt	Peak Diode Recovery dv/dt (Note 3)	-6.0	V/ns
P_D	Power Dissipation ($T_C = 25^\circ\text{C}$)	45	W
	- Derate above 25°C	0.3	W/°C
T_J, T_{STG}	Operating and Storage Temperature Range	-55 to +175	°C
T_L	Maximum lead temperature for soldering purposes, 1/8" from case for 5 seconds	300	°C

Thermal Characteristics

Symbol	Parameter	Typ	Max	Unit
$R_{\theta JC}$	Thermal Resistance, Junction-to-Case	--	3.3	°C/W
$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient	--	62.5	°C/W

Electrical Characteristics $T_C = 25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
--------	-----------	-----------------	-----	-----	-----	------

Off Characteristics

BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS} = 0\text{ V}, I_D = -250\text{ }\mu\text{A}$	-100	--	--	V
$\Delta BV_{DSS} / \Delta T_J$	Breakdown Voltage Temperature Coefficient	$I_D = -250\text{ }\mu\text{A}$, Referenced to 25°C	--	-0.1	--	V/ $^\circ\text{C}$
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS} = -100\text{ V}, V_{GS} = 0\text{ V}$	--	--	-1	μA
		$V_{DS} = -80\text{ V}, T_C = 125^\circ\text{C}$	--	--	-10	μA
I_{GSSF}	Gate-Body Leakage Current, Forward	$V_{GS} = -30\text{ V}, V_{DS} = 0\text{ V}$	--	--	-100	nA
I_{GSSR}	Gate-Body Leakage Current, Reverse	$V_{GS} = 30\text{ V}, V_{DS} = 0\text{ V}$	--	--	100	nA

On Characteristics

$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS} = V_{GS}, I_D = -250\text{ }\mu\text{A}$	-2.0	--	-4.0	V
$R_{DS(on)}$	Static Drain-Source On-Resistance	$V_{GS} = -10\text{ V}, I_D = -6.6\text{ A}$	--	0.096	0.125	Ω
g_{FS}	Forward Transconductance	$V_{DS} = -40\text{ V}, I_D = -6.6\text{ A}$ (Note 4)	--	11	--	S

Dynamic Characteristics

C_{iss}	Input Capacitance	$V_{DS} = -25\text{ V}, V_{GS} = 0\text{ V},$ $f = 1.0\text{ MHz}$	--	1170	1500	pF
C_{oss}	Output Capacitance		--	460	600	pF
C_{rss}	Reverse Transfer Capacitance		--	160	200	pF

Switching Characteristics

$t_{d(on)}$	Turn-On Delay Time	$V_{DD} = -50\text{ V}, I_D = -22\text{ A},$ $R_G = 25\text{ }\Omega$ (Note 4, 5)	--	17	45	ns
t_r	Turn-On Rise Time		--	170	350	ns
$t_{d(off)}$	Turn-Off Delay Time		--	60	130	ns
t_f	Turn-Off Fall Time		--	110	230	ns
Q_g	Total Gate Charge	$V_{DS} = -80\text{ V}, I_D = -22\text{ A},$ $V_{GS} = -10\text{ V}$ (Note 4, 5)	--	40	50	nC
Q_{gs}	Gate-Source Charge		--	7.0	--	nC
Q_{gd}	Gate-Drain Charge		--	21	--	nC

Drain-Source Diode Characteristics and Maximum Ratings

I _S	Maximum Continuous Drain-Source Diode Forward Current		--	--	-13.2	A
I _{SM}	Maximum Pulsed Drain-Source Diode Forward Current		--	--	-52.8	A
V _{SD}	Drain-Source Diode Forward Voltage	V _{GS} = 0 V, I _S = -13.2 A	--	--	-4.0	V
t _{rr}	Reverse Recovery Time	V _{GS} = 0 V, I _S = -22 A,	--	110	--	ns
Q _{rr}	Reverse Recovery Charge	dI _F / dt = 100 A/μs (Note 4)	--	0.6	--	μC

Notes:

1. Repetitive Rating ; Pulse width limited by maximum junction temperature
2. $L = 6.1\text{ mH}$, $I_{AS} = -13.2\text{ A}$, $V_{DD} = -25\text{ V}$, $R_G = 25\text{ }\Omega$, Starting $T_J = 25^\circ\text{C}$
3. $I_{SD} \leq -22\text{ A}$, $dI/dt \leq 300\text{ A}/\mu\text{s}$, $V_{DD} \leq BV_{DSS}$, Starting $T_J = 25^\circ\text{C}$
4. Pulse Test : Pulse width $\leq 300\mu\text{s}$, Duty cycle $\leq 2\%$
5. Essentially independent of operating temperature

Typical Characteristics

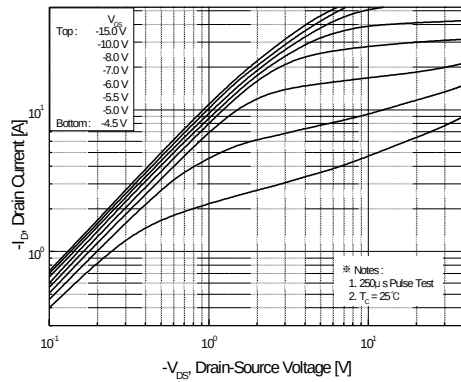


Figure 1. On-Region Characteristics

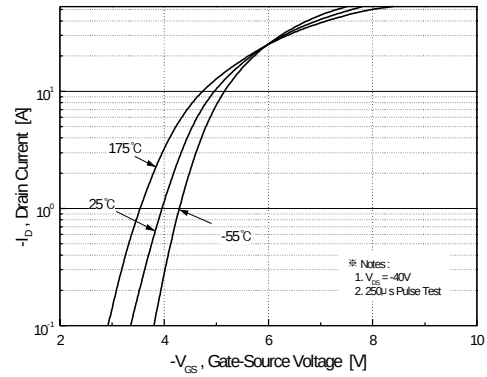


Figure 2. Transfer Characteristics

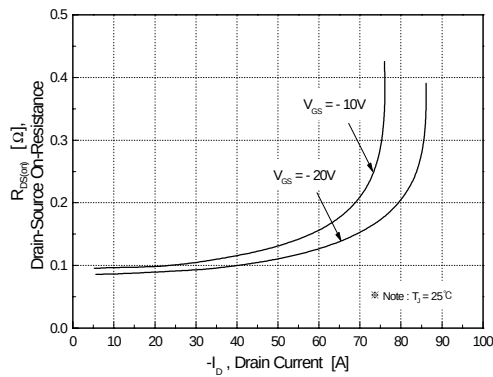


Figure 3. On-Resistance Variation vs. Drain Current and Gate Voltage

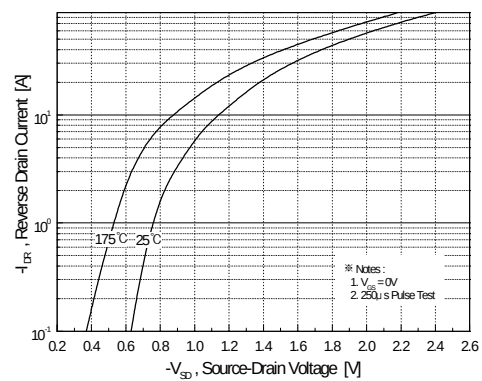


Figure 4. Body Diode Forward Voltage Variation vs. Source Current and Temperature

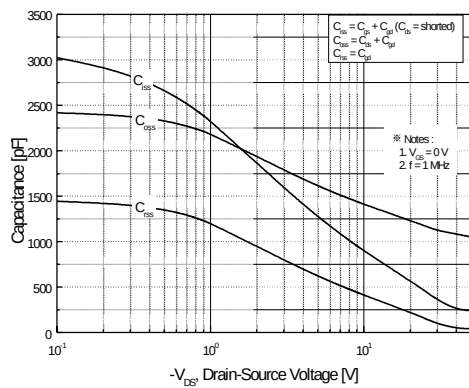


Figure 5. Capacitance Characteristics

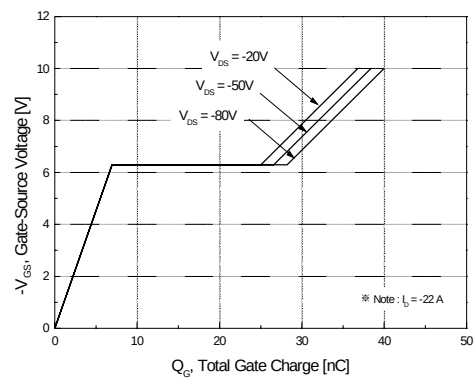


Figure 6. Gate Charge Characteristics

Typical Characteristics (Continued)

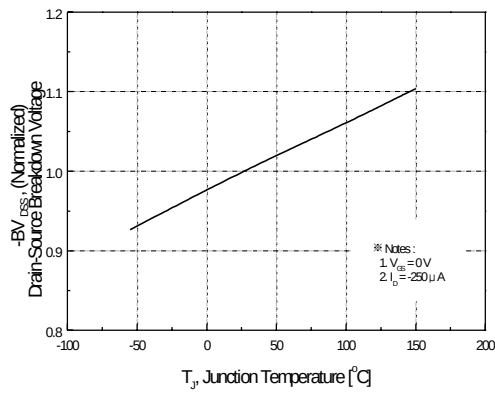


Figure 7. Breakdown Voltage Variation vs. Temperature

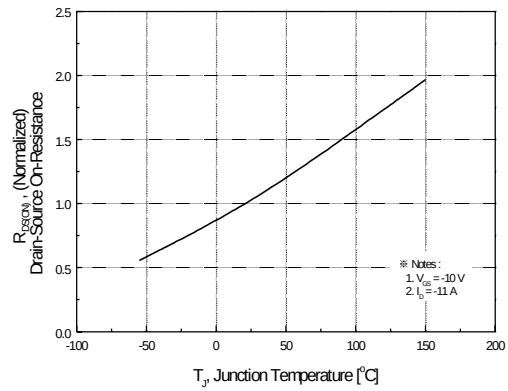


Figure 8. On-Resistance Variation vs. Temperature

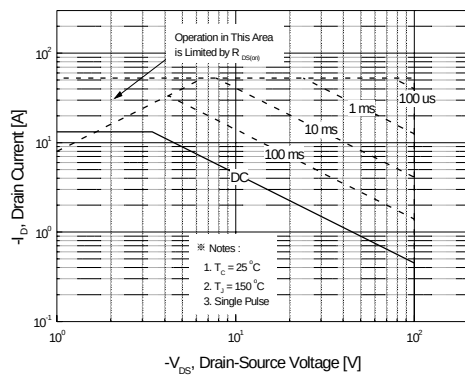


Figure 9. Maximum Safe Operating Area

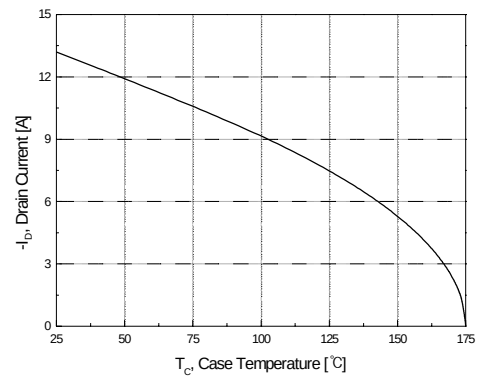


Figure 10. Maximum Drain Current vs. Case Temperature



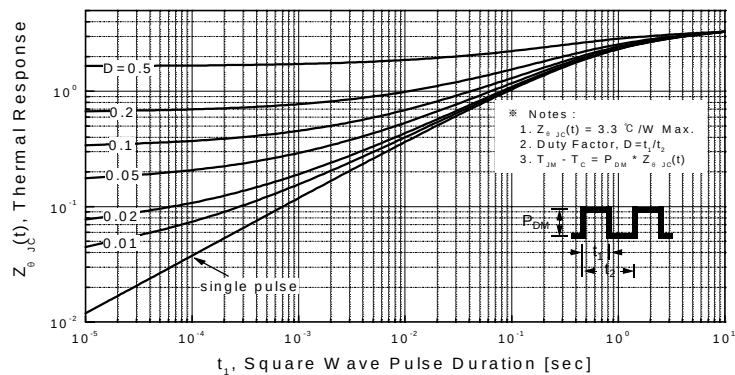


Figure 11. Transient Thermal Response Curve


Gate Charge Test Circuit & Waveform

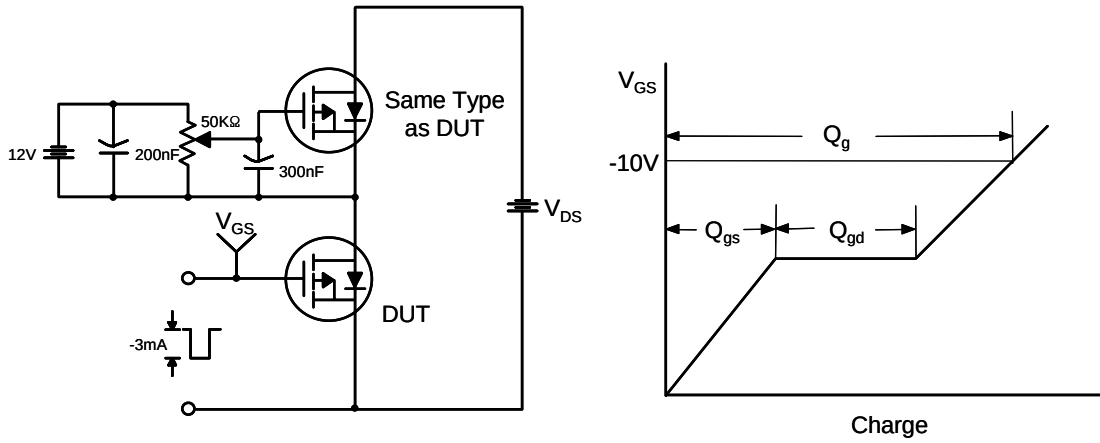

Resistive Switching Test Circuit & Waveforms

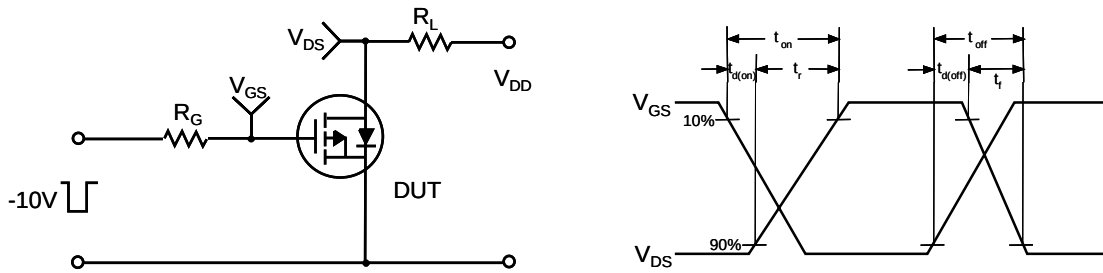


Unclamped Inductive Switching Test Circuit & Waveforms

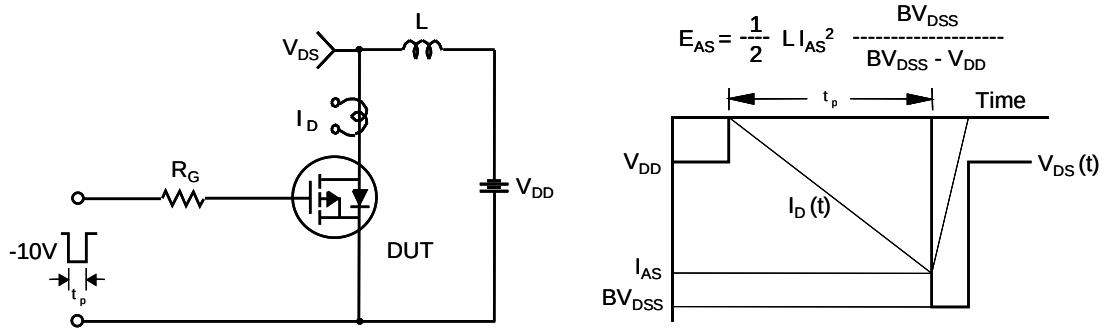

Mechanical Dimensions

TO-220F

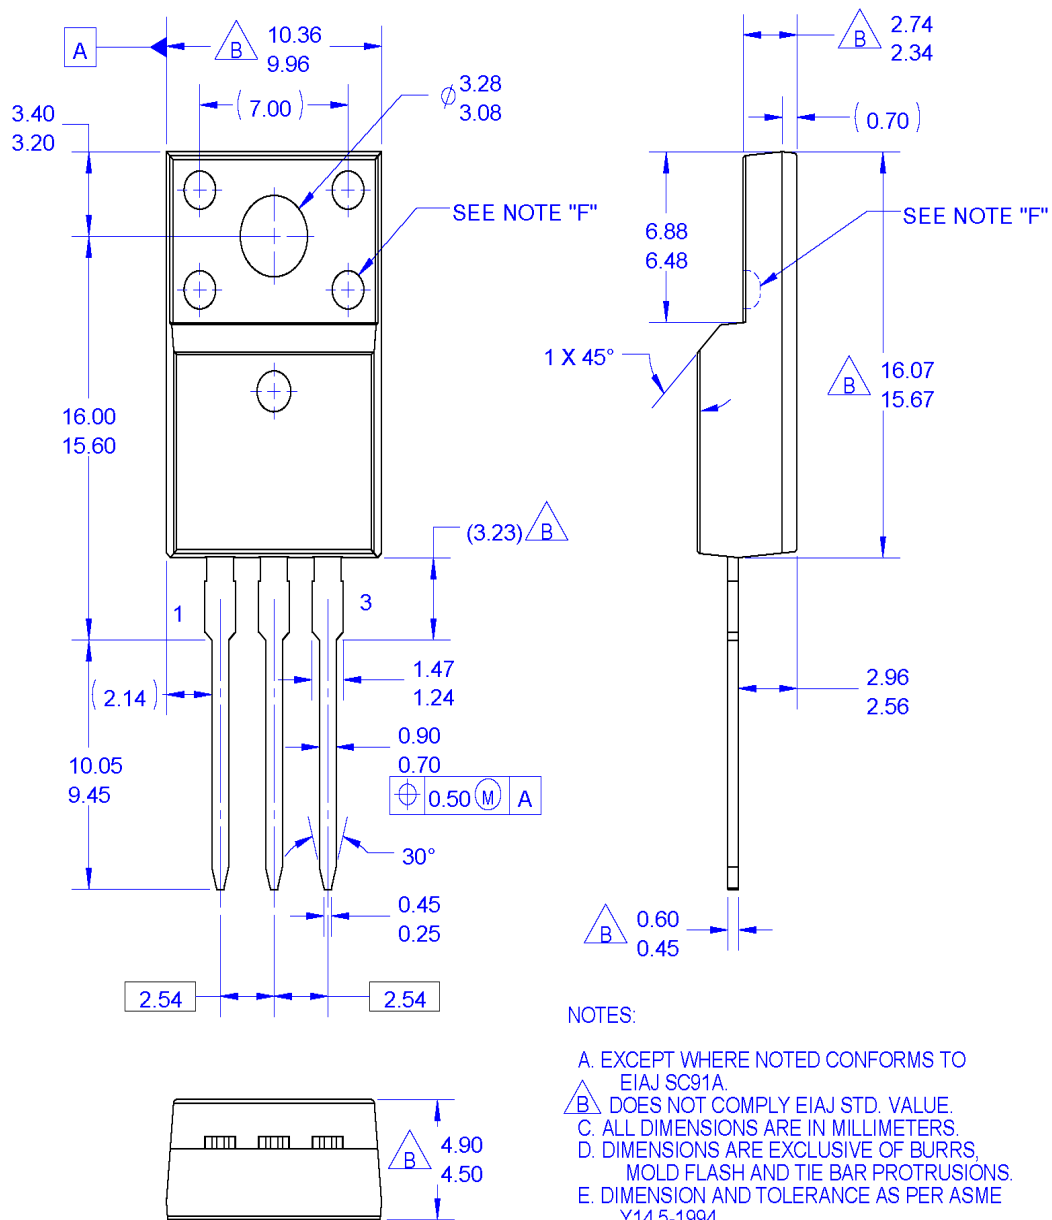

NOTES:

- A. EXCEPT WHERE NOTED CONFORMS TO EIAJ SC91A.
 B. DOES NOT COMPLY EIAJ STD. VALUE.
 C. ALL DIMENSIONS ARE IN MILLIMETERS.
 D. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH AND TIE BAR PROTRUSIONS.
 E. DIMENSION AND TOLERANCE AS PER ASME Y14.5-1994.
 F. OPTION 1 - WITH SUPPORT PIN HOLE.
 G. OPTION 2 - NO SUPPORT PIN HOLE.
 G. DRAWING FILE NAME: TO220M03REV3

Dimensions in Millimeters



TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

2Cool™	FPS™	Sync-Lock™
AccuPower™	F-PFS™	SYSTEM GENERAL®*
AX-CAP®*	FRFET®	TinyBoost™
BitSiC™	Global Power Resource™	TinyBuck™
Build it Now™	Green Bridge™	TinyCalc™
CorePLUS™	Green FPS™	TinyLogic®
CorePOWER™	Green FPS™ e-Series™	TinyOPTO™
CROSSVOLT™	Gmax™	TinyPower™
CTL™	GTO™	TinyPWM™
Current Transfer Logic™	IntelliMAX™	TinyWire™
DEUXPEED®	ISOPLANAR™	TranSiC®
Dual Cool™	Marking Small Speakers Sound Louder and Better™	TriFault Detect™
EcoSPARK®	MegaBuck™	SmartMax™
EfficientMax™	MICROCOUPLER™	SMART START™
ESBC™	MicroFET™	Solutions for Your Success™
Fairchild®	MicroPak™	SPM®
Fairchild Semiconductor®	MicroPak2™	STEALTH™
FACT Quiet Series™	MillerDrive™	SuperFET®
FACT®	MotionMax™	SuperSOT™-3
FAST®	mWSaver™	SuperSOT™-6
FastvCore™	OptoHiT™	SuperSOT™-8
FETBench™	OPTOLOGIC®	SupreMOS®
	OPTOPLANAR®	SyncFET™
		ng our world, 1mW/W/kW at a time™
		SignalWise™
		SmartMax™
		SMART START™
		Solutions for Your Success™
		SPM®
		STEALTH™
		SuperFET®
		SuperSOT™-3
		SuperSOT™-6
		SuperSOT™-8
		SupreMOS®
		SyncFET™
		Sync-Lock™
		SYSTEM GENERAL®*
		TinyBoost™
		TinyBuck™
		TinyCalc™
		TinyLogic®
		TinyOPTO™
		TinyPower™
		TinyPWM™
		TinyWire™
		TranSiC®
		TriFault Detect™
		SmartMax™
		SMART START™
		Solutions for Your Success™
		SPM®
		STEALTH™
		SuperFET®
		SuperSOT™-3
		SuperSOT™-6
		SuperSOT™-8
		SupreMOS®
		SyncFET™
		Sync-Lock™
		SYSTEM GENERAL®*
		TinyBoost™
		TinyBuck™
		TinyCalc™
		TinyLogic®
		TinyOPTO™
		TinyPower™
		TinyPWM™
		TinyWire™
		TranSiC®
		TriFault Detect™
		SmartMax™
		SMART START™
		Solutions for Your Success™
		SPM®
		STEALTH™
		SuperFET®
		SuperSOT™-3
		SuperSOT™-6
		SuperSOT™-8
		SupreMOS®
		SyncFET™
		Sync-Lock™
		SYSTEM GENERAL®*
		TinyBoost™
		TinyBuck™
		TinyCalc™
		TinyLogic®
		TinyOPTO™
		TinyPower™
		TinyPWM™
		TinyWire™
		TranSiC®
		TriFault Detect™
		SmartMax™
		SMART START™
		Solutions for Your Success™
		SPM®
		STEALTH™
		SuperFET®
		SuperSOT™-3
		SuperSOT™-6
		SuperSOT™-8
		SupreMOS®
		SyncFET™
		Sync-Lock™
		SYSTEM GENERAL®*
		TinyBoost™
		TinyBuck™
		TinyCalc™
		TinyLogic®
		TinyOPTO™
		TinyPower™
		TinyPWM™
		TinyWire™
		TranSiC®
		TriFault Detect™
		SmartMax™
		SMART START™
		Solutions for Your Success™
		SPM®
		STEALTH™
		SuperFET®
		SuperSOT™-3
		SuperSOT™-6
		SuperSOT™-8
		SupreMOS®
		SyncFET™
		Sync-Lock™
		SYSTEM GENERAL®*
		TinyBoost™
		TinyBuck™
		TinyCalc™
		TinyLogic®
		TinyOPTO™
		TinyPower™
		TinyPWM™
		TinyWire™
		TranSiC®
		TriFault Detect™
		SmartMax™
		SMART START™
		Solutions for Your Success™
		SPM®
		STEALTH™
		SuperFET®
		SuperSOT™-3
		SuperSOT™-6
		SuperSOT™-8
		SupreMOS®
		SyncFET™
		Sync-Lock™
		SYSTEM GENERAL®*
		TinyBoost™
		TinyBuck™
		TinyCalc™
		TinyLogic®
		TinyOPTO™
		TinyPower™
		TinyPWM™
		TinyWire™
		TranSiC®
		TriFault Detect™
		SmartMax™
		SMART START™
		Solutions for Your Success™
		SPM®
		STEALTH™
		SuperFET®
		SuperSOT™-3
		SuperSOT™-6
		SuperSOT™-8
		SupreMOS®
		SyncFET™
		Sync-Lock™
		SYSTEM GENERAL®*
		TinyBoost™
		TinyBuck™
		TinyCalc™
		TinyLogic®
		TinyOPTO™
		TinyPower™
		TinyPWM™
		TinyWire™
		TranSiC®
		TriFault Detect™
		SmartMax™
		SMART START™
		Solutions for Your Success™
		SPM®
		STEALTH™
		SuperFET®
		SuperSOT™-3
		SuperSOT™-6
		SuperSOT™-8
		SupreMOS®
		SyncFET™
		Sync-Lock™
		SYSTEM GENERAL®*
		TinyBoost™
		TinyBuck™
		TinyCalc™
		TinyLogic®
		TinyOPTO™
		TinyPower™
		TinyPWM™
		TinyWire™
		TranSiC®
		TriFault Detect™
		SmartMax™
		SMART START™
		Solutions for Your Success™
		SPM®
		STEALTH™
		SuperFET®
		SuperSOT™-3
		SuperSOT™-6
		SuperSOT™-8
		SupreMOS®
		SyncFET™
		Sync-Lock™
		SYSTEM GENERAL®*
		TinyBoost™
		TinyBuck™
		TinyCalc™
		TinyLogic®
		TinyOPTO™
		TinyPower™
		TinyPWM™
		TinyWire™
		TranSiC®
		TriFault Detect™
		SmartMax™
		SMART START™
		Solutions for Your Success™
		SPM®
		STEALTH™
		SuperFET®
		SuperSOT™-3
		SuperSOT™-6
		SuperSOT™-8
		SupreMOS®
		SyncFET™
		Sync-Lock™
		SYSTEM GENERAL®*
		TinyBoost™
		TinyBuck™
		TinyCalc™
		TinyLogic®
		TinyOPTO™
		TinyPower™
		TinyPWM™
		TinyWire™
		TranSiC®
		TriFault Detect™
		SmartMax™
		SMART START™
		Solutions for Your Success™
		SPM®
		STEALTH™
		SuperFET®
		SuperSOT™-3
		SuperSOT™-6
		SuperSOT™-8
		SupreMOS®
		SyncFET™
		Sync-Lock™
		SYSTEM GENERAL®*
		TinyBoost™
		TinyBuck™
		TinyCalc™
		TinyLogic®
		TinyOPTO™
		TinyPower™
		TinyPWM™
		TinyWire™
		TranSiC®
		TriFault Detect™
		SmartMax™
		SMART START™
		Solutions for Your Success™
		SPM®
		STEALTH™
		SuperFET®
		SuperSOT™-3
		SuperSOT™-6
		SuperSOT™-8
		SupreMOS®
		SyncFET™
		Sync-Lock™
		SYSTEM GENERAL®*
		TinyBoost™
		TinyBuck™
		TinyCalc™
		TinyLogic®
		TinyOPTO™
		TinyPower™
		TinyPWM™
		TinyWire™
		TranSiC®
		TriFault Detect™
		SmartMax™
		SMART START™
		Solutions for Your Success™
		SPM®
		STEALTH™
		SuperFET®
		SuperSOT™-3
		SuperSOT™-6
		SuperSOT™-8
		SupreMOS®
		SyncFET™
		Sync-Lock™
		SYSTEM GENERAL®*
		TinyBoost™
		TinyBuck™
		TinyCalc™
		TinyLogic®
		TinyOPTO™
		TinyPower™
		TinyPWM™
		TinyWire™
		TranSiC®
		TriFault Detect™
		SmartMax™
		SMART START™
		Solutions for Your Success™
		SPM®
		STEALTH™
		SuperFET®
		SuperSOT™-3
		SuperSOT™-6
		SuperSOT™-8
		SupreMOS®
		SyncFET™
		Sync-Lock™
		SYSTEM GENERAL®*
		TinyBoost™
		TinyBuck™
		TinyCalc™
		TinyLogic®
		TinyOPTO™
		TinyPower™
		TinyPWM™
		TinyWire™
		TranSiC®
		TriFault Detect™
		SmartMax™
		SMART START™
		Solutions for Your Success™
		SPM®
		STEALTH™
		SuperFET®
		SuperSOT™-3
		SuperSOT™-6
		SuperSOT™-8
		SupreMOS®
		SyncFET™
		Sync-Lock™
		SYSTEM GENERAL®*
		TinyBoost™
		TinyBuck™
		TinyCalc™
		TinyLogic®
		TinyOPTO™
		TinyPower™
		TinyPWM™
		TinyWire™
		TranSiC®
		TriFault Detect™
		SmartMax™
		SMART START™
		Solutions for Your Success™
		SPM®
		STEALTH™
		SuperFET®
		SuperSOT™-3
		SuperSOT™-6
		SuperSOT™-8
		SupreMOS®
		SyncFET™
		Sync-Lock™
		SYSTEM GENERAL®*
		TinyBoost™
		TinyBuck™
		TinyCalc™
		TinyLogic®
		TinyOPTO™
		TinyPower™
		TinyPWM™
		TinyWire™
		TranSiC®
		TriFault Detect™
		SmartMax™
		SMART START™
		Solutions for Your Success™
		SPM®
		STEALTH™
		SuperFET®
		SuperSOT™-3
		SuperSOT™-6
		SuperSOT™-8
		SupreMOS®
		SyncFET™
		Sync-Lock™
		SYSTEM GENERAL®*
		TinyBoost™
		TinyBuck™
		TinyCalc™
		TinyLogic®
		TinyOPTO™
		TinyPower™
		TinyPWM™
		TinyWire™
		TranSiC®
		TriFault Detect™
		SmartMax™
		SMART START™
		Solutions for Your Success™
		SPM®
		STEALTH™
		SuperFET®
		SuperSOT™-3
		SuperSOT™-6
		SuperSOT™-8
		SupreMOS®
		SyncFET™
		Sync-Lock™
		SYSTEM GENERAL®*
		TinyBoost™
		TinyBuck™
		TinyCalc™
		TinyLogic®
		TinyOPTO™
		TinyPower™
		TinyPWM™
		TinyWire™
		TranSiC®
		TriFault Detect™
		SmartMax™
		SMART START™
		Solutions for Your Success™
		SPM®
		STEALTH™
		SuperFET®
		SuperSOT™-3
		SuperSOT™-6
		SuperSOT™-8
		SupreMOS®
		SyncFET™
		Sync-Lock™
		SYSTEM GENERAL®*
		TinyBoost™
		TinyBuck™
		TinyCalc™
		TinyLogic®
		TinyOPTO™
		TinyPower™
		TinyPWM™
		TinyWire™
		TranSiC®
		TriFault Detect™
		SmartMax™
		SMART START™
		Solutions for Your Success™
		SPM®
		STEALTH™
		SuperFET®
		SuperSOT™-3
		SuperSOT™-6
		SuperSOT™-8
		SupreMOS®
		SyncFET™
		Sync-Lock™
		SYSTEM GENERAL®*
		TinyBoost™
		TinyBuck™
		TinyCalc™
		TinyLogic®
		TinyOPTO™
		TinyPower™
		TinyPWM™
		TinyWire™
		TranSiC®
		TriFault Detect™
		SmartMax™
		SMART START™
		Solutions for Your Success™
		SPM®
		STEALTH™
		SuperFET®
		SuperSOT™-3
		SuperSOT™-6
		SuperSOT™-8
		SupreMOS®
		SyncFET™
		Sync-Lock™
		SYSTEM GENERAL®*
		TinyBoost™
		TinyBuck™
		TinyCalc™
		TinyLogic®
		TinyOPTO™
		TinyPower™
		TinyPWM™
		TinyWire™
		TranSiC®
		TriFault Detect™
		SmartMax™
		SMART START™
		Solutions for Your Success™
		SPM®
		STEALTH™
		SuperFET®
		SuperSOT™-3
		SuperSOT™-6
		SuperSOT™-8
		SupreMOS®

ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor
19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free
USA/Canada

Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910

Japan Customer Focus Center
Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com

Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local
Sales Representative