



SAW Components

Data Sheet B9032

Data Sheet

A large, stylized, 3D-rendered graphic of the word "EPCOS" in a light gray, sans-serif font. The letters are tilted and appear to be floating or emerging from a dark, textured background that resembles a globe or a complex circuit board. The lighting creates a sense of depth and movement.



SAW Components

B9032

Low-Loss Filter for Mobile Communication

881,5 MHz

Data Sheet Sheet


Features

- Low-loss RF filter for mobile telephone GSM850/AMPS system, receive path
- Usable passband 25 MHz
- Unbalanced to balanced operation
- Impedance transformation from 50 Ω to 150 Ω
- Suitable for GPRS class 1 to 12
- Ceramic package for **Surface Mounted Technology (SMT)**

Terminals

- Ni, gold-plated


Chip sized SAW package DCS6T

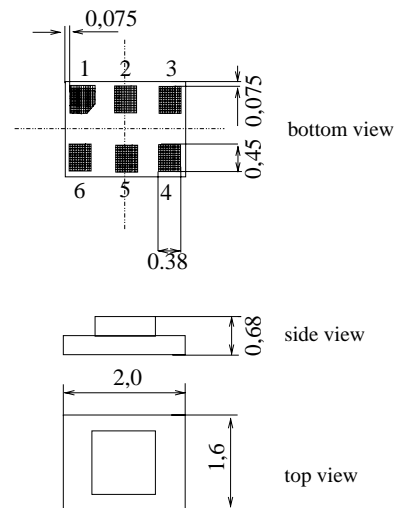

Dimensions in mm, approx. weight 0,007g

Pin configuration

- | | |
|---------|------------------|
| 2 | Unbalanced input |
| 4, 6 | Balanced output |
| 1, 3, 5 | To be grounded |

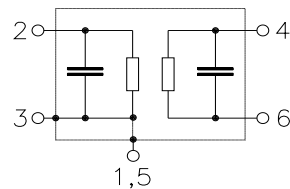

Type	Ordering code	Marking and Package according to	Packing according to
B9032	B39881-B9032-K310	C61157-A7-A128	F61074-V8152-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 40 / + 85	$^{\circ}\text{C}$	Machine Model, 10 pulses
Storage temperature range	T_{stg}	- 40 / + 85	$^{\circ}\text{C}$	
DC voltage	V_{DC}	3	V	
ESD	V_{ESD}	100*	V	
Input power at GSM850, GSM900 GSM1800, GSM1900 Tx bands	P_{IN}	15	dBm	peak power of GSM signal, duty cycle 4:8

* - acc. to JESD22-A115A (Machine Model), 10 negative & 10 positive pulses



SAW Components

B9032

Low-Loss Filter for Mobile Communication

881,5 MHz

Data Sheet Sheet

Characteristics

Operating temperature range: $T = +25\text{ }^{\circ}\text{C}$
Terminating source impedance: $Z_S = 50\text{ }\Omega$ (unbalanced)
Terminating load impedance: $Z_L = 150\text{ }\Omega$ (balanced) || 82nH

			min.	typ.	max.	
Center frequency	f_C		—	881,5	—	MHz
Maximum insertion attenuation	α_{\max}					
869,0 ... 894,0 MHz			—	1,5	1,8	dB
Amplitude ripple (p-p)	$\Delta\alpha$					
869,0 ... 894,0 MHz			—	0,4	0,7	dB
Input VSWR	$v_{\text{SWR}IN}$					
869,0 ... 894,0 MHz			—	1,6	2,0	
Output VSWR	$v_{\text{SWR}OUT}$					
869,0 ... 894,0 MHz			—	1,6	2,0	
Common mode Suppression	$S_{\text{sc}12}$					
824,0 ... 995,0 MHz			20	27	—	dB
1648,0 ... 1990,0 MHz			20	50	—	dB
3296,0 ... 3980,0 MHz			20	40	—	dB
Attenuation	α					
0,0 ... 450,0 MHz			45	57	—	dB
450,0 ... 820,0 MHz			30	34	—	dB
820,0 ... 849,0 MHz			30	34	—	dB
914,0 ... 1738,0 MHz			25	29	—	dB
1738,0 ... 1788,0 MHz			45	55	—	dB
1788,0 ... 4000,0 MHz			40	47	—	dB
4000,0 ... 6000,0 MHz			20	30	—	dB



SAW Components	B9032
Low-Loss Filter for Mobile Communication	881,5 MHz

Data Sheet Sheet

Characteristics

Operating temperature range:	$T = -10 \text{ to } +80 \text{ }^{\circ}\text{C}$
Terminating source impedance:	$Z_S = 50 \text{ } \Omega \text{ (unbalanced)}$
Terminating load impedance:	$Z_L = 150 \text{ } \Omega \text{ (balanced)} \parallel 82\text{nH}$

			min.	typ.	max.	
Center frequency	f_C		—	881,5	—	MHz
Maximum insertion attenuation	α_{\max}					
869,0 ... 894,0 MHz			—	1,5	1,8 ¹⁾	dB
Amplitude ripple (p-p)	$\Delta\alpha$					
869,0 ... 894,0 MHz			—	0,4	0,8	dB
Input VSWR	$v_{\text{SWR}IN}$					
869,0 ... 894,0 MHz			—	1,6	2,0	
Output VSWR	$v_{\text{SWR}OUT}$					
869,0 ... 894,0 MHz			—	1,6	2,0	
Common mode Suppression	$S_{\text{sc}12}$					
824,0 ... 995,0 MHz			20	27	—	dB
1648,0 ... 1990,0 MHz			20	50	—	dB
3296,0 ... 3980,0 MHz			20	40	—	dB
Attenuation	α					
0,0 ... 450,0 MHz			45	57	—	dB
450,0 ... 820,0 MHz			30	34	—	dB
820,0 ... 849,0 MHz			30	34	—	dB
914,0 ... 1738,0 MHz			25	29	—	dB
1738,0 ... 1788,0 MHz			45	55	—	dB
1788,0 ... 4000,0 MHz			40	47	—	dB
4000,0 ... 6000,0 MHz			20	30	—	dB

1) Maximum insertion attenuation from -30 to -10 & from +80 to +85 °C is 2.0 dB



SAW Components


B9032

Low-Loss Filter for Mobile Communication


881,5 MHz

Data Sheet Sheet

Transfer function (narrowband; 50 Ω to 150 Ω operation)

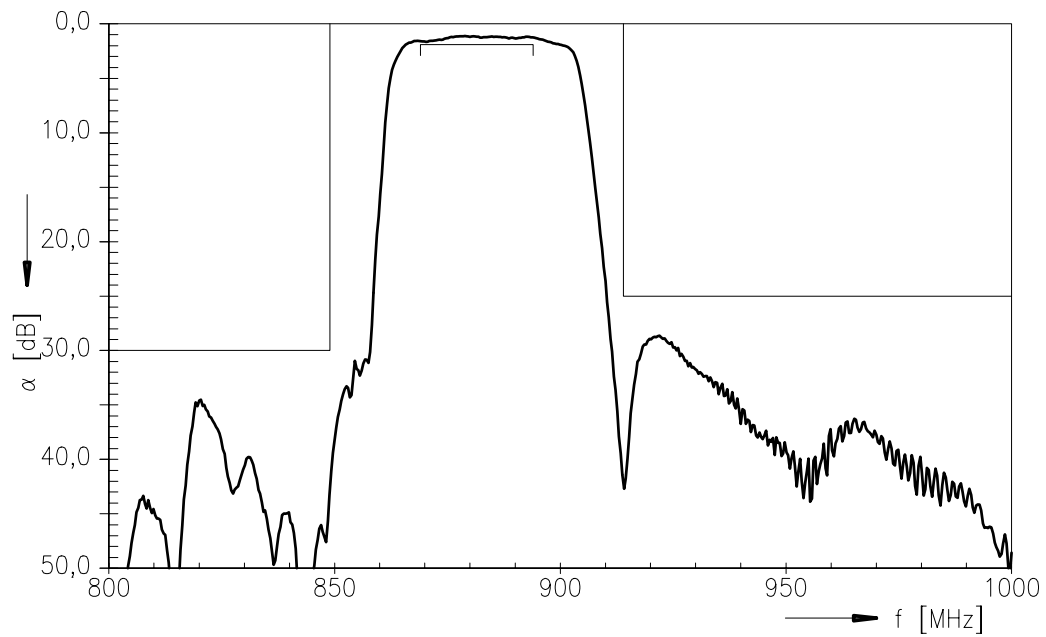

Transfer function (wideband; 50 Ω to 150 Ω operation)

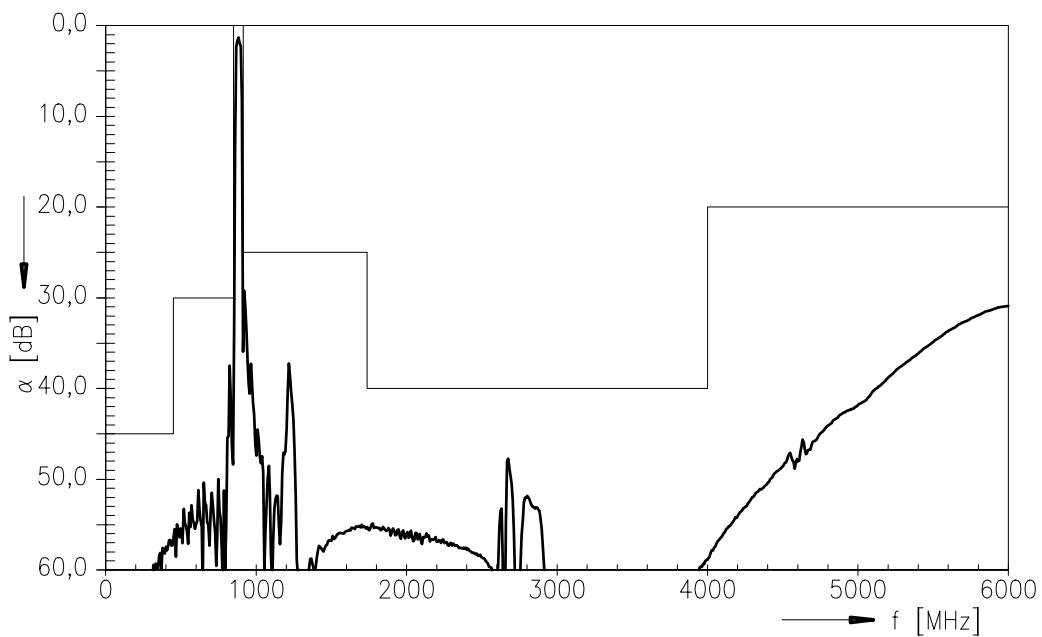



SAW Components

B9032

Low-Loss Filter for Mobile Communication

881,5 MHz

Data Sheet Sheet

Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW MC WT

P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2005. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.