


AUDIO SWITCH AND DC VOLUME CONTROL FOR TV

- TWO AUDIO INPUTS WITH SWITCHING FACILITIES FULLY COMPATIBLE WITH THE SCART EUROPEAN NORM EN 50049
- DC VOLUME CONTROL

DESCRIPTION


The TDA8196 is a monolithic integrated circuit in DIP8 package intended for TV applications.




DIP8
(Plastic Package)

ORDER CODE : TDA8196

PIN CONNECTION (top view)

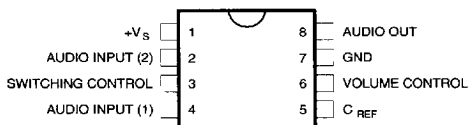

BLOCK DIAGRAM

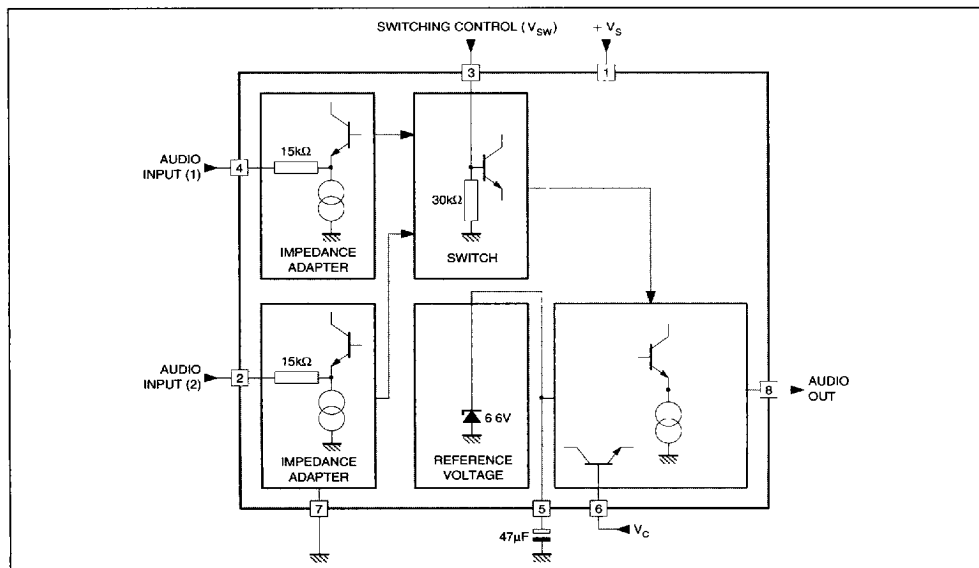

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V_s	Supply Voltage (pin 1)	16	V
T_{stg}, T_j	Storage and Junction Temperature	- 55 to 125	°C
T_{amb}	Operating Ambient Temperature	0 to 70	°C

8196-01 TEL

THERMAL DATA

Symbol	Parameter	Value	Unit
$R_{thj-amb}$	Thermal Resistance Junction-ambient	200	°C/W

8196-02 TEL

ELECTRICAL CHARACTERISTICS

(refer to the test circuit, $V_s = 12V$, $T_{amb} = 25^\circ C$ unless otherwise specified)

Symbol	Parameter	Pin	Test Conditions	Min.	Typ.	Max.	Unit
V_s	Supply Voltage	1		10.8	12	13.2	V
I_s	Supply Current	1	$V_i = 0, V_C = 0.5V$		12		mA
V_R	Reference Voltage	5			6.6		V
V_{sw}	Switching Voltage Audio Input 1 Audio Input 2	3		0 8		5 12	V V
R_{sw}	Switching Input Resistance	3	$V_{sw} = 12V$	20	30		k Ω
C_{sw}	Switching Input Capacitance	3				10	pF
C_t	Crosstalk between Switched Inputs		Selective Voltmeter ($B_w = 8Hz$), see Fig.1	70	90		dB
V_i	Audio Input Amplitude (1 or 2)	4 2			0.5	2	V_{RMS}
R_i	Audio Input Resistance (1 or 2)	4 2		10	13		k Ω
K_{min}	Output / Input Gain for Max Vol				0		dB
R_O	Audio Output Resistance	8			0.2	1	k Ω
K_v	Attenuation Range		Selective Voltmeter ($B_w = 8Hz$), see Fig.2	70	90		dB
V_C	Control Voltage Range $K_V = K_{MAX}$ (Vol. min) $K_V = K_{MIN}$ (Vol. max)	6			0.5 4.5		V V
THD	Distortion	8	$V_i = 2 V_{RMS} @ V_C = 4.5V$		0.4	1	%
E_n	Output Noise Level	8	DIN45405 $V_C = 0.5V$ Weighted		40		μV_{RMS}
E_n	Output Noise Level	8	DIN45405 $V_C = 4.5V$ Weighted		120		μV_{RMS}
K_v ΔT_a	Vol. Attenuation Thermal Drift		$T_{amb} = 0$ to $70^\circ C$ $K_V = 30dB$, see Fig.3		0.04		dB/°C
SVR	Supply Voltage Rejection		$V_C = 0.5V, f = 100Hz$ $V_{ripple} = 1V_{PP}$ Selective Voltmeter ($B_w = 8Hz$), see Fig.4 and 5		38		dB
V_O	Output DC Shift	8	$V_C = 0.5 + 4.5V, V_i = 2 V_{RMS}$		0.25		V

8196-03 TEL

TEST CIRCUIT

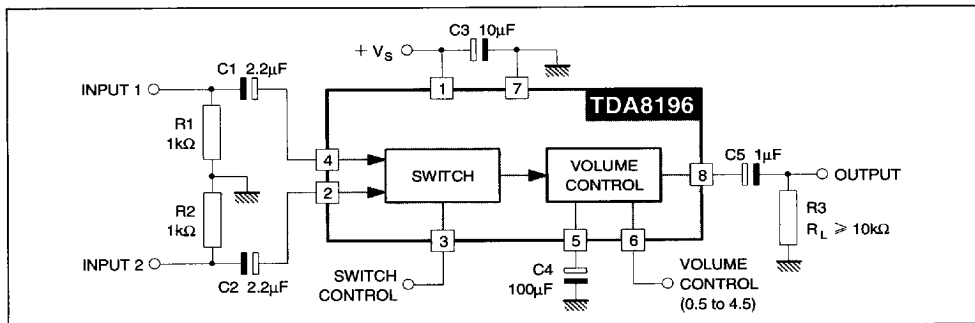


Figure 1 : TDA8196 Crosstalk

Figure 2 : Output Attenuation versus DC Volume Control Voltage

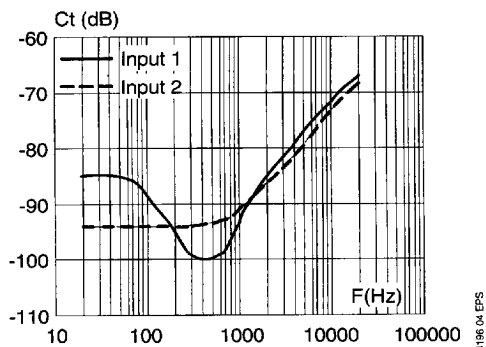


Figure 3 : Kv Drift vs. Tamb Variation

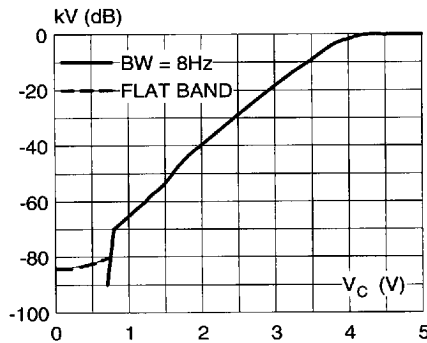


Figure 4 : SVR vs. Ripple Frequency



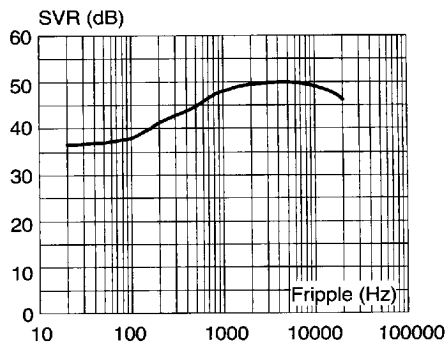


Figure 5 : SVR vs. Volume Attenuation

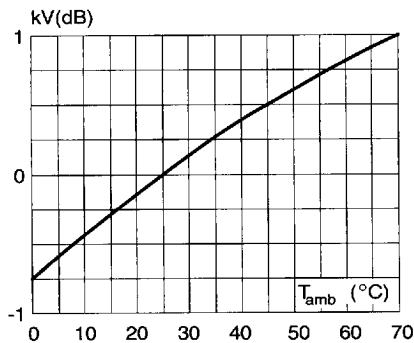

APPLICATION CIRCUIT

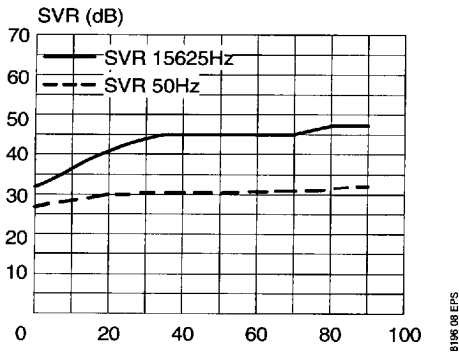