

AC Induction Motor (ACIM) Control Board

Ordering Information

Order No.	Description
MDL-ACIM	Stellaris® ACIM Control Board Only
RDK-ACIM	Stellaris® ACIM Control Board Reference Design Kit (includes MDL-ACIM board)

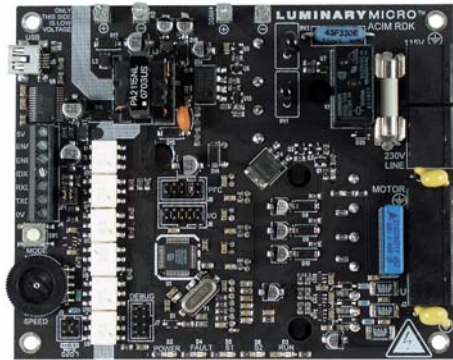


Figure 1. ACIM Control Board Only

Contents

General Description	1
Overview	2
Features	2
Operational Specifications	2
Mechanical	3
Heat Sink	4
Bus Capacitors	4
Safety Information	4
Additional Information	4

General Description

The AC induction motor control board is a sophisticated motor control for single- and three-phase AC induction motors rated at up to 230 V. Key features include the feature-rich Stellaris LM3S818 microcontroller designed for motion control applications, Fairchild Semiconductor's FSBS10CH60 power module, and sophisticated software to optimally control a wide range of motors in diverse applications.

First-time users should purchase the RDK-ACIM Reference Design Kit (RDK) which includes the control board, cables, a documentation CD, and a sample motor. Refer to the *RDK User's Guide* (available for download from www.luminarymicro.com) for complete technical details on using and customizing the motor control board. Figure 1 shows the ACIM control board only (MDL-ACIM) and Figure 2 shows the ACIM RDK control board (RDK-ACIM).



Figure 2. ACIM RDK Control Board

Overview

The MDL-ACIM motor control board controls three-phase and single-phase AC induction motors. The board has an integrated USB port (Virtual COM port) and logic-level serial port connections along with a quadrature encoder/tachometer input for speed and position monitoring. Extensive configuration options using Windows Graphical User Interface (GUI) are available and the board is easy to customize—full source code and design files are available.

Features

The MDL-ACIM motor control board provides the following features:

- End-user customizable line filter, bus capacitors, and JTAG interface
- Split low-side current sensing for accurate current sensing
- Dynamic braking circuit
- Active in-rush control circuit
- Electrically isolated JTAG port for software debugging or production programming (RDK only)
- Integrated AC line filter (RDK only)
- USB/Serial UART
 - FTDI FT232R USB to serial UART
 - Virtual COM port, 115.2k,8,n,1 operation
 - Stellaris MCC protocol

Operational Specifications

Table 1 shows the operating parameters for the MDL-ACIM motor control board.

Table 1. MDL-ACIM Operating Specifications

Parameter Name		Min	Nom	Max	Unit
AC Input Voltage (50/60Hz)	230V operation	195	230	265	V _{AC}
	115V w/ voltage doubler	95	115	135	V _{AC}
DC Bus Voltage		270	320	370	V _{DC}
Frequency Range		0		400	Hz
Continuous Output Current				3.2	A _{RMS}
Electrical Isolation			2500		V _{RMS}
Supply Current				10	A _{RMS}
Operating Temperature Range		0	–	70	°C
Storage Temperature Range		-25	–	85	°C
Digital Input Low Level Input Voltage		-0.3		1.3	V _{DC}

Table 1. MDL-ACIM Operating Specifications (Continued)


Parameter Name	Min	Nom	Max	Unit
Digital Input High Level Input Voltage	2.0		5.0	V _{DC}

Mechanical

Figure 3 shows the mechanical drawing for the MDL-ACIM.

- PCB size: 3.65" x 4.55" (93 mm x 115 mm)
- Heatsink is required (MDL-ACIM only)
- Bus capacitors are required (MDL-ACIM only)
- Motor connector on PCB
 - RIA Connect part #31262104
- Power connector on PCB
 - RIA Connect part #31262102

Figure 3. MDL-ACIM Mechanical Diagram

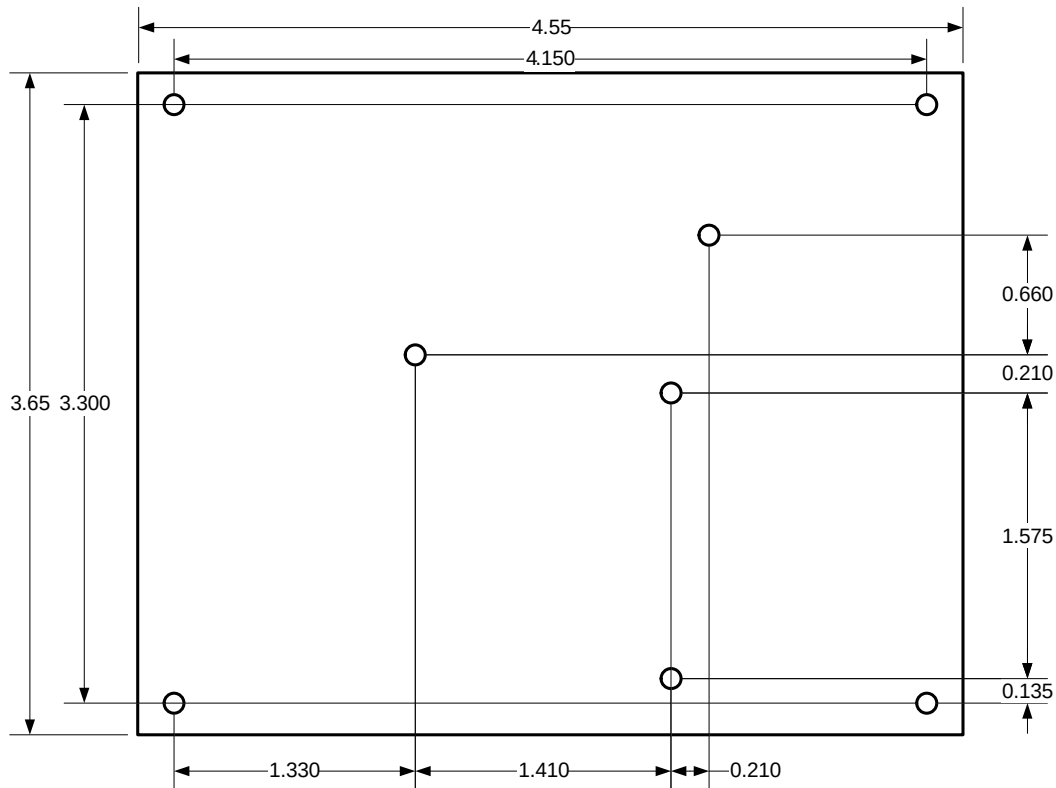

Mounting diagram for MDL-ACIM

All holes 4-40 or M3 tapped
Dimensions in inches +/- 0.010"

Heat Sink

The ACIM motor module does not come with a heatsink like the RDK-ACIM, but does require a heatsink for operation. Underwriters Laboratories (UL) standards generally require that surfaces that could be touched by a user or service person must not exceed 70°C, so this must be considered when choosing the size material of the heatsink.

Bus Capacitors

The ACIM motor module requires that the customer supply bus capacitors for the board. The recommended capacitors to use are 1500 uF, 200 V electrolytic capacitors.

Safety Information

WARNING – Risk of Electric Shock

The microcontroller in the RDK is not referenced to ground; it is at AC line potential. Do not make direct connection to the JTAG header or any other microcontroller-related circuit. Read the Quickstart Guide first for additional warnings.

This RDK operates from AC line voltage. Improper use or application carries electric shock, fire, and other risks that may result in serious injury or death. Please read and follow these safety notices:

- This documentation and kit must only be used by people with training and experience in working with voltage potentials up to 230 V.
- The control board has both high-voltage potential and safety low-voltage sections.
- Do not connect high-voltage potential circuits to safety low-voltage circuits or to ground-referenced equipment such as computers or test equipment.
- After power is removed, high voltages remain until the bus capacitors discharge. Wait at least one minute after removing power before working with high-voltage circuitry.
- Use caution when using the on-board controls to adjust motor speed etc. High-voltage circuits are in close proximity.
- Never perform work on the control board, motor or, wiring while power is applied. Always wear eye protection and use care when operating the motor.

In addition to safety risks, other factors that may damage the control hardware, the motor, and its load include improper configuration, wiring, or software. Minimize the risk of damage by following these guidelines.

Additional Information

The following documents are available for download at www.luminarymicro.com:

- *RDK-ACIM User's Manual*, Publication Number RDK-ACIM-UM
- *RDK-ACIM Quickstart*

Important Notice

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
RF/IF and ZigBee® Solutions	www.ti.com/lprf

Applications

Audio	www.ti.com/audio
Automotive	www.ti.com/automotive
Broadband	www.ti.com/broadband
Digital Control	www.ti.com/digitalcontrol
Medical	www.ti.com/medical
Military	www.ti.com/military
Optical Networking	www.ti.com/opticalnetwork
Security	www.ti.com/security
Telephony	www.ti.com/telephony
Video & Imaging	www.ti.com/video
Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265

Copyright © 2009, Texas Instruments Incorporated

Copyright © 2008–2009 Texas Instruments, Inc. All rights reserved.

Stellaris and StellarisWare are registered trademarks of Texas Instruments. ARM and Thumb are registered trademarks, and Cortex is a trademark of ARM Limited. Other names and brands may be claimed as the property of others.

