
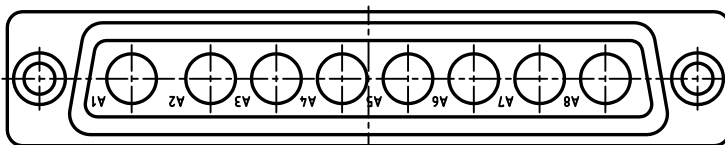

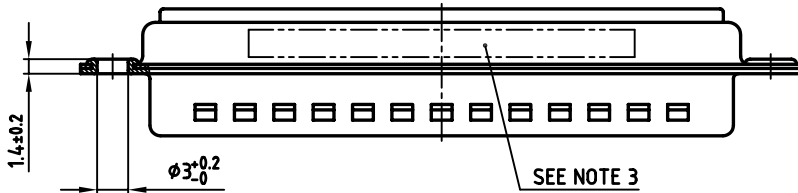
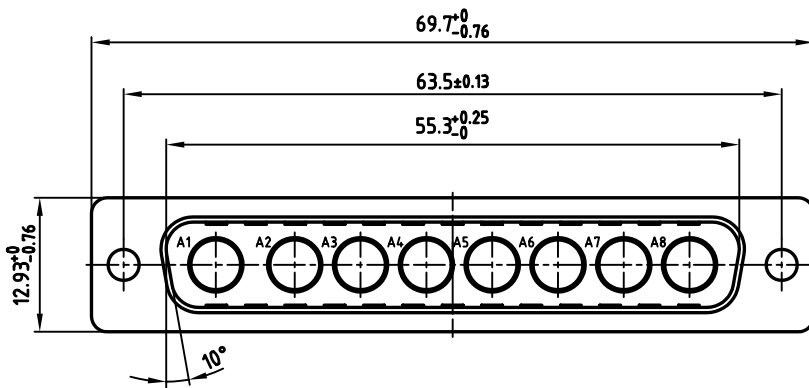


used for: D-SUB COMBINATION

5:1

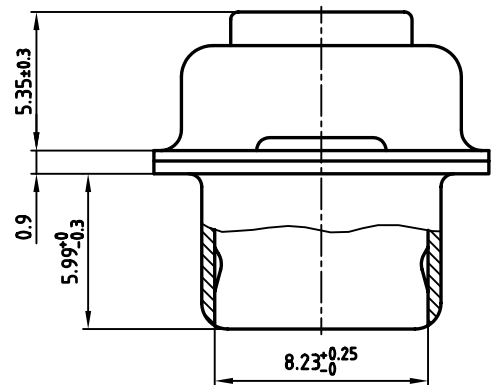

NOTES:

- METALSHELLS: STEEL; min. 315pin TIN over 40-80pin NICKEL
- INSULATOR: PBT GF UL 94 V-0, GREEN
- CONNECTOR IS PART MARKED: 3008W8PXX99A10X CONEC ABC

Directive 2002/95/EC  
RoHS  
Compliant

|                                               |                                               |
|-----------------------------------------------|-----------------------------------------------|
| APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACON | APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACON |
| CUSTOMER APPROVAL DATE:                       |                                               |
| NAME:                                         | TITLE:                                        |
| COMPANY NAME:                                 |                                               |
| APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACON | APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACON |

THIS DRAWING MAY NOT BE COPIED OR  
REPRODUCED IN ANY WAY, AND MAY NOT  
BE PASSED ON TO A THIRD PARTY, WITHOUT  
WRITTEN PERMISSION.  
OWNERSHIP AND COPYRIGHT OF CONEC GmbH  
DO NOT ALTER CAD DRAWING BY HAND

| rev.  | description | date       | name   |
|-------|-------------|------------|--------|
| 1 x b | Ä 2744      | 10.07.2007 | Lehmen |
| a     | Origin      |            |        |

| tolerance | dim. in mm   |
|-----------|--------------|
| 1997      | date         |
| drawn     | 29.07.       |
| appd.     | 29.07.       |
| norm      | Mickenbecker |
| d-old     |              |

**CONEC**

|           |                                  |
|-----------|----------------------------------|
| scale:    | 2:1 ( 5:1 )                      |
| material: | SEE NOTES                        |
| title:    | D-SUB COMBINATION MALE<br>8W8P   |
| dwg no:   | AutoCAD/REL.13 DIN-A<br>16K11BLA |
| part no:  | 3008W8PXX99A10X                  |