

## HW Series — 22mm IEC Style Global Pushbuttons

### Key features:

- Locking lever removable contact blocks
- Finger-safe IP20 contacts as standard, other terminal styles available
- Tamperproof construction
- All E-stops meet EN418 and are compliant with SEMI S2 standards
- Worldwide approvals
- Easy to assemble
- Choice of black plastic or metallic front bezels
- Incandescent or LED illumination
- Transformer or full voltage
- Slow make double break self cleaning contacts



### HW: The Best Engineered Switch in the World

IDEC's HW switches are "The best engineered switch in the world" for a reason. Carrying the CE mark, UL, CSA, CCC (Chinese), and TUV approvals, these switches are designed for use in almost any part of the world.

Complete with finger-safe contact blocks offering IP20 protection, these 7/8" (22mm) switches include illuminated and non-illuminated pushbuttons, pilot

lights, selector switches, and emergency stop switches.

All switches also incorporate mechanically keyed safety locking levers, ensuring correct installation and maintaining safety in high-vibration applications.



File No. E68961



File No. LR92374



Registration No. R9551089 (E-stops)  
Registration No. R50054316 (Dual Pushbuttons)  
Registration No. J9650511 (Pilot Lights)  
Registration No. J9551458 (all other switches)



TÜV Rheinland  
Certificate No.  
2005010305145656



### Specifications

|            |                                    |                                                                                                                                                                                     |
|------------|------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Electrical | Rated Operational Characteristics  | AC-15: A600 or $U_e = 250V$ , $I_e = 3A$ (NO, NC, NO-EM, NC-LB)<br>DC-13: P600 or $U_e = 125V$ , $I_e = 1.1A$ (NO, NC)<br>DC-13: Q600 or $U_e = 125V$ , $I_e = 0.9A$ (NO-EM, NC-LB) |
|            | Maximum Inrush Current             | 40 A (40 ms)                                                                                                                                                                        |
|            | Rated Insulation Voltage           | 600V                                                                                                                                                                                |
|            | Rated Switching Over-Voltage       | Less than 4kV, conforming to IEC60947-1                                                                                                                                             |
|            | Rated Impulse Withstanding Voltage | 4kV for contact circuit, 2.5kV for lamp circuit                                                                                                                                     |
|            | Rated Thermal Current              | 10 Amp                                                                                                                                                                              |
|            | Minimum Switching Capacity         | 5 mA at 3V AC/DC                                                                                                                                                                    |
|            | Electrical Reliability             | MTBF < 1 fault for 10 million operation cycles (3V DC, 5mA)                                                                                                                         |
|            | Lamp Ratings                       | Incandescent: 1 W<br>LEDs: 6V/17mA max, 12V & 24V/11mA max, 120 & 240V/10mA max                                                                                                     |

|                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |             |                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |     |                      |      |      |      |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-----------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|----------------------|------|------|------|
| Mechanical            | Contact Operation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |             |                                                                                         | Slow break NC or NO, self-cleaning                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |     |                      |      |      |      |
|                       | Positive Action Operation<br>(Emergency Stops with NC contacts)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |             |                                                                                         | 5.5mm to 10mm travel to latch, 45N minimum force to latch<br>10mm maximum travel, 1,800 operations per hour maximum for a Pushlock Turn Reset<br>900 operations per hour maximum for a Push-Pull                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |     |                      |      |      |      |
|                       | Operating Force                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |             |                                                                                         | Flush and extended pushbuttons—with 1NO or 1NC contact: 6.2±2N (momentary), 7.0±2N (maintained)<br>Additional contacts—1NO or 1NC: +3.2N (momentary), + 3.3N (maintained)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |     |                      |      |      |      |
|                       | Recommended Terminal Torque                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |             |                                                                                         | 0.8 N m (7.1 in lb.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |     |                      |      |      |      |
|                       | Applicable Wire Size                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |             |                                                                                         | Minimum 1 x 22 AWG, max. 2 x 14 AWG or 1 x 12 AWG                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |     |                      |      |      |      |
|                       | Contact Resistance                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |             |                                                                                         | Initial contact resistance of 50mΩ or less                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |     |                      |      |      |      |
|                       | Contact Gap                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |             |                                                                                         | 4mm (NO and NC), 2mm (NO-EM and NC-LB)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |     |                      |      |      |      |
|                       | Horsepower Rating                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |             |                                                                                         | Reference Value: 1/4 HP @ 120V (1ø non-reversing), 1HP @ 240V (3ø non-reversing)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |     |                      |      |      |      |
|                       | Contact Material                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |             |                                                                                         | Silver (gold plated contacts available - contact IDEC)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |     |                      |      |      |      |
|                       | Operating Temperature                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |             |                                                                                         | Operation: −25 to +50°C (without freezing), Storage: −40 to +70°C (without freezing)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |     |                      |      |      |      |
|                       | Vibration Resistance                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |             |                                                                                         | 10 to 55Hz, 98m/sec <sup>2</sup> (10G) conforming to IEC6068-2-6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |     |                      |      |      |      |
|                       | Shock Resistance                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |             |                                                                                         | 980m/sec <sup>2</sup> (100G) conforming to IEC6068-2-7                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |     |                      |      |      |      |
| Mechanical Life       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |             | Momentary pushbuttons: 5,000,000 (900 operations per hour), All other switches: 500,000 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |     |                      |      |      |      |
| Standards & Approvals | Conforming to Standards                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |             |                                                                                         | EN60947-1, EN60947-5-1, VDE0660-200, UL508, CSA C22-2 No.14                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |     |                      |      |      |      |
|                       | Approvals                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |             |                                                                                         | CSA: pushbuttons and selector switches: A600<br>pilot lights and illuminated pushbuttons, direct supply pilot lights and illuminated pushbuttons with integral transformer (100/110, 115, 120, 200/220, 230, 240, 380, 400/440, 480V)<br>UL: pushbuttons and selector switches: A600<br>pilot lights and illuminated pushbuttons, direct supply pilot lights and illuminated pushbuttons with integral transformer (100/110, 115, 120, 200/220, 230, 240, 380, 400/440, 480V)<br>TÜV: pushbuttons and selector switches: A600=P600 (NO, NC)/Q600 (NO-EM, NC-LB)<br>pilot lights and illuminated pushbuttons, direct supply pilot lights and illuminated pushbuttons with integral transformer (100/110, 115, 120, 200/220, 230, 240, 380, 400/440, 480V) |     |                      |      |      |      |
|                       | <div><div><br/>File No. E68961</div><div><br/>File No. LR92374</div><div></div><div><br/>Registration No. R9551089 (E-stops)<br/>Registration No. R50054316 (Dual Pushbuttons)<br/>Registration No. J9650511 (Pilot Lights)<br/>Registration No. J9551458 (all other switches)</div><div><br/>TÜV Rheinland<br/>Certificate No. 2005010305145656</div></div> |             |                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |     |                      |      |      |      |
|                       | Electric Shock Protection                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |             |                                                                                         | Class 0 conforming to IEC60536                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |     |                      |      |      |      |
|                       | Degree of Protection<br>(conforming to IEC60529)<br>(conforming to NEMA ICS6-110)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |             |                                                                                         | IP65 (from front of the panel)<br>IP20 (Type HW-F contact block)<br>NEMA 1, 2, 3, 3R, 3S, 4, 4X, 5, 12, 13 (from front of panel)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |     |                      |      |      |      |
|                       | Pollution Degree (conforming to IEC60947-1)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |             |                                                                                         | 3 for switches not using a transformer, 2 for switches using a transformer                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |     |                      |      |      |      |
|                       | External Short-Circuit Protection                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |             |                                                                                         | 10A 250V fuse conforming to IEC60269-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |     |                      |      |      |      |
| Terminal Referencing  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |             | Conforming to CENELEC EN50005                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |     |                      |      |      |      |
| Contact Ratings       | Pushbuttons                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |             |                                                                                         | Contact Block                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |     | Type HW-C/HW-F /HW-G |      |      |      |
|                       | Illuminated Pushbuttons                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |             |                                                                                         | Rated Insulation Voltage                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |     | 600V                 |      |      |      |
|                       | Selector Switches                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |             |                                                                                         | Rated Continuous Current                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |     | 10A                  |      |      |      |
|                       | Illuminated Selector Switches                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |             |                                                                                         | Contact Ratings by Utilization Category                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |     | AC-15 (A600)         |      |      |      |
|                       | Pushbutton Selectors                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |             |                                                                                         | IEC 60947-5-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |     | DC-13 (P600)         |      |      |      |
| Characteristics       | Operational Voltage                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |             |                                                                                         | 24V                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 48V | 50V                  | 110V | 220V | 440V |
|                       | Operational Current                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | AC 50/60 Hz | AC-12 Control of resistive loads & solid state loads                                    | 10A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | —   | 10A                  | 10A  | 6A   | 2A   |
|                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |             | AC-15 Control of electromagnetic loads (> 72VA)                                         | 10A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | —   | 7A                   | 5A   | 3A   | 1A   |
|                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | DC          | DC-12 Control of resistive loads & solid state loads                                    | 8A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 5A  | —                    | 2.2A | 1.1A | —    |
|                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |             | DC-13 Control of electromagnets                                                         | 5A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 2A  | —                    | 1.1A | 0.6A | —    |



For dimensions, see page 601.

## LED Lamp Ratings (LSTD Type)

| Model                  |    |                   | LSTD-6②                                                                                             | LSTD-1②        | LSTD-2②                                                 | LSTD-H2②    | LSTD-M4②    |
|------------------------|----|-------------------|-----------------------------------------------------------------------------------------------------|----------------|---------------------------------------------------------|-------------|-------------|
| Lamp Base              |    |                   | BA9S/13                                                                                             |                |                                                         |             |             |
| Rated Voltage          |    |                   | 6V AC/DC                                                                                            | 12V AC/DC      | 24V AC/DC                                               | 120V AC     | 240V AC     |
| Voltage Range          |    |                   | 6V AC/DC ±10%                                                                                       | 12V AC/DC ±10% | 24V AC/DC ±10%                                          | 120V AC ±5% | 240V AC ±5% |
| Current Draw           | AC | A, R, W:<br>G, S: | 17mA<br>8mA                                                                                         | 11mA           | 11mA                                                    | 10mA        | 10mA        |
|                        | DC | A, R, W:<br>G, S: | 14mA<br>5.5mA                                                                                       | 10mA           | 10mA                                                    | —           | —           |
| Color Code             |    |                   | A (amber), G (green), R (red), S (blue), W (white)                                                  |                |                                                         |             |             |
| Lamp Base Color        |    |                   | Same as illumination color                                                                          |                |                                                         |             |             |
| Voltage Marking        |    |                   | Die stamped on the base                                                                             |                |                                                         |             |             |
| Life (reference value) |    |                   | Approx. 50,000 hours (The luminance reduces to 50% the initial intensity when used on complete DC.) |                |                                                         |             |             |
| Internal Circuit       |    |                   | A, R, W                                                                                             |                | A, R, W                                                 |             |             |
|                        |    |                   |                                                                                                     |                |                                                         |             |             |
|                        |    |                   | G, S                                                                                                |                |                                                         |             |             |
|                        |    |                   |                                                                                                     |                | <br>LED Chip<br><br>Protection Diode<br><br>Zener Diode |             |             |

 In place of ②, specify the Lens/LED Color Code.

Non-Illuminated Round Pushbuttons (Assembled)



|            |               | Round Flush   |              | Round Extended |              |
|------------|---------------|---------------|--------------|----------------|--------------|
| Function   | Contacts      | Plastic Bezel | Metal Bezel  | Plastic Bezel  | Metal Bezel  |
| Momentary  | Operator Only | HW1B-M1-①     | HW4B-M1-①    | HW1B-M2-①      | HW4B-M2-①    |
|            | 1NO           | HW1B-M1F10-①  | HW4B-M1F10-① | HW1B-M2F10-①   | HW4B-M2F10-① |
|            | 1NC           | HW1B-M1F01-①  | HW4B-M1F01-① | HW1B-M2F01-①   | HW4B-M2F01-① |
|            | 1NO-1NC       | HW1B-M1F11-①  | HW4B-M1F11-① | HW1B-M2F11-①   | HW4B-M2F11-① |
|            | 2NO           | HW1B-M1F20-①  | HW4B-M1F20-① | HW1B-M2F20-①   | HW4B-M2F20-① |
|            | 2NC           | HW1B-M1F02-①  | HW4B-M1F02-① | HW1B-M2F02-①   | HW4B-M2F02-① |
|            | 2NO-2NC       | HW1B-M1F22-①  | HW4B-M1F22-① | HW1B-M2F22-①   | HW4B-M2F22-① |
| Maintained | Operator Only | HW1B-A1-①     | HW4B-A1-①    | HW1B-A2-①      | HW4B-A2-①    |
|            | 1NO           | HW1B-A1F10-①  | HW4B-A1F10-① | HW1B-A2F10-①   | HW4B-A2F10-① |
|            | 1NC           | HW1B-A1F01-①  | HW4B-A1F01-① | HW1B-A2F01-①   | HW4B-A2F01-① |
|            | 1NO-1NC       | HW1B-A1F11-①  | HW4B-A1F11-① | HW1B-A2F11-①   | HW4B-A2F11-① |
|            | 2NO           | HW1B-A1F20-①  | HW4B-A1F20-① | HW1B-A2F20-①   | HW4B-A2F20-① |
|            | 2NC           | HW1B-A1F02-①  | HW4B-A1F02-① | HW1B-A2F02-①   | HW4B-A2F02-① |
|            | 2NO-2NC       | HW1B-A1F22-①  | HW4B-A1F22-① | HW1B-A2F22-①   | HW4B-A2F22-① |

① Button Color Code

| Color  | Code |
|--------|------|
| Black  | B    |
| Green  | G    |
| Red    | R    |
| Blue   | S    |
| White  | W    |
| Yellow | Y    |
| Gray   | N*   |




\*Gray available for round flush only.




1. In place of ①, specify the Button Color Code from table below.
2. For nameplates and accessories, see page 596 and 599.
3. For dimensions, see page 601.
4. For contact assembly part numbers, see page 600.
5. All assembled part numbers in catalog include standard, fingersafe (HW-F...) contacts.
6. Assembled units with spring-up terminals (HW-G...) can be ordered by removing an "F" from the part number (Ex. HW1B-M1F11-R becomes HW1B-M111-R).
7. Operator only models include operator plus button.
8. Additional contact configurations available (up to 6 total contacts).

## Part Number Structure

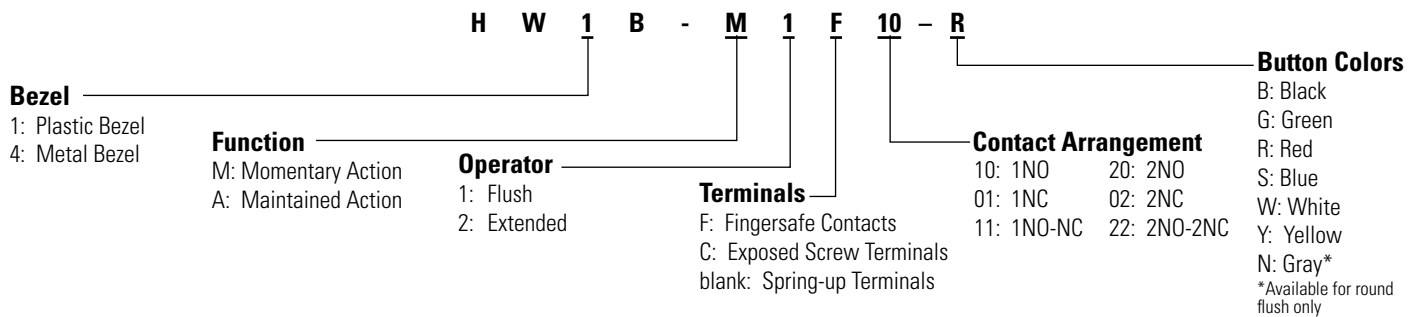

## Non-Illuminated Round Pushbuttons (Replacement Parts)

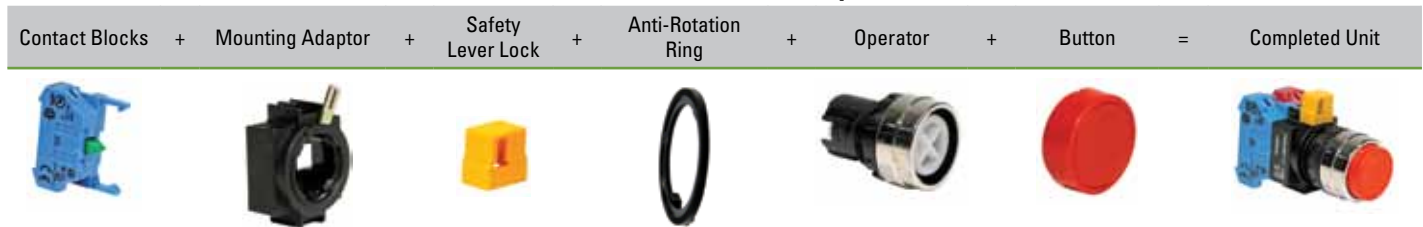

## Contact Blocks

| Style | Contacts                   | 1NO                  | 1NC                  |
|-------|----------------------------|----------------------|----------------------|
|       | Standard Fingersafe (IP20) | HW-F10               | HW-F01               |
|       |                            | HW-F10R (early make) | HW-F01R (late break) |
|       | Spring-Up Terminal         | HW-G10               | HW-G01               |
|       |                            | HW-G10R (early make) | HW-G01R (late break) |
|       | Exposed Screw Terminal     | HW-C10               | HW-C01               |
|       |                            | HW-C10R (early make) | HW-C01R (late break) |
|       | Dummy Block                | TW-DB                |                      |

## Contact Block Mounting Adaptor

| Style | Part Number |
|-------|-------------|
|       | HW-CB2C     |

1. Used to mount contact blocks to operator.  
2. IDEC strongly recommends using the safety lever lock to prevent heavy vibration or maintenance personnel from inadvertently unlocking contacts.

## Anti-Rotation Ring

| Style | Part Number |
|-------|-------------|
|       | HW9Z-RL     |



Use with notched panel cutout to prevent unit rotation.

## Operators

| Style                |            | Plastic Bezel | Metal Bezel |
|----------------------|------------|---------------|-------------|
| Round Flush/Extended | Momentary  | HW1B-M0       | HW4B-M0     |
|                      | Maintained | HW1B-A0       | HW4B-A0     |

## Safety Lever Lock

| Style | Part Number |
|-------|-------------|
|       | HW9Z-LS     |

## Buttons

| Style          | Part Number |
|----------------|-------------|
| Round Flush    | HW1A-B1-①   |
|                |             |
| Round Extended | HW1A-B2-①   |
|                |             |



1. In place of ①, specify the Button Color Code from table.

## ① Button Color Code

| Color | Code | Color  | Code |
|-------|------|--------|------|
| Black | B    | White  | W    |
| Green | G    | Yellow | Y    |
| Red   | R    | Gray   | N*   |
| Blue  | S    |        |      |



\*Gray available for round flush only.

## Non-Illuminated Mushroom Head Pushbuttons (Assembled)



| Function   | Contacts             | ø29mm Mushroom Head |                  | ø40mm Mushroom Head |                  |
|------------|----------------------|---------------------|------------------|---------------------|------------------|
|            |                      | Plastic Bezel       | Metal Bezel      | Plastic Bezel       | Metal Bezel      |
| Momentary  | <i>Operator Only</i> | <b>HW1B-M3-①</b>    | <b>HW4B-M3-①</b> | <b>HW1B-M4-①</b>    | <b>HW4B-M4-①</b> |
|            | 1NO                  | HW1B-M3F10-①        | HW4B-M3F10-①     | HW1B-M4F10-①        | HW4B-M4F10-①     |
|            | 1NC                  | HW1B-M3F01-①        | HW4B-M3F01-①     | HW1B-M4F01-①        | HW4B-M4F01-①     |
|            | 1NO-1NC              | HW1B-M3F11-①        | HW4B-M3F11-①     | HW1B-M4F11-①        | HW4B-M4F11-①     |
|            | 2NO                  | HW1B-M3F20-①        | HW4B-M3F20-①     | HW1B-M4F20-①        | HW4B-M4F20-①     |
|            | 2NC                  | HW1B-M3F02-①        | HW4B-M3F02-①     | HW1B-M4F02-①        | HW4B-M4F02-①     |
| Maintained | 2NO-2NC              | HW1B-M3F22-①        | HW4B-M3F22-①     | HW1B-M4F22-①        | HW4B-M4F22-①     |
|            | <i>Operator Only</i> | <b>HW1B-A3-①</b>    | <b>HW4B-A3-①</b> | <b>HW1B-A4-①</b>    | <b>HW4B-A4-①</b> |
|            | 1NO                  | HW1B-A3F10-①        | HW4B-A3F10-①     | HW1B-A4F10-①        | HW4B-A4F10-①     |
|            | 1NC                  | HW1B-A3F01-①        | HW4B-A3F01-①     | HW1B-A4F01-①        | HW4B-A4F01-①     |
|            | 1NO-1NC              | HW1B-A3F11-①        | HW4B-A3F11-①     | HW1B-A4F11-①        | HW4B-A4F11-①     |
|            | 2NO                  | HW1B-A3F20-①        | HW4B-A3F20-①     | HW1B-A4F20-①        | HW4B-A4F20-①     |
|            | 2NC                  | HW1B-A3F02-①        | HW4B-A3F02-①     | HW1B-A4F02-①        | HW4B-A4F02-①     |
|            | 2NO-2NC              | HW1B-A3F22-①        | HW4B-A3F22-①     | HW1B-A4F22-①        | HW4B-A4F22-①     |



### ① Button Color Code


| Color  | Code |
|--------|------|
| Black  | B    |
| Green  | G    |
| Red    | R    |
| Blue   | S    |
| White  | W    |
| Yellow | Y    |




1. In place of ①, specify the Button Color Code from table.
2. \*60mm mushroom available only in red, green, black, and yellow.
3. For nameplates and accessories, see page 596 and 599.
4. For dimensions, see page 601.
5. For contact assembly part numbers, see page 600.
6. All assembled part numbers in catalog include standard fingersafe (HW-F...) contacts.
7. Assembled units with spring-up terminals (HW-G...) can be ordered by removing an "F" from the part number (Ex. HW1B-M1F11-R becomes HW1B-M111-R).
8. Units with exposed screw terminals (HW-C...) must be ordered as sub-components.
9. Operator only models include operator plus button.
10. Additional contact configurations available (up to 6 total contacts).

| Function  | Contacts             | ø60mm Mushroom Head |
|-----------|----------------------|---------------------|
|           |                      | Plastic Bezel       |
| Momentary | <i>Operator Only</i> | <b>HW1B-M5-① *</b>  |
|           | 1NO                  | HW1B-M5F10-① *      |
|           | 1NC                  | HW1B-M5F01-① *      |
|           | 1NO-1NC              | HW1B-M5F11-① *      |
|           | 2NO                  | HW1B-M5F20-① *      |
|           | 2NC                  | HW1B-M5F02-① *      |
|           | 2NO-2NC              | HW1B-M5F22-① *      |

## Part Number Structure

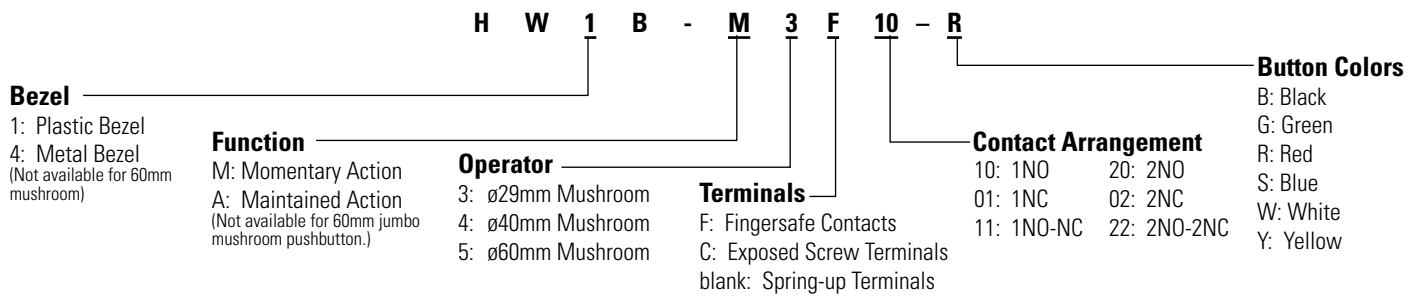

## Non-Illuminated Mushroom Head Pushbuttons (Replacement Parts)

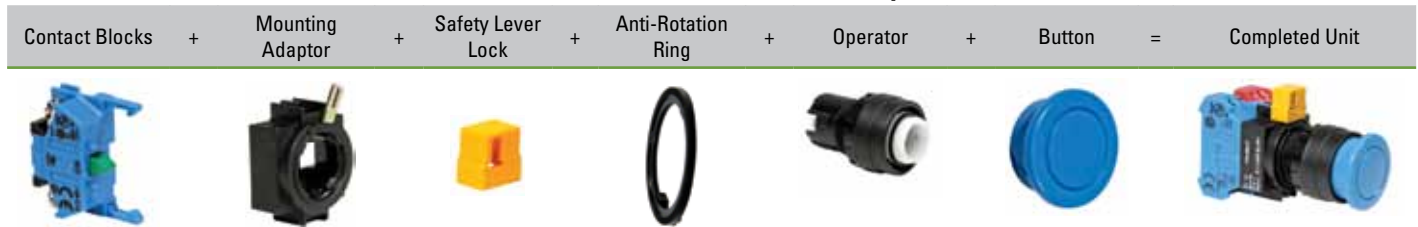

## Contact Blocks

| Style | Contacts                   | 1NO                  | 1NC                  |
|-------|----------------------------|----------------------|----------------------|
|       | Standard Fingersafe (IP20) | HW-F10               | HW-F01               |
|       |                            | HW-F10R (early make) | HW-F01R (late break) |
|       | Spring-Up Terminal         | HW-G10               | HW-G01               |
|       |                            | HW-G10R (early make) | HW-G01R (late break) |
|       | Exposed Screw Terminal     | HW-C10               | HW-C01               |
|       |                            | HW-C10R (early make) | HW-C01R (late break) |
|       | Dummy Block                | TW-DB                |                      |

## Contact Block Mounting Adaptor

| Style | Part Number |
|-------|-------------|
|       | HW-CB2C     |

1. Used to mount contact blocks to operator.  
2. IDEC strongly recommends using the safety lever lock to prevent heavy vibration or maintenance personnel from inadvertently unlocking contacts.

## Safety Lever Lock

| Style | Part Number |
|-------|-------------|
|       | HW9Z-LS     |

## Anti-Rotation Ring

| Appearance | Part Number |
|------------|-------------|
|            | HW9Z-RL     |

## Operators

| Style                            |            | Plastic Bezel | Metal Bezel |
|----------------------------------|------------|---------------|-------------|
| ø29mm Mushroom<br>ø40mm Mushroom | Momentary  | HW1B-M0L      | HW4B-M0L    |
|                                  | Maintained | HW1B-A0L      | HW4B-A0L    |
| ø60mm Jumbo Mushroom             | Momentary  | HW1B-M5-①*    | —           |

1. \*60mm mushroom operator includes non-removable button (available in red, black, green and yellow only).  
2. For nameplates and accessories, see page 596 and 599.  
3. For dimensions, see page 601.

## Buttons

| Style              | Part Number |
|--------------------|-------------|
| ø29mm Mushroom Cap | HW1A-B3-①   |
|                    |             |
| ø40mm Mushroom Cap | HW1A-B4-①   |
|                    |             |

1. In place of ①, specify the Button Color Code from table.

## ① Button Color Code

| Color | Code | Color  | Code |
|-------|------|--------|------|
| Black | B    | Blue   | S    |
| Green | G    | White  | W    |
| Red   | R    | Yellow | Y    |

- HW1B-M5 available only in black, red, green and yellow.

Non-Illuminated Square Pushbuttons (Assembled)



| Function   | Contacts             | Square Flush     | Square Extended  |
|------------|----------------------|------------------|------------------|
|            |                      | Plastic Bezel    | Plastic Bezel    |
| Momentary  | <i>Operator Only</i> | <i>HW2B-M1-①</i> | <i>HW2B-M2-①</i> |
|            | 1NO                  | HW2B-M1F10-①     | HW2B-M2F10-①     |
|            | 1NC                  | HW2B-M1F01-①     | HW2B-M2F01-①     |
|            | 1NO-1NC              | HW2B-M1F11-①     | HW2B-M2F11-①     |
|            | 2NO                  | HW2B-M1F20-①     | HW2B-M2F20-①     |
|            | 2NC                  | HW2B-M1F02-①     | HW2B-M2F02-①     |
|            | 2NO-2NC              | HW2B-M1F22-①     | HW2B-M2F22-①     |
| Maintained | <i>Operator Only</i> | <i>HW2B-A1-①</i> | <i>HW2B-A2-①</i> |
|            | 1NO                  | HW2B-A1F10-①     | HW2B-A2F10-①     |
|            | 1NC                  | HW2B-A1F01-①     | HW2B-A2F01-①     |
|            | 1NO-1NC              | HW2B-A1F11-①     | HW2B-A2F11-①     |
|            | 2NO                  | HW2B-A1F20-①     | HW2B-A2F20-①     |
|            | 2NC                  | HW2B-A1F02-①     | HW2B-A2F02-①     |
|            | 2NO-2NC              | HW2B-A1F22-①     | HW2B-A2F22-①     |

① Button Color Code

| Color  | Code |
|--------|------|
| Black  | B    |
| Green  | G    |
| Red    | R    |
| Blue   | S    |
| White  | W    |
| Yellow | Y    |



- 1. In place of ①, specify the Button Color Code from table.
- 2. For nameplates and accessories, see page 596 and 599.
- 3. For dimensions, see page 601.
- 4. For contact assembly part numbers, see page 600.
- 5. Square pushbuttons available in plastic bezel only.
- 6. All assembled part numbers in catalog include standard fingersafe (HW-F...) contacts.
- 7. Assembled units with spring-up terminals (HW-G...) can be ordered by removing an "F" from the part number (Ex. HW2B-M1F11-R becomes HW1B-M111-R).
- 8. Units with exposed screw terminals (HW-C...) must be ordered as sub-components.
- 9. Operator only model includes operator and button.
- 10. Additional contact configurations available (up to 6 total contacts).

## Part Number Structure

## Function

M: Momentary Action  
A: Maintained Action

## Operator

1: Flush  
2: Extended

## Terminals

F: Fingersafe Contacts  
C: Exposed Screw Terminals  
blank: Spring-up Terminals

## Contact Arrangement

10: 1NO 20: 2NO  
01: 1NC 02: 2NC  
11: 1NO-NC 22: 2NO-2NC

## Button Colors

B: Black  
G: Green  
R: Red  
S: Blue  
W: White  
Y: Yellow

## Non-Illuminated Square Pushbuttons (Replacement Parts)

|                |   |                  |   |                   |   |                    |   |          |   |        |   |                |
|----------------|---|------------------|---|-------------------|---|--------------------|---|----------|---|--------|---|----------------|
| Contact Blocks | + | Mounting Adaptor | + | Safety Lever Lock | + | Anti-Rotation Ring | + | Operator | + | Button | = | Completed Unit |
|----------------|---|------------------|---|-------------------|---|--------------------|---|----------|---|--------|---|----------------|



## Contact Blocks

| Style | Contacts                   | 1NO                  | 1NC                  |
|-------|----------------------------|----------------------|----------------------|
|       | Standard Fingersafe (IP20) | HW-F10               | HW-F01               |
|       |                            | HW-F10R (early make) | HW-F01R (late break) |
|       | Spring-Up Terminal         | HW-G10               | HW-G01               |
|       |                            | HW-G10R (early make) | HW-G01R (late break) |
|       | Exposed Screw Terminal     | HW-C10               | HW-C01               |
|       |                            | HW-C10R (early make) | HW-C01R (late break) |
|       | Dummy Block                | TW-DB                |                      |

## Contact Block Mounting Adaptor

| Style | Part Number |
|-------|-------------|
|       | HW-CB2C     |



- Used to mount contact blocks to operator.
- IEEC strongly recommends using the safety lever lock to prevent heavy vibration or maintenance personnel from inadvertently unlocking contacts.

## Safety Lever Lock

| Style | Part Number |
|-------|-------------|
|       | HW9Z-LS     |

## Anti-Rotation Ring

| Appearance | Part Number |
|------------|-------------|
|            | HW9Z-RL     |



Use with notched panel cutout to prevent unit rotation.

## Operators

| Style | Plastic Bezel |
|-------|---------------|
|       | Momentary     |
|       | Maintained    |
|       | HW2B-M0       |
|       | HW2B-A0       |



- For nameplates and accessories, see pages 596 and 599.
- For dimensions, see page 601.

## Buttons

| Style           | Part Number |
|-----------------|-------------|
| Square Flush    | HW2A-B1-①   |
|                 |             |
| Square Extended | HW2A-B2-①   |
|                 |             |



- In place of ①, specify the Button Color Code from table.

## ① Button Color Code

| Color | Code | Color  | Code |
|-------|------|--------|------|
| Black | B    | Blue   | S    |
| Green | G    | White  | W    |
| Red   | R    | Yellow | Y    |

## Non-Illuminated E-Stop Pushbuttons (Assembled)



| Contacts             | Ø29mm Head Pushlock Turn Reset |                  | Ø40mm Head Pushlock Turn Reset |                  |
|----------------------|--------------------------------|------------------|--------------------------------|------------------|
|                      | Plastic Bezel                  | Metal Bezel      | Plastic Bezel                  | Metal Bezel      |
| <b>Operator Only</b> | <b>HW1B-V3Ⓢ†</b>               | <b>HW4B-V3Ⓢ†</b> | <b>HW1B-V4Ⓢ†</b>               | <b>HW4B-V4Ⓢ†</b> |
| 1NO                  | HW1B-V3F10-Ⓢ†                  | HW4B-V3F10-Ⓢ†    | HW1B-V4F10-Ⓢ†                  | HW4B-V4F10-Ⓢ†    |
| 1NC                  | HW1B-V3F01-Ⓢ†                  | HW4B-V3F01-Ⓢ†    | HW1B-V4F01-Ⓢ†                  | HW4B-V4F01-Ⓢ†    |
| 1NO-1NC              | HW1B-V3F11-Ⓢ†                  | HW4B-V3F11-Ⓢ†    | HW1B-V4F11-Ⓢ†                  | HW4B-V4F11-Ⓢ†    |
| 2NO                  | HW1B-V3F20-Ⓢ†                  | HW4B-V3F20-Ⓢ†    | HW1B-V4F20-Ⓢ†                  | HW4B-V4F20-Ⓢ†    |
| 2NC                  | HW1B-V3F02-Ⓢ†                  | HW4B-V3F02-Ⓢ†    | HW1B-V4F02-Ⓢ†                  | HW4B-V4F02-Ⓢ†    |




| Contacts             | Ø40mm Head EMO Pushlock Turn Reset |                        | Ø40mm Head Pushlock Key Reset |                  |
|----------------------|------------------------------------|------------------------|-------------------------------|------------------|
|                      | Plastic Bezel                      | Metal Bezel            | Plastic Bezel                 | Metal Bezel      |
| <b>Operator Only</b> | <b>HW1B-V4R-EMO-2*</b>             | <b>HW4B-V4R-EMO-2*</b> | <b>HW1B-X4R*</b>              | <b>HW4B-X4R*</b> |
| 1NO                  | HW1B-V4F10-R-EMO-2*                | HW4B-V4F10-R-EMO-2*    | HW1B-X4F10-R*                 | HW4B-X4F10-R*    |
| 1NC                  | HW1B-V4F01-R-EMO-2*                | HW4B-V4F01-R-EMO-2*    | HW1B-X4F01-R*                 | HW4B-X4F01-R*    |
| 1NO-1NC              | HW1B-V4F11-R-EMO-2*                | HW4B-V4F11-R-EMO-2*    | HW1B-X4F11-R*                 | HW4B-X4F11-R*    |
| 2NO                  | HW1B-V4F20-R-EMO-2*                | HW4B-V4F20-R-EMO-2*    | HW1B-X4F20-R*                 | HW4B-X4F20-R*    |
| 2NC                  | HW1B-V4F02-R-EMO-2*                | HW4B-V4F02-R-EMO-2*    | HW1B-X4F02-R*                 | HW4B-X4F02-R*    |



- \* Available in Red only.
- † Available in red or yellow. Insert color code in place of Ⓢ (R: Red, Y: Yellow).
- For accessories, see page 599.
- For dimensions, see page 601.
- For nameplates and shrouds, see page 600.
- For contact assembly part numbers, see page 600.
- All HW series E-stops comply with EN60947-5-5, the IEC "E-Stop Addendum to the Low Voltage Directive," this includes "tamper proof" operation whereby a change of contact state is not possible by "teasing" or "floating" the operator.
- All assembled part numbers in catalog include standard fingersafe (HW-F...) contacts.
- Assembled units with spring-up terminals (HW-G...) can be ordered by removing an "F" from the part number (Ex. HW1B-M1F11-R becomes HW1B-M111-R).
- Units with exposed screw terminals (HW-C...) must be ordered as sub-components.
- Operator only models include operator and button.
- Additional contact configurations available (up to 6 total contacts).

| Contacts             | ø60mm Head Pushlock Turn Reset |  |
|----------------------|--------------------------------|--|
|                      | Plastic Bezel                  |  |
| <b>Operator Only</b> | <b>HW1B-V5R*</b>               |  |
| 1NO                  | HW1B-V5F10-R*                  |  |
| 1NC                  | HW1B-V5F01-R*                  |  |
| 1NO-1NC              | HW1B-V5F11-R*                  |  |
| 2NO                  | HW1B-V5F20-R*                  |  |
| 2NC                  | HW1B-V5F02-R*                  |  |

## Part Number Structure

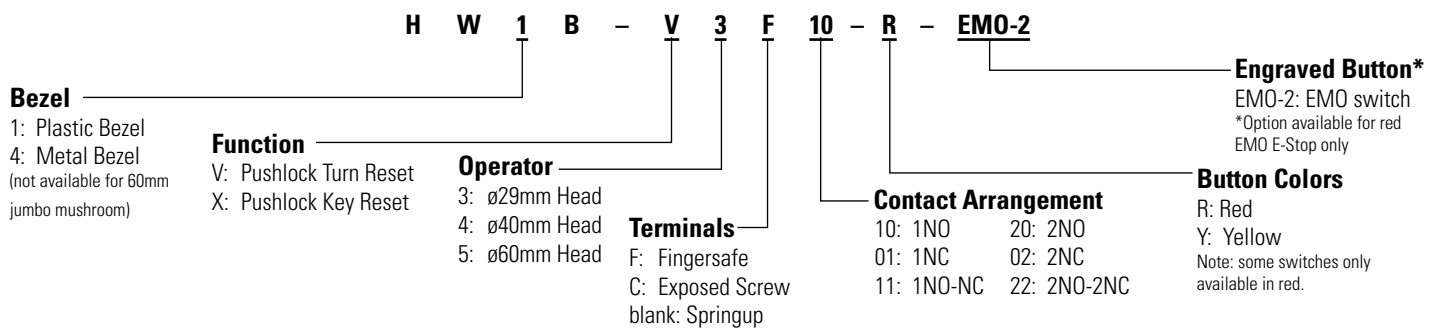

## Non-Illuminated E-Stop Pushbuttons (Replacement Parts)

|                |   |                  |   |                   |   |                    |   |          |   |                |
|----------------|---|------------------|---|-------------------|---|--------------------|---|----------|---|----------------|
| Contact Blocks | + | Mounting Adaptor | + | Safety Lever Lock | + | Anti-Rotation Ring | + | Operator | = | Completed Unit |
|----------------|---|------------------|---|-------------------|---|--------------------|---|----------|---|----------------|



## Contact Blocks

| Style | Contacts                   | 1NO                  | 1NC                  |
|-------|----------------------------|----------------------|----------------------|
|       | Standard Fingersafe (IP20) | HW-F10               | HW-F01               |
|       |                            | HW-F10R (early make) | HW-F01R (late break) |
|       | Spring-Up Terminal         | HW-G10               | HW-G01               |
|       |                            | HW-G10R (early make) | HW-G01R (late break) |
|       | Exposed Screw Terminal     | HW-C10               | HW-C01               |
|       |                            | HW-C10R (early make) | HW-C01R (late break) |
|       | Dummy Block                | TW-DB                |                      |

## Safety Lever Lock

| Style | Part Number |
|-------|-------------|
|       | HW9Z-LS     |

## Anti-Rotation Ring

| Appearance | Part Number |
|------------|-------------|
|            | HW9Z-RL     |



Use with notched panel cutout to prevent unit rotation.

## Operators

| Style                                   | Plastic |                | Metal          |
|-----------------------------------------|---------|----------------|----------------|
| ø29mm Head Pushlock Turn Reset<br>      | red     | HW1B-V3R       | HW4B-V3R       |
|                                         | yellow  | HW1B-V3Y       | HW4B-V3Y       |
| ø40mm Head Pushlock Turn Reset<br>      | red     | HW1B-V4R       | HW4B-V4R       |
|                                         | yellow  | HW1B-V4Y       | HW4B-V4Y       |
| ø40mm Head EMO Pushlock Turn Reset*<br> |         | HW1B-V4R-EMO-2 | HW4B-V4R-EMO-2 |
| ø40mm Head Pushlock Key Reset*<br>      |         | HW1B-X4R       | HW4B-X4R       |
| ø60mm Head Pushlock Turn Reset*<br>     |         | HW1B-V5R       | —              |



1. \*Available in red only.  
 2. All E-Stop buttons are not removable from the operator.

## Contact Block Mounting Adaptor

| Style | Part Number |
|-------|-------------|
|       | HW-CB2C     |



1. Used to mount contact blocks to operator.  
 2. IDEC strongly recommends using the safety lever lock to prevent heavy vibration or maintenance personnel from inadvertently unlocking contacts.

## Push Pull & Unibody E-Stop Pushbuttons (Assembled)



| Contacts                      | ø40mm Head Push-Pull |                 |
|-------------------------------|----------------------|-----------------|
|                               | Plastic Bezel        | Metal Bezel     |
| <i>Operator Only (Red)</i>    | <i>HW1B-Y2R</i>      | <i>HW4B-Y2R</i> |
| <i>Operator Only (Yellow)</i> | <i>HW1B-Y2Y</i>      | <i>HW4B-Y2Y</i> |
| 1NO                           | HW1B-Y2F10-①†        | HW4B-Y2F10-①†   |
| 1NC                           | HW1B-Y2F01-①†        | HW4B-Y2F01-①†   |
| 1NO-1NC                       | HW1B-Y2F11-①†        | HW4B-Y2F11-①†   |
| 2NC                           | HW1B-Y2F02-①†        | HW4B-Y2F02-①†   |
| 2NO                           | HW1B-Y2F20-①†        | HW4B-Y2F20-①†   |

| Contacts | ø40mm Unibody Pushlock Turn Reset* |  |
|----------|------------------------------------|--|
|          | Plastic Bezel                      |  |
| 1NO-1NC  | HW1E-BV4F11-R                      |  |
| 2NC      | HW1E-BV4F02-R                      |  |
| 1NO-2NC  | HW1E-BV412R-TK2093-1               |  |



| Contacts                            | Unibody Illuminated E-Stops* |                  |
|-------------------------------------|------------------------------|------------------|
|                                     | LED                          | Incandescent     |
| 1NO-1NC                             | HW1E-LV4F11QD-R-③            | HW1E-LV4F11Q-R-③ |
| 2NC                                 | HW1E-LV4F02QD-R-③            | HW1E-LV4F02Q-R-③ |
| 2NC (with push-on illumination)     | HW1E-TV4F02QD-R-③            | HW1E-TV4F11Q-R-③ |
| 1NO-1NC (with push-on illumination) | HW1E-TV4F11QD-R-③            | HW1E-TV4F02Q-R-③ |

### ③ Full Voltage Code

| Voltage  | Code |
|----------|------|
| 6VAC/DC  | 6V   |
| 12VAC/DC | 12V  |
| 24VAC/DC | 24V  |
| 120V AC* | 120V |
| 240V AC* | 240V |



\*LED only.


### Terminal Numbering (Unibody only)

| Models           | Terminal Number          |
|------------------|--------------------------|
| 1NO-1NC          | NO = 13/14, NC = 11/12   |
| 2NC              | NC = 11/12, NC = 21/22   |
| HW1E-L<br>HW1E-T | Lamp + = X2, Lamp - = X1 |




- \* Available in Red only.
- † Available in red or yellow. Insert color code in place of ① (R: Red, Y: Yellow).
- In place of ③, specify Full Voltage Code.
- With single unit construction, the positive action contacts are integrated in the body of the switch. This provides an extra degree of safety and reliability for critical emergency stop functions.
- In the illuminated version, the light is independent of the switch action (except push-on LED model).
- For accessories, see page 599.
- For dimensions, see page 601.
- For nameplates and shrouds, see page 599.
- For contact assembly part numbers, see page 599.
- All HW Series E-Stop operators include non-removable color caps.
- All HW series E-Stops comply with EN60947-5-5, the IEC "E-Stop Addendum to the Low Voltage Directive," this includes "tamper proof" operation whereby a change of contact state is not possible by "teasing" or "floating" the operator.
- All HW series E-Stop switches comply with SEMI S2 standards.
- All assembled part numbers in catalog include standard fingersafe (HW-F...) contacts.
- Assembled units with spring-up terminals (HW-G...) can be ordered by removing an "F" from the part number (Ex. HW1B-M1F11-R becomes HW1B-M111-R).
- Units with exposed screw terminals (HW-C...) must be ordered as sub-components.
- Additional contact configurations available (up to 6 total contacts).

## Part Number Structure

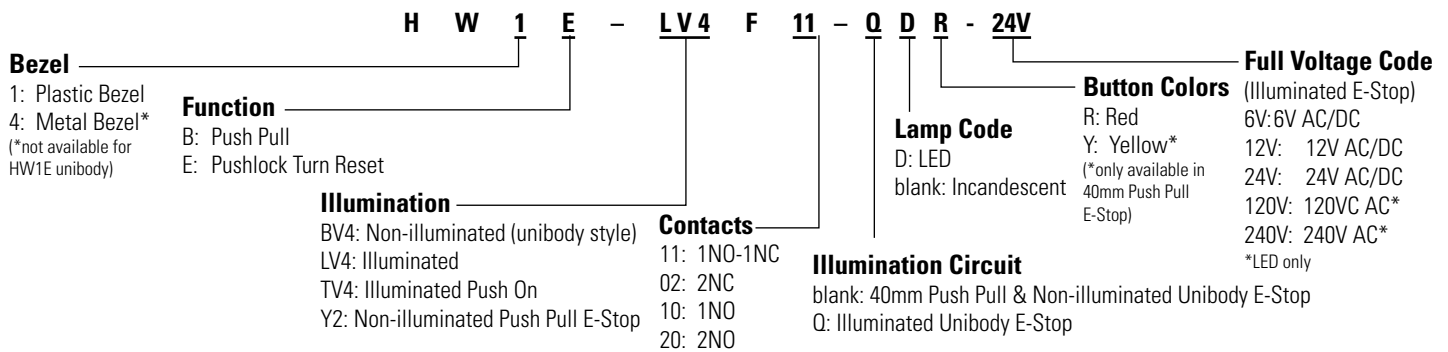

## Illuminated &amp; Non-Illuminated E-Stop Pushbuttons (Replacement Parts)

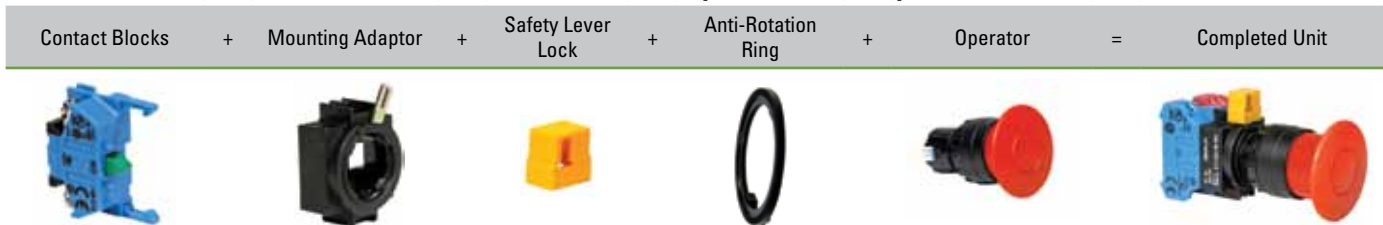

## Contact Blocks

| Style | Contacts                   | 1NO                  | 1NC                  |
|-------|----------------------------|----------------------|----------------------|
|       | Standard Fingersafe (IP20) | HW-F10               | HW-F01               |
|       |                            | HW-F10R (early make) | HW-F01R (late break) |
|       | Spring-Up Terminal         | HW-G10               | HW-G01               |
|       |                            | HW-G10R (early make) | HW-G01R (late break) |
|       | Exposed Screw Terminal     | HW-C10               | HW-C01               |
|       |                            | HW-C10R (early make) | HW-C01R (late break) |
|       | Dummy Block                | TW-DB                |                      |

1. There are no replacement parts for the HW1E unibody E-Stop.  
2. For illuminated unibody E-Stop, see page 600 for replacement lens.

## Contact Block Mounting Adaptor

| Style | Part Number |
|-------|-------------|
|       | HW-CB2C     |

1. Used to mount contact blocks to operator.  
2. IDEC strongly recommends using the safety lever lock to prevent heavy vibration or maintenance personnel from inadvertently unlocking contacts.

## Safety Lever Lock

| Style | Part Number |
|-------|-------------|
|       | HW9Z-LS     |

## Anti-Rotation Ring

| Appearance | Part Number |
|------------|-------------|
|            | HW9Z-RL     |

- Use with notched panel cutout to prevent unit rotation.

## Operators

| Style                | Part Number |          |
|----------------------|-------------|----------|
| ø40mm Head Push-Pull | Plastic     | HW1B-Y2R |
|                      | Metal       | HW4B-Y2R |
|                      | Plastic     | HW1B-Y2Y |
|                      | Metal       | HW4B-Y2Y |

- All E-Stop Buttons are not removable from the operator.

E-Stop Stations



|          | 29mm Pushlock Turn Reset |                 | 40mm Pushlock Turn Reset |                 |
|----------|--------------------------|-----------------|--------------------------|-----------------|
| Contacts | Plastic Bezel            | Metal Bezel     | Plastic Bezel            | Metal Bezel     |
| 1NO-1NC  | FB1W-HW1B-V311R          | FB1W-HW4B-V311R | FB1W-HW1B-V411R          | FB1W-HW4B-V411R |
| 2NC      | FB1W-HW1B-V302R          | FB1W-HW4B-V302R | FB1W-HW1B-V402R          | FB1W-HW4B-V402R |



|          | 40mm Push-Pull Reset |                 | 40mm Pushlock Key Reset |                 |
|----------|----------------------|-----------------|-------------------------|-----------------|
| Contacts | Plastic Bezel        | Metal Bezel     | Plastic Bezel           | Metal Bezel     |
| 1NO-1NC  | FB1W-HW1B-Y211R      | FB1W-HW4B-Y211R | FB1W-HW1B-X411R         | FB1W-HW4B-X411R |
| 2NC      | FB1W-HW1B-Y202R      | FB1W-HW4B-Y202R | FB1W-HW1B-X402R         | FB1W-HW4B-X402R |



|          | 40mm EMO Pushlock Turn Reset |                       |
|----------|------------------------------|-----------------------|
| Contacts | Plastic Bezel                | Metal Bezel           |
| 1NO-1NC  | FB1W-HW1B-V411R-EMO-2        | FB1W-HW4B-V411R-EMO-2 |
| 2NC      | FB1W-HW1B-V402R-EMO-2        | FB1W-HW4B-V402R-EMO-2 |

- 
1. Maximum of two contact blocks.

2. Box is supplied with yellow top and black bottom only.

## Jumbo Dome Pilot Lights (Assembled)



Plastic Bezel

|            |              |                           |            |
|------------|--------------|---------------------------|------------|
| Jumbo Dome | LED          | Operator Only             | HW1P-5Q0   |
|            |              | Full Voltage<br>24V AC/DC | HW1P-5Q4-② |
|            | Incandescent | Operator Only             | HW1P-5Q7*  |
|            |              | Full Voltage<br>24V AC/DC | HW1P-5Q7-② |



1. In place of ②, specify the Lens/LED Color Code.
2. \*Incandescent operator comes with bulb.
3. Available with spring-up terminals in 24V only.
4. For nameplates and accessories, see page 596 and 599.
5. For dimensions, see page 601.

## ② Lens/LED Color Code

| Color  | Code |
|--------|------|
| Amber  | A    |
| Green  | G    |
| Red    | R    |
| Blue   | S    |
| White  | W    |
| Yellow | Y    |



Actual Size



## Jumbo Dome Replacement Parts

| Item                | Appearance | Description        | Part Number |
|---------------------|------------|--------------------|-------------|
| Lens                |            | Polycarbonate Lens | HW1A-P5②    |
| LED Diffusing Lens* |            |                    | HW9Z-PP5C   |
| LED Lamps           |            | LED Lamp           | LSTDB-2②    |



1. In place of ②, specify the Lens/LED Color Code.
2. \*Diffusing lens for LED models only.
3. Use white LED for yellow lens.

## Lamp Ratings

|              | Part Number | Operating Voltage | Rated Current | Power Consumption |
|--------------|-------------|-------------------|---------------|-------------------|
| LED          | LSTDB-2     | 24V AC/DC ±10%    | 15mA          | 0.36W             |
| Incandescent | LSB-2       |                   | 150mA         | 3.6W              |



Pilot Lights (Assembled)



|                  |         | Round Flush   |               | Dome          |               |
|------------------|---------|---------------|---------------|---------------|---------------|
|                  |         | Plastic Bezel | Metal Bezel   | Plastic Bezel | Metal Bezel   |
| Operator Only    |         | HW1P-1FQ0-②   | HW4P-1FQ0-②   | HW1P-2FQ0-②   | HW4P-2FQ0-②   |
| Full Voltage     |         | HW1P-1FQ④-②-③ | HW4P-1FQ④-②-③ | HW1P-2FQ④-②-③ | HW4P-2FQ④-②-③ |
| Transformer      | 120V AC | HW1P-1FH2④-②  | HW4P-1FH2④-②  | HW1P-2FH2④-②  | HW4P-2FH2④-②  |
|                  | 240V AC | HW1P-1FM4④-②  | HW4P-1FM4④-②  | HW1P-2FM4④-②  | HW4P-2FM4④-②  |
|                  | 480V AC | HW1P-1FT8④-②  | HW4P-1FT8④-②  | HW1P-2FT8④-②  | HW4P-2FT8④-②  |
| DC-DC Converter* | 110V DC | HW1P-1D2D-②   | —             | HW1P-2D2D-②   | —             |



|                  |         | Square Flush  |
|------------------|---------|---------------|
|                  |         | Plastic Bezel |
| Operator Only    |         | HW2P-1FQ0-②   |
| Full Voltage     |         | HW2P-1FQ④-②-③ |
| Transformer      | 120V AC | HW2P-1FH2④-②  |
|                  | 240V AC | HW2P-1FM4④-②  |
|                  | 480V AC | HW2P-1FT8④-②  |
| DC-DC Converter* | 110V DC | HW2P-1D2D-②   |

② Lens/LED Color Code

| Color  | Code |
|--------|------|
| Amber  | A    |
| Green  | G    |
| Red    | R    |
| Blue   | S    |
| White  | W    |
| Yellow | Y    |

③ Full Voltage Code

| Voltage            | Code |
|--------------------|------|
| 6VAC/DC            | 6V   |
| 12VAC/DC           | 12V  |
| 24VAC/DC           | 24V  |
| 120V AC (LED only) | 120V |
| 240V AC (LED only) | 240V |


④ Lamp Type Code

| Lamp         | Code  |
|--------------|-------|
| Incandescent | Blank |
| LED          | D     |



- 1. In place of ②, specify the Lens/LED Color Code from table below.
- 2. In place of ③ specify the Full Voltage Code from table below.
- 3. In place of ④ specify Lamp Type Code from table below.
- 4. \*DC-DC convertor voltage input from 90-140V DC, comes with spring-up terminals only.
- 5. DC-DC converter models with LED lamps only.
- 6. For nameplates and accessories, see page 596 and 599.
- 7. For dimensions, see page 601.
- 8. **Pilot lights do not come with anti-rotation ring.**
- 9. Operator models come with operator and lens.
- 10. **Yellow pilot light comes with white LED.**

## Part Number Structure

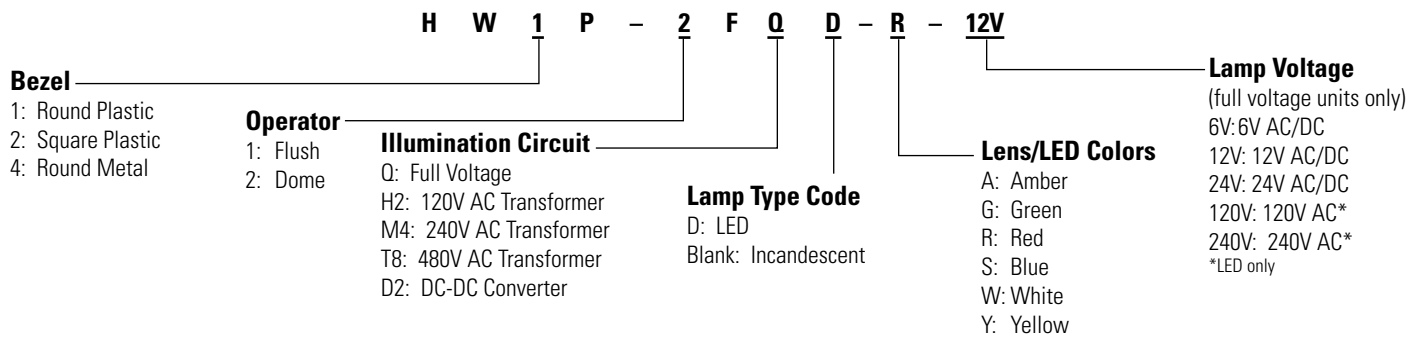

## Pilot Lights (Replacement Parts)

| Transformer* | + | Lamp | + | Operator | + | Lens | = | Completed Unit |
|--------------|---|------|---|----------|---|------|---|----------------|
|--------------|---|------|---|----------|---|------|---|----------------|



(not applicable for full voltage units)

## Transformer Units

| Style                  | Voltage   | Part Number         |
|------------------------|-----------|---------------------|
| LED/Incandescent       | 120V AC   | HW-FH20<br>HW-MH20* |
|                        | 240V AC   | HW-FM40<br>HW-MM40* |
|                        | 480V AC   | HW-FT80<br>HW-RT80* |
| (6V secondary voltage) | 110V DC** | HW-RD0*             |



- \*With spring-up terminals - to use spring-up terminal type, must use transformer type operator designed for spring-up transformer.
- \*\* DC-DC converter voltage input from 90-140V DC.

## Lamps

| Style        | Voltage   | Part Number |
|--------------|-----------|-------------|
| LED          | 6V AC/DC  | LSTD-6②     |
|              | 12V AC/DC | LSTD-1②     |
|              | 24V AC/DC | LSTD-2②     |
|              | 120V AC   | LSTD-H2②    |
|              | 240V AC   | LSTD-M4②    |
| Incandescent | 6V AC/DC  | IS-6        |
|              | 12V AC/DC | IS-12       |
|              | 24V AC/DC | IS-24       |



- In place of ②, specify the LED Color Code.
- The LED contains a current-limiting resistor and reverse polarity protection diodes.

## ② LED Color Code

| Color | Code | Color | Code |
|-------|------|-------|------|
| Amber | A    | Blue  | S    |
| Green | G    | White | W    |
| Red   | R    |       |      |



For yellow lens use white LED.

## Operators

| Style        | Type         | Plastic Bezel       | Metal Bezel |
|--------------|--------------|---------------------|-------------|
| Round Flush  | Full Voltage | Standard            | HW1P-1FQ0   |
|              |              | Spring-up Terminals | HW1P-1Q0    |
|              | Transformer  | Standard            | HW1P-10     |
|              |              | Spring-up Terminals | HW1P-100    |
| Dome         | Full Voltage | Standard            | HW1P-2FQ0   |
|              |              | Spring-up Terminals | HW1P-2Q0    |
|              | Transformer  | Standard            | HW1P-20     |
|              |              | Spring-up Terminals | HW1P-200    |
| Square Flush | Full Voltage | Standard            | HW2P-1FQ0   |
|              |              | Spring-up Terminals | HW2P-1Q0    |
|              | Transformer  | Standard            | HW2P-10     |
|              |              | Spring-up Terminals | HW2P-100    |



- Transformer type requires separate transformer & lamp. Must select correct transformer bases on standard or spring up terminal type. Use 6V lamps or LEDs.
- Full voltage type only requires lamp.

## Lenses

| Style        | Part Number |
|--------------|-------------|
| Round/Flush  | HW1A-P1-③   |
| Dome         | HW1A-P2-③   |
| Square/Flush | HW2A-P1-③   |



In place of ③, specify the Lens Color Code.

## ③ Lens Color Code

| Color  | Code |
|--------|------|
| Amber  | A    |
| Green  | G    |
| Red    | R    |
| Blue   | S    |
| White  | W    |
| Yellow | Y    |



For yellow lens use white LED.

## Illuminated Round Pushbuttons (Assembled)



### Illuminated Full Voltage Pushbuttons



| Contacts   |                      | Flush            |                  | Extended         |                  | Extended w/ Full Shroud |                   |
|------------|----------------------|------------------|------------------|------------------|------------------|-------------------------|-------------------|
|            |                      | Plastic Bezel    | Metal Bezel      | Plastic Bezel    | Metal Bezel      | Plastic Bezel           | Metal Bezel       |
| Momentary  | <b>Operator Only</b> | <b>HW1L-M1-②</b> | <b>HW4L-M1-②</b> | <b>HW1L-M2-②</b> | <b>HW4L-M2-②</b> | <b>HW1L-MF2-②</b>       | <b>HW4L-MF2-②</b> |
|            | 1NO                  | HW1L-M1F10Q④-②-③ | HW4L-M1F10Q④-②-③ | HW1L-M2F10Q④-②-③ | HW4L-M2F10Q④-②-③ | HW1L-MF2F10Q④-②-③       | HW4L-MF2F10Q④-②-③ |
|            | 1NC                  | HW1L-M1F01Q④-②-③ | HW4L-M1F01Q④-②-③ | HW1L-M2F01Q④-②-③ | HW4L-M2F01Q④-②-③ | HW1L-MF2F01Q④-②-③       | HW4L-MF2F01Q④-②-③ |
|            | 1NO-1NC              | HW1L-M1F11Q④-②-③ | HW4L-M1F11Q④-②-③ | HW1L-M2F11Q④-②-③ | HW4L-M2F11Q④-②-③ | HW1L-MF2F11Q④-②-③       | HW4L-MF2F11Q④-②-③ |
|            | 2NO                  | HW1L-M1F20Q④-②-③ | HW4L-M1F20Q④-②-③ | HW1L-M2F20Q④-②-③ | HW4L-M2F20Q④-②-③ | HW1L-MF2F20Q④-②-③       | HW4L-MF2F20Q④-②-③ |
| Maintained | <b>Operator Only</b> | <b>HW1L-A1-②</b> | <b>HW4L-A1-②</b> | <b>HW1L-A2-②</b> | <b>HW4L-A2-②</b> | <b>HW1L-AF2-②</b>       | <b>HW4L-AF2-②</b> |
|            | 1NO                  | HW1L-A1F10Q④-②-③ | HW4L-A1F10Q④-②-③ | HW1L-A2F10Q④-②-③ | HW4L-A2F10Q④-②-③ | HW1L-AF2F10Q④-②-③       | HW4L-AF2F10Q④-②-③ |
|            | 1NC                  | HW1L-A1F01Q④-②-③ | HW4L-A1F01Q④-②-③ | HW1L-A2F01Q④-②-③ | HW4L-A2F01Q④-②-③ | HW1L-AF2F01Q④-②-③       | HW4L-AF2F01Q④-②-③ |
|            | 1NO-1NC              | HW1L-A1F11Q④-②-③ | HW4L-A1F11Q④-②-③ | HW1L-A2F11Q④-②-③ | HW4L-A2F11Q④-②-③ | HW1L-AF2F11Q④-②-③       | HW4L-AF2F11Q④-②-③ |
|            | 2NO                  | HW1L-A1F20Q④-②-③ | HW4L-A1F20Q④-②-③ | HW1L-A2F20Q④-②-③ | HW4L-A2F20Q④-②-③ | HW1L-AF2F20Q④-②-③       | HW4L-AF2F20Q④-②-③ |

### Illuminated Transformer Pushbuttons



|                | Contacts                        | Flush                           |                | Extended       |                | Extended w/ Full Shroud |                 |
|----------------|---------------------------------|---------------------------------|----------------|----------------|----------------|-------------------------|-----------------|
|                |                                 | Plastic Bezel                   | Metal Bezel    | Plastic Bezel  | Metal Bezel    | Plastic Bezel           | Metal Bezel     |
| Momentary      | Operator Only<br>1NO-1NC<br>2NO | HW1L-M1-②                       | HW4L-M1-②      | HW1L-M2-②      | HW4L-M2-②      | HW1L-MF2-②              | HW4L-MF2-②      |
|                |                                 | HW1L-M1F11③④-②                  | HW4L-M1F11③④-② | HW1L-M2F11③④-② | HW4L-M2F11③④-② | HW1L-MF2F11③④-②         | HW4L-MF2F11③④-② |
|                |                                 | HW1L-M1F20③④-②                  | HW4L-M1F20③④-② | HW1L-M2F20③④-② | HW4L-M2F20③④-② | HW1L-MF2F20③④-②         | HW4L-MF2F20③④-② |
|                | Maintained                      | Operator Only<br>1NO-1NC<br>2NO | HW1L-A1-②      | HW4L-A1-②      | HW1L-A2-②      | HW4L-A2-②               | HW1L-AF2-②      |
| HW1L-A1F11③④-② |                                 |                                 | HW4L-A1F11③④-② | HW1L-A2F11③④-② | HW4L-A2F11③④-② | HW1L-AF2F11③④-②         | HW4L-AF2F11③④-② |
| HW1L-A1F20③④-② |                                 |                                 | HW4L-A1F20③④-② | HW1L-A2F20③④-② | HW4L-A2F20③④-② | HW1L-AF2F20③④-②         | HW4L-AF2F20③④-② |



- In place of ②, specify Lens/LED Color Code from table.
- In place of ③ specify Voltage Code from table.
- In place of ④ specify Lamp Code from table.
- Light independent of switch position.
- For replacement part numbers, see page 567.
- For nameplates and accessories, see page 596 and 599.
- For dimensions, see page 601.
- For contact assembly part numbers, see page 600.
- Full voltage and transformer models use the same operator.
- Additional contact configurations available (up to 6 total contacts).
- Yellow pushbutton comes with white LED.**

#### ② Lens/LED Color Code

| Color  | Code |
|--------|------|
| Amber  | A    |
| Green  | G    |
| Red    | R    |
| Blue   | S    |
| White  | W    |
| Yellow | Y    |




Yellow LED not available. Use white LED for yellow lens.

#### ③ Voltage Code

| Full Voltage Models |      | Transformer Models |      |
|---------------------|------|--------------------|------|
| Voltage             | Code | Voltage            | Code |
| 6V AC/DC            | 6V   | 120V AC            | H2   |
| 12V AC/DC           | 12V  | 240V AC            | M4   |
| 24V AC/DC           | 24V  | 480V AC            | T8   |
| 120V AC (LED only)  | 120V |                    |      |
| 240V AC (LED only)  | 240V |                    |      |

#### ④ Lamp Code

| Lamp         | Code  |
|--------------|-------|
| Incandescent | Blank |
| LED          | D     |

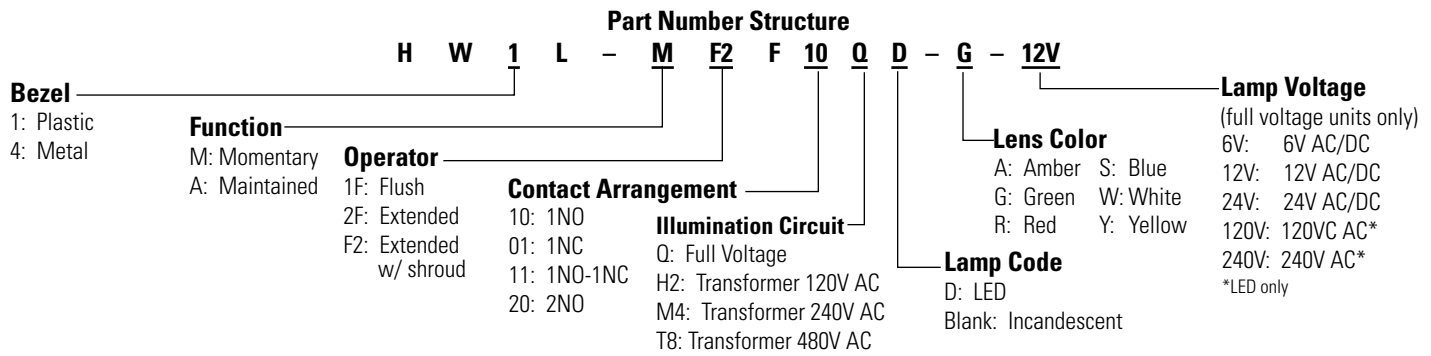

## Illuminated Round Pushbuttons (Replacement Parts)

| Transformer* | Contact Blocks | Lead Holder | Mounting Adaptor | Safety Lever Lock | Lamp | Anti-Rotation Ring | Operator | Lens | Completed Unit |
|--------------|----------------|-------------|------------------|-------------------|------|--------------------|----------|------|----------------|
|              |                |             |                  |                   |      |                    |          |      |                |



\*Transformer not needed with full voltage models.

## Lamp Circuit Components

| Style                                   | Description                                                                                             | Terminals  | Part Number |
|-----------------------------------------|---------------------------------------------------------------------------------------------------------|------------|-------------|
| Lead Holder                             | For use with HW-CBL on all illuminated pushbutton units. One required for each deck (pair) of contacts. |            | HW-LH3      |
| Dummy Block with Full Voltage Adaptor   | For use with odd number of contacts.                                                                    | Fingersafe | HW-DA1FB    |
|                                         |                                                                                                         | Exposed    | HW-DA1B     |
|                                         |                                                                                                         | Spring Up  | HW-GA1      |
| Full Voltage Adaptor                    | For use with even number of contacts.                                                                   | Fingersafe | TW-DA1FB    |
|                                         |                                                                                                         | Exposed    | TW-DA1B     |
| Transformer Unit (6V secondary voltage) | 120VAC                                                                                                  | Fingersafe | TW-F126B    |
|                                         | 240VAC                                                                                                  |            | TW-F246B    |
|                                         | 480VAC                                                                                                  |            | TW-F486B    |
|                                         | 120V                                                                                                    | Spring Up  | HW-T126     |
|                                         | 240V                                                                                                    |            | HW-T246     |
|                                         | 480V                                                                                                    |            | HW-L486     |
|                                         | 120V                                                                                                    | Exposed    | TW-T126B    |
|                                         | 240V                                                                                                    |            | TW-T246B    |
|                                         | 480V                                                                                                    |            | TW-T486B    |
| DC-DC Converter                         | 110VDC                                                                                                  |            | HW-L16D     |



HW-GA1 "Dummy Block with full voltage adaptor" does not require the use of HW-LH3.

## Operators

| Style                     |  |            | Plastic Bezel | Metal Bezel |
|---------------------------|--|------------|---------------|-------------|
| Round Flush/Extended      |  | Momentary  | HW1L-M0       | HW4L-M0     |
|                           |  | Maintained | HW1L-A0       | HW4L-A0     |
| Extended with Full Shroud |  | Momentary  | HW1L-MF0      | HW4L-MF0    |
|                           |  | Maintained | HW1L-AF0      | HW4L-AF0    |

## Contact Blocks

| Style | Contacts                   | 1NO                            | 1NC                            |
|-------|----------------------------|--------------------------------|--------------------------------|
|       | Standard Fingersafe (IP20) | HW-F10<br>HW-F10R (early make) | HW-F01<br>HW-F01R (late break) |
|       | Spring-Up Terminal         | HW-G10<br>HW-G10R (early make) | HW-G01<br>HW-G01R (late break) |
|       | Exposed Screw Terminal     | HW-C10<br>HW-C10R (early make) | HW-C01<br>HW-C01R (late break) |



- All assembled part numbers in catalog include standard fingersafe (HW-F...) contacts.
- Assembled units with spring-up terminals (HW-G...) can be ordered by removing an "F" from the part number (Ex. HW1B-M1F11-R becomes HW1B-M111-R).
- Units with exposed screw terminals (HW-C...) must be ordered as sub-components.

## Contact Block Mounting Adaptor

| Style | Part Number |
|-------|-------------|
|       | HW-CBL      |



- Used to mount contact blocks to operator (first pair only).
- IEC strongly recommends using the safety lever lock to prevent heavy vibration or maintenance personnel from inadvertently unlocking contacts.

## Anti-Rotation Ring

| Appearance | Part Number |
|------------|-------------|
|            | HW9Z-RL     |



Use with notched panel cutout to prevent unit rotation.

## Safety Lever Lock

| Style | Part Number |
|-------|-------------|
|       | HW9Z-LS     |

## Lenses

| Style          | Part Number |
|----------------|-------------|
| Round Flush    | HW1A-L1-Ⓢ   |
|                |             |
| Round Extended | HW1A-L2-Ⓢ   |
|                |             |



In place of Ⓢ, specify the Lens Color Code from previous page.

## Lamps

| Style        | Voltage   | Part Number |
|--------------|-----------|-------------|
| LED          | 6V AC/DC  | LSTD-6Ⓢ     |
|              | 12V AC/DC | LSTD-1Ⓢ     |
|              | 24V AC/DC | LSTD-2Ⓢ     |
|              | 120V AC   | LSTD-H2Ⓢ    |
|              | 240V AC   | LSTD-M4Ⓢ    |
| Incandescent | 6V AC/DC  | IS-6        |
|              | 12V AC/DC | IS-12       |
|              | 24V AC/DC | IS-24       |



- In place of Ⓢ, specify the LED Color Code.
- The LED contains a current-limiting resistor and reverse polarity protection diodes.
- Yellow LED not available, use white LED when using yellow lens.

# Illuminated Mushroom & Square Pushbuttons (Assembled)



|              |            | Contacts                         | 40mm Mushroom Head |                  | Square Flush     |
|--------------|------------|----------------------------------|--------------------|------------------|------------------|
|              |            |                                  | Plastic Bezel      | Metal Bezel      | Plastic Bezel    |
| Full Voltage | Momentary  | <i>Operator Only<sup>†</sup></i> | <i>HW1L-M4-②</i>   | <i>HW4L-M4-②</i> | <i>HW2L-M1-②</i> |
|              |            | 1NO                              | HW1L-M4F10Q④-②-③   | HW4L-M4F10Q④-②-③ | HW2L-M1F10Q④-②-③ |
|              |            | 1NC                              | HW1L-M4F01Q④-②-③   | HW4L-M4F01Q④-②-③ | HW2L-M1F01Q④-②-③ |
|              |            | 1NO-1NC                          | HW1L-M4F11Q④-②-③   | HW4L-M4F11Q④-②-③ | HW2L-M1F11Q④-②-③ |
|              |            | 2NO                              | HW1L-M4F20Q④-②-③   | HW4L-M4F20Q④-②-③ | HW2L-M1F20Q④-②-③ |
|              | Maintained | <i>Operator Only<sup>†</sup></i> | <i>HW1L-A4-②</i>   | <i>HW4L-A4-②</i> | <i>HW2L-A1-②</i> |
|              |            | 1NO                              | HW1L-A4F10Q④-②-③   | HW4L-A4F10Q④-②-③ | HW2L-A1F10Q④-②-③ |
|              |            | 1NC                              | HW1L-A4F01Q④-②-③   | HW4L-A4F01Q④-②-③ | HW2L-A1F01Q④-②-③ |
|              |            | 1NO-1NC                          | HW1L-A4F11Q④-②-③   | HW4L-A4F11Q④-②-③ | HW2L-A1F11Q④-②-③ |
|              |            | 2NO                              | HW1L-A4F20Q④-②-③   | HW4L-A4F20Q④-②-③ | HW2L-A1F20Q④-②-③ |
| Transformer  | Momentary  | 1NO-1NC                          | HW1L-M4F11③④-②     | HW4L-M4F11③④-②   | HW2L-M1F11③④-②   |
|              |            | 2NO                              | HW1L-M4F20③④-②     | HW4L-M4F20③④-②   | HW2L-M1F20③④-②   |
|              | Maintained | 1NO-1NC                          | HW1L-A4F11③④-②     | HW4L-A4F11③④-②   | HW2L-A1F11③④-②   |
|              |            | 2NO                              | HW1L-A4F20③④-②     | HW4L-A4F20③④-②   | HW2L-A1F20③④-②   |



- <sup>1</sup> Full voltage and transformer units use the same operator.
- In place of ②, specify the Lens/LED Color Code from table.
- In place of ③ specify the Voltage Code from table.
- In place of ④ specify Lamp Type Code from table.
- Light independent of switch position
- For nameplates and accessories, see page 596 and 599.
- For dimensions, see page 601.
- For contact assembly part numbers, see page 600.
- Additional contact configurations available (up to 6 total contacts).
- 10. Yellow pushbutton comes with white LED.**

## ② Lens/LED Color Code

| Color  | Code |
|--------|------|
| Amber  | A    |
| Green  | G    |
| Red    | R    |
| Blue   | S    |
| White  | W    |
| Yellow | Y*   |



- \*40mm mushroom lenses not available in yellow.
- Yellow LED not available. Use white LED for yellow lens.


## ③ Voltage Code

| Full Voltage Models |      | Transformer Models |      |
|---------------------|------|--------------------|------|
| Voltage             | Code | Voltage            | Code |
| 6V AC/DC            | 6V   | 120V AC            | H2   |
| 12V AC/DC           | 12V  | 240V AC            | M4   |
| 24V AC/DC           | 24V  | 480V AC            | T8   |
| 120V AC (LED only)  | 120V |                    |      |
| 240V AC (LED only)  | 240V |                    |      |

## ④ Lamp Code

| Lamp         | Code  |
|--------------|-------|
| Incandescent | Blank |
| LED          | D     |

## Part Number Structure

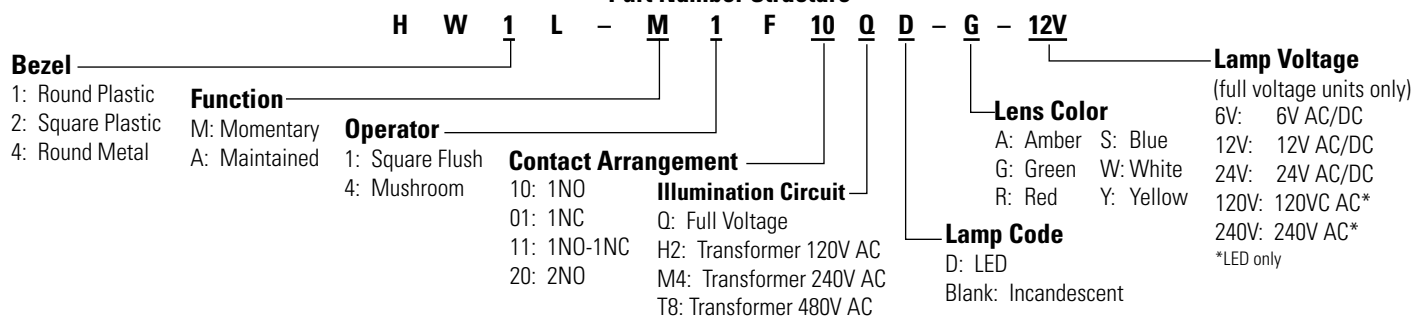

## Illuminated Mushroom &amp; Square Pushbuttons (Replacement Parts)



\*Transformer not needed with full voltage models.

## Lamp Circuit Components

| Style                                                                                                                          | Description                                                                                             | Terminals  | Part Number |
|--------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|------------|-------------|
| Lead Holder<br>                               | For use with HW-CBL on all illuminated pushbutton units. One required for each deck (pair) of contacts. |            | HW-LH3      |
| Dummy Block with Full Voltage Adaptor<br>   | For use with odd number of contacts.                                                                    | Fingersafe | HW-DA1FB    |
|                                                                                                                                |                                                                                                         | Exposed    | HW-DA1B     |
|                                                                                                                                |                                                                                                         | Spring Up  | HW-GA1      |
| Full Voltage Adaptor<br>                    | For use with even number of contacts.                                                                   | Fingersafe | TW-DA1FB    |
|                                                                                                                                |                                                                                                         | Exposed    | TW-DA1B     |
| Transformer Unit (6V secondary voltage)<br> | 120VAC                                                                                                  | Fingersafe | TW-F126B    |
|                                                                                                                                | 240VAC                                                                                                  |            | TW-F246B    |
|                                                                                                                                | 480VAC                                                                                                  |            | TW-F486B    |
|                                                                                                                                | 120V                                                                                                    | Spring Up  | HW-T126     |
|                                                                                                                                | 240V                                                                                                    |            | HW-T246     |
|                                                                                                                                | 480V                                                                                                    |            | HW-L486     |
|                                                                                                                                | 120V                                                                                                    | Exposed    | TW-T126B    |
|                                                                                                                                | 240V                                                                                                    |            | TW-T246B    |
|                                                                                                                                | 480V                                                                                                    |            | TW-T486B    |
| DC-DC Converter                                                                                                                | 110VDC                                                                                                  |            | HW-L16D     |



HW-GA1 "Dummy Block with full voltage adaptor" does not require the use of HW-LH3.

## Operators

| Style                                                                                                 |            |  | Plastic Bezel | Metal Bezel |
|-------------------------------------------------------------------------------------------------------|------------|--|---------------|-------------|
| ø40mm Mushroom<br> | Momentary  |  | HW1L-M0L      | HW4L-M0L    |
|                                                                                                       | Maintained |  | HW1L-A0L      | HW4L-A0L    |
| Square<br>         | Momentary  |  | HW2L-M0       |             |
|                                                                                                       | Maintained |  | HW2L-A0       |             |

## Contact Blocks

| Style                                                                              | Contacts                   | 1NO                            | 1NC                            |
|------------------------------------------------------------------------------------|----------------------------|--------------------------------|--------------------------------|
|  | Standard Fingersafe (IP20) | HW-F10<br>HW-F10R (early make) | HW-F01<br>HW-F01R (late break) |
|                                                                                    | Spring-Up Terminal         | HW-G10<br>HW-G10R (early make) | HW-G01<br>HW-G01R (late break) |
|                                                                                    | Exposed Screw Terminal     | HW-C10<br>HW-C10R (early make) | HW-C01<br>HW-C01R (late break) |



- All assembled part numbers in catalog include standard fingersafe (HW-F...) contacts.
- Assembled units with spring-up terminals (HW-G...) can be ordered by removing an "F" from the part number (Ex. HW1B-M1F11-R becomes HW1B-M111-R).
- Units with exposed screw terminals (HW-C...) must be ordered as sub-components.

## Contact Block Mounting Adaptor

| Style                                                                               | Part Number |
|-------------------------------------------------------------------------------------|-------------|
|  | HW-CBL      |



- Used to mount contact blocks to operator (first pair only).
- IEDEC strongly recommends using the safety lever lock to prevent heavy vibration or maintenance personnel from inadvertently unlocking contacts.

## Safety Lever Lock

| Style                                                                               | Part Number |
|-------------------------------------------------------------------------------------|-------------|
|  | HW9Z-LS     |

## Lenses

| Style                                                                                                      | Part Number |
|------------------------------------------------------------------------------------------------------------|-------------|
| ø40mm Mushroom Lens<br> | ALW4BLU-⊙*  |
| Square Flush<br>        | HW2A-L1-⊙   |



- In place of ⊙, specify the Lens Color Code.
- \*Mushroom lens not available in yellow.

## Anti-Rotation Ring

| Appearance                                                                            | Part Number |
|---------------------------------------------------------------------------------------|-------------|
|  | HW9Z-RL     |



Use with notched panel cutout to prevent unit rotation.

## Lamps

| Style                                                                                                 | Voltage   | Part Number |
|-------------------------------------------------------------------------------------------------------|-----------|-------------|
| LED<br>          | 6V AC/DC  | LSTD-6⊙     |
|                                                                                                       | 12V AC/DC | LSTD-1⊙     |
|                                                                                                       | 24V AC/DC | LSTD-2⊙     |
|                                                                                                       | 120V AC   | LSTD-H2⊙    |
|                                                                                                       | 240V AC   | LSTD-M4⊙    |
| Incandescent<br> | 6V AC/DC  | IS-6        |
|                                                                                                       | 12V AC/DC | IS-12       |
|                                                                                                       | 24V AC/DC | IS-24       |



- In place of ⊙, specify the LED Color Code.
- The LED contains a current-limiting resistor and reverse polarity protection diodes.
- Yellow LED not available, use white LED when using yellow lens.

Selector Switches 2-Position (Assembled)



2-Position Selector Switches

| Contact       | Mounting | Operator Position                                                                 |                                                                                   | Handle        | Maintained               | Spring Return from Right   |
|---------------|----------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|---------------|--------------------------|----------------------------|
|               |          |  |  |               |                          |                            |
| Operator Only |          |                                                                                   |                                                                                   | Knob<br>Lever | HWⓈS-2T<br>HWⓈS-2L       | HWⓈS-21T<br>HWⓈS-21L       |
| 1NO           | 1        | 0                                                                                 | X                                                                                 | Knob<br>Lever | HWⓈS-2TF10<br>HWⓈS-2LF10 | HWⓈS-21TF10<br>HWⓈS-21LF10 |
| 1NO-1NC       | 1        | 0                                                                                 | X                                                                                 | Knob<br>Lever | HWⓈS-2TF11<br>HWⓈS-2LF11 | HWⓈS-21TF11                |
|               | 2        | X                                                                                 | 0                                                                                 |               |                          | HWⓈS-21LF11                |
| 2NO           | 1        | 0                                                                                 | X                                                                                 | Knob<br>Lever | HWⓈS-2TF20<br>HWⓈS-2LF20 | HWⓈS-21TF20                |
|               | 2        | 0                                                                                 | X                                                                                 |               |                          | HWⓈS-21LF20                |
| 2NO-2NC       | 1        | X                                                                                 | 0                                                                                 | Knob<br>Lever | HWⓈS-2TF22<br>HWⓈS-2LF22 | HWⓈS-21TF22<br>HWⓈS-21LF22 |
|               | 2        | 0                                                                                 | X                                                                                 |               |                          |                            |
|               | 3        | X                                                                                 | 0                                                                                 |               |                          |                            |
|               | 4        | 0                                                                                 | X                                                                                 |               |                          |                            |

- 
1. In place of Ⓢ enter 1 for plastic bezel or 4 for metal bezel.

2. For nameplates, see page 596.

3. All assembled part numbers in catalog include standard fingersafe (HW-F...) contacts.

4. Assembled units with spring-up terminals (HW-G...) can be ordered by removing an "F" from the part number (Ex. HW1B-M1F11-R becomes HW1B-M111-R).

5. Units with exposed screw terminals (HW-C...) must be ordered as sub-components.

6. Standard color for knob and lever is black.

7. Optional colors available for lever type. Must order in components. See next page for part numbers.


8. Additional contact configurations available (up to 6 total contacts).

9. For Truth Tables see page 608.

Ⓢ Bezel Type

| Type    | Code |
|---------|------|
| Plastic | 1    |
| Metal   | 4    |

## Part Number Structure

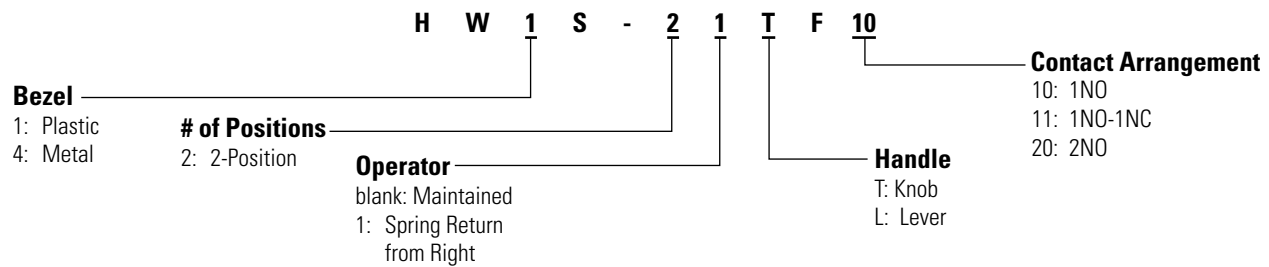

## Selector Switches 2-Position (Replacement Parts)

|                |   |                  |   |                   |   |                    |   |          |   |                |
|----------------|---|------------------|---|-------------------|---|--------------------|---|----------|---|----------------|
| Contact Blocks | + | Mounting Adaptor | + | Safety Lever Lock | + | Anti-Rotation Ring | + | Operator | = | Completed Unit |
|----------------|---|------------------|---|-------------------|---|--------------------|---|----------|---|----------------|



## Contact Blocks

| Style | Contacts                   | 1NO                  | 1NC                  |
|-------|----------------------------|----------------------|----------------------|
|       | Standard Fingersafe (IP20) | HW-F10               | HW-F01               |
|       |                            | HW-F10R (early make) | HW-F01R (late break) |
|       | Spring-Up Terminal         | HW-G10               | HW-G01               |
|       |                            | HW-G10R (early make) | HW-G01R (late break) |
|       | Exposed Screw Terminal     | HW-C10               | HW-C01               |
|       |                            | HW-C10R (early make) | HW-C01R (late break) |
|       | Dummy Block                | TW-DB                |                      |

## Anti-Rotation Ring

| Style | Part Number |
|-------|-------------|
|       | HW9Z-RL     |



Use with notched panel cutout to prevent unit rotation.

## Operators

| Style | Description              | Handle | Plastic Bezel | Metal Bezel |
|-------|--------------------------|--------|---------------|-------------|
|       | Maintained               | Knob   | HW1S-2T       | HW4S-2T     |
|       |                          | Lever  | HW1S-2        | HW4S-2      |
|       | Spring Return from Right | Knob   | HW1S-21T      | HW4S-21T    |
|       |                          | Lever  | HW1S-21       | HW4S-21     |



- Knob operator comes with black handle.
- To order lever type, lever and inserts must be ordered separately, along with lever operator. See part numbers below.

## Contact Block Mounting Adaptor

| Style | Part Number |
|-------|-------------|
|       | HW-CB2C     |



- Used to mount contact blocks to operator (first pair only).
- IDEC strongly recommends using the safety lever lock to prevent heavy vibration or maintenance personnel from inadvertently unlocking contacts.

## Safety Lever Lock

| Style | Part Number |
|-------|-------------|
|       | HW9Z-LS     |

## Levers &amp; Inserts

| Style | Part Number |
|-------|-------------|
|       | ASWHHL-①    |
|       | TW-HC1-①    |



Standard lever color is black. Standard insert color is white.

## ① Handle/Insert Color Code

| Color  | Code |
|--------|------|
| Black* | B    |
| Blue   | S    |
| Green  | G    |
| Red    | R    |
| Yellow | Y    |
| White† | W    |



- \* Lever color inserts not available in black.
- † Lever not available in white.

## Selector Switches 3-Position (Assembled)



### 3-Position Selector Switches

| Contact       | Mounting | Operator Position                                                                 |                                                                                   |                                                                                   | Handle        | Maintained                                                                                               | Spring Return<br>from Right                                                                               | Spring Return<br>from Left                                                                                  | Spring Return<br>Two-Way                                                                                    |
|---------------|----------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|---------------|----------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|
|               |          |  |  |  |               |                                                                                                          |                                                                                                           |                                                                                                             |                                                                                                             |
| Operator Only |          |                                                                                   |                                                                                   |                                                                                   | Knob<br>Lever | <br>HWⓈS-3T*<br>HWⓈS-3L | <br>HWⓈS-31T<br>HWⓈS-31L | <br>HWⓈS-32T<br>HWⓈS-32L | <br>HWⓈS-33T<br>HWⓈS-33L |
| 1NO-1NC       | 1        | 0                                                                                 | X                                                                                 | X                                                                                 | Knob<br>Lever | HWⓈS-3TF11<br>HWⓈS-3LF11                                                                                 | HWⓈS-31TF11<br>HWⓈS-31LF11                                                                                | HWⓈS-32TF11<br>HWⓈS-32LF11                                                                                  | HWⓈS-33TF11<br>HWⓈS-33LF11                                                                                  |
|               | 2        | 0                                                                                 | 0                                                                                 | X                                                                                 |               |                                                                                                          |                                                                                                           |                                                                                                             |                                                                                                             |
| 2NO           | 1        | X                                                                                 | 0                                                                                 | 0                                                                                 | Knob<br>Lever | HWⓈS-3TF20<br>HWⓈS-3LF20                                                                                 | HWⓈS-31TF20<br>HWⓈS-31LF20                                                                                | HWⓈS-32TF20<br>HWⓈS-32LF20                                                                                  | HWⓈS-33TF20<br>HWⓈS-33LF20                                                                                  |
|               | 2        | 0                                                                                 | 0                                                                                 | X                                                                                 |               |                                                                                                          |                                                                                                           |                                                                                                             |                                                                                                             |
| 2NC           | 1        | 0                                                                                 | X                                                                                 | X                                                                                 | Knob<br>Lever | HWⓈS-3TF02<br>HWⓈS-3LF02                                                                                 | HWⓈS-31TF02<br>HWⓈS-31LF02                                                                                | HWⓈS-32TF02<br>HWⓈS-32LF02                                                                                  | HWⓈS-33TF02<br>HWⓈS-33LF02                                                                                  |
|               | 2        | X                                                                                 | X                                                                                 | 0                                                                                 |               |                                                                                                          |                                                                                                           |                                                                                                             |                                                                                                             |
| 2NO-1NC       | 1        | X                                                                                 | 0                                                                                 | 0                                                                                 | Knob          | HWⓈS-3JTF21N1                                                                                            | —                                                                                                         | —                                                                                                           | —                                                                                                           |
|               | 2        | 0                                                                                 | 0                                                                                 | X                                                                                 |               |                                                                                                          |                                                                                                           |                                                                                                             |                                                                                                             |
|               | 3        | 0                                                                                 | X                                                                                 | 0                                                                                 |               |                                                                                                          |                                                                                                           |                                                                                                             |                                                                                                             |
| 2NO-2NC       | 1        | X                                                                                 | 0                                                                                 | 0                                                                                 | Knob          | HWⓈS-3TF22                                                                                               | HWⓈS-31TF22                                                                                               | HWⓈS-32TF22                                                                                                 | HWⓈS-33TF22                                                                                                 |
|               | 2        | 0                                                                                 | 0                                                                                 | X                                                                                 |               |                                                                                                          |                                                                                                           |                                                                                                             |                                                                                                             |
|               | 3        | 0                                                                                 | X                                                                                 | X                                                                                 |               |                                                                                                          |                                                                                                           |                                                                                                             |                                                                                                             |
|               | 4        | X                                                                                 | X                                                                                 | 0                                                                                 |               |                                                                                                          |                                                                                                           |                                                                                                             |                                                                                                             |
| 2NO-2NC       | 1        | 0                                                                                 | 0                                                                                 | X                                                                                 | Knob          | HWⓈS-3STF22N9                                                                                            | —                                                                                                         | —                                                                                                           | —                                                                                                           |
|               | 2        | X                                                                                 | 0                                                                                 | 0                                                                                 |               |                                                                                                          |                                                                                                           |                                                                                                             |                                                                                                             |
|               | 3        | X                                                                                 | X                                                                                 | 0                                                                                 |               |                                                                                                          |                                                                                                           |                                                                                                             |                                                                                                             |
|               | 4        | 0                                                                                 | 0                                                                                 | X                                                                                 |               |                                                                                                          |                                                                                                           |                                                                                                             |                                                                                                             |
| 4NO           | 1        | X                                                                                 | 0                                                                                 | 0                                                                                 | Knob          | HWⓈS-3TF40                                                                                               | HWⓈS-31TF40                                                                                               | HWⓈS-32TF40                                                                                                 | HWⓈS-33TF40                                                                                                 |
|               | 2        | 0                                                                                 | 0                                                                                 | X                                                                                 |               |                                                                                                          |                                                                                                           |                                                                                                             |                                                                                                             |
|               | 3        | X                                                                                 | 0                                                                                 | 0                                                                                 |               |                                                                                                          |                                                                                                           |                                                                                                             |                                                                                                             |
|               | 4        | 0                                                                                 | 0                                                                                 | X                                                                                 |               |                                                                                                          |                                                                                                           |                                                                                                             |                                                                                                             |
| 4NO           | 1        | X                                                                                 | 0                                                                                 | 0                                                                                 | Knob          | HWⓈS-3STF40N2                                                                                            | —                                                                                                         | —                                                                                                           | —                                                                                                           |
|               | 2        | 0                                                                                 | X                                                                                 | X                                                                                 |               |                                                                                                          |                                                                                                           |                                                                                                             |                                                                                                             |
|               | 3        | X                                                                                 | 0                                                                                 | 0                                                                                 |               |                                                                                                          |                                                                                                           |                                                                                                             |                                                                                                             |
|               | 4        | 0                                                                                 | 0                                                                                 | X                                                                                 |               |                                                                                                          |                                                                                                           |                                                                                                             |                                                                                                             |
| 4NC           | 1        | 0                                                                                 | X                                                                                 | X                                                                                 | Knob          | HWⓈS-3TF04                                                                                               | HWⓈS-31TF04                                                                                               | HWⓈS-32TF04                                                                                                 | HWⓈS-33TF04                                                                                                 |
|               | 2        | X                                                                                 | X                                                                                 | 0                                                                                 |               |                                                                                                          |                                                                                                           |                                                                                                             |                                                                                                             |
|               | 3        | 0                                                                                 | X                                                                                 | X                                                                                 |               |                                                                                                          |                                                                                                           |                                                                                                             |                                                                                                             |
|               | 4        | X                                                                                 | X                                                                                 | 0                                                                                 |               |                                                                                                          |                                                                                                           |                                                                                                             |                                                                                                             |


#### ⑤ Bezel Type

| Type    | Code |
|---------|------|
| Plastic | 1    |
| Metal   | 4    |

1. In place of ⊙ enter 1 for plastic bezel or 4 for metal bezel.
2. Knob operator includes black knob/lever operator includes black lever.
3. Three position operator is available with three different cams.  
HW⊙S-3T: Maintained (standard cam)  
HW⊙S-3ST: Maintained (S cam)  
HW⊙S-3JT: Maintained (J cam)
4. Operator cams are color coded (white=standard cam, red=S cam, black=J cam).
5. For nameplates, see page 596.
6. For contact assembly part numbers, see page 600.

7. All assembled part numbers in catalog include standard fingersafe (HW-F...) contacts.
8. Assembled units with spring-up terminals (HW-G...) can be ordered by removing an "F" from the part number (Ex. HW1B-M1F11-R becomes HW1B-M111-R).
9. Units with exposed screw terminals (HW-C...) must be ordered as sub-components.
10. Standard color for knob and lever is black.
11. Optional colors available for lever type. Must order in components. See next page for part numbers.
12. Additional contact configurations available (up to 6 total contacts).
13. For Truth Tables see page 608.

## Part Number Structure

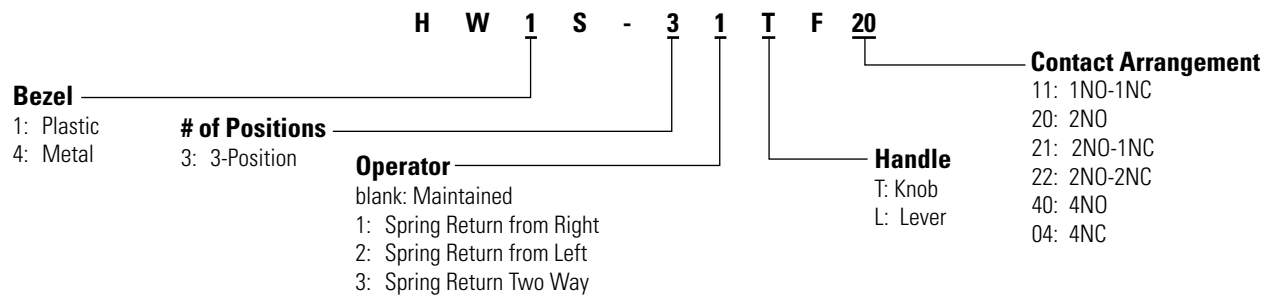

## Selector Switches 3-Position (Replacement Parts)

|                |   |                  |   |                   |   |                    |   |          |   |                |
|----------------|---|------------------|---|-------------------|---|--------------------|---|----------|---|----------------|
| Contact Blocks | + | Mounting Adaptor | + | Safety Lever Lock | + | Anti-Rotation Ring | + | Operator | = | Completed Unit |
|----------------|---|------------------|---|-------------------|---|--------------------|---|----------|---|----------------|



## Contact Blocks

| Style                                                                              | Contacts                   | 1NO                  | 1NC                  |
|------------------------------------------------------------------------------------|----------------------------|----------------------|----------------------|
|  | Standard Fingersafe (IP20) | HW-F10               | HW-F01               |
|                                                                                    |                            | HW-F10R (early make) | HW-F01R (late break) |
|                                                                                    | Spring-Up Terminal         | HW-G10               | HW-G01               |
|                                                                                    |                            | HW-G10R (early make) | HW-G01R (late break) |
|                                                                                    | Exposed Screw Terminal     | HW-C10               | HW-C01               |
|                                                                                    |                            | HW-C10R (early make) | HW-C01R (late break) |
|                                                                                    | Dummy Block                | TW-DB                |                      |

## Contact Block Mounting Adaptor

| Style                                                                               | Part Number |
|-------------------------------------------------------------------------------------|-------------|
|  | HW-CB2C     |



- Used to mount contact blocks to operator (first pair only).
- IEC strongly recommends using the safety lever lock to prevent heavy vibration or maintenance personnel from inadvertently unlocking contacts.

## Safety Lever Lock

| Style                                                                               | Part Number |
|-------------------------------------------------------------------------------------|-------------|
|  | HW9Z-LS     |

## Anti-Rotation Ring

| Style                                                                             | Part Number |
|-----------------------------------------------------------------------------------|-------------|
|  | HW9Z-RL     |



Use with notched panel cutout to prevent unit rotation.

## Operators

| Style                                                                               | Description                             | Handle | Plastic Bezel | Metal Bezel |
|-------------------------------------------------------------------------------------|-----------------------------------------|--------|---------------|-------------|
|  | Maintained (standard cam)               | Knob   | HW1S-3T       | HW4S-3T     |
|                                                                                     |                                         | Lever  | HW1S-3        | HW4S-3      |
|  | Maintained (S cam)                      | Knob   | HW1S-3ST      | HW4S-3ST    |
|                                                                                     |                                         | Knob   | HW1S-3JT      | HW4S-3JT    |
|  | Spring Return from Right (standard cam) | Knob   | HW1S-31T      | HW4S-31T    |
|                                                                                     |                                         | Lever  | HW1S-31       | HW4S-31     |
|  | Spring Return from Left (standard cam)  | Knob   | HW1S-32T      | HW4S-32T    |
|                                                                                     |                                         | Lever  | HW1S-32       | HW4S-32     |
|  | 2-Way Spring Return (standard cam)      | Knob   | HW1S-33T      | HW4S-33T    |
|                                                                                     |                                         | Lever  | HW1S-33       | HW4S-33     |



- Knob operator comes with black handle.
- Three position knob operator is available with three different cams.
- Operator cams are color coded (white=standard cam, red=S cam, black=J cam).
- To order lever type, lever and inserts must be ordered separately, along with lever operator. See part numbers below.

## Levers &amp; Inserts

| Style                                                                               | Part Number                 |
|-------------------------------------------------------------------------------------|-----------------------------|
|  | Lever ASWHHL-①              |
|  | Lever Color Insert TW-HC1-① |



Standard lever color is black. Standard insert color is white.

## ① Handle/Insert Color Code

| Color  | Code | Color              | Code |
|--------|------|--------------------|------|
| Black* | B    | Red                | R    |
| Blue   | S    | Yellow             | Y    |
| Green  | G    | White <sup>†</sup> | W    |



- \* Lever color inserts not available in black.
- <sup>†</sup>Lever not available in white.

Selector Switches 4- & 5-Position (Assembled)



4-Position Selector Switches

| Contact       | Mounting | Operator Position |   |   |   | Handle        | Maintained                     |
|---------------|----------|-------------------|---|---|---|---------------|--------------------------------|
|               |          | 1                 | 2 | 3 | 4 |               |                                |
|               |          |                   |   |   |   |               |                                |
| Operator Only |          |                   |   |   |   | Knob<br>Lever | HWⓈ S-4T<br>HWⓈ S-4L           |
| 1NO-<br>2NC   | 1        | X                 | 0 | 0 | 0 | Knob<br>Lever | HWⓈ S-4TF12<br>HWⓈ S-4LF12     |
|               | 2        | 0                 | X | 0 | 0 |               |                                |
|               | 3        | 0                 | 0 | X | 0 |               |                                |
|               | 4        | 0                 | 0 | 0 | 0 |               |                                |
| 1NO-<br>3NC   | 1        | 0                 | X | X | X | Knob<br>Lever | HWⓈ S-4TF13N6<br>HWⓈ S-4LF13N6 |
|               | 2        | 0                 | X | 0 | 0 |               |                                |
|               | 3        | 0                 | 0 | X | 0 |               |                                |
|               | 4        | 0                 | 0 | 0 | X |               |                                |
| 2NO-<br>2NC   | 1        | X                 | 0 | 0 | 0 | Knob<br>Lever | HWⓈ S-4TF22N3<br>HWⓈ S-4LF22N3 |
|               | 2        | 0                 | X | 0 | 0 |               |                                |
|               | 3        | 0                 | 0 | X | 0 |               |                                |
|               | 4        | 0                 | 0 | 0 | X |               |                                |

5-Position Selector Switch

| Contact       | Mounting | Operator Position |   |   |   |   | Handle        | Maintained                     |
|---------------|----------|-------------------|---|---|---|---|---------------|--------------------------------|
|               |          | 1                 | 2 | 3 | 4 | 5 |               |                                |
|               |          |                   |   |   |   |   |               |                                |
| Operator Only |          |                   |   |   |   |   | Knob<br>Lever | HWⓈ S-5T<br>HWⓈ S-5L           |
| 2NO-<br>2NC   | 1        | X                 | 0 | 0 | 0 | 0 | Knob<br>Lever | HWⓈ S-5TF22N3<br>HWⓈ S-5LF22N3 |
|               | 2        | 0                 | X | 0 | 0 | 0 |               |                                |
|               | 3        | 0                 | 0 | 0 | X | 0 |               |                                |
|               | 4        | 0                 | 0 | 0 | 0 | X |               |                                |




- 1. In place of Ⓢ enter 1 for plastic bezel or 4 for metal bezel.
- 2. Knob operator includes black knob/lever operator includes black lever.
- 3. For nameplates, see page 596.
- 4. For contact assembly part numbers, see page 600.
- 5. Five position circuit cannot be made to make five independent contact closures.
- 6. All assembled part numbers in catalog include standard fingersafe (HW-F...) contacts.
- 7. Assembled units with spring-up terminals (HW-G...) can be ordered by removing an "F" from the part number (Ex. HW1B-M1F11-R becomes HW1B-M111-R).
- 8. Units with exposed screw terminals (HW-C...) must be ordered as sub-components.
- 9. Standard color for knob and lever is black.
- 10. Optional colors available for lever type. Must order in components. See next page for part numbers.
- 11. Additional contact configurations available (up to 6 total contacts).
- 12. For Truth Tables see page 608.

Ⓢ Bezel Type

| Type    | Code |
|---------|------|
| Plastic | 1    |
| Metal   | 4    |

## Part Number Structure

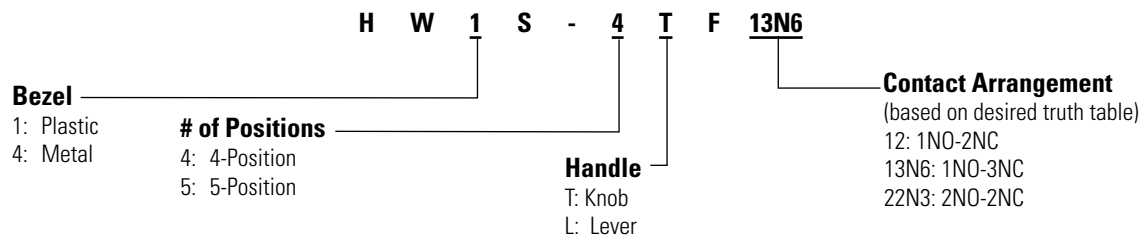

## Selector Switches 4- &amp; 5-Position (Replacement Parts)

Contact Blocks + Mounting Adaptor + Safety Lever Lock + Anti-Rotation Ring + Operator = Completed Unit



## Contact Blocks

| Style                                                                               | Contacts                   | 1NO                  | 1NC                  |
|-------------------------------------------------------------------------------------|----------------------------|----------------------|----------------------|
|   | Standard Fingersafe (IP20) | HW-F10               | HW-F01               |
|                                                                                     |                            | HW-F10R (early make) | HW-F01R (late break) |
|  | Spring-Up Terminal         | HW-G10               | HW-G01               |
|                                                                                     |                            | HW-G10R (early make) | HW-G01R (late break) |
|  | Exposed Screw Terminal     | HW-C10               | HW-C01               |
|                                                                                     |                            | HW-C10R (early make) | HW-C01R (late break) |
|  | Dummy Block                | TW-DB                |                      |

## Anti-Rotation Ring

| Style                                                                             | Part Number |
|-----------------------------------------------------------------------------------|-------------|
|  | HW9Z-RL     |



Use with notched panel cutout to prevent unit rotation.

## Operators

| Style                                                                               | Position | Description | Handle | Plastic Bezel | Metal Bezel |
|-------------------------------------------------------------------------------------|----------|-------------|--------|---------------|-------------|
|  | 4        | Maintained  | Knob   | HW1S-4T       | HW4S-4T     |
|                                                                                     |          |             | Lever  | HW1S-4        | HW4S-4      |
|  | 5        | Maintained  | Knob   | HW1S-5T       | HW4S-5T     |
|                                                                                     |          |             | Lever  | HW1S-5        | HW4S-5      |



- Knob operator comes with black handle.
- To order lever type, lever and inserts must be ordered separately, along with lever operator. See part numbers below.

## Contact Block Mounting Adaptor

| Style                                                                               | Part Number |
|-------------------------------------------------------------------------------------|-------------|
|  | HW-CB2C     |



- Used to mount contact blocks to operator (first pair only).
- IEEC strongly recommends using the safety lever lock to prevent heavy vibration or maintenance personnel from inadvertently unlocking contacts.

## Safety Lever Lock

| Style                                                                               | Part Number |
|-------------------------------------------------------------------------------------|-------------|
|  | HW9Z-LS     |

## Levers &amp; Inserts

| Style                                                                               | Part Number |
|-------------------------------------------------------------------------------------|-------------|
|  | ASWHHL-①    |
|  | TW-HC1-①    |



Standard lever color is black. Standard insert color is white.

## ① Handle/Insert Color Code

| Color  | Code |
|--------|------|
| Black* | B    |
| Blue   | S    |
| Green  | G    |
| Red    | R    |
| Yellow | Y    |
| White† | W    |



- \* Lever color inserts not available in black.
- † Lever not available in white.

Key Switches 2-Position (Assembled)



2-Position Key Switches

| Contact       | Mounting | Operator Position                                                                 |                                                                                   | Maintained                                                                        | Spring Return from Right                                                          |
|---------------|----------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
|               |          |  |  |  |  |
| Operator Only |          |                                                                                   |                                                                                   | HW⊙K-2A                                                                           | HW⊙K-21B                                                                          |
| 1NO           | 1        | 0                                                                                 | X                                                                                 | HW⊙K-2AF10                                                                        | HW⊙K-21BF10                                                                       |
| 1NO-1NC       | 1        | 0                                                                                 | X                                                                                 | HW⊙K-2AF11                                                                        | HW⊙K-21BF11                                                                       |
|               | 2        | X                                                                                 | 0                                                                                 |                                                                                   |                                                                                   |
| 2NO           | 1        | 0                                                                                 | X                                                                                 | HW⊙K-2AF20                                                                        | HW⊙K-21BF20                                                                       |
|               | 2        | 0                                                                                 | X                                                                                 |                                                                                   |                                                                                   |
| 2NO-2NC       | 1        | 0                                                                                 | X                                                                                 | HW⊙K-2AF22                                                                        | HW⊙K-21BF22                                                                       |
|               | 2        | X                                                                                 | 0                                                                                 |                                                                                   |                                                                                   |
|               | 3        | 0                                                                                 | X                                                                                 |                                                                                   |                                                                                   |
|               | 4        | X                                                                                 | 0                                                                                 |                                                                                   |                                                                                   |

- 
1. In place of ⊙ enter 1 for plastic bezel or 4 for metal bezel.

2. Key is removable in all maintained positions. Other key removable options available.

3. Two keys are supplied with all switches.

4. All standard operators are keyed alike.

5. Other key removable options available. See table below

6. For nameplates, see page 596.

7. For contact assembly part numbers, see page 600.

8. Key is retained in "Spring Return" position.

9. All assembled part numbers in catalog include standard fingersafe (HW-F...) contacts.

10. Assembled units with spring-up terminals (HW-G...) can be ordered by removing an "F" from the part number (Ex. HW1B-M1F11-R becomes HW1B-M111-R).

11. Units with exposed screw terminals (HW-C...) must be ordered as sub-components.

12. Additional contact configurations available (up to 6 total contacts).

13. For Truth Tables see page 600.


Ⓢ Bezel Type

| Type    | Code |
|---------|------|
| Plastic | 1    |
| Metal   | 4    |

Key Removable Option Codes

| Code | Description                                                   |
|------|---------------------------------------------------------------|
| A    | Key not retained in any position (removable in all positions) |
| B    | Key retained in right position only                           |
| C    | Key retained in left position only                            |

## Part Number Structure

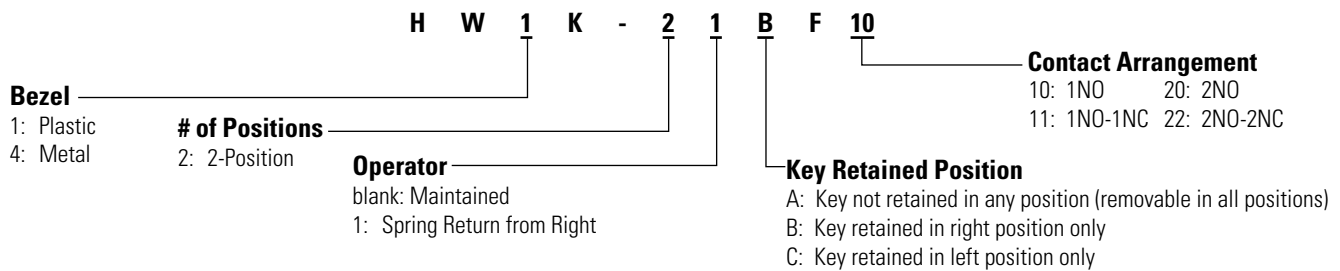

## Key Switches 2-Position (Replacement Parts)

Contact Assembly + Mounting Adaptor + Safety Lever Lock + Anti-Rotation Ring + Operator = Completed Unit



## Contact Blocks

| Style | Contacts                   | 1NO                  | 1NC                  |
|-------|----------------------------|----------------------|----------------------|
|       | Standard Fingersafe (IP20) | HW-F10               | HW-F01               |
|       |                            | HW-F10R (early make) | HW-F01R (late break) |
|       | Spring-Up Terminal         | HW-G10               | HW-G01               |
|       |                            | HW-G10R (early make) | HW-G01R (late break) |
|       | Exposed Screw Terminal     | HW-C10               | HW-C01               |
|       |                            | HW-C10R (early make) | HW-C01R (late break) |
|       | Dummy Block                | TW-DB                |                      |

## Safety Lever Lock

| Style | Part Number |
|-------|-------------|
|       | HW9Z-LS     |

## Anti-Rotation Ring

| Style | Part Number |
|-------|-------------|
|       | HW9Z-RL     |



Use with notched panel cutout to prevent unit rotation.

## Operators

| Style | Description                        | Plastic Bezel | Metal Bezel |
|-------|------------------------------------|---------------|-------------|
|       | Maintained                         | HW1K-2A       | HW4K-2A     |
|       | Maintained, key removed left only  | HW1K-2B       | HW4K-2B     |
|       | Spring Return from Right           | HW1K-21B      | HW4K-21B    |
|       | Maintained, key removed right only | HW1K-2C       | HW4K-2C     |



- Operator includes two keys.
- All standard operators are keyed alike.

## Contact Block Mounting Adaptor

| Style | Part Number |
|-------|-------------|
|       | HW-CB2C     |



- Used to mount contact blocks to operator (first pair only).
- IDEC strongly recommends using the safety lever lock to prevent heavy vibration or maintenance personnel from inadvertently unlocking contacts.

## Key Switches 3-Position (Assembled)



3-Position Key Switches

| Contact       | Mounting | Operator Position                                                                 |                                                                                   |                                                                                   | Maintained                                                                        | Spring Return from Right                                                          | Spring Return from Left                                                           | Spring Return Two Way                                                             |
|---------------|----------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
|               |          |  |  |  |  |  |  |  |
| Operator Only |          |                                                                                   |                                                                                   |                                                                                   | HW⊙K-3A*                                                                          | HW⊙K-31B                                                                          | HW⊙K-32C                                                                          | HW⊙K-33D                                                                          |
| 1NO-1NC       | 1        | 0                                                                                 | X                                                                                 | X                                                                                 | HW⊙K-3AF11                                                                        | HW⊙K-31BF11                                                                       | HW⊙K-32CF11                                                                       | HW⊙K-33DF11                                                                       |
|               | 2        | 0                                                                                 | 0                                                                                 | X                                                                                 |                                                                                   |                                                                                   |                                                                                   |                                                                                   |
| 2NO           | 1        | X                                                                                 | 0                                                                                 | 0                                                                                 | HW⊙K-3AF20                                                                        | HW⊙K-31BF20                                                                       | HW⊙K-32CF20                                                                       | HW⊙K-33DF20                                                                       |
|               | 2        | 0                                                                                 | 0                                                                                 | X                                                                                 |                                                                                   |                                                                                   |                                                                                   |                                                                                   |
| 2NC           | 1        | 0                                                                                 | X                                                                                 | X                                                                                 | HW⊙K-3AF02                                                                        | HW⊙K-31BF02                                                                       | HW⊙K-32CF02                                                                       | HW⊙K-33DF02                                                                       |
|               | 2        | X                                                                                 | X                                                                                 | 0                                                                                 |                                                                                   |                                                                                   |                                                                                   |                                                                                   |
| 2NO-1NC       | 1        | X                                                                                 | 0                                                                                 | 0                                                                                 | HW⊙K-3JAF21N1                                                                     | —                                                                                 | —                                                                                 | —                                                                                 |
|               | 2        | 0                                                                                 | 0                                                                                 | X                                                                                 |                                                                                   |                                                                                   |                                                                                   |                                                                                   |
|               | 3        | 0                                                                                 | X                                                                                 | 0                                                                                 |                                                                                   |                                                                                   |                                                                                   |                                                                                   |
| 2NO-2NC       | 1        | X                                                                                 | 0                                                                                 | 0                                                                                 | HW⊙K-3AF22                                                                        | HW⊙K-31BF22                                                                       | HW⊙K-32CF22                                                                       | HW⊙K-33DF22                                                                       |
|               | 2        | 0                                                                                 | 0                                                                                 | X                                                                                 |                                                                                   |                                                                                   |                                                                                   |                                                                                   |
|               | 3        | 0                                                                                 | X                                                                                 | X                                                                                 |                                                                                   |                                                                                   |                                                                                   |                                                                                   |
|               | 4        | X                                                                                 | X                                                                                 | 0                                                                                 |                                                                                   |                                                                                   |                                                                                   |                                                                                   |
| 2NO-2NC       | 1        | 0                                                                                 | 0                                                                                 | X                                                                                 | HW⊙K-3SAF22N9                                                                     | —                                                                                 | —                                                                                 | —                                                                                 |
|               | 2        | X                                                                                 | 0                                                                                 | 0                                                                                 |                                                                                   |                                                                                   |                                                                                   |                                                                                   |
|               | 3        | X                                                                                 | X                                                                                 | 0                                                                                 |                                                                                   |                                                                                   |                                                                                   |                                                                                   |
|               | 4        | 0                                                                                 | 0                                                                                 | X                                                                                 |                                                                                   |                                                                                   |                                                                                   |                                                                                   |
| 4NO           | 1        | X                                                                                 | 0                                                                                 | 0                                                                                 | HW⊙K-3AF40                                                                        | HW⊙K-31BF40                                                                       | HW⊙K-32CF40                                                                       | HW⊙K-33DF40                                                                       |
|               | 2        | 0                                                                                 | 0                                                                                 | X                                                                                 |                                                                                   |                                                                                   |                                                                                   |                                                                                   |
|               | 3        | X                                                                                 | 0                                                                                 | 0                                                                                 |                                                                                   |                                                                                   |                                                                                   |                                                                                   |
|               | 4        | 0                                                                                 | 0                                                                                 | X                                                                                 |                                                                                   |                                                                                   |                                                                                   |                                                                                   |
| 4NO           | 1        | X                                                                                 | 0                                                                                 | 0                                                                                 | HW⊙K-3SAF40N2                                                                     | —                                                                                 | —                                                                                 | —                                                                                 |
|               | 2        | 0                                                                                 | X                                                                                 | X                                                                                 |                                                                                   |                                                                                   |                                                                                   |                                                                                   |
|               | 3        | X                                                                                 | 0                                                                                 | 0                                                                                 |                                                                                   |                                                                                   |                                                                                   |                                                                                   |
|               | 4        | 0                                                                                 | 0                                                                                 | X                                                                                 |                                                                                   |                                                                                   |                                                                                   |                                                                                   |
| 4NC           | 1        | 0                                                                                 | X                                                                                 | X                                                                                 | HW⊙K-3AF04                                                                        | HW⊙K-31BF04                                                                       | HW⊙K-32CF04                                                                       | HW⊙K-33DF04                                                                       |
|               | 2        | X                                                                                 | X                                                                                 | 0                                                                                 |                                                                                   |                                                                                   |                                                                                   |                                                                                   |
|               | 3        | 0                                                                                 | X                                                                                 | X                                                                                 |                                                                                   |                                                                                   |                                                                                   |                                                                                   |
|               | 4        | X                                                                                 | X                                                                                 | 0                                                                                 |                                                                                   |                                                                                   |                                                                                   |                                                                                   |

### Ⓢ Bezel Type

| Type    | Code |
|---------|------|
| Plastic | 1    |
| Metal   | 4    |




- In place of Ⓢ enter 1 for plastic bezel or 4 for metal bezel.
- Key is removable in all maintained positions. Other key removable options available.
- Two keys are supplied with all switches.
- All standard operators are keyed alike.
- Other key removable options available. See table to the right.
- \* Operator is available with three different cams.  
HW⊙K-3A: Maintained (standard cam)  
HW⊙K-3SA: Maintained (Cam S)  
HW⊙K-3JA: Maintained (Cam J)
- For nameplates, see page 596.
- For contact assembly part numbers, see page 600.
- All assembled part numbers in catalog include standard fingersafe (HW-F...) contacts.
- Assembled units with spring-up terminals (HW-G...) can be ordered by removing an "F" from the part number (Ex. HW1B-M1F11-R becomes HW1B-M111-R).
- Units with exposed screw terminals (HW-C...) must be ordered as sub-components.
- Additional contact configurations available (up to 6 total contacts).
- For Truth Tables see page 608.

### Key Removable Option Codes

| Code | Description                                                   |
|------|---------------------------------------------------------------|
| A    | Key not retained in any position (removable in all positions) |
| B    | Key retained in right position only                           |
| C    | Key retained in left position only                            |
| D    | Key retained in left and right (3 position only)              |
| E    | Key retained in center only (3 position only)                 |
| G    | Key retained right and center (3 position only)               |
| H    | Key retained left and center (3 position only)                |

## Part Number Structure

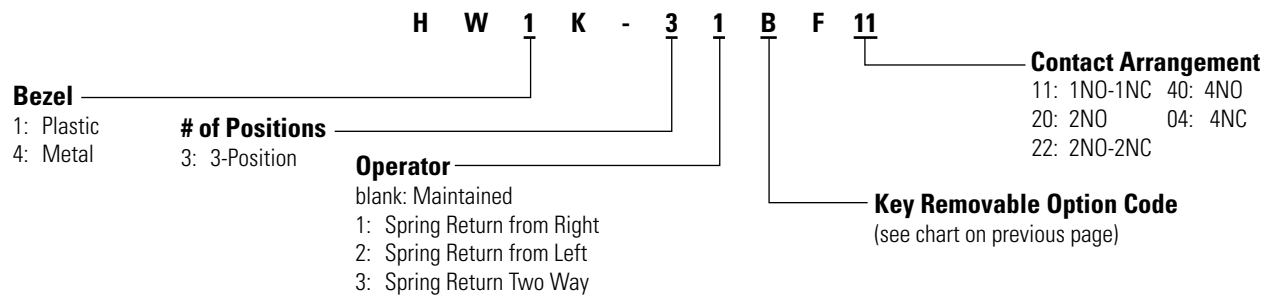

## Key Switches 3-Position (Replacement Parts)

|                  |   |                  |   |                   |   |                    |   |          |   |                |
|------------------|---|------------------|---|-------------------|---|--------------------|---|----------|---|----------------|
| Contact Assembly | + | Mounting Adaptor | + | Safety Lever Lock | + | Anti-Rotation Ring | + | Operator | = | Completed Unit |
|------------------|---|------------------|---|-------------------|---|--------------------|---|----------|---|----------------|



## Contact Blocks

| Style | Contacts                   | 1NO                  | 1NC                  |
|-------|----------------------------|----------------------|----------------------|
|       | Standard Fingersafe (IP20) | HW-F10               | HW-F01               |
|       |                            | HW-F10R (early make) | HW-F01R (late break) |
|       | Spring-Up Terminal         | HW-G10               | HW-G01               |
|       |                            | HW-G10R (early make) | HW-G01R (late break) |
|       | Exposed Screw Terminal     | HW-C10               | HW-C01               |
|       |                            | HW-C10R (early make) | HW-C01R (late break) |
|       | Dummy Block                | TW-DB                |                      |

## Safety Lever Lock

| Style | Part Number |
|-------|-------------|
|       | HW9Z-LS     |

## Anti-Rotation Ring

| Style | Part Number |
|-------|-------------|
|       | HW9Z-RL     |



Use with notched panel cutout to prevent unit rotation.

## Operators

| Style | Description                             | Plastic Bezel | Metal Bezel |
|-------|-----------------------------------------|---------------|-------------|
|       | Maintained (standard cam)               | HW1K-3A       | HW4K-3A     |
|       | Maintained (S cam)                      | HW1K-3SA      | HW4K-3SA    |
|       | Maintained (J cam)                      | HW1K-3JA      | HW4K-3JA    |
|       | Spring Return from Right (standard cam) | HW1K-31B      | HW4K-31B    |
|       | Spring Return from Left (standard cam)  | HW1K-32C      | HW4K-32C    |
|       | 2-Way Spring Return (standard cam)      | HW1K-33D      | HW4K-33D    |



1. Operator includes two keys.
2. All standard operators are keyed alike.
3. Other key removable options available. See table on previous page.
4. Key not removable from spring-returned position

## Contact Block Mounting Adaptor

| Style | Part Number |
|-------|-------------|
|       | HW-CB2C     |



1. Used to mount contact blocks to operator (first pair only).
2. IDEC strongly recommends using the safety lever lock to prevent heavy vibration or maintenance personnel from inadvertently unlocking contacts.

## Illuminated Selector Switches 2-Position (Assembled)



### 2-Position Illuminated Selector Switches

| Style         |                  |                                                                                   |                                                                                   |              | Part Number                                                                       |                                                                                   |                          |
|---------------|------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--------------------------|
| Contact       | Mounting         | Operator Position                                                                 |                                                                                   | Type         | Maintained                                                                        |                                                                                   | Spring Return from Right |
|               |                  |  |  |              |  |  |                          |
| Operator Only |                  |                                                                                   |                                                                                   |              | HWⓄF-2②                                                                           |                                                                                   | HWⓄF-21②                 |
| 1NO-1NC       | 1<br>2           | O<br>X                                                                            | X<br>O                                                                            | Full Voltage |                                                                                   | HWⓄF-2F11Q④-②-③                                                                   | HWⓄF-21F11Q④-②-③         |
|               |                  |                                                                                   |                                                                                   | Transformer  | 120V                                                                              | HWⓄF-2F11H2④-②                                                                    | HWⓄF-21F11H2④-②          |
|               |                  |                                                                                   |                                                                                   |              | 240V                                                                              | HWⓄF-2F11M4④-②                                                                    | HWⓄF-21F11M4④-②          |
|               |                  |                                                                                   |                                                                                   |              | 480V                                                                              | HWⓄF-2F11T8④-②                                                                    | HWⓄF-21F11T8④-②          |
| 2NO           | 1<br>2           | O<br>O                                                                            | X<br>X                                                                            | Full Voltage |                                                                                   | HWⓄF-2F20Q④-②-③                                                                   | HWⓄF-21F20Q④-②-③         |
|               |                  |                                                                                   |                                                                                   | Transformer  | 120V                                                                              | HWⓄF-2F20H2④-②                                                                    | HWⓄF-21F20H2④-②          |
|               |                  |                                                                                   |                                                                                   |              | 240V                                                                              | HWⓄF-2F20M4④-②                                                                    | HWⓄF-21F20M4④-②          |
|               |                  |                                                                                   |                                                                                   |              | 480V                                                                              | HWⓄF-2F20T8④-②                                                                    | HWⓄF-21F20T8④-②          |
| 2NO-2NC       | 1<br>2<br>3<br>4 | O<br>X<br>O<br>X                                                                  | X<br>O<br>X<br>O                                                                  | Full Voltage |                                                                                   | HWⓄF-2F22Q④-②-③                                                                   | HWⓄF-21F22Q④-②-③         |
|               |                  |                                                                                   |                                                                                   | Transformer  | 120V                                                                              | HWⓄF-2F22H2④-②                                                                    | HWⓄF-21F22H2④-②          |
|               |                  |                                                                                   |                                                                                   |              | 240V                                                                              | HWⓄF-2F22M4④-②                                                                    | HWⓄF-21F22M4④-②          |
|               |                  |                                                                                   |                                                                                   |              | 480V                                                                              | HWⓄF-2F22T8④-②                                                                    | HWⓄF-21F22T8④-②          |



1. In place of ② specify Lens/LED color code.
2. In place of ③ specify Full Voltage code.
3. In place of ④ specify Lamp code.
4. In place of ⑤ enter 1 for plastic bezel or 4 for metal bezel.
5. For nameplates, see page 596.
6. For contact assembly part numbers, see page 600.
7. Light is independent of switch position.
8. All assembled part numbers in catalog include standard fingersafe (HW-F...) contacts.
9. Assembled units with spring-up terminals (HW-G...) can be ordered by removing an "F" from the part number (Ex. HW1B-M1F11-R becomes HW1B-M111-R).
10. Units with exposed screw terminals (HW-C...) must be ordered as sub-components.
11. **Yellow selector switch comes with white LED.**
12. Additional contact configurations available (up to 6 total contacts).
13. For Truth Tables see page 608.

#### ② Lens/LED Color Code

| Color  | Code |
|--------|------|
| Amber  | A    |
| Green  | G    |
| Red    | R    |
| Blue   | S    |
| White  | W    |
| Yellow | Y    |

#### ③ Full Voltage Code

| Full Voltage Models |      |
|---------------------|------|
| Voltage             | Code |
| 6VAC/DC             | 6V   |
| 12VAC/DC            | 12V  |
| 24VAC/DC            | 24V  |
| 120V AC (LED only)  | 120V |
| 240V AC (LED only)  | 240V |


#### ④ Lamp Code

| Lamp         | Code  |
|--------------|-------|
| Incandescent | Blank |
| LED          | D     |

#### ⑤ Bezel Code

| Type    | Code |
|---------|------|
| Plastic | 1    |
| Metal   | 4    |

## Part Number Structure

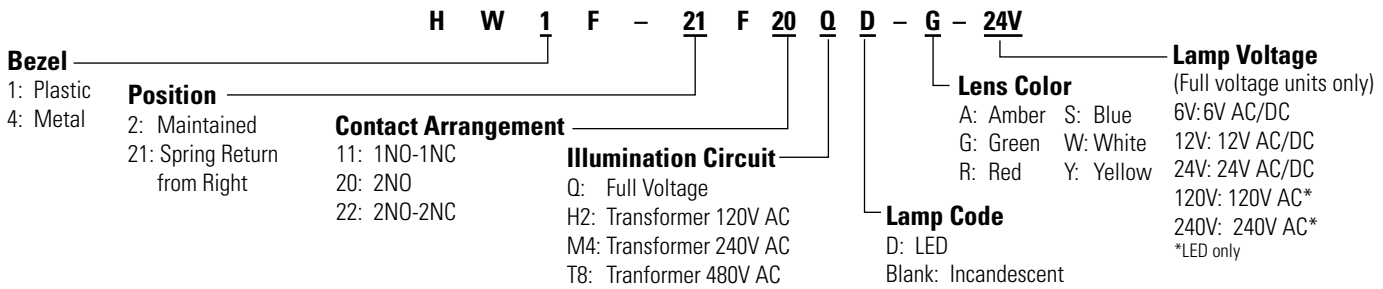

## Illuminated Selector Switches 2-Position (Replacement Parts)



\*Transformer not needed with full voltage models.

## Lamp Circuit Components

| Style                                   | Description                                                                                             | Terminals  | Part Number |
|-----------------------------------------|---------------------------------------------------------------------------------------------------------|------------|-------------|
| Lead Holder                             | For use with HW-CBL on all illuminated pushbutton units. One required for each deck (pair) of contacts. |            | HW-LH3      |
| Dummy Block with Full Voltage Adaptor   | For use with odd number of contacts.                                                                    | Fingersafe | HW-DA1FB    |
|                                         |                                                                                                         | Exposed    | HW-DA1B     |
|                                         |                                                                                                         | Spring Up  | HW-GA1      |
| Full Voltage Adaptor                    | For use with even number of contacts.                                                                   | Fingersafe | TW-DA1FB    |
|                                         |                                                                                                         | Exposed    | TW-DA1B     |
| Transformer Unit (6V secondary voltage) | 120VAC                                                                                                  | Fingersafe | TW-F126B    |
|                                         | 240VAC                                                                                                  |            | TW-F246B    |
|                                         | 480VAC                                                                                                  |            | TW-F486B    |
|                                         | 120V                                                                                                    | Spring Up  | HW-T126     |
|                                         | 240V                                                                                                    |            | HW-T246     |
|                                         | 480V                                                                                                    |            | HW-L486     |
|                                         | 120V                                                                                                    | Exposed    | TW-T126B    |
|                                         | 240V                                                                                                    |            | TW-T246B    |
|                                         | 480V                                                                                                    |            | TW-T486B    |
| DC-DC Converter                         | 110VDC                                                                                                  |            | HW-L16D     |

1. HW-GA1 "Dummy Block with full voltage adaptor" does not require the use of HW-LH3.  
2. DC-DC convertor features spring-up terminals.  
3. DC-DC convertor applicable voltage range 90-140V DC.

## Operators

| Style | Description              | Plastic Bezel | Metal Bezel |
|-------|--------------------------|---------------|-------------|
|       | Maintained               | HW1F-2        | HW4F-2      |
|       | Spring return from right | HW1F-21       | HW4F-21     |

Illuminated knobs must be ordered separately.

## Contact Blocks

| Style | Contacts                   | 1NO                            | 1NC                            |
|-------|----------------------------|--------------------------------|--------------------------------|
|       | Standard Fingersafe (IP20) | HW-F10<br>HW-F10R (early make) | HW-F01<br>HW-F01R (late break) |
|       | Spring-Up Terminal         | HW-G10<br>HW-G10R (early make) | HW-G01<br>HW-G01R (late break) |
|       | Exposed Screw Terminal     | HW-C10<br>HW-C10R (early make) | HW-C01<br>HW-C01R (late break) |

## Contact Block Mounting Adaptor

| Style | Part Number |
|-------|-------------|
|       | HW-CBL      |

1. Used to mount contact blocks to operator (first pair only).  
2. IDEC strongly recommends using the safety lever lock to prevent heavy vibration or maintenance personnel from inadvertently unlocking contacts.

## Safety Lever Lock

| Style | Part Number |
|-------|-------------|
|       | HW9Z-LS     |

## Illuminated Knob

| Appearance | Part Number |
|------------|-------------|
|            | HW9Z-FDY-⊙  |

In place of ⊙, specify the Color Code.

## ⊙ Lens/LED Color Code

| Color | Code | Color  | Code |
|-------|------|--------|------|
| Amber | A    | Blue   | S    |
| Green | G    | White  | W    |
| Red   | R    | Yellow | Y    |

## Anti-Rotation Ring

| Style | Part Number |
|-------|-------------|
|       | HW9Z-RL     |

Use with notched panel cutout to prevent unit rotation.

## Lamps

| Style | Voltage   | Part Number |
|-------|-----------|-------------|
|       | 6V AC/DC  | LSTD-6⊙     |
|       | 12V AC/DC | LSTD-1⊙     |
|       | 24V AC/DC | LSTD-2⊙     |
|       | 120V AC   | LSTD-H2⊙    |
|       | 240V AC   | LSTD-M4⊙    |
|       | 6V AC/DC  | IS-6        |
|       | 12V AC/DC | IS-12       |
|       | 24V AC/DC | IS-24       |

1. In place of ⊙, specify the LED Color Code.  
2. The LED contains a current-limiting resistor and reverse polarity protection diodes.  
3. Use white LED for yellow lens. Yellow LED not available.

### Illuminated Selector Switches 3-Position (Assembled)



#### 3-Position Illuminated Selector Switches

| Style         |                  |                                                                                   |                                                                                   |                                                                                   | Part Number  |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                    |
|---------------|------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------|
| Contact       | Mounting         | Operator Position                                                                 |                                                                                   |                                                                                   | Type         | Maintained                                                                        | Spring Return from Right                                                          | Spring Return from Left                                                           | Spring Return Two-Way                                                             |                                    |
|               |                  |  |  |  |              |  |  |  |  |                                    |
| Operator Only |                  |                                                                                   |                                                                                   |                                                                                   |              | HWⓄF-3②                                                                           | HWⓄF-31②                                                                          | HWⓄF-32②                                                                          | HWⓄF-33②                                                                          |                                    |
| 1NO-1NC       | 1<br>2           | 0<br>0                                                                            | X<br>0                                                                            | X<br>X                                                                            | Full Voltage | HWⓄF-3F11Q④-②-③                                                                   | HWⓄF-31F11Q④-②-③                                                                  | HWⓄF-32F11Q④-②-③                                                                  | HWⓄF-33F11Q④-②-③                                                                  |                                    |
|               |                  |                                                                                   |                                                                                   |                                                                                   | Transformer  | 120V                                                                              | HWⓄF-3F11H2④-②                                                                    | HWⓄF-31F11H2④-②                                                                   | HWⓄF-32F11H2④-②                                                                   | HWⓄF-33F11H2④-②                    |
|               |                  |                                                                                   |                                                                                   |                                                                                   |              | 240V<br>480V                                                                      | HWⓄF-3F11M4④-②<br>HWⓄF-3F11T8④-②                                                  | HWⓄF-31F11M4④-②<br>HWⓄF-31F11T8④-②                                                | HWⓄF-32F11M4④-②<br>HWⓄF-32F11T8④-②                                                | HWⓄF-33F11M4④-②<br>HWⓄF-33F11T8④-② |
| 2NO           | 1<br>2           | 0<br>0                                                                            | X<br>0                                                                            | 0<br>X                                                                            | Full Voltage | HWⓄF-3F20Q④-②-③                                                                   | HWⓄF-31F20Q④-②-③                                                                  | HWⓄF-32F20Q④-②-③                                                                  | HWⓄF-33F20Q④-②-③                                                                  |                                    |
|               |                  |                                                                                   |                                                                                   |                                                                                   | Transformer  | 120V                                                                              | HWⓄF-3F20H2④-②                                                                    | HWⓄF-31F20H2④-②                                                                   | HWⓄF-32F20H2④-②                                                                   | HWⓄF-33F20H2④-②                    |
|               |                  |                                                                                   |                                                                                   |                                                                                   |              | 240V<br>480V                                                                      | HWⓄF-3F20M4④-②<br>HWⓄF-3F20T8④-②                                                  | HWⓄF-31F20M4④-②<br>HWⓄF-31F20T8④-②                                                | HWⓄF-32F20M4④-②<br>HWⓄF-32F20T8④-②                                                | HWⓄF-33F20M4④-②<br>HWⓄF-33F20T8④-② |
| 2NC           | 1<br>2           | 0<br>X                                                                            | X<br>X                                                                            | X<br>0                                                                            | Full Voltage | HWⓄF-3F02Q④-②-③                                                                   | HWⓄF-31F02Q④-②-③                                                                  | HWⓄF-32F02Q④-②-③                                                                  | HWⓄF-33F02Q④-②-③                                                                  |                                    |
|               |                  |                                                                                   |                                                                                   |                                                                                   | Transformer  | 120V                                                                              | HWⓄF-3F02H2④-②                                                                    | HWⓄF-31F02H2④-②                                                                   | HWⓄF-32F02H2④-②                                                                   | HWⓄF-33F02H2④-②                    |
|               |                  |                                                                                   |                                                                                   |                                                                                   |              | 240V<br>480V                                                                      | HWⓄF-3F02M4④-②<br>HWⓄF-3F02T8④-②                                                  | HWⓄF-31F02M4④-②<br>HWⓄF-31F02T8④-②                                                | HWⓄF-32F02M4④-②<br>HWⓄF-32F02T8④-②                                                | HWⓄF-33F02M4④-②<br>HWⓄF-33F02T8④-② |
| 2NO-2NC       | 1<br>2<br>3<br>4 | X<br>0<br>0<br>X                                                                  | 0<br>0<br>X<br>X                                                                  | 0<br>X<br>X<br>0                                                                  | Full Voltage | HWⓄF-3F22Q④-②-③                                                                   | HWⓄF-31F22Q④-②-③                                                                  | HWⓄF-32F22Q④-②-③                                                                  | HWⓄF-33F22Q④-②-③                                                                  |                                    |
|               |                  |                                                                                   |                                                                                   |                                                                                   | Transformer  | 120V                                                                              | HWⓄF-3F22H2④-②                                                                    | HWⓄF-31F22H2④-②                                                                   | HWⓄF-32F22H2④-②                                                                   | HWⓄF-33F22H2④-②                    |
|               |                  |                                                                                   |                                                                                   |                                                                                   |              | 240V<br>480V                                                                      | HWⓄF-3F22M4④-②<br>HWⓄF-3F22T8④-②                                                  | HWⓄF-31F22M4④-②<br>HWⓄF-31F22T8④-②                                                | HWⓄF-32F22M4④-②<br>HWⓄF-32F22T8④-②                                                | HWⓄF-33F22M4④-②<br>HWⓄF-33F22T8④-② |
| 4NO           | 1<br>2<br>3<br>4 | X<br>0<br>X<br>0                                                                  | 0<br>0<br>0<br>0                                                                  | 0<br>X<br>0<br>X                                                                  | Full Voltage | HWⓄF-3F40Q④-②-③                                                                   | HWⓄF-31F40Q④-②-③                                                                  | HWⓄF-32F40Q④-②-③                                                                  | HWⓄF-33F40Q④-②-③                                                                  |                                    |
|               |                  |                                                                                   |                                                                                   |                                                                                   | Transformer  | 120V                                                                              | HWⓄF-3F40H2④-②                                                                    | HWⓄF-31F40H2④-②                                                                   | HWⓄF-32F40H2④-②                                                                   | HWⓄF-33F40H2④-②                    |
|               |                  |                                                                                   |                                                                                   |                                                                                   |              | 240V<br>480V                                                                      | HWⓄF-3F40M4④-②<br>HWⓄF-3F40T8④-②                                                  | HWⓄF-31F40M4④-②<br>HWⓄF-31F40T8④-②                                                | HWⓄF-32F40M4④-②<br>HWⓄF-32F40T8④-②                                                | HWⓄF-33F40M4④-②<br>HWⓄF-33F40T8④-② |
| 4NC           | 1<br>2<br>3<br>4 | 0<br>X<br>0<br>X                                                                  | X<br>X<br>X<br>X                                                                  | X<br>0<br>X<br>0                                                                  | Full Voltage | HWⓄF-3F04Q④-②-③                                                                   | HWⓄF-31F04Q④-②-③                                                                  | HWⓄF-32F04Q④-②-③                                                                  | HWⓄF-33F04Q④-②-③                                                                  |                                    |
|               |                  |                                                                                   |                                                                                   |                                                                                   | Transformer  | 120V                                                                              | HWⓄF-3F04H2④-②                                                                    | HWⓄF-31F04H2④-②                                                                   | HWⓄF-32F04H2④-②                                                                   | HWⓄF-33F04H2④-②                    |
|               |                  |                                                                                   |                                                                                   |                                                                                   |              | 240V<br>480V                                                                      | HWⓄF-3F04M4④-②<br>HWⓄF-3F04T8④-②                                                  | HWⓄF-31F04M4④-②<br>HWⓄF-31F04T8④-②                                                | HWⓄF-32F04M4④-②<br>HWⓄF-32F04T8④-②                                                | HWⓄF-33F04M4④-②<br>HWⓄF-33F04T8④-② |



- In place of ② specify Lens/LED color code.
- In place of ③ specify Full Voltage code.
- In place of ④ specify Lamp code.
- In place of ⑤ enter 1 for plastic bezel or 4 for metal bezel.
- For nameplates, see page 596.
- For contact assembly part numbers, see page 600.
- Light is independent of switch position.
- All assembled part numbers in catalog include standard fingersafe (HW-F...) contacts.
- Assembled units with spring-up terminals (HW-G...) can be ordered by removing an "F" from the part number (Ex. HW1B-M1F11-R becomes HW1B-M111-R).
- Units with exposed screw terminals (HW-C...) must be ordered as sub-components.
- 11. Yellow selector switch comes with white LED.**
- Additional contact configurations available (up to 6 total contacts).
- For Truth Tables see page 608.

#### ② Lens/LED Color

| Color  | Code |
|--------|------|
| Amber  | A    |
| Green  | G    |
| Red    | R    |
| Blue   | S    |
| White  | W    |
| Yellow | Y    |

#### ③ Full Voltage Code

| Full Voltage Models |      |
|---------------------|------|
| Voltage             | Code |
| 6VAC/DC             | 6V   |
| 12VAC/DC            | 12V  |
| 24VAC/DC            | 24V  |
| 120V AC (LED only)  | 120V |
| 240V AC (LED only)  | 240V |

#### ④ Lamp Code

| Lamp         | Code  |
|--------------|-------|
| Incandescent | Blank |
| LED          | D     |

#### ⑤ Bezel Code

| Type    | Code |
|---------|------|
| Plastic | 1    |
| Metal   | 4    |

## Part Number Structure

| Bezel                  | Position                                                                                                | Contact Arrangement                                                    | Illumination Circuit                                                                             | Lens Color                                                         | Lamp Code                     | Full Voltage Code                                                                                 |
|------------------------|---------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|-------------------------------|---------------------------------------------------------------------------------------------------|
| 1: Plastic<br>4: Metal | 3: Maintained<br>31: Spring Return from Right<br>32: Spring Return from Left<br>33: Spring Return 2-Way | 11: 1NO-1NC<br>20: 2NO<br>02: 2NC<br>22: 2NO-2NC<br>40: 4NO<br>04: 4NC | Q: Full Voltage<br>H2: Transformer 120V AC<br>M4: Transformer 240V AC<br>T8: Transformer 480V AC | A: Amber<br>G: Green<br>R: Red<br>S: Blue<br>W: White<br>Y: Yellow | D: LED<br>Blank: Incandescent | 6V: 6V AC/DC<br>12V: 12V AC/DC<br>24V: 24V AC/DC<br>120V: 120V AC*<br>240V: 240V AC*<br>*LED only |

## Illuminated Selector Switches 3-Position (Replacement Parts)

| Transformer* | Contact Blocks | Lead Holder | Mounting Adaptor | Safety Lever Lock | Lamp | Anti-Rotation Ring | Operator | Lens | Completed Unit |
|--------------|----------------|-------------|------------------|-------------------|------|--------------------|----------|------|----------------|
|              |                |             |                  |                   |      |                    |          |      |                |



\*Transformer not needed with full voltage models.

## Lamp Circuit Components

| Style                                   | Description                                                                                             | Terminals  | Part Number |
|-----------------------------------------|---------------------------------------------------------------------------------------------------------|------------|-------------|
| Lead Holder                             | For use with HW-CBL on all illuminated pushbutton units. One required for each deck (pair) of contacts. |            | HW-LH3      |
| Dummy Block with Full Voltage Adaptor   | For use with odd number of contacts.                                                                    | Fingersafe | HW-DA1FB    |
|                                         |                                                                                                         | Exposed    | HW-DA1B     |
|                                         |                                                                                                         | Spring Up  | HW-GA1      |
| Full Voltage Adaptor                    | For use with even number of contacts.                                                                   | Fingersafe | TW-DA1FB    |
|                                         |                                                                                                         | Exposed    | TW-DA1B     |
| Transformer Unit (6V secondary voltage) | 120VAC                                                                                                  | Fingersafe | TW-F126B    |
|                                         | 240VAC                                                                                                  |            | TW-F246B    |
|                                         | 480VAC                                                                                                  |            | TW-F486B    |
|                                         | 120V                                                                                                    | Spring Up  | HW-T126     |
|                                         | 240V                                                                                                    |            | HW-T246     |
|                                         | 480V                                                                                                    |            | HW-L486     |
|                                         | 120V                                                                                                    | Exposed    | TW-T126B    |
|                                         | 240V                                                                                                    |            | TW-T246B    |
|                                         | 480V                                                                                                    |            | TW-T486B    |
| DC-DC Converter                         | 110VDC                                                                                                  |            | HW-L16D     |



- HW-GA1 "Dummy Block with full voltage adaptor" does not require the use of HW-LH3.
- DC-DC converter features spring-up terminals.
- DC-DC converter applicable voltage range 90-140V DC.

## Operators

| Style | Description              | Plastic Bezel | Metal Bezel |
|-------|--------------------------|---------------|-------------|
|       | Maintained               | HW1F-3        | HW4F-3      |
|       | Spring return from right | HW1F-31       | HW4F-31     |
|       | Spring return from left  | HW1F-32       | HW4F-32     |
|       | 2-Way spring return      | HW1F-33       | HW4F-33     |



Illuminated knobs must be ordered separately.

## Contact Blocks

| Style | Contacts                   | 1NO                            | 1NC                            |
|-------|----------------------------|--------------------------------|--------------------------------|
|       | Standard Fingersafe (IP20) | HW-F10<br>HW-F10R (early make) | HW-F01<br>HW-F01R (late break) |
|       | Spring-Up Terminal         | HW-G10<br>HW-G10R (early make) | HW-G01<br>HW-G01R (late break) |
|       | Exposed Screw Terminal     | HW-C10<br>HW-C10R (early make) | HW-C01<br>HW-C01R (late break) |

## Contact Block Mounting Adaptor

| Style | Part Number |
|-------|-------------|
|       | HW-CBL      |



- Used to mount contact blocks to operator (first pair only).
- IEC strongly recommends using the safety lever lock to prevent heavy vibration or maintenance personnel from inadvertently unlocking contacts.

## Safety Lever Lock

| Style | Part Number |
|-------|-------------|
|       | HW9Z-LS     |

## Illuminated Knob

| Appearance | Part Number |
|------------|-------------|
|            | HW9Z-FDY-②  |



In place of ②, specify the Color Code.

## ② Lens/LED Color Code

| Color | Code | Color  | Code |
|-------|------|--------|------|
| Amber | A    | Blue   | S    |
| Green | G    | White  | W    |
| Red   | R    | Yellow | Y    |

## Anti-Rotation Ring

| Style | Part Number |
|-------|-------------|
|       | HW9Z-RL     |



Use with notched panel cutout to prevent unit rotation.

## Lamps

| Style | Voltage   | Part Number |
|-------|-----------|-------------|
|       | 6V AC/DC  | LSTD-6②     |
|       | 12V AC/DC | LSTD-1②     |
|       | 24V AC/DC | LSTD-2②     |
|       | 120V AC   | LSTD-H2②    |
|       | 240V AC   | LSTD-M4②    |
|       | 6V AC/DC  | IS-6        |
|       | 12V AC/DC | IS-12       |
|       | 24V AC/DC | IS-24       |



- In place of ②, specify the LED Color Code.
- The LED contains a current-limiting resistor and reverse polarity protection diodes.
- Use white LED for yellow lens. Yellow LED not available.

Mono Lever Switches 2-Position (Assembled)



2-Position Mono Lever Switches

| Style                        | Part Number    | Description                  |
|------------------------------|----------------|------------------------------|
| HW1M<br>Standard Lever       | HW1M-F1010-20  | Maintained up and down       |
|                              | HW1M-F2020-20  | Spring return up and down    |
|                              | HW1M-F1010-40  | Maintained up and down       |
|                              | HW1M-F2020-40  | Spring return up and down    |
|                              | HW1M-F0101-20  | Maintained right and left    |
|                              | HW1M-F0202-20  | Spring return right and left |
|                              | HW1M-F0101-40  | Maintained right and left    |
| HW1M-L<br>Interlocking Lever | HW1M-F0202-40  | Spring return right and left |
|                              | HW1M-LF1010-20 | Maintained up and down       |
|                              | HW1M-LF2020-20 | Spring return up and down    |
|                              | HW1M-LF1010-40 | Maintained up and down       |
|                              | HW1M-LF2020-40 | Spring return up and down    |
|                              | HW1M-LF0101-20 | Maintained right and left    |
|                              | HW1M-LF0202-20 | Spring return right and left |
|                              | HW1M-LF0101-40 | Maintained right and left    |
|                              | HW1M-LF0202-40 | Spring return right and left |

- 
1. All assembled part numbers in catalog include standard (HW-F...) contacts.

2. Assembled units with spring-up terminals (HW-G...) can be ordered by removing an "F" from the part number (Ex. HW1B-M1F11-R becomes HW1B-M111-R).

3. Units with exposed screw terminals (HW-C...) must be ordered as sub-components.

4. Additional contact configurations available (up to 6 total contacts).

Circuit Diagrams


2 Position Left/Right

| Circuit Number | Contact Mounting |        | Position |        |       |
|----------------|------------------|--------|----------|--------|-------|
|                | No.              |        | Left     | Center | Right |
| 20             | 1                | HW-F10 | X        | 0      | 0     |
|                | 2                | HW-F10 | 0        | 0      | X     |
| 40             | 1                | HW-F10 | X        | 0      | 0     |
|                | 2                | HW-F10 | 0        | 0      | X     |
|                | 3                | HW-F10 | X        | 0      | 0     |
|                | 4                | HW-F10 | 0        | 0      | X     |

2 Position Up/Down

| Circuit Number | Contact Mounting |        | Position |        |    |
|----------------|------------------|--------|----------|--------|----|
|                | No.              |        | Down     | Center | Up |
| 20             | 1                | HW-F10 | X        | 0      | 0  |
|                | 2                | HW-F10 | 0        | 0      | X  |
| 40             | 1                | HW-F10 | X        | 0      | 0  |
|                | 2                | HW-F10 | 0        | 0      | X  |
|                | 3                | HW-F10 | X        | 0      | 0  |
|                | 4                | HW-F10 | 0        | 0      | X  |

## Part Number Structure

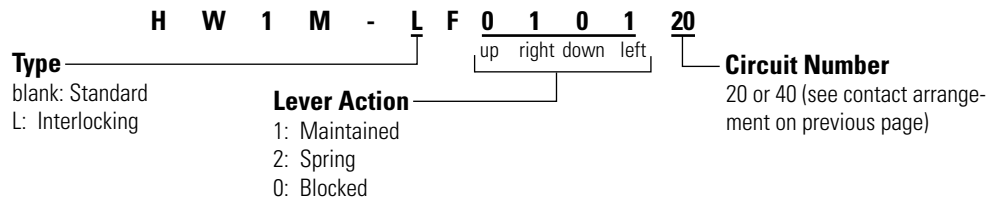

## Mono Lever Switches 2-Position (Sub-assembled) Part Numbers

|                  |   |                  |   |                   |   |                    |   |          |   |                |
|------------------|---|------------------|---|-------------------|---|--------------------|---|----------|---|----------------|
| Contact Assembly | + | Mounting Adaptor | + | Safety Lever Lock | + | Anti-Rotation Ring | + | Operator | = | Completed Unit |
|------------------|---|------------------|---|-------------------|---|--------------------|---|----------|---|----------------|



## Contact Blocks

| Style | Contacts                   | 1NO                  | 1NC                  |
|-------|----------------------------|----------------------|----------------------|
|       | Standard Fingersafe (IP20) | HW-F10               | HW-F01               |
|       |                            | HW-F10R (early make) | HW-F01R (late break) |
|       | Spring-Up Terminal         | HW-G10               | HW-G01               |
|       |                            | HW-G10R (early make) | HW-G01R (late break) |
|       | Exposed Screw Terminal     | HW-C10               | HW-C01               |
|       |                            | HW-C10R (early make) | HW-C01R (late break) |
|       | Dummy Block                | TW-DB                |                      |

## Contact Block Mounting Adaptor

| Style | Part Number |
|-------|-------------|
|       | HW-CB2C     |

1. Used to mount contact blocks to operator (first pair only).  
 2. IDEC strongly recommends using the safety lever lock (included) to prevent heavy vibration or maintenance personnel from inadvertently unlocking contacts.

## Safety Lever Lock

| Style | Part Number |
|-------|-------------|
|       | HW9Z-LS     |

## Anti-Rotation Ring

| Style | Part Number |
|-------|-------------|
|       | HW9Z-RL     |



Use with notched panel cutout to prevent unit rotation.

## Operators

| Style | Description              | Part Number |
|-------|--------------------------|-------------|
|       | Maintained Up/Down       | HW1M-1010   |
|       | Spring return Up/Down    | HW1M-2020   |
|       | Maintained Left/Right    | HW1M-0101   |
|       | Spring return Left/Right | HW1M-0202   |
|       | Maintained Up/Down       | HW1M-L1010  |
|       | Spring return Up/Down    | HW1M-L2020  |
|       | Maintained Left/Right    | HW1M-L0101  |
|       | Spring return Left/Right | HW1M-L0202  |

## Replacement Parts

| Item          | Part Number                            |
|---------------|----------------------------------------|
| Black Cap<br> | HW9Z-CPM                               |
| Boot<br>      | HW9Z-BLM (fits standard operator only) |

Mono Lever Switches 3- & 4-Position (Assembled)



3-Position

| Style                        | Part Number    | Description                                      |
|------------------------------|----------------|--------------------------------------------------|
| HW1M<br>Standard Lever       | HW1M-F0121-30  | Maintained right and left,<br>spring return down |
|                              | HW1M-F0222-30  | Spring return right, down, left                  |
| HW1M-L<br>Interlocking Lever | HW1M-LF0121-30 | Maintained right and left,<br>spring return down |
|                              | HW1M-LF0222-30 | Spring return right, down, left                  |

Circuit Diagram

| Circuit<br>Number | Contact Mounting |        | Position |      |        |    |       |
|-------------------|------------------|--------|----------|------|--------|----|-------|
|                   | No.              |        | Down     | Left | Center | Up | Right |
| 30                | 1                | HW-F01 | 0        | 0    | 0      | 0  | X     |
|                   | 2                | HW-F01 | X        | 0    | 0      | 0  | 0     |
|                   | 3                | HW-F10 | 0        | X    | 0      | 0  | 0     |

4-Position

| Style                        | Part Number      | Description                                        |
|------------------------------|------------------|----------------------------------------------------|
| HW1M<br>Standard Lever       | HW1M-F1111-22N9  | Maintained all positions                           |
|                              | HW1M-F1212-22N9  | Maintained up and down,<br>spring left and right   |
|                              | HW1M-2121-22N9   | Spring up and down, main-<br>tained left and right |
|                              | HW1M-2222-22N9   | Spring return all positions                        |
| HW1M-L<br>Interlocking Lever | HW1M-LF1111-22N9 | Maintained all positions                           |
|                              | HW1M-LF1212-22N9 | Maintained up and down,<br>spring left and right   |
|                              | HW1M-LF2121-22N9 | Spring up and down, main-<br>tained left and right |
|                              | HW1M-LF2222-22N9 | Spring return all positions                        |


Circuit Diagram

| Circuit<br>Number | Contact Mounting |        | Position |      |        |    |       |
|-------------------|------------------|--------|----------|------|--------|----|-------|
|                   | No.              |        | Down     | Left | Center | Up | Right |
| 22N9              | 1                | HW-F01 | 0        | 0    | 0      | 0  | X     |
|                   | 2                | HW-F01 | X        | 0    | 0      | 0  | 0     |
|                   | 3                | HW-F10 | 0        | X    | 0      | 0  | 0     |
|                   | 4                | HW-F10 | 0        | 0    | 0      | X  | 0     |



1. All assembled part numbers in catalog include standard (HW-F...) contacts.
2. Assembled units with spring-up terminals (HW-G...) can be ordered by removing an "F" from the part number (Ex. HW1B-M1F11-R becomes HW1B-M111-R).
3. Units with exposed screw terminals (HW-C...) must be ordered as sub-components.
4. Additional contact configurations available (up to 6 total contacts).

## Part Number Structure

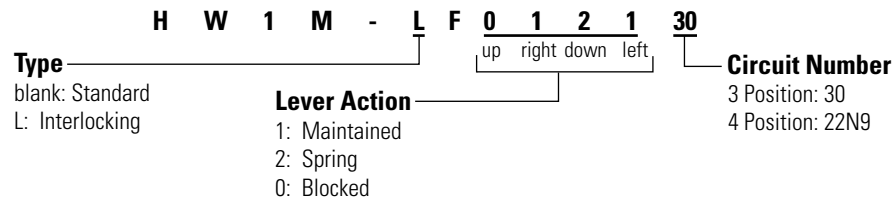

## Mono Lever Switches 3 &amp; 4-Position (Sub-assembled) Part Numbers

|                  |   |                  |   |                   |   |                    |   |          |   |                |
|------------------|---|------------------|---|-------------------|---|--------------------|---|----------|---|----------------|
| Contact Assembly | + | Mounting Adaptor | + | Safety Lever Lock | + | Anti-Rotation Ring | + | Operator | = | Completed Unit |
|------------------|---|------------------|---|-------------------|---|--------------------|---|----------|---|----------------|



## Contact Blocks

| Style | Contacts                   | 1NO                  | 1NC                  |
|-------|----------------------------|----------------------|----------------------|
|       | Standard Fingersafe (IP20) | HW-F10               | HW-F01               |
|       |                            | HW-F10R (early make) | HW-F01R (late break) |
|       | Spring-Up Terminal         | HW-G10               | HW-G01               |
|       |                            | HW-G10R (early make) | HW-G01R (late break) |
|       | Exposed Screw Terminal     | HW-C10               | HW-C01               |
|       |                            | HW-C10R (early make) | HW-C01R (late break) |
|       | Dummy Block                | TW-DB                |                      |

## Contact Block Mounting Adaptor

| Style | Part Number |
|-------|-------------|
|       | HW-CB2C     |

1. Used to mount contact blocks to operator (first pair only).  
 2. IDEC strongly recommends using the safety lever lock (included) to prevent heavy vibration or maintenance personnel from inadvertently unlocking contacts.

## Safety Lever Lock

| Style | Part Number |
|-------|-------------|
|       | HW9Z-LS     |

## Anti-Rotation Ring

| Style | Part Number |
|-------|-------------|
|       | HW9Z-RL     |



Use with notched panel cutout to prevent unit rotation.

## Operators

| Style | Description               | Part Number |
|-------|---------------------------|-------------|
|       | Combination, 3 position   | HW1M-0121   |
|       | Spring return, 3 position | HW1M-0222   |
|       | Maintained, 4 position    | HW1M-1111   |
|       | Combination, 4 position   | HW1M-1212   |
|       | Combination, 4 position   | HW1M-2121   |
|       | Spring return, 4 position | HW1M-2222   |
|       | Combination, 3 position   | HW1M-L0121  |
|       | Spring return, 3 position | HW1M-L0222  |
|       | Maintained, 4 position    | HW1M-L1111  |
|       | Combination, 4 position   | HW1M-L1212  |
|       | Combination, 4 position   | HW1M-L2121  |
|       | Spring return, 4 position | HW1M-L2222  |

## Replacement Parts

| Item          | Part Number                            |
|---------------|----------------------------------------|
| Black Cap<br> | HW9Z-CPM                               |
| Boot<br>      | HW9Z-BLM (fits standard operator only) |

Pushbutton Selectors (Assembled)



2-Position Pushbutton Selectors

|     |               |                  |                                      | Operator Position |                  |                  |                  |                |
|-----|---------------|------------------|--------------------------------------|-------------------|------------------|------------------|------------------|----------------|
|     |               |                  |                                      | Left              |                  | Right            |                  |                |
| Cam | Contacts      | Mounting         |                                      | Normal            | Push             | Normal           | Push             | Part Number    |
| A   | Operator Only |                  |                                      |                   |                  |                  |                  | HW1R-2A-①      |
|     | 1NO-1NC       | 1<br>2           | HW-F10<br>HW-F01                     | 0<br>X            | X<br>0           | 0<br>0           | X<br>0           | HW1R-2AF11-①   |
|     | 2NO           | 1<br>2           | HW-F10<br>HW-F10                     | 0<br>0            | X<br>X           | 0<br>X           | X<br>X           | HW1R-2AF20-①   |
|     | 2NO-2NC       | 1<br>2<br>3<br>4 | HW-F10<br>HW-F01<br>HW-F10<br>HW-F01 | 0<br>X<br>0<br>X  | X<br>0<br>X<br>0 | 0<br>0<br>0<br>0 | X<br>0<br>X<br>0 | HW1R-2AF22-①   |
|     | Operator Only |                  |                                      |                   |                  |                  |                  | HW1R-2D-①      |
| D   | 2NO           | 1<br>2           | HW-F10<br>HW-F10                     | 0<br>0            | X<br>0           | 0<br>0           | 0<br>X           | HW1R-2DF20-①   |
|     | 2NO-2NC       | 1<br>2<br>3<br>4 | HW-F10<br>HW-F10<br>HW-F01<br>HW-F01 | 0<br>0<br>X<br>X  | X<br>0<br>0<br>X | 0<br>0<br>X<br>X | 0<br>X<br>X<br>0 | HW1R-2DF22N1-① |
|     | Operator Only |                  |                                      |                   |                  |                  |                  | HW1R-2E-①      |
|     | 2NO-2NC       | 1<br>2<br>3<br>4 | HW-F10<br>HW-F10<br>HW-F01<br>HW-F01 | 0<br>0<br>0<br>X  | X<br>0<br>0<br>X | 0<br>0<br>X<br>0 | 0<br>X<br>X<br>0 | HW1R-2EF22N1-① |
|     | Operator Only |                  |                                      |                   |                  |                  |                  | HW1R-2F-①      |
| F   | 2NO-2NC       | 1<br>2<br>3<br>4 | HW-F10<br>HW-F10<br>HW-F01<br>HW-F01 | 0<br>0<br>0<br>X  | 0<br>X<br>0<br>0 | 0<br>0<br>X<br>0 | X<br>0<br>0<br>0 | HW1R-2FF22N1-① |
|     | Operator Only |                  |                                      |                   |                  |                  |                  | HW1R-2N-①      |
|     | 2NO-2NC       | 1<br>2<br>3<br>4 | HW-F01<br>HW-F10<br>HW-F01<br>HW-F10 | 0<br>0<br>0<br>0  | 0<br>X<br>0<br>X | X<br>0<br>X<br>0 | 0<br>X<br>0<br>X | HW1R-2NF22N2-① |
|     | Operator Only |                  |                                      |                   |                  |                  |                  | HW1R-2T-①      |
|     | 2NO-2NC       | 1<br>2<br>3<br>4 | HW-F10<br>HW-F10<br>HW-F01<br>HW-F01 | 0<br>0<br>X<br>X  | X<br>X<br>0<br>0 | X<br>X<br>0<br>0 | Blocked          | HW1R-2TF22N1-① |


① Button Color Code

| Color | Code | Color  | Code |
|-------|------|--------|------|
| Black | B    | White  | W    |
| Green | G    | Yellow | Y    |
| Red   | R    | Gray   | N    |
| Blue  | S    |        |      |



1. All assembled part numbers in catalog include standard (HW-F...) contacts.
2. Assembled units with spring-up terminals (HW-G...) can be ordered by removing an "F" from the part number (Ex. HW1B-M1F11-R becomes HW1B-M111-R).
3. Units with exposed screw terminals (HW-C...) must be ordered as sub-components.
4. Operator only models come with operator and button.
5. Additional contact configurations available (up to 6 total contacts).

## Part Number Structure

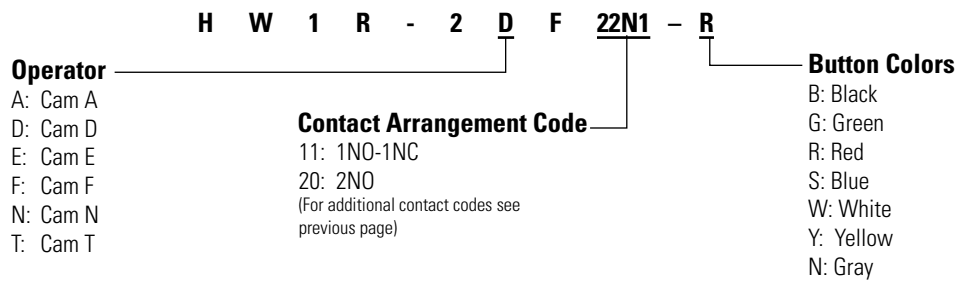

## Pushbutton Selectors (Sub-assembled)

Contact Blocks + Mounting Adaptor + Safety Lever Lock + Anti-Rotation Ring + Operator + Button = Completed Unit



## Contact Blocks

| Style | Contacts                   | 1NO                  | 1NC                  |
|-------|----------------------------|----------------------|----------------------|
|       | Standard Fingersafe (IP20) | HW-F10               | HW-F01               |
|       |                            | HW-F10R (early make) | HW-F01R (late break) |
|       | Spring-Up Terminal         | HW-G10               | HW-G01               |
|       |                            | HW-G10R (early make) | HW-G01R (late break) |
|       | Exposed Screw Terminal     | HW-C10               | HW-C01               |
|       |                            | HW-C10R (early make) | HW-C01R (late break) |
|       | Dummy Block                | TW-DB                |                      |

## Contact Block Mounting Adaptor

(safety lever lock included)

| Style | Part Number |
|-------|-------------|
|       | HW-CB2C     |

1. Used to mount contact blocks to operator (first pair only).  
 2. IDEC strongly recommends using the safety lever lock (included) to prevent heavy vibration or maintenance personnel from inadvertently unlocking contacts.

## Safety Lever Lock

| Style | Part Number |
|-------|-------------|
|       | HW9Z-LS     |

## Anti-Rotation Ring

| Style | Part Number |
|-------|-------------|
|       | HW9Z-RL     |



Use with notched panel cutout to prevent unit rotation.

## Operators

| Style | Description | Part Number |
|-------|-------------|-------------|
|       | Cam A       | HW1R-2A     |
|       | Cam D       | HW1R-2D     |
|       | Cam E       | HW1R-2E     |
|       | Cam F       | HW1R-2F     |
|       | Cam N       | HW1R-2N     |
|       | Cam T       | HW1R-2T     |

## Buttons

| Style       | Part Number |
|-------------|-------------|
| Round Flush | HW1A-B1-Ⓢ   |
|             |             |



In place of Ⓢ, specify the Button Color Code from table below.

## ① Button Color Code

| Color | Code | Color  | Code |
|-------|------|--------|------|
| Black | B    | White  | W    |
| Green | G    | Yellow | Y    |
| Red   | R    | Gray   | N    |
| Blue  | S    |        |      |

## Dual Pushbutton Switches

### Key features:

- Two pushbuttons and a pilot light are integrated into one space-saving ø22 mm control unit.
- Momentary and interlock types are available for pushbuttons. Interlock type prevents both buttons from being pressed at the same time.
- Pilot lights are available in full voltage and transformer with LED or incandescent lamps.
- IP40 protection, IP65 when using silicon cover.
- UL Listed, CSA approved, and EN compliant



### Applications:

- Ideal for use as power switches and start/stop switches (available with I/ON and O/OFF markings on the buttons and a pilot light in the center).
- Interlock type prevents two pushbuttons from being pressed at the same time.

### Dual Pushbutton Switches (Assembled) Part Numbers

#### Without Center Pilot Light

| Operation Type | Button Style                     |  | Contact Arrangement |               | Part Number      | ④ Button Color Code                  | ⑤ Legend Code                      |
|----------------|----------------------------------|--|---------------------|---------------|------------------|--------------------------------------|------------------------------------|
|                |                                  |  | Top Button          | Bottom Button |                  |                                      |                                    |
| Momentary      | Flush (top)<br>Flush (bottom)    |  | 1NO                 | 1NC           | HW7D-B11F1001-④⑤ | GR:<br>Green (top)<br>Red (bottom)   | Blank:<br>Without legend           |
|                |                                  |  | 1NO                 | 1NO           | HW7D-B11F1010-④⑤ |                                      |                                    |
|                |                                  |  | 1NO-1NC             | 1NO-1NC       | HW7D-B11F1111-④⑤ |                                      |                                    |
|                |                                  |  | 2NO                 | 2NC           | HW7D-B11F2002-④⑤ |                                      |                                    |
|                |                                  |  | 2NO                 | 2NO           | HW7D-B11F2020-④⑤ |                                      |                                    |
|                | Flush (top)<br>Extended (bottom) |  | 1NO                 | 1NC           | HW7D-B12F1001-④⑤ |                                      |                                    |
|                |                                  |  | 1NO                 | 1NO           | HW7D-B12F1010-④⑤ |                                      |                                    |
|                |                                  |  | 1NO-1NC             | 1NO-1NC       | HW7D-B12F1111-④⑤ |                                      |                                    |
|                |                                  |  | 2NO                 | 2NC           | HW7D-B12F2002-④⑤ |                                      |                                    |
|                |                                  |  | 2NO                 | 2NO           | HW7D-B12F2020-④⑤ |                                      |                                    |
| Interlock*     | Flush (top)<br>Flush (bottom)    |  | 1NO                 | 1NC           | HW7D-B21F1001-④⑤ | WB:<br>White (top)<br>Black (bottom) | 1:<br>I/ON (top)<br>O/OFF (bottom) |
|                |                                  |  | 1NO                 | 1NO           | HW7D-B21F1010-④⑤ |                                      |                                    |
|                |                                  |  | 1NO-1NC             | 1NO-1NC       | HW7D-B21F1111-④⑤ |                                      |                                    |
|                |                                  |  | 2NO                 | 2NC           | HW7D-B21F2002-④⑤ |                                      |                                    |
|                |                                  |  | 2NO                 | 2NO           | HW7D-B21F2020-④⑤ |                                      |                                    |
|                | Flush (top)<br>Extended (bottom) |  | 1NO                 | 1NC           | HW7D-B22F1001-④⑤ |                                      |                                    |
|                |                                  |  | 1NO                 | 1NO           | HW7D-B22F1010-④⑤ |                                      |                                    |
|                |                                  |  | 1NO-1NC             | 1NO-1NC       | HW7D-B22F1111-④⑤ |                                      |                                    |
|                |                                  |  | 2NO                 | 2NC           | HW7D-B22F2002-④⑤ |                                      |                                    |
|                |                                  |  | 2NO                 | 2NO           | HW7D-B22F2020-④⑤ |                                      |                                    |



- \*Interlock type prevents both top and bottom buttons from being pressed simultaneously.
- Clear silicon rubber cover part number HW9Z-D7D.
- Additional contact configurations available (up to 6 total contacts).

## With Center Pilot Light

| Operation Type | Button Style                     |                                                                                   | Top Button | Bottom Button | Part Number        |
|----------------|----------------------------------|-----------------------------------------------------------------------------------|------------|---------------|--------------------|
| Momentary      | Flush (Top)<br>Flush (Bottom)    | Flush (top)<br>Flush (bottom)                                                     | 1NO        | 1NC           | HW7D-L11F1001②③-④⑤ |
|                |                                  |                                                                                   | 1NO        | 1NO           | HW7D-L11F1010②③-④⑤ |
|                |                                  |                                                                                   | 1NO-1NC    | 1NO-1NC       | HW7D-L11F1111②③-④⑤ |
|                |                                  |                                                                                   | 2NO        | 2NC           | HW7D-L11F2002②③-④⑤ |
|                |                                  |                                                                                   | 2NO        | 2NO           | HW7D-L11F2020②③-④⑤ |
|                | Flush (Top)<br>Extended (Bottom) |  | 1NO        | 1NC           | HW7D-L12F1001②③-④⑤ |
|                |                                  |                                                                                   | 1NO        | 1NO           | HW7D-L12F1010②③-④⑤ |
|                |                                  |                                                                                   | 1NO-1NC    | 1NO-1NC       | HW7D-L12F1111②③-④⑤ |
|                |                                  |                                                                                   | 2NO        | 2NC           | HW7D-L12F2002②③-④⑤ |
|                |                                  |                                                                                   | 2NO        | 2NO           | HW7D-L12F2020②③-④⑤ |
| Interlock*     | Flush (Top)<br>Flush (Bottom)    | Flush (top)<br>Extended (bottom)                                                  | 1NO        | 1NC           | HW7D-L21F1001②③-④⑤ |
|                |                                  |                                                                                   | 1NO        | 1NO           | HW7D-L21F1010②③-④⑤ |
|                |                                  |                                                                                   | 1NO-1NC    | 1NO-1NC       | HW7D-L21F1111②③-④⑤ |
|                |                                  |                                                                                   | 2NO        | 2NC           | HW7D-L21F2002②③-④⑤ |
|                |                                  |                                                                                   | 2NO        | 2NO           | HW7D-L21F2020②③-④⑤ |
|                | Flush (Top)<br>Extended (Bottom) |  | 1NO        | 1NC           | HW7D-L22F1001②③-④⑤ |
|                |                                  |                                                                                   | 1NO        | 1NO           | HW7D-L22F1010②③-④⑤ |
|                |                                  |                                                                                   | 1NO-1NC    | 1NO-1NC       | HW7D-L22F1111②③-④⑤ |
|                |                                  |                                                                                   | 2NO        | 2NC           | HW7D-L22F2002②③-④⑤ |
|                |                                  |                                                                                   | 2NO        | 2NO           | HW7D-L22F2020②③-④⑤ |



- \*Interlock type prevents both top and bottom buttons from being pressed simultaneously.
- Clear silicon rubber cover part number HW9Z-D7D.
- All assembled part numbers in catalog include standard (HW-F...) contacts.
- Assembled units with spring-up terminals (HW-G...) can be ordered by removing an "F" from the part number (Ex. HW1B-M1F11-R becomes HW1B-M111-R).
- Units with exposed screw terminals (HW-C...) must be ordered as sub-components.

## ② Pilot Light Illumination &amp; Voltage Code

| Full Voltage                                         |      |
|------------------------------------------------------|------|
| Voltage                                              | Code |
| 6V AC/DC, LED                                        | Q2   |
| 12V AC/DC, LED                                       | Q3   |
| 24V AC/DC, LED                                       | Q4   |
| 120V AC, LED                                         | Q8   |
| 6V AC/DC, Incandescent                               | Q5*  |
| 12V AC/DC, Incandescent                              | Q6*  |
| 24V AC/DC, Incandescent                              | Q7*  |
| Step-Down Transformer<br>(6V Secondary Lamp Voltage) |      |
| Voltage                                              | Code |
| 120V AC, LED                                         | H22  |
| 240V AC, LED                                         | M42  |
| 480V AC, LED                                         | T82  |
| 120V AC, Incandescent                                | H25* |
| 240V AC, Incandescent                                | M45* |
| 480V AC, Incandescent                                | T85* |



\*Only available for White Lens Pilot Lamp.

## ③ Pilot Lamp Color Code

| Color | Code |
|-------|------|
| Amber | A*   |
| Green | G*   |
| Red   | R*   |
| Blue  | S*   |
| White | W    |



\*Only available in LED illumination.

## ④ Pushbutton Color Code

| Color  | Code  |
|--------|-------|
| Top    | Green |
| Bottom | Red   |
| Top    | White |
| Bottom | Black |
|        | WB    |

## ⑤ Engraving Codes

| Engraving    | Code   |
|--------------|--------|
| No Engraving | Blank  |
| I/ON         | Top    |
| O/OFF        | Bottom |
|              | 1      |

**Part Number Structure**

H W 7 D - L 21 F 20 20 H22 R - GR 1

**Pilot Light**  
B: Without Center Pilot Light  
L: With Center Pilot Light

**Button Arrangement**  
11: Momentary (Flush/Flush)  
12: Momentary (Flush/Extended)  
21: Interlock (Flush/Flush)  
22: Interlock (Flush/Extended)

**Contact Arrangement**  
**Top Button**  
01: 1NC 02: 2NC  
10: 1NO 20: 2NO  
**Bottom Button**  
01: 1NC 02: 2NC  
10: 1NO 20: 2NO

**Voltage Code**  
blank: without center pilot light  
**Full Voltage\*** Q2: 6V LED  
**Transformer\*** H22: 120V AC LED  
\*For additional voltage codes, please see previous page

**Pilot Lamp Color**  
A: Amber\* Y: Yellow\*  
G: Green\* blank: without center pilot light  
R: Red\* S: Blue\* W: White  
\*Only available in LED illumination.

**Engraving Code**  
blank: No Engraving  
1: Top: I/ON  
Bottom: O/OFF  
**Pushbutton Color**  
GR: Top: Green  
Bottom: Red  
WB: Top: White  
Bottom: Black

### Dual Pushbutton Switches (Sub-assembled) Part Numbers

|                |   |                  |   |                   |   |          |   |      |   |                |
|----------------|---|------------------|---|-------------------|---|----------|---|------|---|----------------|
| Contact Blocks | + | Mounting Adaptor | + | Safety Lever Lock | + | Operator | + | Lens | = | Completed Unit |
|----------------|---|------------------|---|-------------------|---|----------|---|------|---|----------------|



### Lamp Circuit Components with Fingersafe Terminals

| Style                                   | Description                                                                                             | Part Number                      |
|-----------------------------------------|---------------------------------------------------------------------------------------------------------|----------------------------------|
| Lead Holder                             | For use with HW-CBL on all illuminated pushbutton units. One required for each deck (pair) of contacts. | HW-LH3                           |
| Dummy Block with Full Voltage Adaptor   | For use with odd number of contacts.                                                                    | HW-DA1FB                         |
| Full Voltage Adaptor                    | For use with even number of contacts.                                                                   | TW-DA1FB                         |
| Transformer Unit (6V secondary voltage) | 120VAC<br>240VAC<br>480VAC                                                                              | TW-F126B<br>TW-F246B<br>TW-F486B |

Exposed and spring up terminals also available.

### Operators

| Style     | Button            | Part Number |
|-----------|-------------------|-------------|
| Momentary | Flush (top)       | HW7D-*11④-⑤ |
|           | Flush (bottom)    |             |
|           | Flush (top)       | HW7D-*12④-⑤ |
|           | Extended (bottom) |             |
| Interlock | Flush (top)       | HW7D-*21④-⑤ |
|           | Flush (bottom)    |             |
|           | Flush (top)       | HW7D-*22④-⑤ |
|           | Extended (bottom) |             |

Instead of \* insert:  
B: Non-illuminated  
L: Illuminated

### ④ Pushbutton Color Code

| Color  | Code  | Color  | Code  |
|--------|-------|--------|-------|
| Top    | Green | Top    | White |
| Bottom | Red   | Bottom | Black |
|        | GR    |        | WB    |

### Contact Blocks

| Style                      | Contacts | 1NO                            | 1NC                            |
|----------------------------|----------|--------------------------------|--------------------------------|
| Standard Fingersafe (IP20) |          | HW-F10<br>HW-F10R (early make) | HW-F01<br>HW-F01R (late break) |
| Dummy Block                |          | TW-DB                          |                                |

### Contact Block Mounting Adaptor

| Style                          | Part Number |
|--------------------------------|-------------|
| Non-illuminated                | HW-CB2C     |
| Illuminated (with Pilot Light) | HW-CBL      |

- Used to mount contact blocks to operator (first pair only).
- IEC strongly recommends using the safety lever lock (included) to prevent heavy vibration or maintenance personnel from inadvertently unlocking contacts.

### Safety Lever Lock

| Style | Part Number |
|-------|-------------|
|       | HW9Z-LS     |

### Anti-Rotation Ring

| Appearance | Part Number |
|------------|-------------|
|            | HW9Z-RL     |

Use with notched panel cutout to prevent unit rotation.

### ⑤ Engraving Codes

| Engraving    | Code   |
|--------------|--------|
| No Engraving | Blank  |
| I/ON         | Top    |
| O/OFF        | Bottom |
|              | 1      |

### Lamps/Lens

| Style           | Voltage   | Part Number |
|-----------------|-----------|-------------|
| LED             | 6V AC/DC  | LSTD-6②     |
|                 | 12V AC/DC | LSTD-1②     |
|                 | 24V AC/DC | LSTD-2②     |
|                 | 120V AC   | LSTD-H2②    |
|                 | 240V AC   | LSTD-M4②    |
| Incandescent    | 6V AC/DC  | IS-6        |
|                 | 12V AC/DC | IS-12       |
|                 | 24V AC/DC | IS-24       |
| Non-illuminated |           | HW9Z-B7B    |
| Illuminated     |           | HW9Z-L7W    |

- In place of ②, specify the LED Color Code.
- The LED contains a current-limiting resistor and reverse polarity protection diodes.

### ② LED Color Code


| Color | Code | Color | Code |
|-------|------|-------|------|
| Amber | A*   | Blue  | S*   |
| Green | G*   | White | W    |
| Red   | R*   |       |      |

Only for LED illumination.

Contact Arrangement Chart

| Contact Arrangement |               |              | Contact Block     |       | Top Button |      | Bottom Button |      |
|---------------------|---------------|--------------|-------------------|-------|------------|------|---------------|------|
| Top Button          | Bottom Button | Contact Code | Mounting Position | Type  | Normal     | Push | Normal        | Push |
| 1NO                 | 1NO           | 1010         | 1                 | NO    |            | X    |               |      |
|                     |               |              | 2                 | NO    |            |      |               | X    |
| 1NO                 | 1NC           | 1001         | 1                 | NO    |            | X    |               |      |
|                     |               |              | 2                 | NC    |            |      | X             |      |
| 1NC                 | 1NO           | 0110         | 1                 | NC    | X          |      |               |      |
|                     |               |              | 2                 | NO    |            |      |               | X    |
| 1NC                 | 1NC           | 0101         | 1                 | NC    | X          |      |               |      |
|                     |               |              | 2                 | NC    |            |      | X             |      |
| 1NO                 | 2NO           | 1020         | 1                 | NO    |            | X    |               |      |
|                     |               |              | 2                 | NO    |            |      |               | X    |
|                     |               |              | 3                 | Dummy |            |      |               |      |
|                     |               |              | 4                 | NO    |            |      |               | X    |
| 1NO                 | 1NO-1NC       | 1011         | 1                 | NO    |            | X    |               |      |
|                     |               |              | 2                 | NO    |            |      |               | X    |
|                     |               |              | 3                 | Dummy |            |      |               |      |
|                     |               |              | 4                 | NC    |            |      | X             |      |
| 1NO                 | 2NC           | 1002         | 1                 | NO    |            | X    |               |      |
|                     |               |              | 2                 | NC    |            |      | X             |      |
|                     |               |              | 3                 | Dummy |            |      |               |      |
|                     |               |              | 4                 | NC    |            |      | X             |      |
| 1NC                 | 2NO           | 0120         | 1                 | NC    | X          |      |               |      |
|                     |               |              | 2                 | NO    |            |      |               | X    |
|                     |               |              | 3                 | Dummy |            |      |               |      |
|                     |               |              | 4                 | NO    |            |      |               | X    |
| 1NC                 | 1NO-1NC       | 0111         | 1                 | NC    | X          |      |               |      |
|                     |               |              | 2                 | NO    |            |      |               | X    |
|                     |               |              | 3                 | Dummy |            |      |               |      |
|                     |               |              | 4                 | NC    |            |      | X             |      |
| 1NC                 | 2NC           | 0102         | 1                 | NC    | X          |      |               |      |
|                     |               |              | 2                 | NC    |            |      | X             |      |
|                     |               |              | 3                 | Dummy |            |      |               |      |
|                     |               |              | 4                 | NC    |            |      | X             |      |
| 2NO                 | 1NO           | 2010         | 1                 | NO    |            | X    |               |      |
|                     |               |              | 2                 | NO    |            |      |               | X    |
|                     |               |              | 3                 | NO    |            | X    |               |      |
|                     |               |              | 4                 | Dummy |            |      |               |      |
| 2NO                 | 1NC           | 2001         | 1                 | NO    |            | X    |               |      |
|                     |               |              | 2                 | NC    |            |      | X             |      |
|                     |               |              | 3                 | NO    |            | X    |               |      |
|                     |               |              | 4                 | Dummy |            |      |               |      |
| 1NO-1NC             | 1NO           | 1110         | 1                 | NO    |            | X    |               |      |
|                     |               |              | 2                 | NO    |            |      |               | X    |
|                     |               |              | 3                 | NC    | X          |      |               |      |
|                     |               |              | 4                 | Dummy |            |      |               |      |
| 1NO-1NC             | 1NC           | 1101         | 1                 | NO    |            | X    |               |      |
|                     |               |              | 2                 | NO    |            |      | X             |      |
|                     |               |              | 3                 | NC    | X          |      |               |      |
|                     |               |              | 4                 | Dummy |            |      |               |      |

Contact Block Mounting Position Example

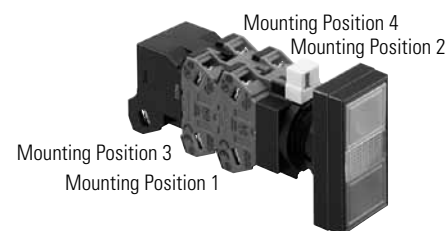


1. Transformers can have two or four contact blocks only.
2. Contact blocks 1 and 3 are actuated by the top button. Contact blocks 2 and 4 are actuated by the bottom button.

### Contact Arrangement Chart (con't)

| Contact Arrangement |               |              | Contact Block     |       | Top Button |      | Bottom Button |      |
|---------------------|---------------|--------------|-------------------|-------|------------|------|---------------|------|
| Top Button          | Bottom Button | Contact Code | Mounting Position | Type  | Normal     | Push | Normal        | Push |
| 2NC                 | 1NO           | 0210         | 1                 | NC    | X          |      |               |      |
|                     |               |              | 2                 | NO    |            |      |               | X    |
|                     |               |              | 3                 | NC    | X          |      |               |      |
|                     |               |              | 4                 | Dummy |            |      |               |      |
| 2NC                 | 1NC           | 0201         | 1                 | NC    | X          |      |               |      |
|                     |               |              | 2                 | NC    |            |      | X             |      |
|                     |               |              | 3                 | NC    | X          |      |               |      |
|                     |               |              | 4                 | Dummy |            |      |               |      |
| 2NO                 | 2NO           | 2020         | 1                 | NO    |            | X    |               |      |
|                     |               |              | 2                 | NO    |            |      |               | X    |
|                     |               |              | 3                 | NO    |            | X    |               |      |
|                     |               |              | 4                 | NO    |            |      |               | X    |
| 2NO                 | 1NO-1NC       | 2011         | 1                 | NO    |            | X    |               |      |
|                     |               |              | 2                 | NO    |            |      |               | X    |
|                     |               |              | 3                 | NO    |            | X    |               |      |
|                     |               |              | 4                 | NC    |            |      | X             |      |
| 2NO                 | 2NC           | 2002         | 1                 | NO    |            | X    |               |      |
|                     |               |              | 2                 | NC    |            |      | X             |      |
|                     |               |              | 3                 | NO    |            | X    |               |      |
|                     |               |              | 4                 | NC    |            |      | X             |      |
| 1NO-1NC             | 2NO           | 1120         | 1                 | NO    |            | X    |               |      |
|                     |               |              | 2                 | NO    |            |      |               | X    |
|                     |               |              | 3                 | NC    | X          |      |               |      |
|                     |               |              | 4                 | NO    |            |      |               | X    |
| 1NO-1NC             | 1NO-1NC       | 1111         | 1                 | NO    |            | X    |               |      |
|                     |               |              | 2                 | NO    |            |      |               | X    |
|                     |               |              | 3                 | NC    | X          |      |               |      |
|                     |               |              | 4                 | NC    |            |      | X             |      |
| 1NO-1NC             | 2NC           | 1102         | 1                 | NO    |            | X    |               |      |
|                     |               |              | 2                 | NC    |            |      | X             |      |
|                     |               |              | 3                 | NC    | X          |      |               |      |
|                     |               |              | 4                 | NC    |            |      | X             |      |
| 2NC                 | 2NO           | 0220         | 1                 | NC    | X          |      |               |      |
|                     |               |              | 2                 | NO    |            |      |               | X    |
|                     |               |              | 3                 | NC    | X          |      |               |      |
|                     |               |              | 4                 | NO    |            |      |               | X    |
| 2NC                 | 1NO-1NC       | 0211         | 1                 | NC    | X          |      |               |      |
|                     |               |              | 2                 | NO    |            |      |               | X    |
|                     |               |              | 3                 | NC    | X          |      |               |      |
|                     |               |              | 4                 | NC    |            |      | X             |      |
| 2NC                 | 2NC           | 0202         | 1                 | NC    | X          |      |               |      |
|                     |               |              | 2                 | NC    |            |      | X             |      |
|                     |               |              | 3                 | NC    | X          |      |               |      |
|                     |               |              | 4                 | NC    |            |      | X             |      |

### Contact Block Mounting Position Example

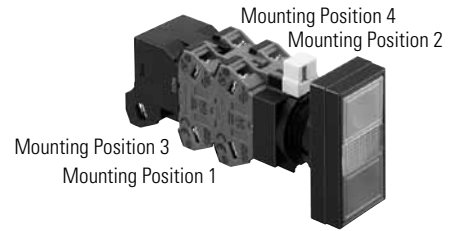

## Contactor Reset Button



### Reset Buttons (Assembled)

|              | Plastic Bezel      | Metal Bezel        |
|--------------|--------------------|--------------------|
| (Blank)      | HW1B-M1RS-⓪T       | HW4B-M1RS-⓪T       |
| Engraved "R" | HW1B-M1RS-⓪T-ENG-R | HW4B-M1RS-⓪T-ENG-R |



1. In place of ⓪ specify Button Color Code.
2. 130mm (5.1") overall length.
3. 16mm flat base for easy alignment

### ① Button Color Code

| Color | Code | Color  | Code |
|-------|------|--------|------|
| Black | B    | White  | W    |
| Green | G    | Yellow | Y    |
| Red   | R    | Gray   | N    |
| Blue  | S    |        |      |

### Contactor Reset Button (Sub-assembled)



### Rod

| Style                                                                               | Part Number    |
|-------------------------------------------------------------------------------------|----------------|
|  | HW9Z-RS-TK2141 |

### Operator

| Style                                                                               | Plastic | Metal   |
|-------------------------------------------------------------------------------------|---------|---------|
|  | HW1B-M0 | HW4B-M0 |
|  |         |         |

### Button

| Style                                                                               | Part Number |
|-------------------------------------------------------------------------------------|-------------|
|  | HW1A-B1-⓪   |



In place of ⓪, specify the Button Color Code from table.

### ① Button Color Code

| Color | Code | Color  | Code |
|-------|------|--------|------|
| Black | B    | White  | W    |
| Green | G    | Yellow | Y    |
| Red   | R    | Gray   | N    |
| Blue  | S    |        |      |

### Nameplates - HW Series

|                                            | HWAM—Black Plastic | HWAQ—Black Plastic | HWAS—Black Plastic  | HWAV—Yellow Plastic   |
|--------------------------------------------|--------------------|--------------------|---------------------|-----------------------|
|                                            |                    |                    |                     |                       |
| Nameplate (blank engraving plate included) | HWAM-OB            | HWAQ-OB            | HWAS-OB             | HWAV-0<br>HWAV5-0†    |
| Nameplate (engraved)                       | HWAM-①             | HWAQ-①             | HWAS-①              | HWAV-27*<br>HWAV5-27† |
| Additional Insert (blank)                  | HWNP-0             | HWNP-0             | HWNP Dimensions<br> |                       |
| Additional Insert (engraved)               | HWNP-①             | HWNP-①             |                     |                       |

1. In place of ①, insert either the standard legend code from table below or custom engraving delimited by " ".  
 2. Standard engravings are available at no charge.  
 3. \* HWAV-27 comes engraved "Emergency Stop" as shown in drawing.  
 4. † HWAV5-27 and HWAV5-0 for 60mm diameter E-Stops (80mm diameter nameplate).

### Standard Legend Codes

| Pushbuttons |      |               |      | Pushbuttons/Selector Switches |      |                   |      | Selector Switches |      |
|-------------|------|---------------|------|-------------------------------|------|-------------------|------|-------------------|------|
| Legend      | Code | Legend        | Code | Legend                        | Code | Legend            | Code | Legend            | Code |
| AUTO        | 101  | OPEN          | 116  | AUTO-MAN                      | 201  | REV-FOR           | 216  | AUTO-MAN-OFF      | 301  |
| CLOSE       | 102  | OUT           | 117  | CLOSE-OPEN                    | 202  | RUN-JOG           | 217  | AUTO-OFF-MAN      | 302  |
| DOWN        | 103  | RAISE         | 118  | DOWN-UP                       | 203  | RUN-SAFE          | 218  | CLOSE-OFF-OPEN    | 303  |
| EMERG.STOP  | 104  | RESET         | 119  | FAST-SLOW                     | 204  | SAFE-RUN          | 219  | DOWN-OFF-SLOW     | 304  |
| FAST        | 105  | REVERSE       | 120  | FOR-REV                       | 205  | SLOW-FAST         | 220  | FAST-OFF-SLOW     | 305  |
| FORWARD     | 106  | RUN           | 121  | HAND-AUTO                     | 206  | START-STOP        | 221  | FOR-OFF-REV       | 306  |
| HAND        | 107  | SLOW          | 122  | HIGH-LOW                      | 207  | STOP-START        | 222  | LEFT-OFF-RIGHT    | 307  |
| HIGH        | 108  | START         | 123  | JOG-RUN                       | 208  | UP-DOWN           | 223  | LOWER-OFF-RAISE   | 308  |
| IN          | 109  | STOP          | 125  | LEFT-RIGHT                    | 209  | Ol (Int'l OFF ON) | 250  | OFF-MAN-AUTO      | 309  |
| INCH        | 110  | TEST          | 126  | LOWER-RAISE                   | 210  |                   |      | OFF-SLOW-FAST     | 310  |
| JOG         | 111  | UP            | 127  | MAN-AUTO                      | 211  |                   |      | OFF-1-2           | 311  |
| LOW         | 112  | I (Int'l On)  | 150  | OFF-ON                        | 212  |                   |      | OPEN-OFF-CLOSE    | 312  |
| LOWER       | 113  | O (Int'l Off) | 151  | ON-OFF                        | 213  |                   |      | SLOW-OFF-FAST     | 313  |
| OFF         | 114  | EMO           | 152  | OPEN-CLOSE                    | 214  |                   |      | SUMMER-OFF-WINTER | 314  |
| ON          | 115  |               |      | RAISE-LOWER                   | 215  |                   |      | UP-OFF-DOWN       | 315  |
|             |      |               |      |                               |      |                   |      | 1-OFF-2           | 316  |
|             |      |               |      |                               |      |                   |      | HAND-OFF-AUTO     | 317  |

1. To order engraved nameplates, add legend code to nameplate part number.  
 2. Character height based on the number of characters and size of nameplate. Standard character size is 3/16".  
 3. Nameplates with standard legends are the same list price as blank nameplates.  
 4. Nameplates have built-in anti-rotation feature for use with notched panel cut-outs. Additional anti-rotation ring (HW9Z-RL) is not necessary.

## Nameplates Order Form — HW Series


Copy this order form and use it to specify Letter Height, Custom Engravings, Location of Engraving on Nameplate, and Quantity Desired.

To ensure engraving accuracy, fax it to your IDEC representative or Distributor.

Your Company: \_\_\_\_\_  
 Name: \_\_\_\_\_  
 Telephone: \_\_\_\_\_  
 Fax & Email: \_\_\_\_\_

IDEC Rep/Distributor Contact: \_\_\_\_\_  
 PO number (if known): \_\_\_\_\_  
 IDEC Rep/Distributor Phone: \_\_\_\_\_  
 IDEC Rep/Distributor Fax & Email: \_\_\_\_\_

## HWAM Nameplate



**Step 1.**  
**Choose Letter Size - 7/64" or 1/8".**  
 Check the box for the letter size you want.  
 Then write your lettering in box below the  
 check boxes. Note: 1/8" size letters cannot  
 exceed 9 characters.

7/64" Letter Size ☐ 11 characters maximum  
 (for 7/64" size letters)

1/8" Letter Size ☐ 9 characters maximum  
 (for 7/8" size letters)

\_\_\_\_\_


1 2 3 4 5 6 7 8 9 10 11

**Step 2.**  
**Specify Quantity.**  
 Enter the number of nameplates  
 desired in the box on the right.

Qty

Sample Letter Sizes  
 7/64" Letters: A B C D  
 1/8" Letters: A B C D

## HWAQ Nameplate



**Step 1.**  
**Choose Letter Size - 7/64" or 1/8".**  
 Check the box for the letter size you want.  
 Then write your lettering in box below the  
 check boxes. Note: 1/8" size letters cannot  
 exceed 9 characters.

7/64" Letter Size ☐ 11 characters maximum  
 (for 7/64" size letters)

1/8" Letter Size ☐ 9 characters maximum  
 (for 7/8" size letters)

\_\_\_\_\_


1 2 3 4 5 6 7 8 9 10 11

**Step 2.**  
**Specify Quantity.**  
 Enter the number of nameplates  
 desired in the box on the right.

Qty

Sample Letter Sizes  
 7/64" Letters: A B C D  
 1/8" Letters: A B C D

## HWAS Nameplate



**Step 1.**  
**Choose Letter Size - 3/32" or 1/8".**  
 Check the box for the letter size you want.  
 Then write your lettering in box below the  
 check boxes. Note: 1/8" size letters cannot  
 exceed 9 characters.

3/32" Letter Size ☐ 20 characters maximum  
 (for 3/32" size letters)

1/8" Letter Size ☐ 14 characters maximum  
 (for 7/8" size letters)

\_\_\_\_\_

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20

**Step 2.**  
**Specify Quantity.**  
 Enter the number of nameplates  
 desired in the box on the right.

Qty

**Step 3.**  
**Specify Location.**  
 Enter the location of engraving  
 (A or B), in box on the right.

Location

Sample Letter Sizes  
 3/32" Letters: A B C D  
 1/8" Letters: A B C D

## Switch Engraving Order Form – HW Series

Copy this order form and use it to specify Letter Height, Maximum Number of Lines and Text to be engraved.

To ensure engraving accuracy, fax it to your IDEC representative or Distributor.


Your Company: \_\_\_\_\_  
 Name: \_\_\_\_\_  
 Address: \_\_\_\_\_  
 PO: \_\_\_\_\_

Telephone: \_\_\_\_\_  
 Fax: \_\_\_\_\_  
 Email: \_\_\_\_\_  
 Part Number to be Engraved: \_\_\_\_\_

Please check one of the boxes below to indicate your choice of engraving options:



ø29mm, ø40mm Mushroom Head



|                          | # of Lines | Letter Height | Max. Characters Per Line |
|--------------------------|------------|---------------|--------------------------|
| <input type="checkbox"/> | 1          | 5/32          | 5                        |
| <input type="checkbox"/> |            | 1/8           | 6                        |
| <input type="checkbox"/> | 2          | 5/32          | 5                        |
| <input type="checkbox"/> |            | 1/8           | 6                        |
| <input type="checkbox"/> | 3          | 1/8           | 6                        |
| <input type="checkbox"/> | 4          | 3/32          | 5                        |

|                          | # of Lines | Letter Height | Max. Characters Per Line |
|--------------------------|------------|---------------|--------------------------|
| <input type="checkbox"/> | 1          | 5/32          | 5                        |
| <input type="checkbox"/> |            | 1/8           | 5                        |
| <input type="checkbox"/> | 2          | 5/32          | 5                        |
| <input type="checkbox"/> |            | 1/8           | 6                        |
| <input type="checkbox"/> | 3          | 1/8           | 5                        |
| <input type="checkbox"/> | 4          | 3/32          | 5                        |

|                          |                  | # of Lines | Letter Height | Max. Characters Per Line |
|--------------------------|------------------|------------|---------------|--------------------------|
| <input type="checkbox"/> | Engraving Area 1 | 1          | 5/32          | 5                        |
| <input type="checkbox"/> |                  |            | 1/8           | 5                        |
| <input type="checkbox"/> | Engraving Area 2 | 1          | 5/32          | 7                        |
| <input type="checkbox"/> |                  |            | 1/8           | 7                        |



- Above mentioned specifications hold true for standard size pushbuttons (round and square).
- 'Engraving Area 2 can be engraved for 40mm mushroom Head non-illuminated push button only.
- Engraving is done on the button itself for non-illuminated push buttons and on marking plate for illuminated push buttons and pilot lights.
- Please enter text exactly how you want it engraved, take care to emphasize capital or small letters.

Enter text to be engraved:

### Sample Letter Sizes

1/8 Letters: OPEN

5/32 Letters: OPEN

Line 1: \_\_\_\_\_  
 Line 2: \_\_\_\_\_  
 Line 3: \_\_\_\_\_  
 Line 4: \_\_\_\_\_

For IDEC Internal Use Only:

Work Order #: \_\_\_\_\_

## Accessories

| Item                              | Appearance                                                                          | Description/Usage                                                                                                                                      | Part Number                                            |          |
|-----------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------|----------|
| Locking Ring Wrench               |    | Metallic tool used to tighten the plastic locking ring when installing the HW series in a panel                                                        | MW9Z-T1                                                |          |
| Lamp/LED Removal Tool             |    | Rubber tool makes lamp/LED removal easier.                                                                                                             | OR-55                                                  |          |
| Anti-Rotation Ring                |    | Prevents rotation of switches in panel. (included with all assembled switches except pilot lights)                                                     | for notched panel cutout (standard)                    | HW9Z-RL  |
|                                   |                                                                                     |                                                                                                                                                        | for round panel cutout                                 | LW9Z-L   |
| Rubber Mounting Hole Plug         |    | Black rubber plug fills unused 7/8" mounting holes in panel.                                                                                           | OB-31                                                  |          |
| Metallic Mounting Hole Plug       |    | For plugging unused 7/8" mounting holes in the panel. Tighten the attached locking ring to a torque of 12 kfg-cm maximum<br>Degree of protection: IP66 | LW9Z-BM                                                |          |
| Barrier                           |    | To prevent contact between adjacent lead wires when buttons or switches are tightly mounted close together.                                            | HW-VL1                                                 |          |
| Pushbutton Clear Boot             |    | Used to cover and protect pushbuttons<br><br>Operating temperature: -50 to +60°C                                                                       | Flush Pushbuttons                                      | OC-31    |
|                                   |                                                                                     |                                                                                                                                                        | Extended Pushbuttons                                   | OC-32    |
| Padlock Cover                     |   | Plastic hinged padlockable cover to protect pushbuttons or selector switches. (Not intended for E-Stops)<br><br>Degree of protection: IP65             | HW9Z-KL1                                               |          |
| Tab Terminal Adapter              |  | Tab #250 (6.35 x 0.8mm): Single tab                                                                                                                    | TW-FA1                                                 |          |
| Mounting Adaptor                  |  | Used to mount round HW series (except Jumbo Mushroom, unibody, and square units) into a larger panel cut-out. (includes both pieces)                   | 22 to 30mm                                             | HW9Z-A30 |
|                                   |                                                                                     |                                                                                                                                                        | 22 to 25mm                                             | HW9Z-A25 |
| Replacement Safety Lever Lock     |  | Used to prevent contact mounting lever from moving due to heavy vibration or panel maintenance.                                                        | HW9Z-LS                                                |          |
| Reset Rod for Contactors Overload |  | 5" rod used with HW1B-M0.                                                                                                                              | HW9Z-RS-TK2141                                         |          |
| Replacement Operator Washer       |  | Provided with operator. Insert between bezel and locking ring.                                                                                         | HWM-WASHER                                             |          |
| Replacement Locking Ring          |  | Plastic locking nut comes with all HW operators & assemblies.                                                                                          | Standard (plastic)                                     | HW9Z-LN  |
|                                   |                                                                                     |                                                                                                                                                        | Optional (metal)                                       | HW9Z-LNM |
| Switch Cover (Square)             |  | Used only with round or square flush pushbuttons.                                                                                                      | HW9Z-K1 (spring return)<br>HW9Z-K11 (maintained cover) |          |
| Replacement Keys                  |  | Pair of Keys (#231)                                                                                                                                    | HW9Z-SKP                                               |          |

| Item                                    | Appearance                                                                        | Description/Usage                                                                                                                               | Part Number                         |
|-----------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| Replacement Lens                        |  | HW Illuminated Unibody Replacement Lens                                                                                                         | HWLV-LENSR                          |
| Replacement Jumbo Dome Lens             |  | Polycarbonate Replacement Lens<br>(If using yellow lens, use white LED.)                                                                        | HW1A-P5①<br>① = (A, G, R, S, W, Y)) |
| Replacement Jumbo LED Diffusing Lens    |  |                                                                                                                                                 | HW9Z-PP5C                           |
| Replacement LED Lamps for HW Jumbo Dome |  | Replacement LED Lamp - applicable for jumbo pilot lights only                                                                                   | LSTDB-2①<br>① = (A, G, R, S, W)     |
| Rubber Cover for Dual Pushbuttons       |  | Clear Silicon rubber cover                                                                                                                      | HW9Z-D7D                            |
| Barrier for Dual Pushbuttons            |  | Plastic barrier. Used when mounting the HW7 units on 30mm horizontal centers, to prevent possible interconnections between adjoining terminals. | HW-VG1                              |
| EMO Sticker                             |  | Emergency stop nameplate sticker                                                                                                                | HW9Z-EMO-NP-TK2120                  |

## E-Stop Shrouds

| Style                                                                               | Part Numbers | E-Stop Types                       | Applicable Standards                         |
|-------------------------------------------------------------------------------------|--------------|------------------------------------|----------------------------------------------|
|  | HW9Z-KG1     | 40mm<br>Mushroom Head              | SEMI S2-0703,<br>12.5.1 Compliant            |
|  | HW9Z-KG2     | 40mm,<br>and 60mm<br>Mushroom Head | SEMI S2-0703, 12.5.1 &<br>SEMATECH Compliant |

| Style                                                                               | Part Numbers | E-Stop Types          | Applicable Standards                                 |
|-------------------------------------------------------------------------------------|--------------|-----------------------|------------------------------------------------------|
|  | HW9Z-KG3     | 40mm<br>Mushroom Head | SEMI S2 Compliant<br>(Approved by TUV)               |
|  | HW9Z-KG4     | 40mm<br>Mushroom Head | SEMI S2 Compliant<br>(Approved by TUV)<br>& SEMATECH |

## Contact Assemblies

### Standard Contact Assemblies

For use with Non-Illuminated Pushbuttons & E-Stops

| Style                                                                               | Contacts | Part Number |
|-------------------------------------------------------------------------------------|----------|-------------|
|  | 1NO      | HW-CBF10    |
|                                                                                     | 1NC      | HW-CBF01    |
|                                                                                     | 1NO/1NC  | HW-CBF11    |
|                                                                                     | 2NO      | HW-CBF20    |
|                                                                                     | 2NC      | HW-CBF02    |
|                                                                                     | 2NO/2NC  | HW-CBF22    |
|  | 1NO      | HW-CB10     |
|                                                                                     | 1NC      | HW-CB01     |
|                                                                                     | 1NO/1NC  | HW-CB11     |
|                                                                                     | 2NO      | HW-CB20     |
|                                                                                     | 2NC      | HW-CB02     |
|                                                                                     | 2NO/2NC  | HW-CB22     |

 Gold contact option is available for spring-up terminals. Add suffix "MAU" to end of part number. For example, HW-CB20 becomes HW-CB20-MAU.

### Full Voltage Contact Assemblies

For use with Illuminated Pushbuttons.

| Style                                                                                | Contacts | Part Number |
|--------------------------------------------------------------------------------------|----------|-------------|
|  | 1NO      | HW-FL10Q0   |
|                                                                                      | 2NO      | HW-FL20Q0   |
|                                                                                      | 1NO/1NC  | HW-FL11Q0   |
|                                                                                      | 1NC      | HW-FL01Q0   |
|                                                                                      | 2NC      | HW-FL02Q0   |

 Order lamp separately.

## Transformer Contact Assemblies

For use with Illuminated Pushbuttons.

| Style                                                                             | Contacts                  | Part Number                                              |
|-----------------------------------------------------------------------------------|---------------------------|----------------------------------------------------------|
|  | 120V AC with LED          | 1NO<br>2NO<br>1NC<br>1NO/1NC                             |
|                                                                                   | 240V AC with LED          | 1NO<br>2NO<br>1NC<br>1NO/1NC                             |
|                                                                                   | 480V AC with LED          | 1NO<br>2NO<br>1NC<br>1NO/1NC                             |
|                                                                                   | 120V AC with Incandescent | 1NO<br>2NO<br>1NC<br>1NO/1NC                             |
|                                                                                   | 240V AC with Incandescent | 1NO<br>2NO<br>1NC<br>1NO/1NC                             |
|                                                                                   |                           | HW-FL10H2-②<br>HW-FL20H2-②<br>HW-FL01H2-②<br>HW-FL11H2-② |
|                                                                                   |                           | HW-FL10M4-②<br>HW-FL20M4-②<br>HW-FL01M4-②<br>HW-FL11M4-② |
|                                                                                   |                           | HW-FL10T8-②<br>HW-FL20T8-②<br>HW-FL01T8-②<br>HW-FL11T8-② |
|                                                                                   |                           | HW-FL10H2<br>HW-FL20H2<br>HW-FL01H2<br>HW-FL11H2         |
|                                                                                   |                           | HW-FL10M4<br>HW-FL20M4<br>HW-FL01M4<br>HW-FL11M4         |



1. In place of ②, specify the LED Color Code.


② = A, G, R, S, or W

2. 6V LED or incandescent lamp included.


## Dimensions (mm)

## Non-Illuminated Pushbuttons


## Flush (HW1B-M1, -A1)

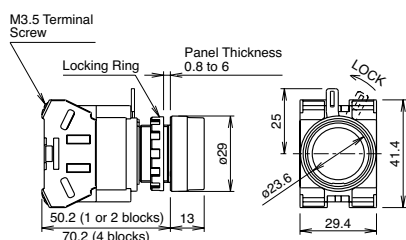


## Extended (HW1B-M2, -A2)

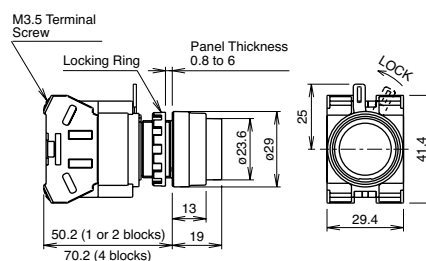


## ø29mm Mushroom (HW1B-M3 -A3)

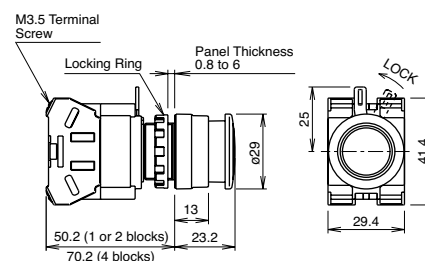


## ø40mm Mushroom (HW1B-M4, -A4)

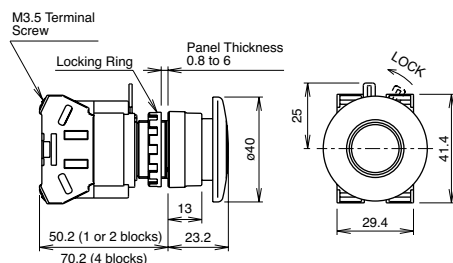


## ø60mm Mushroom (HW1B-M5)

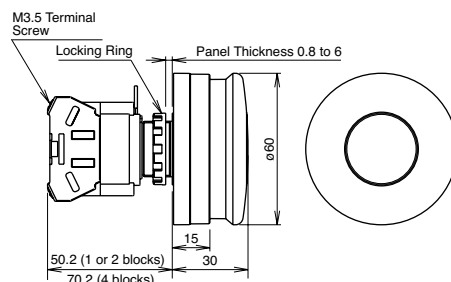


## Square Flush (HW2B-M1, -A1)

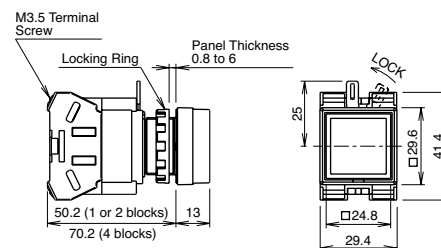

## Square Extended (HW2B-M2, -A2)

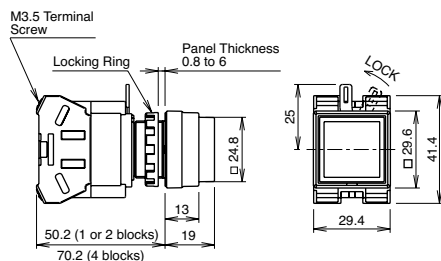


## Contact Block (Bottom View)



## Terminal Wiring


Arrows indicate access directions for wiring




## Operators

Dimensions (mm)


### Flush (Round & Square)

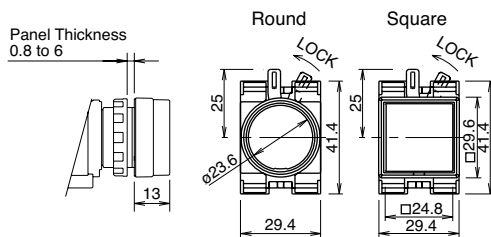


### Extended

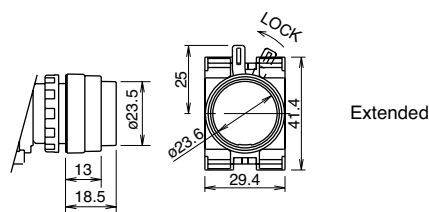

### Extended with Full Shroud




### ø40mm Mushroom




## Emergency Stop Pushbuttons

Dimensions (mm)


### ø29mm Head Pushlock Turn Reset (HW1B-V3)

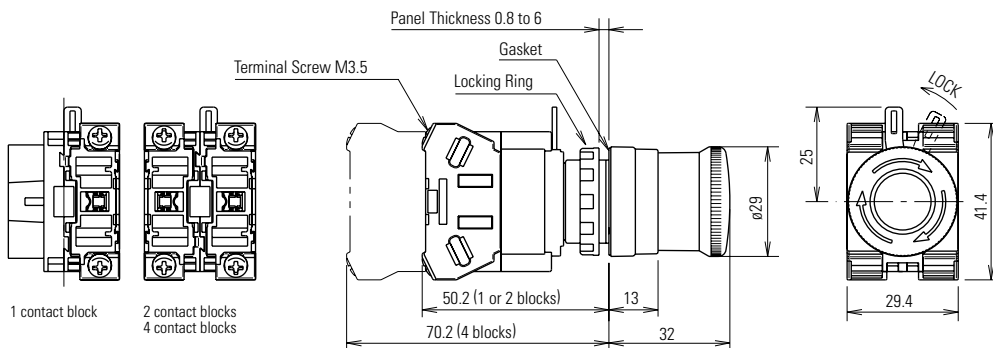


### ø40mm Head Pushlock Turn Reset (HW1B-V4)

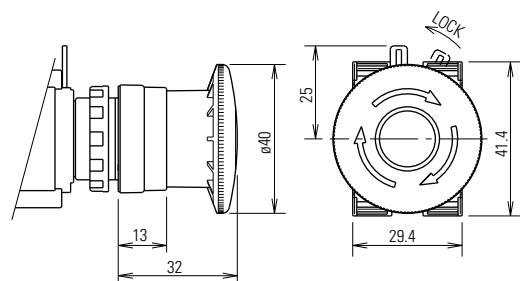


### ø40mm Head EMO Pushlock Turn Reset (HW1B-V4)

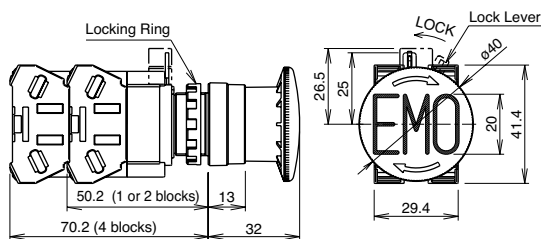


### ø40mm Head Pushlock Key Reset (HW1B-X4)

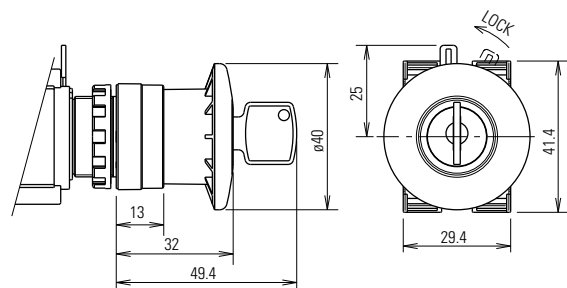


### ø60mm Head Pushlock Turn Reset (HW1B-V5)

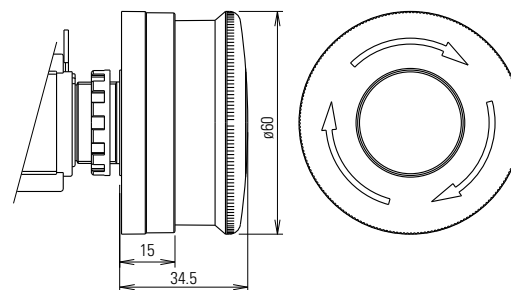


ø40mm Head Push-Pull (HW1B-Y2)

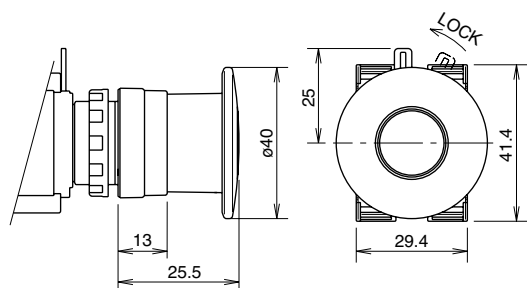


ø40mm Head Unibody Pushlock Turn Reset (HW1B-BV4)

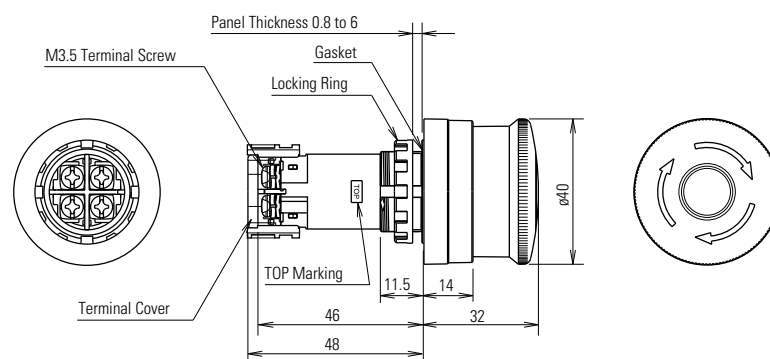

Illuminated E-Stop Pushbuttons (HW1E-LV4)

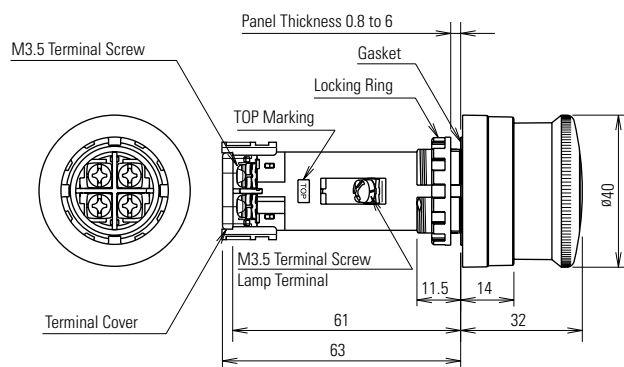

Mounting Hole




The minimum mounting centers shown below are applicable to E-Stop switches with one layer of contact blocks (two contact blocks). When two layers of contact blocks are mounted, determine the minimum mounting centers for ease of wiring.


| Unit                                     | Vertical Spacing | Horizontal Spacing |
|------------------------------------------|------------------|--------------------|
| HW1B-V3<br>HW1B-V4<br>HW1B-X4<br>HW1B-Y2 | 50 mm            | 50 mm              |
| HW1B-V5                                  | 60 mm            | 60 mm              |

Terminal Arrangement (Bottom View)


HW1E-BV4



HW1E-LV4




Emergency Stop Stations

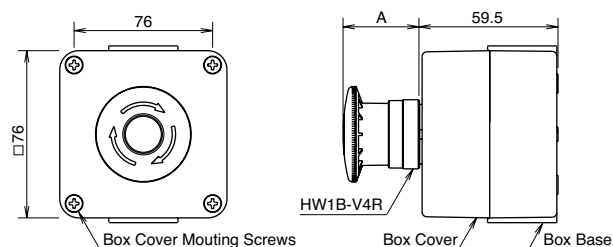

| Operator            | Dimension A (mm)        |
|---------------------|-------------------------|
| Pushlock Turn Reset | 32                      |
| Pushlock Key Reset  | 32 (Key inserted: 49.4) |
| Push Pull           | 25.5                    |

Dimensions (mm)


Mounting Hole Layout




Dimensions (mm)

## Pilot Lights

Full Voltage

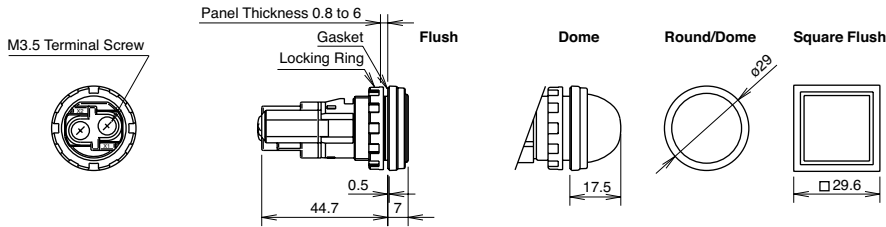


Transformer

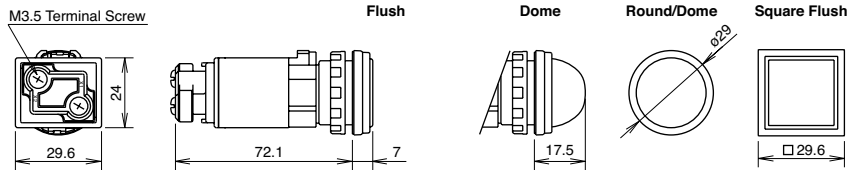


Mounting Hole Layout

Close mounting on 30mm centers  
Degree of protection: IP65




DC-DC Converter

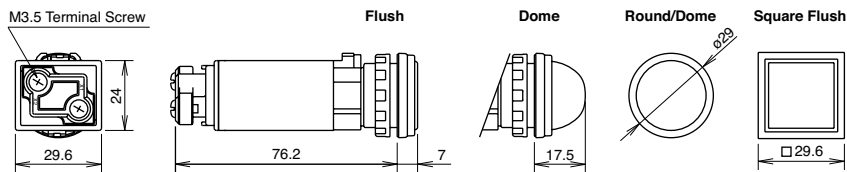


When mounting transformer or DC-DC converter type units on 30mm centers vertically and horizontally, keep the ambient temperature below 40°C.


## Jumbo Dome Pilot Lights

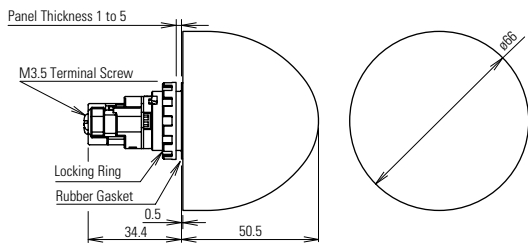


LED Lamp LSTDB



Incandescent Lamp LSB




Mounting Hole Layout




## Illuminated Pushbuttons

Full Voltage Models


1 Contact Block

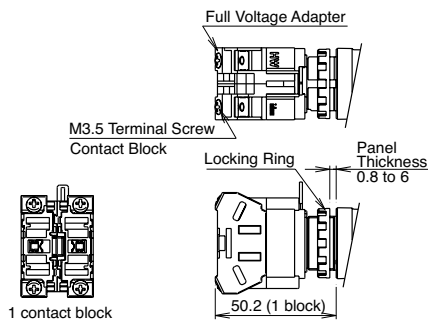

2 Contact Blocks

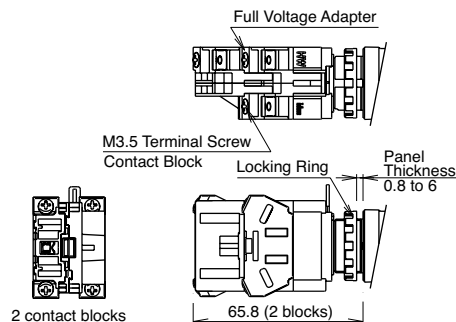


3 Contact Blocks

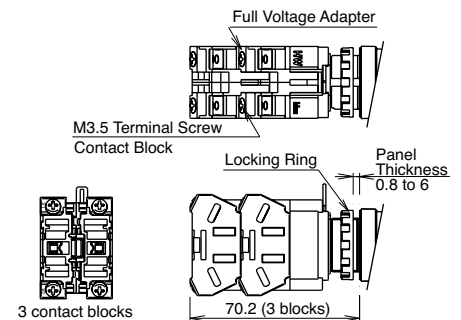

Dimensions (mm)


### Illuminated Pushbuttons con't

#### 4 Contact Blocks

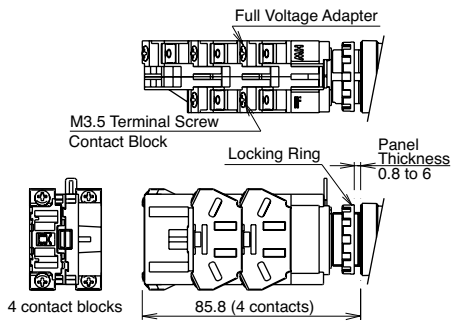


#### Terminal Wiring


Arrows indicate access directions for wiring.

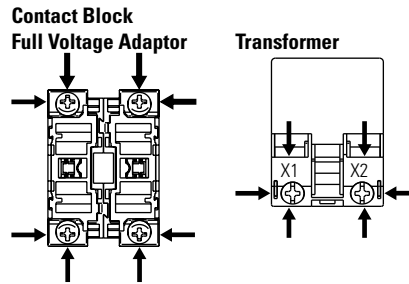

#### Transformer Models

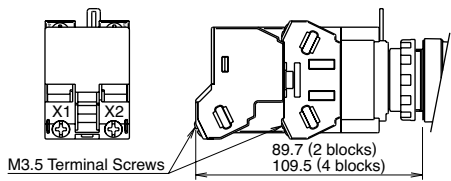


#### DC-DC Converter Models

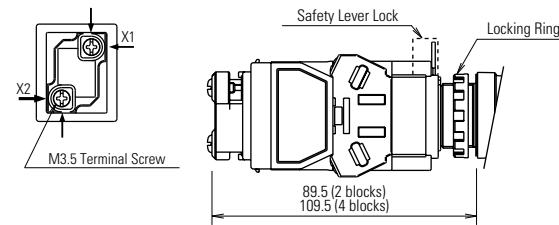

### Non-Illuminated Selector & Key Switches


Dimensions (mm)

#### Knob Operator

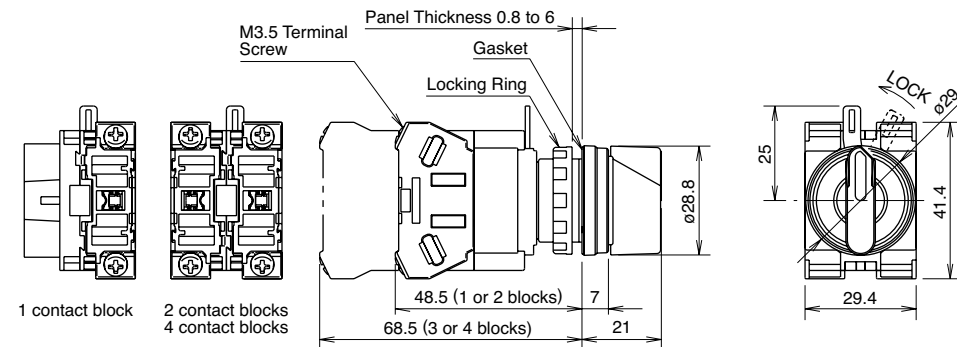


#### Terminal Wiring


Arrows indicate access directions for wiring.



#### Key Operator

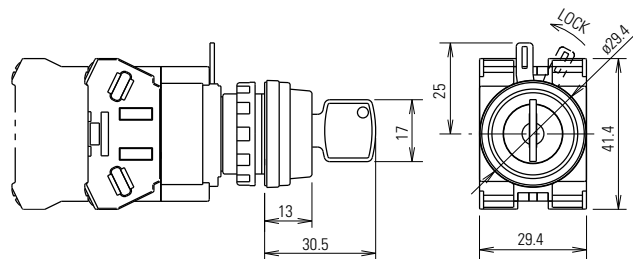


#### Transformer




### Illuminated Selector Switches

#### Full Voltage Model

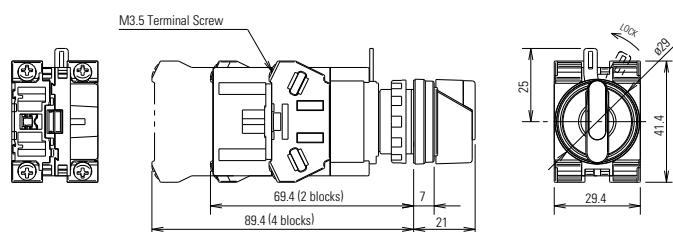


#### Transformer Model

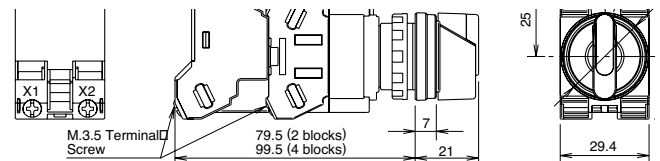


## Dual Pushbutton


Without Pilot Light

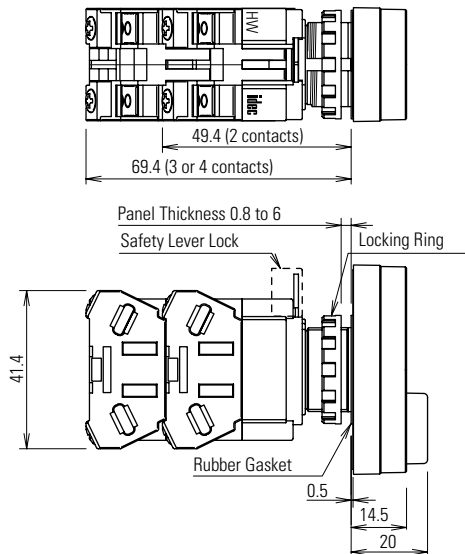

Without Button Markings




With Button Markings (I/ON and O/OFF)



With Pilot Light


Full Voltage

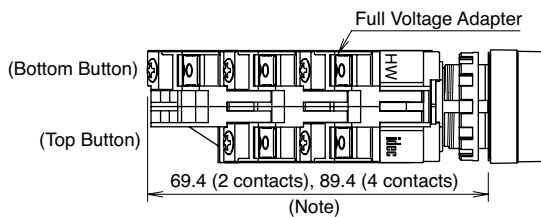


The depth of a 3-contact model depends on the combination of contact blocks at top and bottom pushbuttons.

|               |                  |                  |
|---------------|------------------|------------------|
| Top Button    | 1 contact block  | 2 contact blocks |
| Bottom Button | 2 contact blocks | 1 contact block  |
| Depth         | 89.4 mm          | 69.4 mm          |

Transformer (240V minimum)

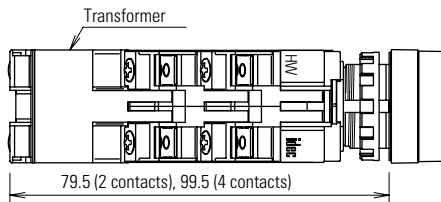


Transformer (480V)

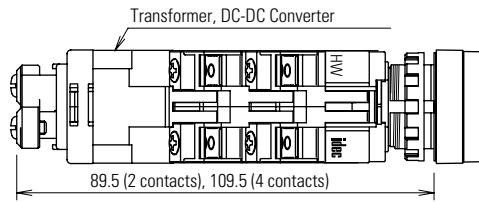


## Monolever

Dimensions (mm)

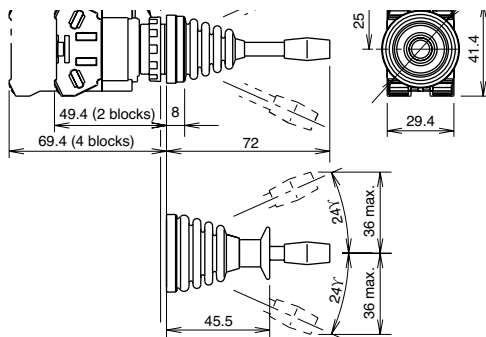

Mounting Hole Layout

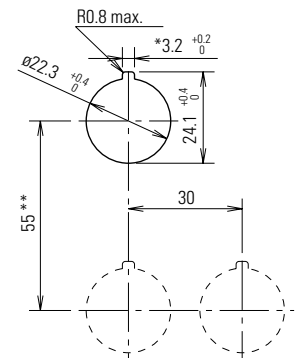

-The 3.2 mm recess is for preventing rotation and is not necessary when a nameplate or anti-rotation ring is not used.

-When using the safety lever lock, determine the vertical spacing in consideration of convenience for installing and removing the safety lever lock.


-Recommended vertical spacing: 100 mm

-The minimum mounting centers are applicable to switches with one layer of contact blocks (two contact blocks). When two layers of contact blocks are mounted, determine the minimum mounting centers for ease of wiring.


## Accessory Dimensions

**LW9Z-BM**


Metallic Mounting Hole Plug

**OB-31**


Rubber Mounting Hole Plug

**HW9Z-RL**


Anti-Rotation Ring

**OR-55**


Lamp/LED Removal Tool

**HW9Z-D7D**


Dual Pushbutton Rubber Cover

**HW-VG1**


Dual Pushbutton Barrier

**MW9Z-T1**


Locking Ring Wrench

**HW-VL1**








Barrier

**HW9Z-KL1**



Padlock Cover

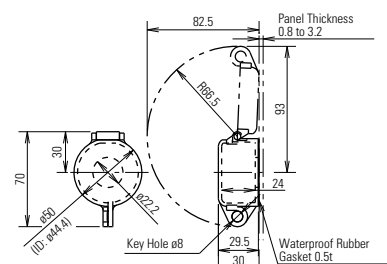**HWLS-TK1971**

Safety Lever Lock

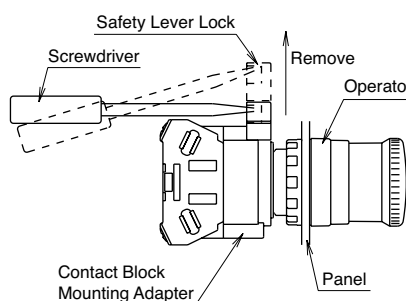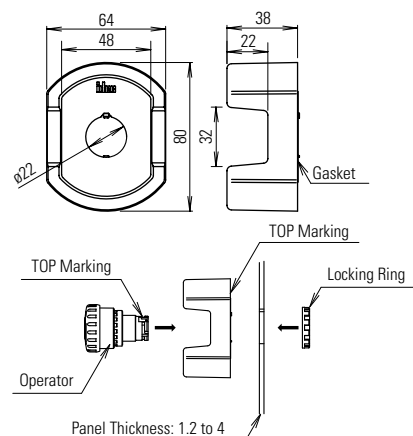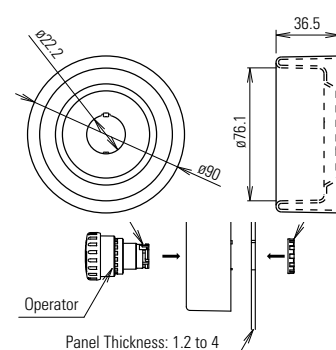**HW9Z-KG1****HW9Z-KG2****HW9Z-KG3****HW9Z-KG4****LSTD**

## Specification Charts

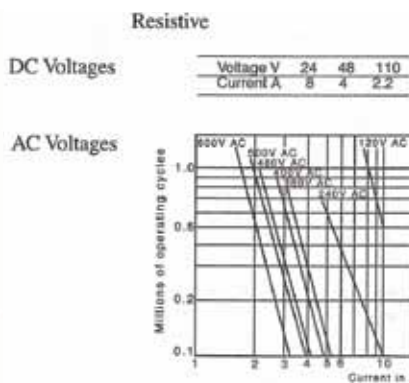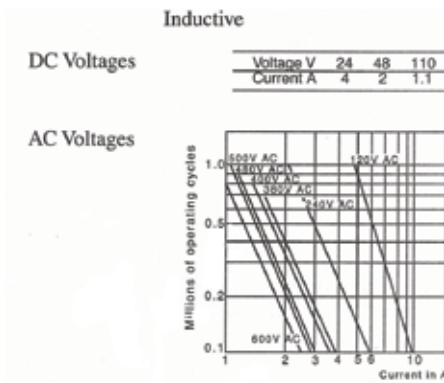

Conforming to IEC 947-5-1 Appendix C.  
Utilization categories AC-15 and DC-13.  
Operation rate: 1,800 op. hour  
Load factor:  
Inductive  $0.4 \pm 0.05$   
Resistive  $0.9 \pm 0.05$

## Operator Truth Tables

### 2 Position Selector Switches

|                              | Contact         | Mounting Position | Operator Position |       |
|------------------------------|-----------------|-------------------|-------------------|-------|
|                              |                 |                   | Left              | Right |
| HW1S-2T<br>HW1K-2*<br>HW1F-2 | HW-F10 (NO)     | L                 | 0                 | X     |
|                              |                 | R                 | 0                 | X     |
|                              | HW-F01 (NC)     | L                 | X                 | 0     |
|                              |                 | R                 | X                 | 0     |
|                              | HW-F10R (NO-EM) | L                 | 0                 | X     |
|                              |                 | R                 | 0                 | X     |
|                              | HW-F01R (NC-LB) | L                 | X                 | 0     |
|                              |                 | R                 | X                 | 0     |

### 3 Position Selector Switches can't

|                      | Contact         | Mounting Position | Operator Position |        |       |
|----------------------|-----------------|-------------------|-------------------|--------|-------|
|                      |                 |                   | Left              | Center | Right |
| HW1S-3JT<br>HW1K-3J* | HW-F10 (NO)     | L                 | X                 | 0      | 0     |
|                      |                 | R                 | 0                 | 0      | X     |
|                      | HW-F01 (NC)     | L                 | 0                 | X      | 0     |
|                      |                 | R                 | 0                 | X      | 0     |
|                      | HW-F10R (NO-EM) | L                 | X                 | 0      | X     |
|                      |                 | R                 | X                 | 0      | X     |
|                      | HW-F01R (NC-LB) | L                 | 0                 | X      | X     |
|                      |                 | R                 | X                 | X      | 0     |

### 3 Position Selector Switches

|                              | Contact         | Mounting Position | Operator Position |        |       |
|------------------------------|-----------------|-------------------|-------------------|--------|-------|
|                              |                 |                   | Left              | Center | Right |
| HW1S-3T<br>HW1K-3*<br>HW1F-3 | HW-F10 (NO)     | L                 | X                 | 0      | 0     |
|                              |                 | R                 | 0                 | 0      | X     |
|                              | HW-F01 (NC)     | L                 | 0                 | X      | X     |
|                              |                 | R                 | X                 | X      | 0     |
|                              | HW-F10R (NO-EM) | L                 | X                 | 0      | 0     |
|                              |                 | R                 | 0                 | 0      | X     |
|                              | HW-F01R (NC-LB) | L                 | 0                 | X      | X     |
|                              |                 | R                 | X                 | X      | 0     |

### 4 Position Selector Switches

|         | Contact         | Mounting Position | Operator Position |   |   |   |
|---------|-----------------|-------------------|-------------------|---|---|---|
|         |                 |                   | 1                 | 2 | 3 | 4 |
| HW1S-4T | HW-F10 (NO)     | L                 | X                 | 0 | 0 | 0 |
|         |                 | R                 | 0                 | 0 | 0 | X |
|         | HW-F01 (NC)     | L                 | 0                 | 0 | X | 0 |
|         |                 | R                 | 0                 | X | 0 | 0 |
|         | HW-F10R (NO-EM) | L                 | X                 | X | 0 | X |
|         |                 | R                 | X                 | 0 | X | X |
|         | HW-F01R (NC-LB) | L                 | 0                 | X | X | X |
|         |                 | R                 | X                 | X | X | 0 |

### 5 Position Selector Switches

|         | Contact         | Mounting Position | Operator Position |   |   |   |   |
|---------|-----------------|-------------------|-------------------|---|---|---|---|
|         |                 |                   | 1                 | 2 | 3 | 4 | 5 |
| HW1S-5T | HW-F10 (NO)     | L                 | X                 | 0 | 0 | 0 | 0 |
|         |                 | R                 | 0                 | 0 | 0 | 0 | X |
|         | HW-F01 (NC)     | L                 | 0                 | 0 | 0 | X | 0 |
|         |                 | R                 | 0                 | X | 0 | 0 | 0 |
|         | HW-F10R (NO-EM) | L                 | X                 | X | X | 0 | X |
|         |                 | R                 | X                 | 0 | X | X | X |
|         | HW-F01R (NC-LB) | L                 | 0                 | X | X | X | X |
|         |                 | R                 | X                 | X | X | X | 0 |



1. Mounting position indicates which side of operator each contact should be mounted (as viewed from the front of the panel).
2. \*For key removable code see page 579.

3. HW1S-3T is identified by white plungers on the operator.
4. HW1S-3ST is identified by red plungers on the operator.
5. HW1S-3JT is identified by black plungers on the operator.

## HW Safety Precautions

Turn off power to HW series control units before starting installation, removal, wiring, maintenance, and inspection of the products. Failure to turn power off may cause electrical shocks or fire hazard.

To avoid the possibility of burning yourself, use the lamp holder tool when replacing lamps.

For wiring, use wires of a proper size to meet voltage and current requirements. Tighten the M3.5 terminal screws to a tightening torque of 1.0 to 1.3 N·m. Failure to tighten terminal screws may cause overheating and fire.


## HW General Instructions

### Panel Mounting

Remove the contact block assembly from the operator (for transformer type pilot lights, remove the transformer from the illumination unit). Remove the locking ring from the operator. Insert the operator into the panel cut-out from the front, tighten the locking ring from the back, then install the contact block assembly to the operator.

### Removing and Installing the Contact Block Assembly

1. To remove the operator from the contact block, turn the locking lever in the direction of the arrow shown below. The operator can now be removed.
2. To reinstall, place the TOP markings on the operator and the contact block mounting adapter in the same direction, and insert the operator into the contact block mounting adapter. Then turn the locking lever in the opposite direction.

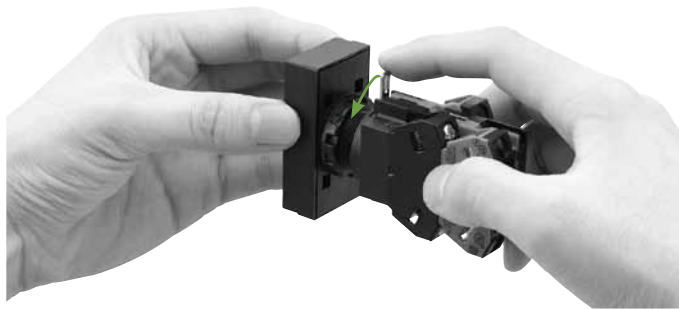


### Notes for Panel Mounting

1. When mounting the operator onto a panel, use the optional locking ring wrench (MW9Z-T1) to tighten the locking ring. Tightening torque must not exceed 2.0 N·m. Do not use pliers. Excessive tightening will damage the locking ring.
2. For the contact blocks and transformers housing LED and incandescent lamps, make sure not to press the lamps too hard, otherwise the lamp socket may be damaged.

### Safety Lever Lock

IDEC strongly recommends using the safety lever lock (HW9Z-LS, yellow) to prevent heavy vibration or maintenance personnel from unlocking the contact assembly.

1. HW series can be mounted vertically with a minimum spacing of 55 mm but spacing should be determined to ensure easy operation (recommended minimum spacing: 100 mm).
2. Mount the control unit onto the panel, lock the lever, and push in the safety lever lock to install.
3. When the spacing is narrower than the recommended value, with the lever unlocked, mount the safety lever lock and insert the contact unit to the operator. Then, lock the lever and strongly push in the safety lever lock to install.
4. To remove the safety lever lock, insert a flat screwdriver into the safety lever and push upwards.

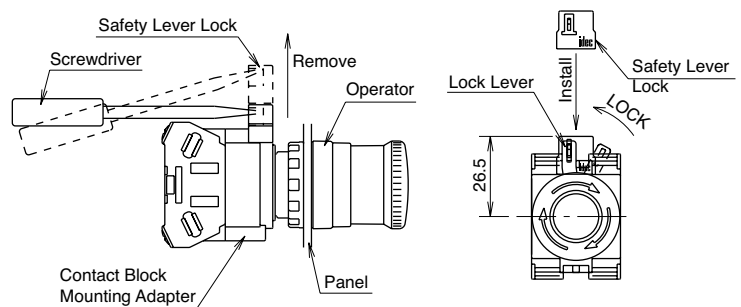

## Dual Pushbutton Instructions

### Replacement of Lens

#### Removing

Remove the lens by inserting a screwdriver into the recess of the lens through the bezel.

#### Installing

Install the lens in the recess between the buttons by pressing against the bezel.



## Dual Pushbuttons Instructions con't

### Replacement of Lamps

Lamps can be replaced by using the lamp holder tool (OR-55) from the front of the panel, or by removing the contact block assembly from the operator unit.

### Removing the Lamps from the Front of the Panel


#### Removal

1. To remove, slip the lamp holder tool onto the lamp head lightly. Then push slightly, and turn the lamp holder tool counterclockwise.



#### Installation


1. To install, insert the lamp head into the lamp holder tool, and hold the lamp as shown in the figure below.
2. Place the pins on the lamp base to the grooves in the lamp socket. Insert the lamp and turn it clockwise.



### About Pushbutton Switches

The pushbuttons cannot be removed or replaced!

Do not attempt to remove using a flat screwdriver or pincers, otherwise the pushbuttons may be damaged.




### Narrow Mounting

When mounting the units closely in a horizontal row on 30mm centers, use optional barriers to prevent interconnection between adjoining terminals. The barriers can be attached simply by pressing them onto the sides of contact blocks.



When mounting transformer type illuminated units closely in a horizontal row on 30-mm centers, insert solid wires or stranded wires into inside of the terminal screw on the transformer (see figure on the right) to prevent short circuit between adjoining terminals.



### Tightening Torque for Terminal Screws

Tighten the M3.5 terminal screws to a torque of 1.0 to 1.3 N·m.


### Installation of LED Illuminated Units

When using full voltage type LED illuminated units, provide protection against electrical noise, if necessary.

### Applicable Wiring


The applicable wire size is 2 mm<sup>2</sup> maximum. (solid wire ø1.6mm<sup>2</sup> maximum) One or two wires can be connected.

### Applicable Crimping Terminal




Be sure to use an insulation tube or cover on the crimping part of the crimping terminal to prevent electrical shocks.

### Solid Wire



Note: When connecting wires to contact blocks or transformers in the direction shown below, keep the insulation stripping length 6.6 mm at the maximum.

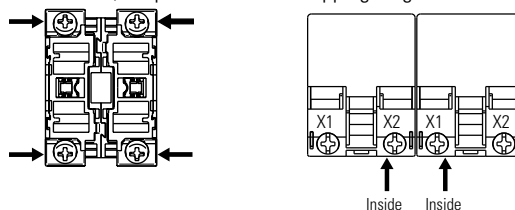

### Installing the Rubber Cover

When using the HW7D pushbuttons in places where the pushbuttons are subjected to water splash or an excessive amount of dust, make sure to use the HW9Z-D7D rubber boot (IP65) which is ordered separately.

### Notes for Installing the Rubber Cover

Remove the gasket from the operator, and install the rubber boot on the operator. Pull out the seals of the rubber boot and place them around the operator sleeve as shown. Make sure that the seals are not twisted or tucked inside and that the gasket does not remain, otherwise the normal waterproof and dustproof characteristics are not ensured.

1. Remove the gasket.
2. Install the rubber boot on the pushbuttons.
3. Rubber boot is installed.

