

- Compliant with PCI Hot-Plug Specification, Revision 1.0
- Supports up to Four Independently Controlled Hot-Plug Slots
- Provides Register Accessing Through Both Generic Parallel Bus and Two-Wire Serial Interface
- Provides Interrupt and Event Status/Enable State Compliant with ACPI Specification 1.0
- Provides an Automatic Bus Connection Sequencing Feature
- Supports 66-MHz PCI Clock Frequency
- Features Two Attention Indicators with Variable LED Blinking Rates per Slot
- Provides an Easy Scheme to Cascade the HPC3130 for Compact PCI Applications
- Provides Card Detection Mechanism Independent of PCI Present Signals for Advanced Card Protection
- Provides Path to Guarantee Idle State During PCI Bus Connections
- Fabricated in Advanced Low-Power CMOS Process
- Features a CBT Switch<sup>†</sup> Control Feature for REQ64 Implementation
- Package Options:
  - 120-pin QFP Package
  - 128-pin LQFP Package
  - 144-pin LQFP Package

## Table of Contents

|                                                   |    |                                           |    |
|---------------------------------------------------|----|-------------------------------------------|----|
| Description .....                                 | 2  | 66 MHz PCI Support .....                  | 24 |
| Functional Block Diagram .....                    | 2  | Configuration and Control Registers ..... | 25 |
| Pin Assignments (120-Pin) .....                   | 3  | Absolute Maximum Ratings .....            | 32 |
| Pin Assignments (128-Pin) .....                   | 4  | Recommended Operating Conditions .....    | 33 |
| Pin Assignments (144-Pin) .....                   | 5  | Serial Bus Interface .....                | 34 |
| Signal Name/Pin Number Sort Table (120-Pin) ..... | 6  | Electrical Characteristics .....          | 34 |
| Signal Name/Pin Number Sort Table (128-Pin) ..... | 8  | PCI Clock/Reset Timing Requirements ..... | 35 |
| Signal Name/Pin Number Sort Table (144-Pin) ..... | 10 | PCI Timing Requirements .....             | 36 |
| Terminal Functions .....                          | 12 | Mechanical Data (120-Pin) .....           | 37 |
| HPC3130 Applications .....                        | 15 | Mechanical Data (128-Pin) .....           | 38 |
| SLOTREQ64 .....                                   | 23 | Mechanical Data (144-Pin) .....           | 39 |



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

<sup>†</sup> Contact Texas Instrument's Bus Interface product group for information related to CBT switches.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS  
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 1998, Texas Instruments Incorporated

# HPC3130

## PCI HOT PLUG CONTROLLER

SCPS029B – DECEMBER1998

### description

The Texas Instruments HPC3130 is a peripheral component interconnect (PCI) hot-plug controller, compliant with *PCI Hot-Plug Specification, Revision 1.0*. This device supports hot insertion/removal of up to four hot-plug slots on a PCI bus, provides a 64-bit data path in any of the four hot-plug slots, and supports 66-MHz systems for two slots.


The primary function of the HPC3130 is to allow noninterfering hot-plug slot connection/disconnection with the other PCI devices on the bus. The HPC3130 provides automatic bus connection sequencing and supports a protocol for connection during bus idle conditions. It also supports an interrupt pin to report hot-plug slot events. The interrupt event status and enable state are compliant with the *Advanced Configuration and Power Interface (ACPI) Specification*.

Internal registers may be accessed through either a two-signal serial interface or a generic parallel bus. The serial interface slave decoding circuit supports up to eight different controllers or other serial bus devices with the same system base. Decoding through the parallel interface supports multiple controllers with external chip-select logic. Two double-words of configuration and control registers are provided per slot. As a result, the HPC3130 decodes an address range of 32 bytes.

An advanced complementary metal-oxide semiconductor (CMOS) process provides low system power consumption while operating at PCI clock rates up to 66 MHz.


### functional block diagram

A simplified block diagram of the HPC3130 is provided below. The block diagram illustrates the HPC3130 functionality on a per slot basis. The SMODE chip input, not shown, is used for terminal multiplexing of the serial and parallel bus slave interfaces.

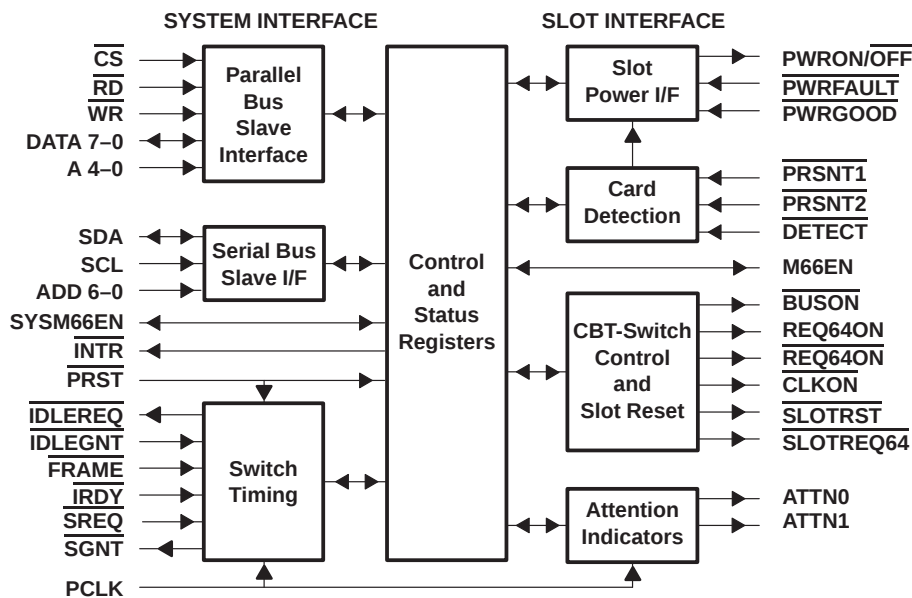

pin assignments (120-pin package)

PBM QUAD FLAT PACKAGE  
TOP VIEW

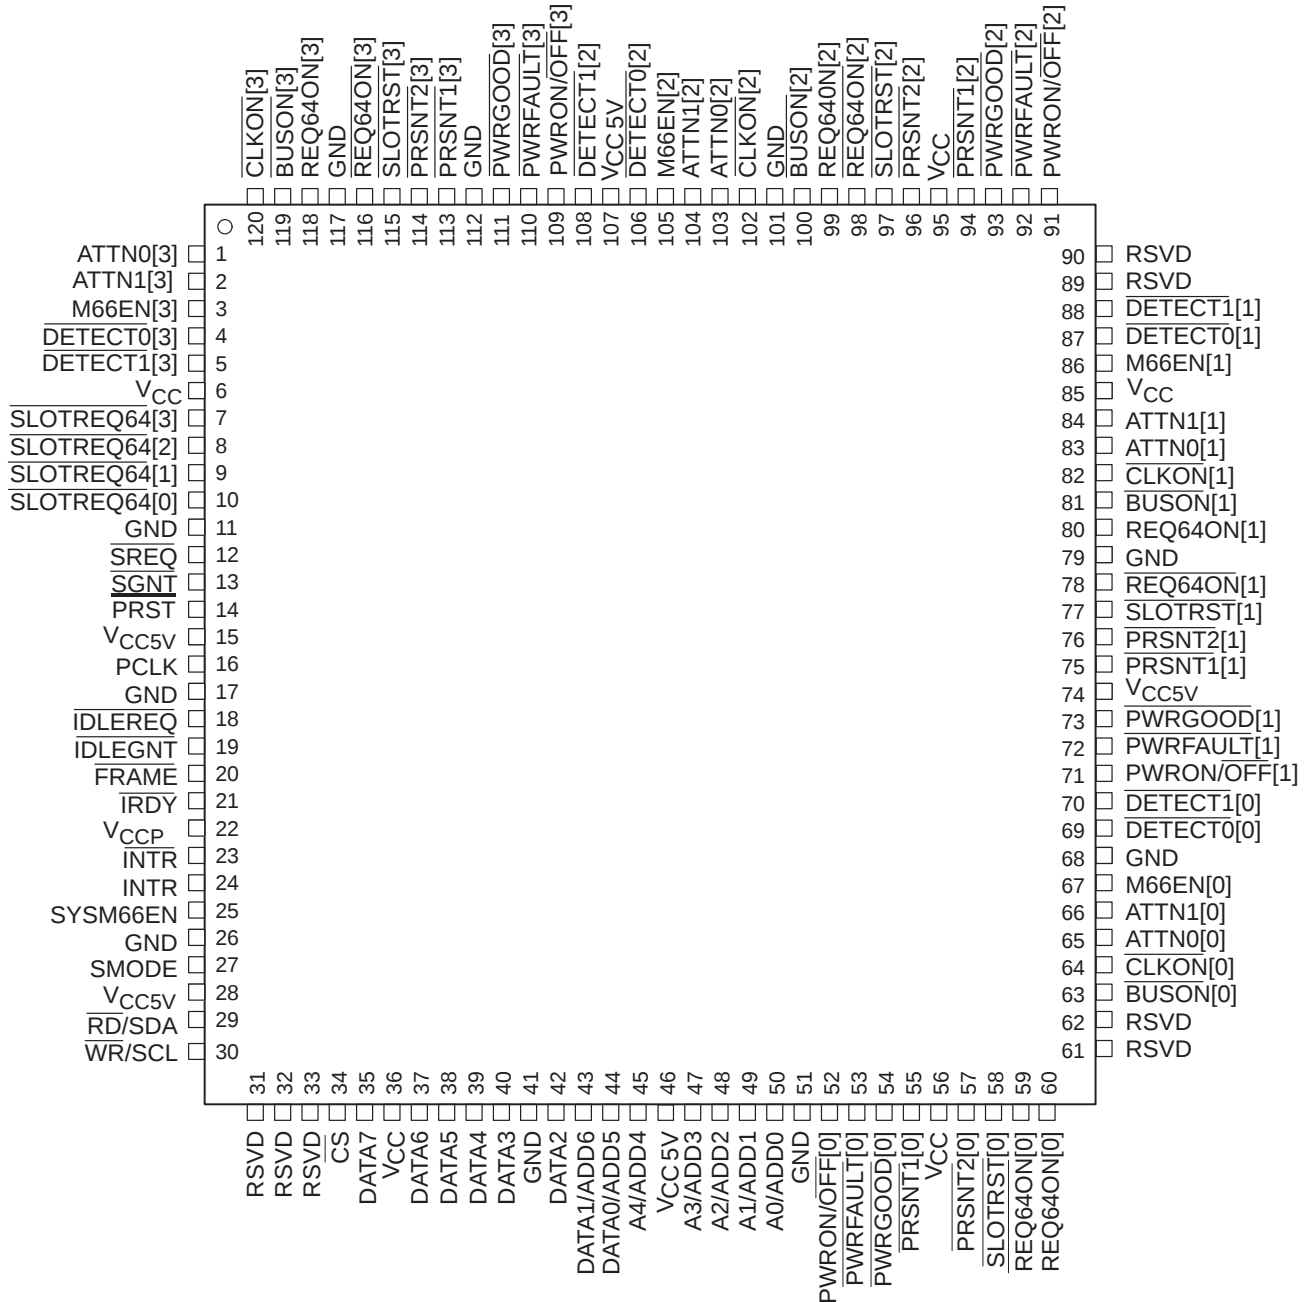


## SCPS029B – DECEMBER1998

### PBK LOW-PROFILE QUAD FLAT PACKAGE TOP VIEW



**pin assignments (144-pin package)**

**PGE LOW-PROFILE QUAD FLAT PACKAGE**  
**TOP VIEW**

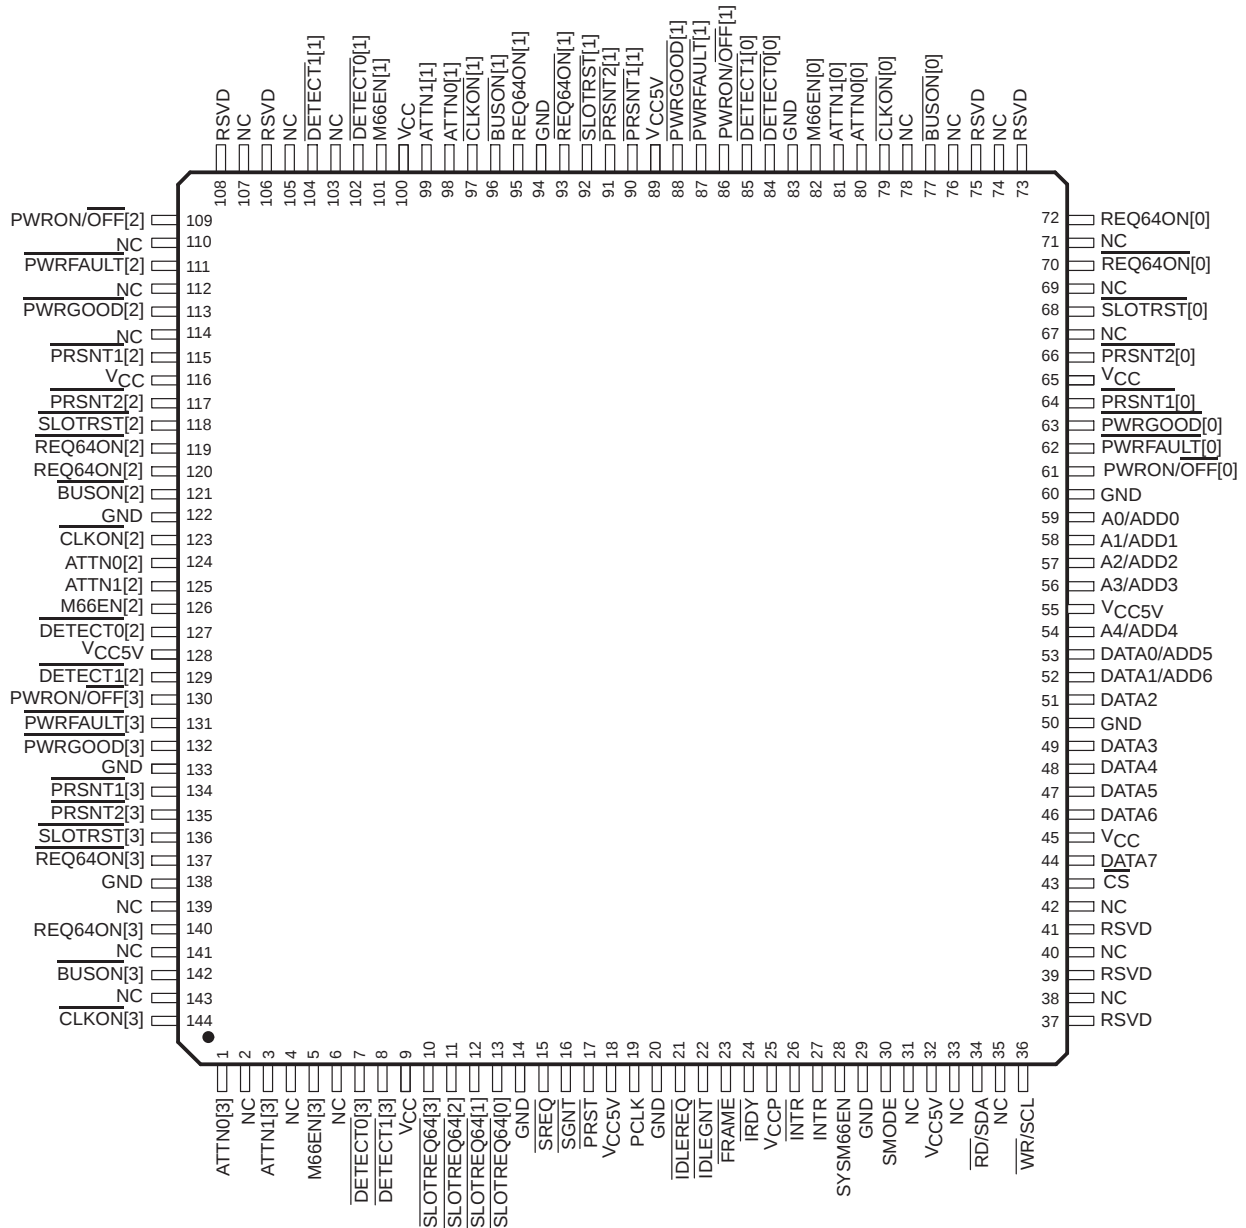

# HPC3130

## PCI HOT PLUG CONTROLLER

SCPS029B – DECEMBER1998

### signal names by terminal name

**Table 1. Signals Sorted Alphabetically by Terminal Name (120-Pin Package)**

| TERMINAL NAME                  | NO  | TERMINAL NAME                   | NO  | TERMINAL NAME                     | NO  |
|--------------------------------|-----|---------------------------------|-----|-----------------------------------|-----|
| A0/ADD0                        | 50  | GND                             | 17  | $\overline{\text{RD}}/\text{SDA}$ | 29  |
| A1/ADD1                        | 49  | GND                             | 26  | $\overline{\text{REQ64ON}}[0]$    | 59  |
| A2/ADD2                        | 48  | GND                             | 41  | $\overline{\text{REQ64ON}}[1]$    | 78  |
| A3/ADD3                        | 47  | GND                             | 51  | $\overline{\text{REQ64ON}}[2]$    | 98  |
| A4/ADD4                        | 45  | GND                             | 68  | $\overline{\text{REQ64ON}}[3]$    | 116 |
| ATTN0[0]                       | 65  | GND                             | 79  | $\text{REQ64ON}[0]$               | 60  |
| ATTN0[1]                       | 83  | GND                             | 101 | $\text{REQ64ON}[1]$               | 80  |
| ATTN0[2]                       | 103 | GND                             | 112 | $\text{REQ64ON}[2]$               | 99  |
| ATTN0[3]                       | 1   | GND                             | 117 | $\text{REQ64ON}[3]$               | 118 |
| ATTN1[0]                       | 66  | $\overline{\text{IDLEGNT}}$     | 19  | RSVD                              | 31  |
| ATTN1[1]                       | 84  | $\overline{\text{IDLEREQ}}$     | 18  | RSVD                              | 32  |
| ATTN1[2]                       | 104 | INTR                            | 24  | RSVD                              | 33  |
| ATTN1[3]                       | 2   | $\overline{\text{INTR}}$        | 23  | RSVD                              | 61  |
| $\overline{\text{BUSON}}[0]$   | 63  | $\overline{\text{IRDY}}$        | 21  | RSVD                              | 62  |
| $\overline{\text{BUSON}}[1]$   | 81  | M66EN[0]                        | 67  | RSVD                              | 89  |
| $\overline{\text{BUSON}}[2]$   | 100 | M66EN[1]                        | 86  | RSVD                              | 90  |
| $\overline{\text{BUSON}}[3]$   | 119 | M66EN[2]                        | 105 | SGNT                              | 13  |
| $\overline{\text{CLKON}}[0]$   | 64  | M66EN[3]                        | 3   | $\overline{\text{SLOTREQ64}}[0]$  | 10  |
| $\overline{\text{CLKON}}[1]$   | 82  | PCLK                            | 16  | $\overline{\text{SLOTREQ64}}[1]$  | 9   |
| $\overline{\text{CLKON}}[2]$   | 102 | $\overline{\text{PRSNT1}}[0]$   | 55  | $\overline{\text{SLOTREQ64}}[2]$  | 8   |
| $\overline{\text{CLKON}}[3]$   | 120 | $\overline{\text{PRSNT1}}[1]$   | 75  | $\overline{\text{SLOTREQ64}}[3]$  | 7   |
| $\overline{\text{CS}}$         | 34  | $\overline{\text{PRSNT1}}[2]$   | 94  | $\overline{\text{SLOTTRST}}[0]$   | 58  |
| DATA0/ADD5                     | 44  | $\overline{\text{PRSNT1}}[3]$   | 113 | $\overline{\text{SLOTTRST}}[1]$   | 77  |
| DATA1/ADD6                     | 43  | $\overline{\text{PRSNT2}}[0]$   | 57  | $\overline{\text{SLOTTRST}}[2]$   | 97  |
| DATA2                          | 42  | $\overline{\text{PRSNT2}}[1]$   | 76  | $\overline{\text{SLOTTRST}}[3]$   | 115 |
| DATA3                          | 40  | $\overline{\text{PRSNT2}}[2]$   | 96  | SMODE                             | 27  |
| DATA4                          | 39  | $\overline{\text{PRSNT2}}[3]$   | 114 | $\overline{\text{SREQ}}$          | 12  |
| DATA5                          | 38  | $\overline{\text{PRST}}$        | 14  | SYSM66EN                          | 25  |
| DATA6                          | 37  | $\overline{\text{PWRFAULT}}[0]$ | 53  | VCC                               | 6   |
| DATA7                          | 35  | $\overline{\text{PWRFAULT}}[1]$ | 72  | VCC                               | 36  |
| $\overline{\text{DETECT0}}[0]$ | 69  | $\overline{\text{PWRFAULT}}[2]$ | 92  | VCC                               | 56  |
| $\overline{\text{DETECT0}}[1]$ | 87  | $\overline{\text{PWRFAULT}}[3]$ | 110 | VCC                               | 85  |
| $\overline{\text{DETECT0}}[2]$ | 106 | $\overline{\text{PWRGOOD}}[0]$  | 54  | VCC                               | 95  |
| $\overline{\text{DETECT0}}[3]$ | 4   | $\overline{\text{PWRGOOD}}[1]$  | 73  | VCC5V                             | 15  |
| $\overline{\text{DETECT1}}[0]$ | 70  | $\overline{\text{PWRGOOD}}[2]$  | 93  | VCC5V                             | 28  |
| $\overline{\text{DETECT1}}[1]$ | 88  | $\overline{\text{PWRGOOD}}[3]$  | 111 | VCC5V                             | 46  |
| $\overline{\text{DETECT1}}[2]$ | 108 | $\text{PWRON/OFF}[0]$           | 52  | VCC5V                             | 74  |
| $\overline{\text{DETECT1}}[3]$ | 5   | $\text{PWRON/OFF}[1]$           | 71  | VCC5V                             | 107 |
| $\overline{\text{FRAME}}$      | 20  | $\text{PWRON/OFF}[2]$           | 91  | VCCP                              | 22  |
| GND                            | 11  | $\text{PWRON/OFF}[3]$           | 109 | $\overline{\text{WR}}/\text{SCL}$ | 30  |

signal names by pin number

Table 2. Signals Sorted Numerically by Pin Number (120-Pin Package)

| NO | TERMINAL NAME     | NO | TERMINAL NAME     | NO  | TERMINAL NAME     |
|----|-------------------|----|-------------------|-----|-------------------|
| 1  | ATTN0[3]          | 41 | GND               | 81  | BUSON[1]          |
| 2  | ATTN1[3]          | 42 | DATA2             | 82  | CLKON[1]          |
| 3  | M66EN[3]          | 43 | DATA1/ADD6        | 83  | ATTN0[1]          |
| 4  | DETECT0[3]        | 44 | DATA0/ADD5        | 84  | ATTN1[1]          |
| 5  | DETECT1[3]        | 45 | A4/ADD4           | 85  | V <sub>CC</sub>   |
| 6  | V <sub>CC</sub>   | 46 | V <sub>CC5V</sub> | 86  | M66EN[1]          |
| 7  | SLOTREQ64[3]      | 47 | A3/ADD3           | 87  | DETECT0[1]        |
| 8  | SLOTREQ64[2]      | 48 | A2/ADD2           | 88  | DETECT1[1]        |
| 9  | SLOTREQ64[1]      | 49 | A1/ADD1           | 89  | RSVD              |
| 10 | SLOTREQ64[0]      | 50 | A0/ADD0           | 90  | RSVD              |
| 11 | GND               | 51 | GND               | 91  | PWRON/OFF[2]      |
| 12 | SREQ              | 52 | PWRON/OFF[0]      | 92  | PWRFAULT[2]       |
| 13 | SGNT              | 53 | PWRFAULT[0]       | 93  | PWRGOOD[2]        |
| 14 | PRST              | 54 | PWRGOOD[0]        | 94  | PRSNT1[2]         |
| 15 | V <sub>CC5V</sub> | 55 | PRSNT1[0]         | 95  | V <sub>CC</sub>   |
| 16 | PCLK              | 56 | V <sub>CC</sub>   | 96  | PRSNT2[2]         |
| 17 | GND               | 57 | PRSNT2[0]         | 97  | SLOTTRST[2]       |
| 18 | IDLEREQ           | 58 | SLOTTRST[0]       | 98  | REQ64ON[2]        |
| 19 | IDLEGNT           | 59 | REQ64ON[0]        | 99  | REQ64ON[2]        |
| 20 | FRAME             | 60 | REQ64ON[0]        | 100 | BUSON[2]          |
| 21 | IRDY              | 61 | RSVD              | 101 | GND               |
| 22 | V <sub>CCP</sub>  | 62 | RSVD              | 102 | CLKON[2]          |
| 23 | INTR              | 63 | BUSON[0]          | 103 | ATTN0[2]          |
| 24 | INTR              | 64 | CLKON[0]          | 104 | ATTN1[2]          |
| 25 | SYSM66EN          | 65 | ATTN0[0]          | 105 | M66EN[2]          |
| 26 | GND               | 66 | ATTN1[0]          | 106 | DETECT0[2]        |
| 27 | SMODE             | 67 | M66EN[0]          | 107 | V <sub>CC5V</sub> |
| 28 | V <sub>CC5V</sub> | 68 | GND               | 108 | DETECT1[2]        |
| 29 | RD/SDA            | 69 | DETECT0[0]        | 109 | PWRON/OFF[3]      |
| 30 | WR/SCL            | 70 | DETECT1[0]        | 110 | PWRFAULT[3]       |
| 31 | RSVD              | 71 | PWRON/OFF[1]      | 111 | PWRGOOD[3]        |
| 32 | RSVD              | 72 | PWRFAULT[1]       | 112 | GND               |
| 33 | RSVD              | 73 | PWRGOOD[1]        | 113 | PRSNT1[3]         |
| 34 | CS                | 74 | V <sub>CC5V</sub> | 114 | PRSNT2[3]         |
| 35 | DATA7             | 75 | PRSNT1[1]         | 115 | SLOTTRST[3]       |
| 36 | V <sub>CC</sub>   | 76 | PRSNT2[1]         | 116 | REQ64ON[3]        |
| 37 | DATA6             | 77 | SLOTTRST[1]       | 117 | GND               |
| 38 | DATA5             | 78 | REQ64ON[1]        | 118 | REQ64ON[3]        |
| 39 | DATA4             | 79 | GND               | 119 | BUSON[3]          |
| 40 | DATA3             | 80 | REQ64ON[1]        | 120 | CLKON[3]          |

# HPC3130

## PCI HOT PLUG CONTROLLER

SCPS029B – DECEMBER1998

### signal names by terminal name

**Table 3. Signals Sorted Alphabetically by Terminal Name (128-Pin Package)**

| TERMINAL NAME                  | NO  | TERMINAL NAME                  | NO  | TERMINAL NAME                     | NO  | TERMINAL NAME | NO  |
|--------------------------------|-----|--------------------------------|-----|-----------------------------------|-----|---------------|-----|
| A0/ADD0                        | 53  | $\overline{\text{DETECT0}}[2]$ | 113 | NC                                | 97  | REQ64ON[3]    | 125 |
| A1/ADD1                        | 52  | $\overline{\text{DETECT0}}[3]$ | 5   | NC                                | 128 | RSVD          | 34  |
| A2/ADD2                        | 51  | $\overline{\text{DETECT1}}[0]$ | 75  | PCLK                              | 17  | RSVD          | 35  |
| A3/ADD3                        | 50  | $\overline{\text{DETECT1}}[1]$ | 93  | $\overline{\text{PRSNT1}}[0]$     | 58  | RSVD          | 36  |
| A4/ADD4                        | 48  | $\overline{\text{DETECT1}}[2]$ | 115 | $\overline{\text{PRSNT1}}[1]$     | 80  | RSVD          | 66  |
| ATTN0[0]                       | 70  | $\overline{\text{DETECT1}}[3]$ | 6   | $\overline{\text{PRSNT1}}[2]$     | 101 | RSVD          | 67  |
| ATTN0[1]                       | 88  | FRAME                          | 21  | $\overline{\text{PRSNT1}}[3]$     | 120 | RSVD          | 94  |
| ATTN0[2]                       | 110 | GND                            | 12  | $\overline{\text{PRSNT2}}[0]$     | 60  | RSVD          | 95  |
| ATTN0[3]                       | 2   | GND                            | 18  | $\overline{\text{PRSNT2}}[1]$     | 81  | SGNT          | 14  |
| ATTN1[0]                       | 71  | GND                            | 27  | $\overline{\text{PRSNT2}}[2]$     | 103 | SLOTREQ64[0]  | 11  |
| ATTN1[1]                       | 89  | GND                            | 44  | $\overline{\text{PRSNT2}}[3]$     | 121 | SLOTREQ64[1]  | 10  |
| ATTN1[2]                       | 111 | GND                            | 54  | PRST                              | 15  | SLOTREQ64[2]  | 9   |
| ATTN1[3]                       | 3   | GND                            | 73  | $\overline{\text{PWRFAULT}}[0]$   | 56  | SLOTREQ64[3]  | 8   |
| $\overline{\text{BUSON}}[0]$   | 68  | GND                            | 84  | $\overline{\text{PWRFAULT}}[1]$   | 77  | SLOTTRST[0]   | 61  |
| $\overline{\text{BUSON}}[1]$   | 86  | GND                            | 108 | $\overline{\text{PWRFAULT}}[2]$   | 99  | SLOTTRST[1]   | 82  |
| $\overline{\text{BUSON}}[2]$   | 107 | GND                            | 119 | $\overline{\text{PWRFAULT}}[3]$   | 117 | SLOTTRST[2]   | 104 |
| $\overline{\text{BUSON}}[3]$   | 126 | GND                            | 124 | $\overline{\text{PWRGOOD}}[0]$    | 57  | SLOTTRST[3]   | 122 |
| $\overline{\text{CLKON}}[0]$   | 69  | IDLEGNT                        | 20  | $\overline{\text{PWRGOOD}}[1]$    | 78  | SMODE         | 28  |
| $\overline{\text{CLKON}}[1]$   | 87  | IDLEREQ                        | 19  | $\overline{\text{PWRGOOD}}[2]$    | 100 | SREQ          | 13  |
| $\overline{\text{CLKON}}[2]$   | 109 | INTR                           | 25  | $\overline{\text{PWRGOOD}}[3]$    | 118 | SYSM66EN      | 26  |
| $\overline{\text{CLKON}}[3]$   | 127 | INTR                           | 24  | PWRON/OFF[0]                      | 55  | VCC           | 7   |
| $\overline{\text{CS}}$         | 37  | IRDY                           | 22  | PWRON/OFF[1]                      | 76  | VCC           | 39  |
| DATA0/ADD5                     | 47  | M66EN[0]                       | 72  | PWRON/OFF[2]                      | 98  | VCC           | 59  |
| DATA1/ADD6                     | 46  | M66EN[1]                       | 91  | PWRON/OFF[3]                      | 116 | VCC           | 90  |
| DATA2                          | 45  | M66EN[2]                       | 112 | $\overline{\text{RD}}/\text{SDA}$ | 30  | VCC           | 102 |
| DATA3                          | 43  | M66EN[3]                       | 4   | $\overline{\text{REQ64ON}}[0]$    | 62  | VCC5V         | 16  |
| DATA4                          | 42  | NC                             | 1   | $\overline{\text{REQ64ON}}[1]$    | 83  | VCC5V         | 29  |
| DATA5                          | 41  | NC                             | 32  | $\overline{\text{REQ64ON}}[2]$    | 105 | VCC5V         | 49  |
| DATA6                          | 40  | NC                             | 33  | $\overline{\text{REQ64ON}}[3]$    | 123 | VCC5V         | 79  |
| DATA7                          | 38  | NC                             | 64  | REQ64ON[0]                        | 63  | VCC5V         | 114 |
| $\overline{\text{DETECT0}}[0]$ | 74  | NC                             | 65  | REQ64ON[1]                        | 85  | VCCP          | 23  |
| $\overline{\text{DETECT0}}[1]$ | 92  | NC                             | 96  | REQ64ON[2]                        | 106 | WR/SCL        | 31  |

**signal names by pin number**

**Table 4. Signals Sorted Numerically by Pin Number (128-Pin Package)**

| NO | TERMINAL NAME     | NO | TERMINAL NAME     | NO | TERMINAL NAME     | NO  | TERMINAL NAME     |
|----|-------------------|----|-------------------|----|-------------------|-----|-------------------|
| 1  | NC                | 33 | NC                | 65 | NC                | 97  | NC                |
| 2  | ATTN0[3]          | 34 | RSVD              | 66 | RSVD              | 98  | PWRON/OFF[2]      |
| 3  | ATTN1[3]          | 35 | RSVD              | 67 | RSVD              | 99  | PWRFAULT[2]       |
| 4  | M66EN[3]          | 36 | RSVD              | 68 | BUSON[0]          | 100 | PWRGOOD[2]        |
| 5  | DETECT0[3]        | 37 | CS                | 69 | CLKON[0]          | 101 | PRSNT1[2]         |
| 6  | DETECT1[3]        | 38 | DATA7             | 70 | ATTN0[0]          | 102 | V <sub>CC</sub>   |
| 7  | V <sub>CC</sub>   | 39 | V <sub>CC</sub>   | 71 | ATTN1[0]          | 103 | PRSNT2[2]         |
| 8  | SLOTREQ64[3]      | 40 | DATA6             | 72 | M66EN[0]          | 104 | SLOTST[2]         |
| 9  | SLOTREQ64[2]      | 41 | DATA5             | 73 | GND               | 105 | REQ64ON[2]        |
| 10 | SLOTREQ64[1]      | 42 | DATA4             | 74 | DETECT0[0]        | 106 | REQ64ON[2]        |
| 11 | SLOTREQ64[0]      | 43 | DATA3             | 75 | DETECT1[0]        | 107 | BUSON[2]          |
| 12 | GND               | 44 | GND               | 76 | PWRON/OFF[1]      | 108 | GND               |
| 13 | SREQ              | 45 | DATA2             | 77 | PWRFAULT[1]       | 109 | CLKON[2]          |
| 14 | SGNT              | 46 | DATA1/ADD6        | 78 | PWRGOOD[1]        | 110 | ATTN0[2]          |
| 15 | PRST              | 47 | DATA0/ADD5        | 79 | V <sub>CC5V</sub> | 111 | ATTN1[2]          |
| 16 | V <sub>CC5V</sub> | 48 | A4/ADD4           | 80 | PRSNT1[1]         | 112 | M66EN[2]          |
| 17 | PCLK              | 49 | V <sub>CC5V</sub> | 81 | PRSNT2[1]         | 113 | DETECT0[2]        |
| 18 | GND               | 50 | A3/ADD3           | 82 | SLOTST[1]         | 114 | V <sub>CC5V</sub> |
| 19 | IDLEREQ           | 51 | A2/ADD2           | 83 | REQ64ON[1]        | 115 | DETECT1[2]        |
| 20 | IDLEGNT           | 52 | A1/ADD1           | 84 | GND               | 116 | PWRON/OFF[3]      |
| 21 | FRAME             | 53 | A0/ADD0           | 85 | REQ64ON[1]        | 117 | PWRFAULT[3]       |
| 22 | IRDY              | 54 | GND               | 86 | BUSON[1]          | 118 | PWRGOOD[3]        |
| 23 | V <sub>CCP</sub>  | 55 | PWRON/OFF[0]      | 87 | CLKON[1]          | 119 | GND               |
| 24 | INTR              | 56 | PWRFAULT[0]       | 88 | ATTN0[1]          | 120 | PRSNT1[3]         |
| 25 | INTR              | 57 | PWRGOOD[0]        | 89 | ATTN1[1]          | 121 | PRSNT2[3]         |
| 26 | SYSM66EN          | 58 | PRSNT1[0]         | 90 | V <sub>CC</sub>   | 122 | SLOTST[3]         |
| 27 | GND               | 59 | V <sub>CC</sub>   | 91 | M66EN[1]          | 123 | REQ64ON[3]        |
| 28 | SMODE             | 60 | PRSNT2[0]         | 92 | DETECT0[1]        | 124 | GND               |
| 29 | V <sub>CC5V</sub> | 61 | SLOTST[0]         | 93 | DETECT1[1]        | 125 | REQ64ON[3]        |
| 30 | RD/SDA            | 62 | REQ64ON[0]        | 94 | RSVD              | 126 | BUSON[3]          |
| 31 | WR/SCL            | 63 | REQ64ON[0]        | 95 | RSVD              | 127 | CLKON[3]          |
| 32 | NC                | 64 | NC                | 96 | NC                | 128 | NC                |

# HPC3130

## PCI HOT PLUG CONTROLLER

SCPS029B – DECEMBER1998

### signal names by terminal name

**Table 5. Signals Sorted Alphabetically by Terminal Name (144-Pin Package)**

| TERMINAL NAME                  | NO  | TERMINAL NAME                  | NO  | TERMINAL NAME                     | NO  | TERMINAL NAME                    | NO  |
|--------------------------------|-----|--------------------------------|-----|-----------------------------------|-----|----------------------------------|-----|
| A0/ADD0                        | 59  | $\overline{\text{DETECT1}}[2]$ | 129 | NC                                | 78  | $\overline{\text{REQ64ON}}[3]$   | 137 |
| A1/ADD1                        | 58  | $\overline{\text{DETECT1}}[3]$ | 8   | NC                                | 103 | $\overline{\text{REQ64ON}}[0]$   | 72  |
| A2/ADD2                        | 57  | $\overline{\text{FRAME}}$      | 23  | NC                                | 105 | $\overline{\text{REQ64ON}}[1]$   | 95  |
| A3/ADD3                        | 56  | GND                            | 14  | NC                                | 107 | $\overline{\text{REQ64ON}}[2]$   | 120 |
| A4/ADD4                        | 54  | GND                            | 20  | NC                                | 110 | $\overline{\text{REQ64ON}}[3]$   | 140 |
| ATTN0[0]                       | 80  | GND                            | 29  | NC                                | 112 | RSVD                             | 37  |
| ATTN0[1]                       | 98  | GND                            | 50  | NC                                | 114 | RSVD                             | 39  |
| ATTN0[2]                       | 124 | GND                            | 60  | NC                                | 139 | RSVD                             | 41  |
| ATTN0[3]                       | 1   | GND                            | 83  | NC                                | 141 | RSVD                             | 73  |
| ATTN1[0]                       | 81  | GND                            | 94  | NC                                | 143 | RSVD                             | 75  |
| ATTN1[1]                       | 99  | GND                            | 122 | PCLK                              | 19  | RSVD                             | 106 |
| ATTN1[2]                       | 125 | GND                            | 133 | $\overline{\text{PRSNT1}}[0]$     | 64  | RSVD                             | 108 |
| ATTN1[3]                       | 3   | GND                            | 138 | $\overline{\text{PRSNT1}}[1]$     | 90  | $\overline{\text{SGNT}}$         | 16  |
| $\overline{\text{BUSON}}[0]$   | 77  | $\overline{\text{IDLEGNT}}$    | 22  | $\overline{\text{PRSNT1}}[2]$     | 115 | $\overline{\text{SLOTREQ64}}[0]$ | 13  |
| $\overline{\text{BUSON}}[1]$   | 96  | $\overline{\text{IDLEREQ}}$    | 21  | $\overline{\text{PRSNT1}}[3]$     | 134 | $\overline{\text{SLOTREQ64}}[1]$ | 12  |
| $\overline{\text{BUSON}}[2]$   | 121 | INTR                           | 27  | $\overline{\text{PRSNT2}}[0]$     | 66  | $\overline{\text{SLOTREQ64}}[2]$ | 11  |
| $\overline{\text{BUSON}}[3]$   | 142 | INTR                           | 26  | $\overline{\text{PRSNT2}}[1]$     | 91  | $\overline{\text{SLOTREQ64}}[3]$ | 10  |
| $\overline{\text{CLKON}}[0]$   | 79  | $\overline{\text{IRDY}}$       | 24  | $\overline{\text{PRSNT2}}[2]$     | 117 | $\overline{\text{SLOTTRST}}[0]$  | 68  |
| $\overline{\text{CLKON}}[1]$   | 97  | M66EN[0]                       | 82  | $\overline{\text{PRSNT2}}[3]$     | 135 | $\overline{\text{SLOTTRST}}[1]$  | 92  |
| $\overline{\text{CLKON}}[2]$   | 123 | M66EN[1]                       | 101 | $\overline{\text{PRST}}$          | 17  | $\overline{\text{SLOTTRST}}[2]$  | 118 |
| $\overline{\text{CLKON}}[3]$   | 144 | M66EN[2]                       | 126 | $\overline{\text{PWRFAULT}}[0]$   | 62  | $\overline{\text{SLOTTRST}}[3]$  | 136 |
| $\overline{\text{CS}}$         | 43  | M66EN[3]                       | 5   | $\overline{\text{PWRFAULT}}[1]$   | 87  | $\overline{\text{SMODE}}$        | 30  |
| DATA0/ADD5                     | 53  | NC                             | 2   | $\overline{\text{PWRFAULT}}[2]$   | 111 | $\overline{\text{SREQ}}$         | 15  |
| DATA1/ADD6                     | 52  | NC                             | 4   | $\overline{\text{PWRFAULT}}[3]$   | 131 | SYSM66EN                         | 28  |
| DATA2                          | 51  | NC                             | 6   | $\overline{\text{PWRGOOD}}[0]$    | 63  | VCC                              | 9   |
| DATA3                          | 49  | NC                             | 31  | $\overline{\text{PWRGOOD}}[1]$    | 88  | VCC                              | 45  |
| DATA4                          | 48  | NC                             | 33  | $\overline{\text{PWRGOOD}}[2]$    | 113 | VCC                              | 65  |
| DATA5                          | 47  | NC                             | 35  | $\overline{\text{PWRGOOD}}[3]$    | 132 | VCC                              | 100 |
| DATA6                          | 46  | NC                             | 38  | PWRON/ $\overline{\text{OFF}}[0]$ | 61  | VCC                              | 116 |
| DATA7                          | 44  | NC                             | 40  | PWRON/ $\overline{\text{OFF}}[1]$ | 86  | VCC5V                            | 18  |
| $\overline{\text{DETECT0}}[0]$ | 84  | NC                             | 42  | PWRON/ $\overline{\text{OFF}}[2]$ | 109 | VCC5V                            | 32  |
| $\overline{\text{DETECT0}}[1]$ | 102 | NC                             | 67  | PWRON/ $\overline{\text{OFF}}[3]$ | 130 | VCC5V                            | 55  |
| $\overline{\text{DETECT0}}[2]$ | 127 | NC                             | 69  | $\overline{\text{RD}}/\text{SDA}$ | 34  | VCC5V                            | 89  |
| $\overline{\text{DETECT0}}[3]$ | 7   | NC                             | 71  | $\overline{\text{REQ64ON}}[0]$    | 70  | VCC5V                            | 128 |
| $\overline{\text{DETECT1}}[0]$ | 85  | NC                             | 74  | $\overline{\text{REQ64ON}}[1]$    | 93  | VCCP                             | 25  |
| $\overline{\text{DETECT1}}[1]$ | 104 | NC                             | 76  | $\overline{\text{REQ64ON}}[2]$    | 119 | WR/SCL                           | 36  |

signal names by pin number

Table 6. Signals Sorted Numerically by Pin Number (144-Pin Package)

| NO | TERMINAL NAME | NO | TERMINAL NAME | NO  | TERMINAL NAME | NO  | TERMINAL NAME |
|----|---------------|----|---------------|-----|---------------|-----|---------------|
| 1  | ATTN0[3]      | 37 | RSVD          | 73  | RSVD          | 109 | PWRON/ÖFF[2]  |
| 2  | NC            | 38 | NC            | 74  | NC            | 110 | NC            |
| 3  | ATTN1[3]      | 39 | RSVD          | 75  | RSVD          | 111 | PWRFAULT[2]   |
| 4  | NC            | 40 | NC            | 76  | NC            | 112 | NC            |
| 5  | M66EN[3]      | 41 | RSVD          | 77  | BUSON[0]      | 113 | PWRGOOD[2]    |
| 6  | NC            | 42 | NC            | 78  | NC            | 114 | NC            |
| 7  | DETECT0[3]    | 43 | CS            | 79  | CLKON[0]      | 115 | PRSNT1[2]     |
| 8  | DETECT1[3]    | 44 | DATA7         | 80  | ATTN0[0]      | 116 | VCC           |
| 9  | VCC           | 45 | VCC           | 81  | ATTN1[0]      | 117 | PRSNT2[2]     |
| 10 | SLOTREQ64[3]  | 46 | DATA6         | 82  | M66EN[0]      | 118 | SLOTST[2]     |
| 11 | SLOTREQ64[2]  | 47 | DATA5         | 83  | GND           | 119 | REQ64ON[2]    |
| 12 | SLOTREQ64[1]  | 48 | DATA4         | 84  | DETECT0[0]    | 120 | REQ64ON[2]    |
| 13 | SLOTREQ64[0]  | 49 | DATA3         | 85  | DETECT1[0]    | 121 | BUSON[2]      |
| 14 | GND           | 50 | GND           | 86  | PWRON/ÖFF[1]  | 122 | GND           |
| 15 | SREQ          | 51 | DATA2         | 87  | PWRFAULT[1]   | 123 | CLKON[2]      |
| 16 | SGNT          | 52 | DATA1/ADD6    | 88  | PWRGOOD[1]    | 124 | ATTN0[2]      |
| 17 | PRST          | 53 | DATA0/ADD5    | 89  | VCC5V         | 125 | ATTN1[2]      |
| 18 | VCC5V         | 54 | A4/ADD4       | 90  | PRSNT1[1]     | 126 | M66EN[2]      |
| 19 | PCLK          | 55 | VCC5V         | 91  | PRSNT2[1]     | 127 | DETECT0[2]    |
| 20 | GND           | 56 | A3/ADD3       | 92  | SLOTST[1]     | 128 | VCC5V         |
| 21 | IDLEREQ       | 57 | A2/ADD2       | 93  | REQ64ON[1]    | 129 | DETECT1[2]    |
| 22 | IDLEGNT       | 58 | A1/ADD1       | 94  | GND           | 130 | PWRON/ÖFF[3]  |
| 23 | FRAME         | 59 | A0/ADD0       | 95  | REQ64ON[1]    | 131 | PWRFAULT[3]   |
| 24 | IRDY          | 60 | GND           | 96  | BUSON[1]      | 132 | PWRGOOD[3]    |
| 25 | VCCP          | 61 | PWRON/ÖFF[0]  | 97  | CLKON[1]      | 133 | GND           |
| 26 | INTR          | 62 | PWRFAULT[0]   | 98  | ATTN0[1]      | 134 | PRSNT1[3]     |
| 27 | INTR          | 63 | PWRGOOD[0]    | 99  | ATTN1[1]      | 135 | PRSNT2[3]     |
| 28 | SYSM66EN      | 64 | PRSNT1[0]     | 100 | VCC           | 136 | SLOTST[3]     |
| 29 | GND           | 65 | VCC           | 101 | M66EN[1]      | 137 | REQ64ON[3]    |
| 30 | SMODE         | 66 | PRSNT2[0]     | 102 | DETECT0[1]    | 138 | GND           |
| 31 | NC            | 67 | NC            | 103 | NC            | 139 | NC            |
| 32 | VCC5V         | 68 | SLOTST[0]     | 104 | DETECT1[1]    | 140 | REQ64ON[3]    |
| 33 | NC            | 69 | NC            | 105 | NC            | 141 | NC            |
| 34 | RD/SDA        | 70 | REQ64ON[0]    | 106 | RSVD          | 142 | BUSON[3]      |
| 35 | NC            | 71 | NC            | 107 | NC            | 143 | NC            |
| 36 | WR/SCL        | 72 | REQ64ON[0]    | 108 | RSVD          | 144 | CLKON[3]      |

# HPC3130

## PCI HOT PLUG CONTROLLER

SCPS029B – DECEMBER1998

### Terminal Functions

This section describes the HPC3130 terminal functions. The terminals are grouped in tables by function.

#### power supply terminal functions

| TERMINAL          |                                              |                                              |                                              | I/O | FUNCTION                                          |
|-------------------|----------------------------------------------|----------------------------------------------|----------------------------------------------|-----|---------------------------------------------------|
| NAME              | NO.<br>120                                   | NO.<br>128                                   | NO.<br>144                                   |     |                                                   |
| GND               | 11, 17, 26, 41, 51,<br>68, 79, 101, 112, 117 | 12, 18, 27, 44, 54,<br>73, 84, 108, 119, 124 | 14, 20, 29, 50, 60,<br>83, 94, 122, 133, 138 | I   | Device ground terminals                           |
| V <sub>CC</sub>   | 6, 36, 56, 85, 95                            | 7, 39, 59, 90, 102                           | 9, 45, 65, 100, 116                          | I   | 3.3-V power supply                                |
| V <sub>CC5V</sub> | 15, 28, 46, 74, 107                          | 16, 29, 49, 79, 114                          | 18, 32, 55, 89, 128                          | I   | 5-V clamp-rail voltage supply                     |
| V <sub>CCP</sub>  | 22                                           | 23                                           | 25                                           | I   | Clamp rail voltage for PCI signaling (5V or 3.3V) |

#### control bus interface

| TERMINAL                                           |                                  |                                  |                                  | I/O | FUNCTION                                                                                                                                                                                                                                                                                                                                                                                                   |
|----------------------------------------------------|----------------------------------|----------------------------------|----------------------------------|-----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NAME                                               | NO.<br>120                       | NO.<br>128                       | NO.<br>144                       |     |                                                                                                                                                                                                                                                                                                                                                                                                            |
| A2/ADD2<br>A1/ADD1<br>A0/ADD0                      | 48<br>49<br>50                   | 51<br>52<br>53                   | 57<br>58<br>59                   | I   | Parallel bus address. These terminals are address inputs in generic parallel bus cycles and are only used when the SMODE is input low. These lower address terminals select one of the eight registers for read/write access.<br><br>Serial bus address select. These terminals indicate the full serial bus address of the HPC3130 when the SMODE is input high.                                          |
| A4/ADD4<br>A3/ADD3                                 | 45<br>47                         | 48<br>50                         | 54<br>56                         | I   | Parallel bus address. These terminals are address inputs in generic parallel bus cycles, and are only used when SMODE is input low. These upper address terminals select one of four hot-plug slots supported by the HPC3130.<br><br>Serial bus address select. These terminals indicate the full serial bus address of the HPC3130 when the SMODE is input high.                                          |
| $\overline{\text{CS}}$                             | 34                               | 37                               | 43                               | I   | Chip selection. This active low input selects the HPC3130 chip as addressed in the current generic parallel bus cycle. This chip input is only valid if the SMODE is input low. Multiple HPC3130 chips may exist in a system with external logic driving this signal.                                                                                                                                      |
| DATA1/ADD6<br>DATA0/ADD5                           | 43<br>44                         | 46<br>47                         | 52<br>53                         | I/O | Parallel bus data. This bus is the data bus in generic parallel bus cycles and is selected when the SMODE is input low. The data path is used during both read and write transactions to internal registers when the parallel control bus interface is implemented.<br><br>Serial bus address selection. These terminals indicate the full serial bus address of the HPC3130 when the SMODE is input high. |
| DATA7<br>DATA6<br>DATA5<br>DATA4<br>DATA3<br>DATA2 | 35<br>37<br>38<br>39<br>40<br>42 | 38<br>40<br>41<br>42<br>43<br>45 | 44<br>46<br>47<br>48<br>49<br>51 | I/O | Parallel bus data. This bus is the data bus in generic parallel bus cycles and is selected when the SMODE is input low. The data path is used during both read and write transactions to internal registers when the parallel control bus interface is implemented.                                                                                                                                        |
| $\overline{\text{RD}}/\text{SDA}$                  | 29                               | 30                               | 34                               | I/O | Read selection. This terminal indicates a register read cycle when the SMODE input is low and the $\overline{\text{CS}}$ terminal input is asserted. This is used to read an internal HPC3130 register.<br><br>Serial bus data. This terminal signals the serial bus data when the SMODE input is high. It is used during internal register read and write transactions.                                   |
| $\overline{\text{WR}}/\text{SCL}$                  | 30                               | 31                               | 36                               | I   | Write selection. This terminal indicates a register write cycle when the SMODE input is low and the $\overline{\text{CS}}$ terminal input is asserted. This input is used to write to an internal HPC3130 register.<br><br>Serial bus clock. This terminal inputs serial bus clock in when the SMODE input is high. It is used during internal register read and write transactions.                       |

## Terminal Functions (Continued)

### system interface

| TERMINAL                    |         |         |         | I/O | FUNCTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-----------------------------|---------|---------|---------|-----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NAME                        | NO. 120 | NO. 128 | NO. 144 |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| $\overline{\text{FRAME}}$   | 20      | 21      | 23      | I   | Frame. This input and the $\overline{\text{IRDY}}$ input indicate that the PCI bus is idle. When the HPC3130 senses the PCI bus is idle after $\overline{\text{IDLEGNT}}$ is low, a hot-plug slot can be connected to the PCI bus. This input must be wired to a valid logic level if the bus idling procedure is not implemented.                                                                                                                                                                                                                                                                                                 |
| $\overline{\text{IDLEGNT}}$ | 19      | 20      | 22      | I   | Idle grant. This input indicates when the PCI bus is idled by the HOST-PCI bridge after a request is made by $\overline{\text{IDLEREQ}}$ . The protocol is identical to PCI request/grant. This input must be wired to a valid logic level if the bus idling procedure is not implemented.                                                                                                                                                                                                                                                                                                                                         |
| $\overline{\text{IDLEREQ}}$ | 18      | 19      | 21      | O   | Idle request. This output is driven to request the HOST-PCI bridge to idle the PCI bus before connecting a hot-plug slot. The protocol is identical to PCI request/grant. A pullup resistor must be implemented on this terminal if the bus idling procedure is not implemented.                                                                                                                                                                                                                                                                                                                                                   |
| INTR                        | 24      | 25      | 27      | O   | System interrupt. This output provides a system interrupt. The HPC3130 can be programmed to assert this interrupt under various conditions, which may be serviced by the hot-plug service. Furthermore, the event status/enable state is compliant with the <i>ACPI Specification</i> and, as a result, supports ACPI control methods for switching the HPC3130.                                                                                                                                                                                                                                                                   |
| $\overline{\text{INTR}}$    | 23      | 24      | 26      | O   | System interrupt. This open drain output provides a system interrupt. The HPC3130 can be programmed to assert this interrupt under various conditions, which may be serviced by the hot-plug. Furthermore, the event status/enable state is compliant with the <i>ACPI Specification</i> and, as a result, supports ACPI control methods for switching the HPC3130.                                                                                                                                                                                                                                                                |
| $\overline{\text{IRDY}}$    | 21      | 22      | 24      | I   | Initiator ready. This and the $\overline{\text{FRAME}}$ input indicate that the PCI bus is idle. When the HPC3130 senses the PCI bus is idle after $\overline{\text{IDLEGNT}}$ is low, a hot-plug slot may be connected to the PCI bus. This input must be wired to a valid logic level if the bus idling procedure is not implemented.                                                                                                                                                                                                                                                                                            |
| PCLK                        | 16      | 17      | 19      | I   | PCI clock input. These terminals provide the PCI clock to the HPC3130, which uses it only for activity indicator timing, $\overline{\text{IDLEREQ}}/\overline{\text{IDLEGNT}}$ protocol, and connection sequencing.                                                                                                                                                                                                                                                                                                                                                                                                                |
| PRST                        | 14      | 15      | 17      | I   | PCI reset. This signal provides the PCI reset to the HPC3130. After a PCI reset, the HPC3130 resides in a state where all slots are enabled, as in a non-hot-plug system. The HPC3130 passes PCI resets from the host to all hot-plug slots.                                                                                                                                                                                                                                                                                                                                                                                       |
| $\overline{\text{SGNT}}$    | 13      | 14      | 16      | O   | Secondary grant. This output provides a scheme to cascade a secondary HPC3130 device in order to provide more than four slots. The $\overline{\text{SGNT}}$ output from the primary HPC3130 is input to the $\overline{\text{IDLEGNT}}$ terminal for the secondary HPC3130. After the secondary HPC3130 requests the primary HPC3130 to idle the bus, the primary HPC3130 arbitrates for the bus using $\overline{\text{IDLEREQ}}$ . Once $\overline{\text{IDLEGNT}}$ is asserted, the primary HPC3130 asserts its $\overline{\text{SGNT}}$ output. This indicates to the secondary HPC3130 device that it can connect to the bus. |
| SMODE                       | 27      | 28      | 30      | I   | Serial bus mode. When this input is asserted high, the internal HPC3130 registers are accessible through serial bus interface; otherwise, they are accessed through the generic parallel bus interface. This input selects the control bus interface.                                                                                                                                                                                                                                                                                                                                                                              |
| $\overline{\text{SREQ}}$    | 12      | 13      | 15      | I   | Secondary request. This input provides a scheme to cascade a second HPC3130 device in order to provide more than four slots. The $\overline{\text{IDLEREQ}}$ from the second HPC3130 device is input to the $\overline{\text{SREQ}}$ terminal of the primary HPC3130. If the second HPC3130 device arbitrates for the bus by asserting its $\overline{\text{IDLEREQ}}$ output, this scheme causes the primary HPC3130 to assert its $\overline{\text{IDLEREQ}}$ . If cascading is not used, this input is pulled high.                                                                                                             |
| SYSM66EN                    | 25      | 26      | 28      | I/O | PCI bus frequency indicator. This signal indicates the PCI clock frequency requirements of the hot-plug slots, and must be tied to the system PCI bus M66EN signal. The output from this terminal only changes state after a PCI reset and is only required in a 66-MHz system.                                                                                                                                                                                                                                                                                                                                                    |

# HPC3130

## PCI HOT PLUG CONTROLLER

SCPS029B – DECEMBER1998

### Terminal Functions (Continued)

#### slot control and status functions

| TERMINAL    |         |         |         | I/O | FUNCTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-------------|---------|---------|---------|-----|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NAME        | NO. 120 | NO. 128 | NO. 144 |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| ATTN0[3]    | 1       | 2       | 1       | O   | Attention indicators. These two outputs are provided per slot as attention indicators and can be independently programmed to drive high, low, fast blink, and slow blink. The timer is based on the PCI clock frequency and the state of SYSM66EN.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| ATTN0[2]    | 103     | 110     | 124     |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| ATTN0[1]    | 83      | 88      | 98      |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| ATTN0[0]    | 65      | 70      | 80      |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| ATTN1[3]    | 2       | 3       | 3       |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| ATTN1[2]    | 104     | 111     | 125     |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| ATTN1[1]    | 84      | 89      | 99      |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| ATTN1[0]    | 66      | 71      | 81      |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| BUSON[3]    | 119     | 126     | 142     | O   | CBT switch control for PCI bus. This output controls the CBT switch that connects the hot-plug slot to the system PCI bus. This output is only driven by the HPC3130 under programmed control.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| BUSON[2]    | 100     | 107     | 121     |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| BUSON[1]    | 81      | 86      | 96      |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| BUSON[0]    | 63      | 68      | 77      |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| CLKON[3]    | 120     | 127     | 144     | O   | PCI clock connection control. This output is used to control the CBT switch or clock driver that connects the hot-plug slot to the system PCI clock. This output is only driven by the HPC3130 under programmed control.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| CLKON[2]    | 102     | 109     | 123     |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| CLKON[1]    | 82      | 87      | 97      |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| CLKON[0]    | 64      | 69      | 79      |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| DETECT0[3]  | 4       | 5       | 7       | I   | Card detection signals. These two card detect input signals, <u>DETECT0</u> and <u>DETECT1</u> , are provided as additional card detection signals to the PRSNT1 and PRSNT2. Since only one present input must be tied to ground to indicate a card is present per the <i>PCI Specification</i> , these optional inputs are provided for designers of a more mechanically robust system. If the protection enable bit is set to 1 in the <u>general configuration register</u> , the HPC3130 does not power a hot-plug slot unless <u>DETECT0</u> and <u>DETECT1</u> are input low. A design not implementing additional card detection must tie these signals to ground. When this feature is utilized, the HPC3130 guarantees that power can not be applied to an empty slot or a slot with a partially inserted card. |
| DETECT0[2]  | 106     | 113     | 127     |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| DETECT0[1]  | 87      | 92      | 102     |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| DETECT0[0]  | 69      | 74      | 84      |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| DETECT1[3]  | 5       | 6       | 8       |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| DETECT1[2]  | 108     | 115     | 129     |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| DETECT1[1]  | 88      | 93      | 104     |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| DETECT1[0]  | 70      | 75      | 85      |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| M66EN[3]    | 3       | 4       | 5       | I/O | PCI bus frequency indicator. This signal indicates the PCI clock frequency requirements of the hot-plug slots and is only required in a 66-MHz system (two slot maximum electrical loading limits). The two slot interfaces that provide the M66EN terminals are sensed at PCI reset and are driven afterwards.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| M66EN[2]    | 105     | 112     | 126     |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| M66EN[1]    | 86      | 91      | 101     |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| M66EN[0]    | 67      | 72      | 82      |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| PRSNT1[3]   | 113     | 120     | 134     | I   | Present signals. These inputs are provided by hot-plug slots to indicate that an add-in card is physically present in the slot and to power requirements to the system. Only one of these signals must be tied to ground to indicate a card is present in an expansion slot. A set of PRSNT1 and PRSNT2 inputs are provided for each hot-plug slot.                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| PRSNT1[2]   | 94      | 101     | 115     |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| PRSNT1[1]   | 75      | 80      | 90      |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| PRSNT1[0]   | 55      | 58      | 64      |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| PRSNT2[3]   | 114     | 121     | 135     |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| PRSNT2[2]   | 96      | 103     | 117     |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| PRSNT2[1]   | 76      | 81      | 91      |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| PRSNT2[0]   | 57      | 60      | 66      |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| PWRFAULT[3] | 110     | 117     | 131     | I   | Power fault. This input is provided per slot power switch to indicate if there is a power fault. The HPC3130 can be programmed to generate an interrupt through INTR when this input is asserted.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| PWRFAULT[2] | 92      | 99      | 111     |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| PWRFAULT[1] | 72      | 77      | 87      |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| PWRFAULT[0] | 53      | 56      | 62      |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| PWRGOOD[3]  | 111     | 118     | 132     | I   | Power good. This input is provided per slot power switch to indicate when power is successfully switched. The HPC3130 can be programmed to generate an interrupt through INTR when this input is asserted.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| PWRGOOD[2]  | 93      | 100     | 113     |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| PWRGOOD[1]  | 73      | 78      | 88      |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| PWRGOOD[0]  | 54      | 57      | 63      |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

## Terminal Functions (Continued)

### slot control and status functions (continued)

| TERMINAL                                                         |                       |                        |                        | I/O | FUNCTION                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|------------------------------------------------------------------|-----------------------|------------------------|------------------------|-----|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NAME                                                             | NO.<br>120            | NO.<br>128             | NO.<br>144             |     |                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| PWRON/OFF[3]<br>PWRON/OFF[2]<br>PWRON/OFF[1]<br>PWRON/OFF[0]     | 109<br>91<br>71<br>52 | 116<br>98<br>76<br>55  | 130<br>109<br>86<br>61 | O   | Power ON/OFF. This output is provided per slot and is driven to the power switch to control the slot power state.                                                                                                                                                                                                                                                                                                                           |
| REQ64ON[3]<br>REQ64ON[2]<br>REQ64ON[1]<br>REQ64ON[0]             | 116<br>98<br>78<br>59 | 123<br>105<br>83<br>62 | 137<br>119<br>93<br>70 | O   | CBT switch control for SLOTRREQ64. A CBT switch can be implemented to reduce trace loading of the additional REQ64 signal inherent to the HPC3130 controller. This output can be used to control the CBT switch. This output is only driven by the HPC3130 under programmed control.                                                                                                                                                        |
| REQ64ON[3]<br>REQ64ON[2]<br>REQ64ON[1]<br>REQ64ON[0]             | 118<br>99<br>80<br>60 | 125<br>106<br>85<br>63 | 140<br>120<br>95<br>72 | O   | CBT switch control for SLOTRREQ64. A CBT switch can be implemented to reduce trace loading of the additional REQ64 signal inherent to the HPC3130 controller. This output can be used to control the CBT switch. This output is only driven by the HPC3130 under programmed control.                                                                                                                                                        |
| SLOTRREQ64[3]<br>SLOTRREQ64[2]<br>SLOTRREQ64[1]<br>SLOTRREQ64[0] | 7<br>8<br>9<br>10     | 8<br>9<br>10<br>11     | 10<br>11<br>12<br>13   | O   | Slot request 64. This output is driven in conjunction with SLOTRST to the hot-plug slot to indicate to option cards whether or not they are plugged into a 64-bit slot. If a 64-bit device is plugged into a 32-bit slot, then it must ensure that its high-word path inputs do not oscillate and that there is not a significant power drain through the input buffer. This output is only driven by the HPC3130 under programmed control. |
| SLOTRST[3]<br>SLOTRST[2]<br>SLOTRST[1]<br>SLOTRST[0]             | 115<br>97<br>77<br>58 | 122<br>104<br>82<br>61 | 136<br>118<br>92<br>68 | O   | Slot PCI reset. This output is driven to the hot-plug slot to reset it after power up. When a card is inserted into a hot-plug slot it must be reset independent of the other PCI devices on the bus. This output is only driven by the HPC3130 under programmed control.                                                                                                                                                                   |

### HPC3130 applications

This section discusses the various features of the HPC3130 in detail, and presents design considerations including a general connection sequencing guideline.

### system implementation

Figure 1 illustrates the HPC3130 implementation. The PCI bus signals are switched to the hot-plug PCI slot by the BUSON output, which controls a CBT switch. The PCI clock, PCI reset, M66EN, and REQ64 must not be routed through the CBT switch. The HPC3130 drives the slot PCI reset and SLOTRREQ64, which can be controlled by internal HPC3130 registers. The SLOTRREQ64 requires special consideration during reset, as described. The PCI clock to the slot is driven by a clock driver, which is enabled by the HPC3130 CLKON output.

The HPC3130 also provides other features such as mechanical detection circuits, attention indicators, and interrupt signaling. The mechanical detection circuitry using the DETECT[1,0] inputs is displayed as a dotted line and is an optional feature. Two attention indicator outputs, ATTN[1,0], are provided: one indicator to draw the attention of the user to a particular slot for insertion/removal, and one optional indicator that can be used to indicate fault conditions. Additional features, such as 66-MHz capability and automatic sequencing, are discussed in the following sections.

# HPC3130

## PCI HOT PLUG CONTROLLER

SCPS029B – DECEMBER1998

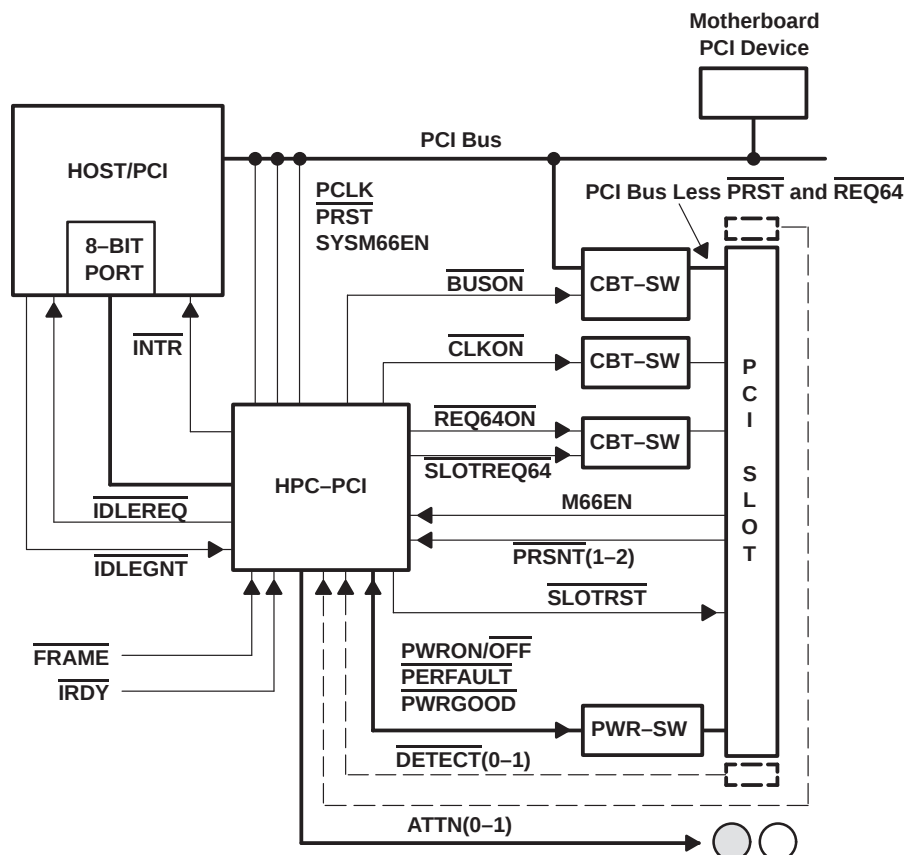


Figure 1. HPC3130 Implementation

The HPC3130 internal registers can be accessed through either a two-wire serial interface or an 8-bit generic parallel bus (ISA-like). The above figure illustrates the 8-bit port configuration. Not shown in the diagram is the SMODE chip input that must be wired low to indicate parallel bus interface mode. Also not shown in the diagram is the external chip-select logic required to select the HPC3130 in ISA bus cycles.

### serial interface

The internal registers can be accessed either through a two-wire serial interface or through an 8-bit generic parallel interface. The SMODE input selects one of these modes.

The HPC3130 implements a two-pin serial slave interface with one clock signal (SCL) and one data signal (SDA). This serial interface can operate with a serial clock frequency up to 400 kHz. Both SCL and SDA require pullup resistors for the serial slave interface to function properly.

All data transfers are initiated by the serial bus master. The beginning of a data transfer is indicated by a START condition (S) when the SDA line transitions to a low state while SCL is in a high state as illustrated in Figure 2. The end of a requested data transfer is indicated by a STOP condition (P), which is the low-to-high transition of SDA while SCL is in the high state. Data on SDA must remain stable during the high state of the SCL signal. Changes on the SDA signal during the high state of SCL will be interpreted as control signals, that is, a START or STOP condition.

The SCL is an input into the HPC3130 and SDA is bidirectional.

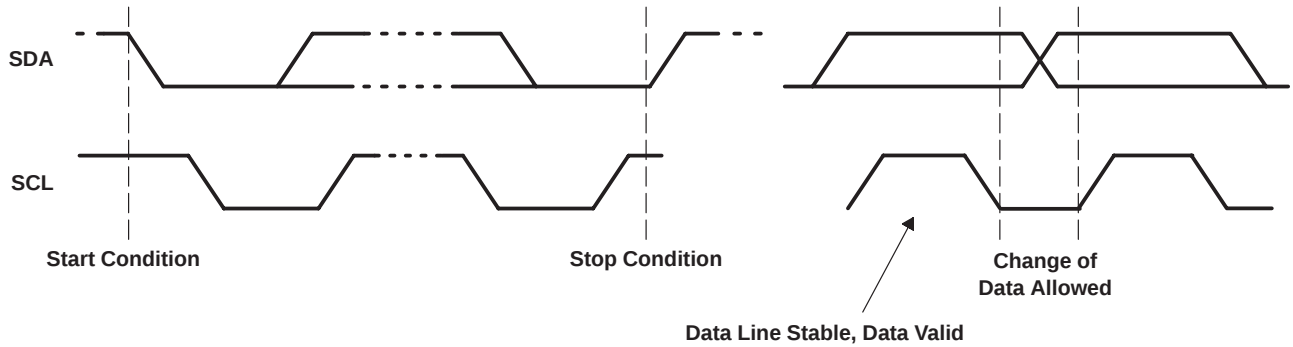


Figure 2. Serial Bus Start/Stop Conditions and Bit Transfers

Data is transferred on the bus in 8-bit bytes. The number of bytes that can be transmitted during a data transfer is unlimited; however, each byte must be completed with an acknowledge bit. An acknowledge (ACK) is indicated by the receiver pulling down the SDA signal so that it remains low during the high state of the SCL signal as shown in Figure 3.

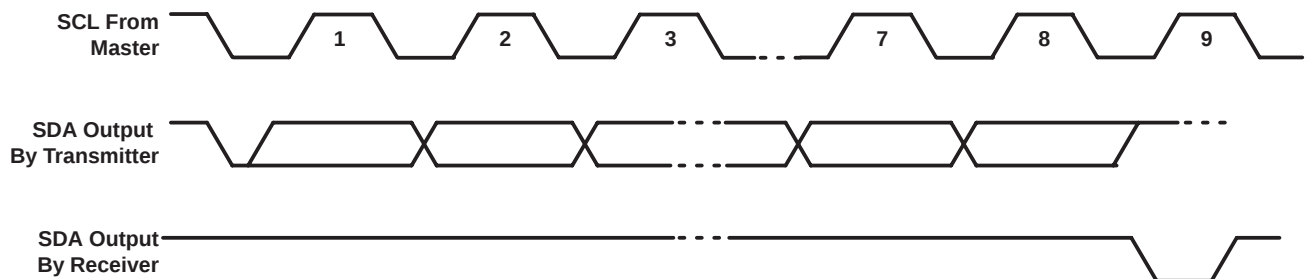


Figure 3. Serial Bus Protocol – Acknowledge

The HPC3130 serial bus slave interface protocol for write transactions is illustrated in Figure 4. The  $\overline{R/\overline{W}}$  command bit is set to zero to indicate a write transaction. For a write operation, the HPC3130 requires a word address field after the slave address. This address field is comprised of eight bits. Upon receipt of the word address, the HPC3130 responds with an acknowledge, and waits for the next eight bits of data, again responding with an acknowledge. After all the data bytes are transferred, the master then terminates the transfer by generating a STOP condition. The device automatically increments the address for subsequent data words. After the receipt of each word, the low order address bits are internally incremented by one.

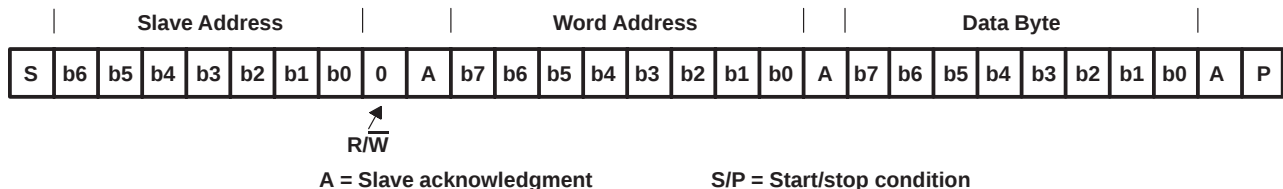


Figure 4. Serial Bus Protocol – Byte Write

A byte read operation is illustrated below. The read protocol is very similar to the write protocol, except the  $\overline{R/\overline{W}}$  command bit must be set to one to indicate a read data transfer. First the master issues a write command that includes the START condition and the slave address field (with the  $\overline{R/\overline{W}}$  bit set to write), followed by the address of the word it is to read. This procedure sets the internal address counter of the HPC3130 to the desired address. After the word address acknowledgment is received by the master, the master immediately reissues a START condition followed by another slave address field with the  $\overline{R/\overline{W}}$  bit set to read. The HPC3130 responds with an acknowledgment and transmits the eight data bits stored in the addressed location. If the master responds with

# HPC3130

## PCI HOT PLUG CONTROLLER

SCPS029B – DECEMBER1998

an acknowledge signal, indicating that it requires additional data, the HPC3130 continues to output data for each received acknowledge signal. The master terminates the sequential read operation by not responding with an acknowledge signal, and issues a STOP condition.

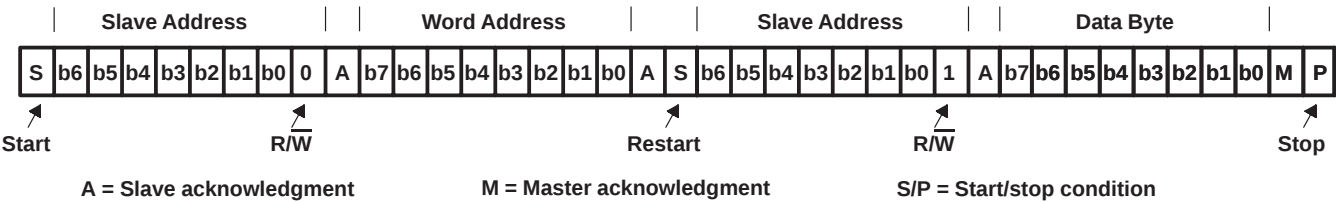


Figure 5. Serial Bus Protocol – Byte Read

### parallel interface

The HPC3130 also implements an 8-bit parallel interface mode. When this mode is selected, the HPC3130 internal register addressed by the A[4:0] inputs can be accessed for a read/write transaction using the  $\overline{CS}$ ,  $\overline{RD}$ ,  $\overline{WR}$  strobes. The following signals have pullups on the mother board:  $\overline{IO16}$ ,  $\overline{M16}$ ,  $\overline{N0WS}$ ,  $\overline{CHRDY}$ ,  $\overline{MEMR}$ ,  $\overline{MEMW}$ ,  $\overline{IOR}$ ,  $\overline{IOW}$ , SD[15:0] to implement default states. Figure 6 shows write access using the default 8-bit standard ISA bus cycle with four wait states. A read cycle is similar.

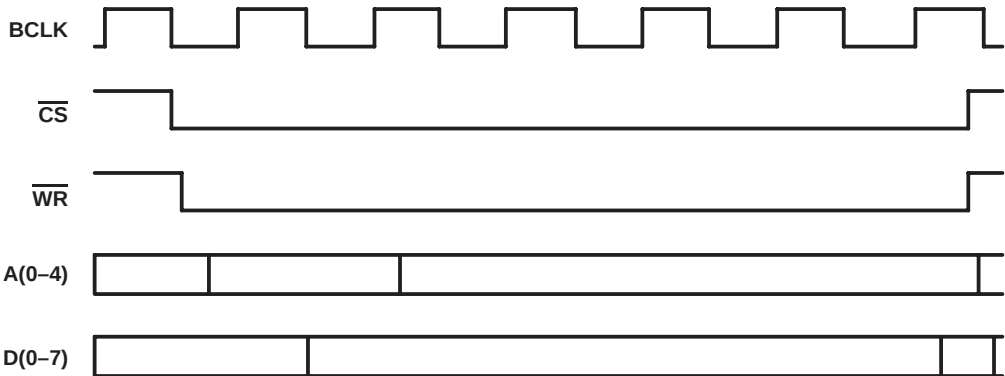


Figure 6. Parallel Bus Write Cycle

### connection sequencing

Before an add-in card is hot plugged and made available to the slot, the various pins in the HPC3130 have to be controlled in a specific sequence. The HPC3130 provides the software interface to sequence the power to the slot, clocks, and signals to the add-in cards that are being live inserted. The switch-timing block is used to control the exact timing when the CBT switches are enabled.

The initial software sequencing is done by setting individual bits in the hot plug control register in the following sequence. First, the SLTPWR\_CTL bit is set high to drive the  $\overline{PWRON/OFF}$  signal high. After the power to the slot is applied, the SLOTRST\_O bit is set low to drive the  $\overline{SLOTRST}$  output. Next the CLKON\_O bit is set low to enable the PCI clock to the slot. Also, the REQ64\_O bit is set to a value of 0 and the SLOTREQ64 bit is set to indicate to the add-in card whether it is inserted into a 64-bit or 32-bit slot. SLOTREQ64 is set low for a 64-bit slot and is set high for a 32-bit slot.

After initial software sequencing of the above signals is complete, the next step is to enable the CBT switches. This can be done either by using the software to manually set the BUS\_CTL bit or using the HPC3130 via the automatic connection sequence mode located in the general configuration register.

If automatic sequencing mode 1 is selected, then the BUS\_CTL bit controls the sequencing by using idling protocol. When this bit is set to zero, the switch-timing block will arbitrate for the PCI Bus by asserting IDLEREQ. Subsequently, IDLEGNT is asserted and the HPC3130 waits for bus idle condition. When FRAME and IRDY are deasserted, the CBT switches are enabled. Following this, the SLOTTRST, SLOTREQ64 and REQ64ON are deasserted. Figure 7 depicts the sequencing of events when automatic sequencing mode 1 is enabled.

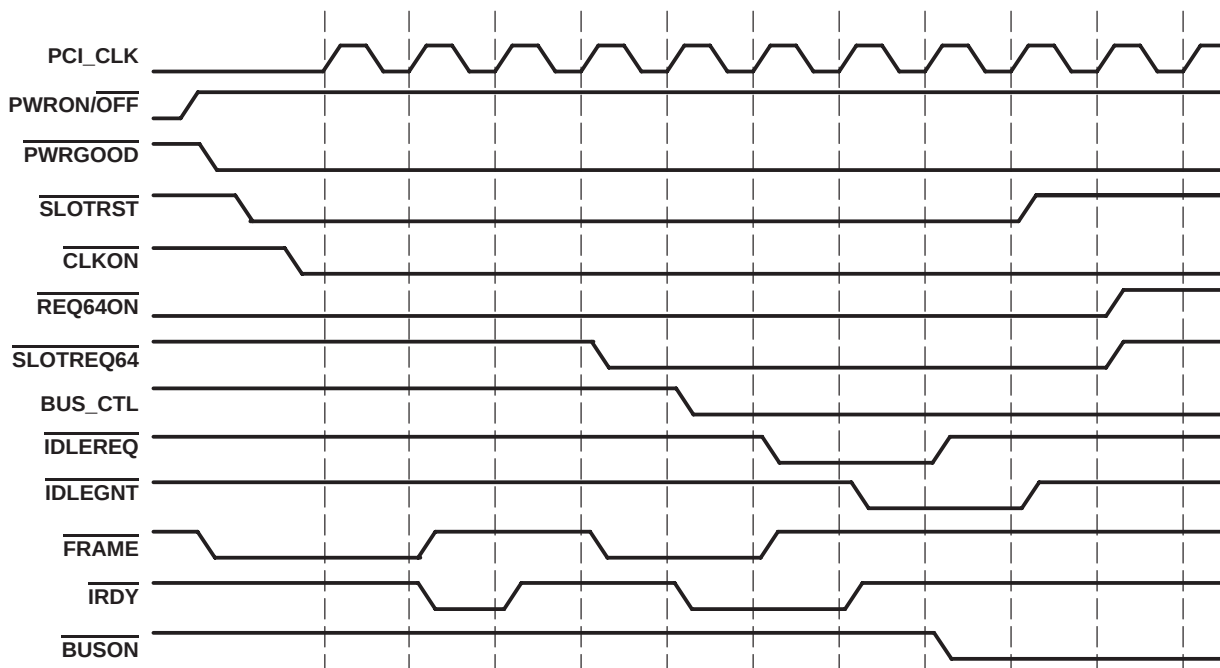



Figure 7. Automatic Connection Sequencing Mode 1

If automatic sequencing mode 2 is selected, then the BUS\_CTL bit controls the sequencing by using idling protocol. When this bit is set to zero, the switch timing block arbitrates for the PCI bus by asserting IDLEREQ. Subsequently, IDLEGNT is asserted and the HPC3130 waits for the bus idle condition. When FRAME and IRDY are deasserted, the SLOTTRST is deasserted. Following this, the SLOTREQ64 and REQ64ON are deasserted and the CBT switches are enabled. Figure 8 depicts the sequencing of events when automatic sequencing mode 2 is enabled.

# HPC3130

## PCI HOT PLUG CONTROLLER

SCPS029B – DECEMBER1998

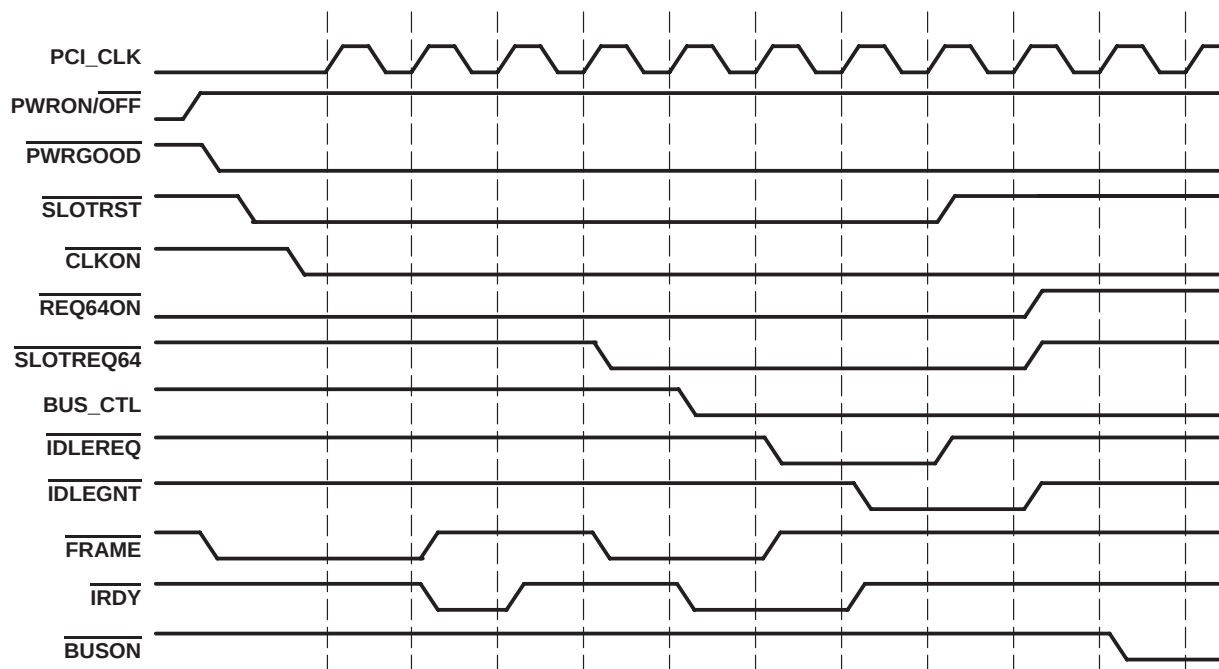

**Figure 8. Automatic Connection Sequencing Mode 2**

The protocol described above is identical to the PCI  $\overline{\text{REQ}}/\overline{\text{GNT}}$  protocol used by PCI bus masters, which also must wait for bus idle through PCI  $\overline{\text{FRAME}}$  and  $\overline{\text{IRDY}}$  before initiating a PCI cycle. If the HPC3130 is connected to PCI  $\overline{\text{FRAME}}$  and  $\overline{\text{IRDY}}$ , the HPC3130 arbitrates for the bus; although it does not drive the PCI bus or assert  $\overline{\text{FRAME}}$  to start a cycle.

There are some issues with this implementation such as bus parking and additional loading on the PCI  $\overline{\text{FRAME}}$  and  $\overline{\text{IRDY}}$  signals, which need to be considered when designing a system. The system designer may have a level of confidence that PCI adapter cards can tolerate connection to a non-idle bus. In the scenario where the HPC3130 is not connected to the bus, then the  $\overline{\text{FRAME}}$ ,  $\overline{\text{IRDY}}$ , and  $\overline{\text{IDLEGNT}}$  must be wired to valid logic levels and the automatic sequencing will start without any relationship to the bus.

$\overline{\text{IDLEREQ}}$ ,  $\overline{\text{IDLEGNT}}$ ,  $\overline{\text{FRAME}}$ , and  $\overline{\text{IRDY}}$  pins are not connected in manual mode. In contrast, during automatic connection, the HPC3130 requests the PCIBus to make sure it is idle before it sequences through the connection sequence.

In manual mode, software has to perform each part of the connection sequence. Figure 9 is an example of the manual connection sequence. There could be several other ways to implement this protocol.

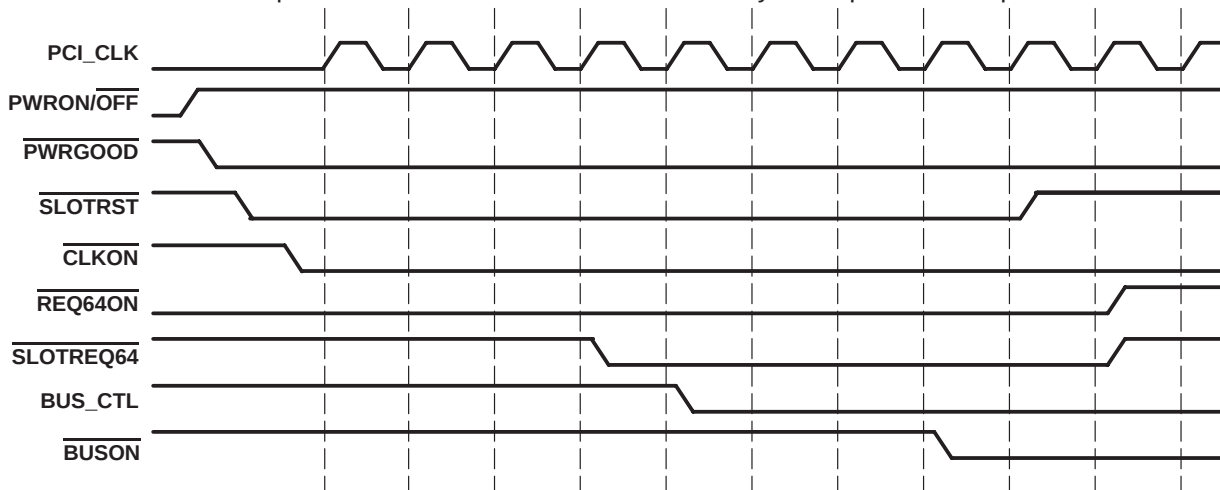


Figure 9. Manual Connection Sequencing

#### disconnecting sequence

The HPC3130 provides two mechanisms to isolate a PCI slot from the PCI bus so an add-in card can be removed. One of the mechanisms is called manual sequencing and is enabled by default. This mechanism allows the software to control the entire disconnect sequence. This means it is the software's responsibility to remove a powered slot from the PCI bus without any impact to the system.

The second mechanism is called auto sequencing and can be enabled by programming either Auto-Sequence 1 or Auto-Sequence 2 in the general configuration register. Unlike the connection sequence, which has two different auto-connection sequencing modes, the autodisconnect sequence has only one mode of operation. The steps in the auto-disconnect sequence are as follows:

1. Software may assert  $\overline{\text{SLOTRST}}$  to the appropriate slot by writing a 0 to the SLOTRST\_O bit in the hot-plug control register. This is optional.
2. Next the software must set the BUS\_CTL bit in the hot-plug control register to a 1.
3. Once the BUS\_CTL bit is set to a 1, the HPC3130 asserts  $\overline{\text{IDLEREQ}}$ .
4. Once  $\overline{\text{IDLEGNT}}$  is asserted and  $\overline{\text{FRAME}}$  and  $\overline{\text{IRDY}}$  are deasserted, the HPC3130 deasserts  $\overline{\text{BUSON}}$  and  $\overline{\text{CLKON}}$  and asserts  $\overline{\text{REQ64ON}}$  to isolate the slot from the PCI bus.
5. The HPC3130 then drives PWRON/OFF low to power off the slot.

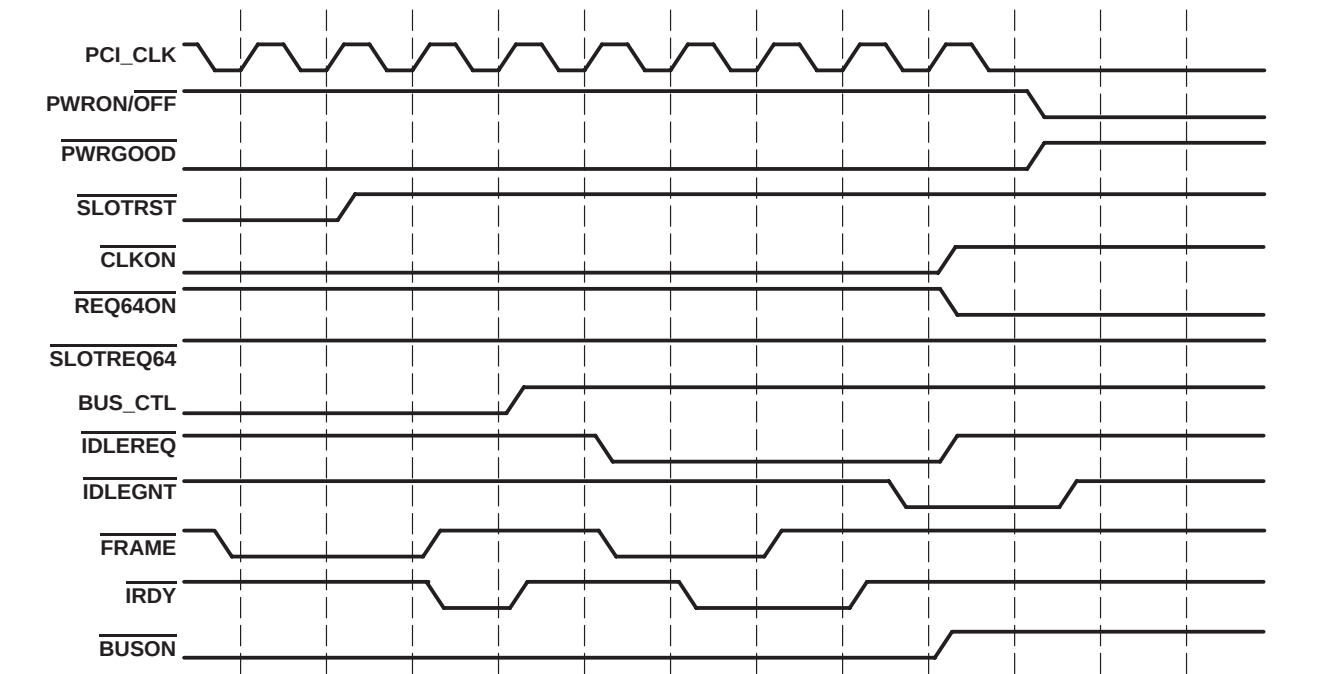


Figure 10. Automatic Disconnect Sequencing Mode

In manual disconnect mode, software has to perform each part of the disconnection sequence. Figure 11 is an example of the manual disconnection sequence. There could be several other ways to implement this protocol. During the manual disconnection, PCIBus may or may not idle; it will depend on the software implementation of the system.

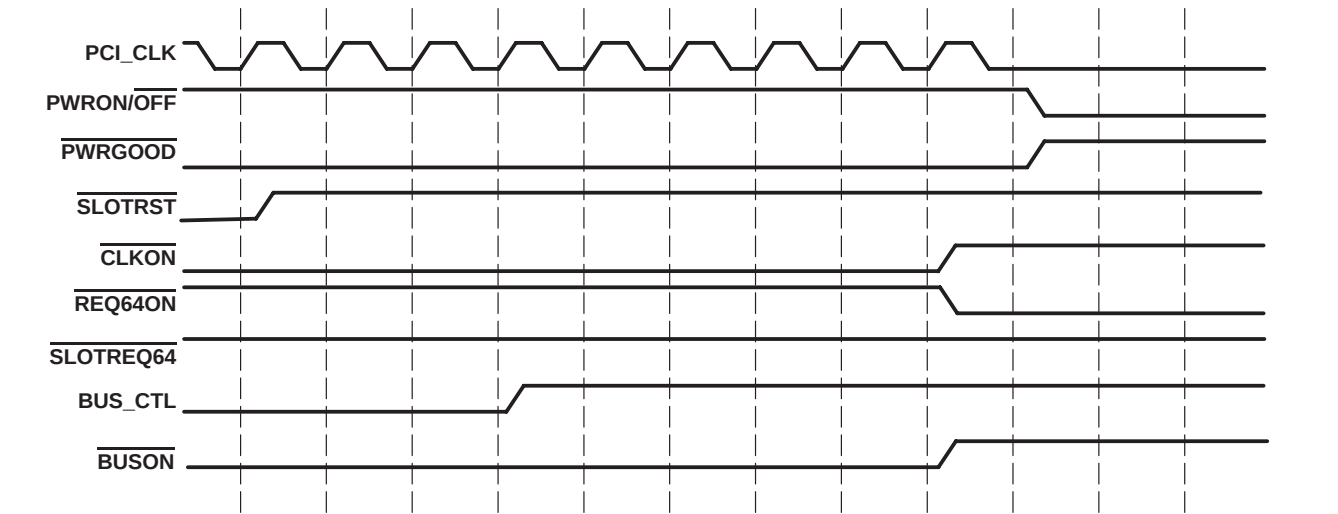


Figure 11. Manual Disconnect Sequencing Mode

## SLOTREQ64

The  $\overline{\text{SLOTREQ64}}$  signal must be driven by the HPC3130 during reset of a hot-plug slot. The  $\overline{\text{REQ64}}$  signal must also be driven by the system PCI bus. This requirement can be implemented using the HPC3130 and the CBT3306 switch or the CBT3257 switch, as shown in Figures 12 and 13. The PCI  $\overline{\text{REQ64}}$  signal must not pass through the PCI bus CBT switch controlled by  $\overline{\text{BUSON}}$  for this implementation. In a 32-bit PCI bus implementation, the  $\overline{\text{SLOTREQ64}}$ ,  $\overline{\text{REQ64ON}}$  and  $\overline{\text{RFQ64ON}}$  outputs are not connected to any device.

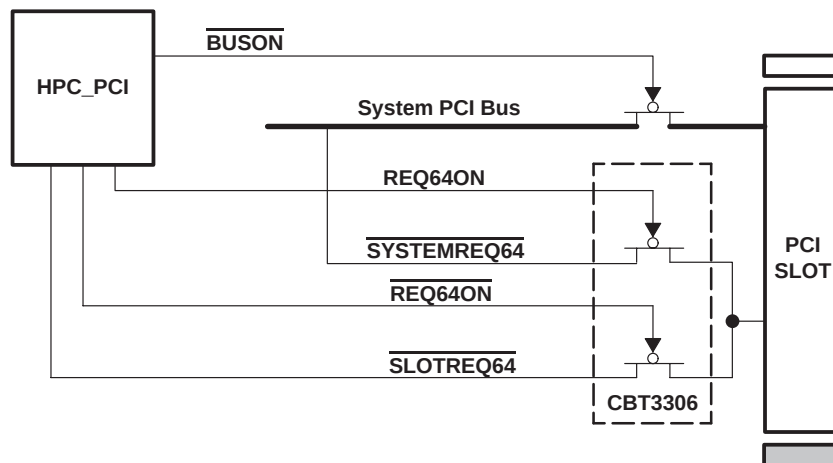


Figure 12.  $\overline{\text{SLOTREQ64}}$  Implementation Using CBT3306

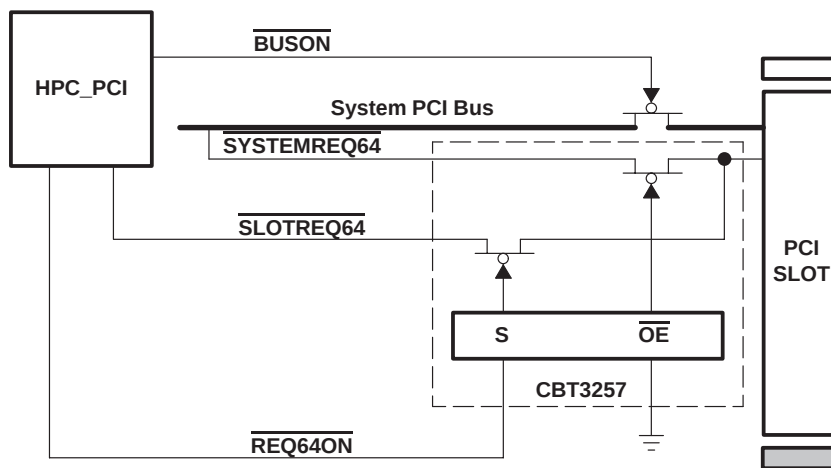


Figure 13.  $\overline{\text{SLOTREQ64}}$  Implementation Using CBT3257

# HPC3130

## PCI HOT PLUG CONTROLLER

SCPS029B – DECEMBER1998

### 66-MHz PCI support

The HPC3130 supports up to two slots in a 66-MHz system: slot 0 and slot 1. These hot-plug slot interfaces include the M66EN signal and the SYSM66EN signal communicates hot-plug slot capability to the system. Figure 14 illustrates the 66-MHz support function in the HPC3130.

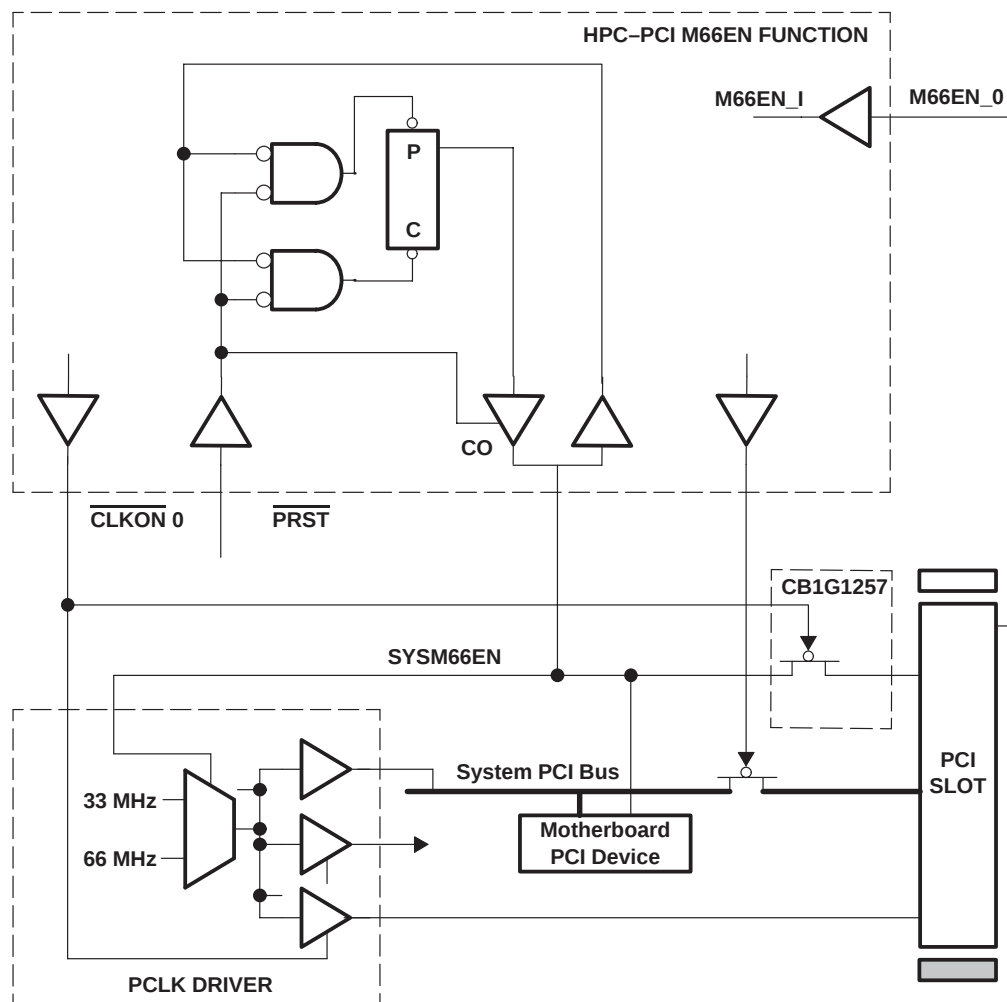


Figure 14. HPC3130 66-MHz System Support

Upon reset, the  $\overline{\text{PCIRST}}$  signal is asserted and the bussed system M66EN signal is latched and selects the system frequency.

Before an adapter card can be inserted, the slot is prepared for insertion by deasserting  $\overline{\text{BUSON}}$ , deasserting  $\overline{\text{CLKON}}$ , and powering down the slot. When an adapter card is inserted into either hot-plug slot 0 or slot 1, the value M66EN from the card can be read through internal registers. If the bus is operating at 66-MHz and a 33-MHz adapter card is inserted, then the software ensures that the card is never connected to the bus. If the bus is operating at 33 MHz and a 66-MHz adapter card is inserted, then the latched SYSM66EN state can be driven to the slot by enabling the CBT switch using  $\overline{\text{CLKON}}$ .

SYSM66EN and  $\overline{\text{CLKON}}$  input to a clock driver circuit to control the PCI clock frequency. The 66-MHz support designed into the HPC3130 allows option cards to indicate PCI clock frequency capabilities upon PCI reset; however, does not allow an inserted hot-plug card to alter the clock frequency of an operating PCI bus.

## configuration and control registers

The HPC3130 register set is accessible through either a generic parallel bus interface or a two-wire serial interface. Eight bytes of register space are provided per slot. Since the HPC3130 supports four slots, a total of 32 bytes of registers is implemented. Register and bit descriptions are provided in the following sections and indicate the bits that are common to all slots. The bit default values are given, which represent the state of the HPC3130 after a PCI reset event. After a PCI reset, the HPC3130 drives outputs to a state such that the slots appear as if they were not a hot-plug platform.

The register map that follows provides the register overview. Byte addressing is required when accessing the internal registers. Read transactions from reserved registers return zeros.

**Table 7. Register Map**

| SLOT   | REGISTER NAME                   | ADDRESS | SLOT   | REGISTER NAME                   | ADDRESS |
|--------|---------------------------------|---------|--------|---------------------------------|---------|
| Slot 0 | General configuration register  | 0x00    | Slot 2 | General configuration register  | 0x10    |
| Slot 0 | Hot-plug slot status register   | 0x01    | Slot 2 | Hot-plug slot status register   | 0x11    |
| Slot 0 | Hot-plug slot control register  | 0x02    | Slot 2 | Hot-plug slot control register  | 0x12    |
| Slot 0 | Attention indicator control     | 0x03    | Slot 2 | Attention indicator control     | 0x13    |
| Slot 0 | Reserved                        | 0x04    | Slot 2 | Reserved                        | 0x14    |
| Slot 0 | Reserved                        | 0x05    | Slot 2 | Reserved                        | 0x15    |
| Slot 0 | Interrupt event status register | 0x06    | Slot 2 | Interrupt event status register | 0x16    |
| Slot 0 | Interrupt event enable register | 0x07    | Slot 2 | Interrupt event enable register | 0x17    |
| Slot 1 | General configuration register  | 0x08    | Slot 3 | General configuration register  | 0x18    |
| Slot 1 | Hot-plug slot status register   | 0x09    | Slot 3 | Hot-plug slot status register   | 0x19    |
| Slot 1 | Hot-plug slot control register  | 0x0A    | Slot 3 | Hot-plug slot control register  | 0x1A    |
| Slot 1 | Attention indicator control     | 0x0B    | Slot 3 | Attention indicator control     | 0x1B    |
| Slot 1 | Reserved                        | 0x0C    | Slot 3 | Reserved                        | 0x1C    |
| Slot 1 | Reserved                        | 0x0D    | Slot 3 | Reserved                        | 0x1D    |
| Slot 1 | Interrupt event status register | 0x0E    | Slot 3 | Interrupt event status register | 0x1E    |
| Slot 1 | Interrupt event enable register | 0x0F    | Slot 3 | Interrupt event enable register | 0x1F    |

# HPC3130

## PCI HOT PLUG CONTROLLER

SCPS029B – DECEMBER1998

### general configuration register

| Bit     | 7                              | 6 | 5 | 4 | 3   | 2   | 1 | 0   |
|---------|--------------------------------|---|---|---|-----|-----|---|-----|
| Name    | General configuration register |   |   |   |     |     |   |     |
| Type    | R                              | R | R | R | R/W | R/W | R | R/W |
| Default | 0                              | 0 | 0 | 1 | 0   | 0   | X | 0   |

Register: General configuration  
 Type: Read-only, Read/Write  
 Offset: 00h (slot 0), 08h (slot 1), 10h (slot 2), 18h (slot 3)  
 Default: 0Xh  
 Description: This register is for general configurations and indications. The automatic PCI bus connection sequencing is enabled through this register, and the register access mode is indicated. This register is shared among all four slots.

**Table 8. General Configuration Register**

| BIT | TYPE | NAME       | FUNCTION                                                                                                                                                                                                                                                                                                                                                           |
|-----|------|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7–4 | R    | RSVD       | Reserved for revision ID. These bits return 0001 for this device.                                                                                                                                                                                                                                                                                                  |
| 3–2 | R/W  | SEQUENCING | Automatic PCI bus connection sequencing. These bits control the sequencing used to connect the hot-plug slot to the PCI bus.<br>00 = Manual sequencing through register accesses<br>01 = Auto–Sequence 1: Enable CBT switches before deasserting $\overline{RST}$<br>10 = Auto–Sequence 2: Enable CBT switches after deasserting $\overline{RST}$<br>11 = Reserved |
| 1   | R    | SYSM66STAT | Status of SYSM66EN. This bit represents the latched value of SYSM66EN during a PCI reset. A value of 1 indicates the PCI bus is operating at a frequency greater than 33 MHz. A value of 0 indicates the PCI bus is operating at 33 MHz or less.                                                                                                                   |
| 0   | R/W  | PROTECTEN  | Protection enable. This bit enables a protection mechanism provided by the HPC3130. When this bit is enabled and either of the DETECT[1:0] inputs are high, the HPC3130 drives the BUS_ON and CLKON outputs high. The HPC3130 also drives PWRON/OFF and REQ64ON outputs low.                                                                                       |

**hot-plug slot status register**

| Bit     | 7                             | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---------|-------------------------------|---|---|---|---|---|---|---|
| Name    | Hot-plug slot status register |   |   |   |   |   |   |   |
| Type    | R                             | R | R | R | R | R | R | R |
| Default | X                             | X | X | X | X | X | X | X |

Register: Hot-plug slot status

Type: Read-only

Offset: 01h (slot 0), 09h (slot 1), 11h (slot 2), 19h (slot 3)

Default: XXh

Description: This register reports card detection, power status, and other chip input from the hot-plug slot interface. All bits in this register are read only, and the data read from each bit represents the logical value of the data input from the corresponding terminal.

**Table 9. Hot-Plug Slot Status Register**

| BIT | TYPE | NAME       | FUNCTION                                                                                      |
|-----|------|------------|-----------------------------------------------------------------------------------------------|
| 7   | R    | BUSON      | Bus On. This bit returns the logical value of the <u>BUSON</u> terminal output.               |
| 6   | R    | M66EN_I    | M66EN input. This bit returns the logical value of the <u>M66EN</u> terminal input.           |
| 5   | R    | PWRGOOD_I  | Power good input. This bit returns the logical value of the <u>PWRGOOD</u> terminal input.    |
| 4   | R    | PWRFAULT_I | Power fault input. This bit returns the logical value of the <u>PWRFAULT</u> terminal input.  |
| 3   | R    | DETECT1_I  | Mech detect 1 input. This bit returns the logical value of the <u>DETECT1</u> terminal input. |
| 2   | R    | DETECT0_I  | Mech detect 0 input. This bit returns the logical value of the <u>DETECT0</u> terminal input. |
| 1   | R    | PRSNT2_I   | Card present 2 input. This bit returns the logical value of the <u>PRSNT2</u> terminal input. |
| 0   | R    | PRSNT1_I   | Card present 1 input. This bit returns the logical value of the <u>PRSNT1</u> terminal input. |

# HPC3130

## PCI HOT PLUG CONTROLLER

SCPS029B – DECEMBER1998

### hot-plug slot control register

| Bit     | 7                              | 6 | 5   | 4   | 3   | 2   | 1   | 0   |
|---------|--------------------------------|---|-----|-----|-----|-----|-----|-----|
| Name    | Hot-plug slot control register |   |     |     |     |     |     |     |
| Type    | R                              | R | R/W | R/W | R/W | R/W | R/W | R/W |
| Default | 0                              | 0 | 1   | 0   | 1   | 1   | 0   | 1   |

Register: Hot-plug slot control  
 Type: Read-only, Read/Write  
 Offset: 02 (slot 0), 0Ah (slot 1), 12h (slot 2), 1Ah (slot 3)  
 Default: 2Dh  
 Description: This register applies power, resets, and provides general control of a hot-plug slot connection to the system PCI bus.

**Table 10. Hot-Plug Slot Control Register**

| BIT | TYPE | NAME       | FUNCTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-----|------|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | R    | RSVD       | Reserved. This bit returns 0 when read.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| 6   | R    | RSVD       | Reserved. This bit returns 0 when read.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| 5   | R/W  | SLTPWR_CTL | Slot power On/Off control. The data written to this bit represents the logical value of the data to drive the PWRON/OFF output and is used to control the power state of a hot-plug slot. If the PROTECTEN bit in the general configuration register is set to 1, then a logic high can only be driven by the PWRON/OFF output if the DETECT[1:0] inputs are low.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| 4   | R/W  | BUS_CTL    | PCI bus CBT-switch control. When manual sequencing is enabled, then the value written to this bit represents the logical value of the data driven to the BUSON output, and it is used to connect/disconnect a hot-plug slot to/from the PCI bus.<br><br>If an auto sequencing mode is enabled in the general configuration register, then this bit functions as follows:<br>1 = By setting this bit, the hot-plug slot gets disconnected from the PCI bus. This is accomplished by asserting IDLEREQ, then waiting for IDLEGNT assertion and deassertion of FRAME and IRDY before driving BUSON high, CLKON high, REQ64ON low, and PWRON/OFF low.<br>0 = By clearing this bit, the hot-plug slot gets connected to the PCI bus. This is accomplished by asserting IDLEREQ, then waiting for IDLEGNT assertion and deassertion of FRAME and IRDY before driving BUSON low. Also verifies assertion of DETECT[1:0] if the protection enable bit is enabled in the General Configuration Register. |
| 3   | R/W  | SLOTREQ64  | Slot request 64-bit control. The data written to this bit represents the logical value of the data driven to the SLOTREQ64 output and is used during reset of a slot after power is applied. This input indicates to an option card whether or not it is connected to a 64-bit slot.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| 2   | R/W  | REQ64_O    | REQ64 CBT switch control. The data written to this bit represents the logical value of the data driven to the REQ64ON output and is used to control the CBT switch that implements the REQ64 PCI signal.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 1   | R/W  | CLKON_O    | CLKON CBT switch control. The data written to this bit represents the logical value of the data driven to the CLKON output and is used to control the clock driver to the hot-plug slot.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 0   | R/W  | SLOTTRST_O | Slot reset control. The data written to this bit represents the logical value of the data driven to the SLOTTRST output and is used to reset a hot-plug slot after power is applied.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

**attention indicator control register**

| Bit     | 7                                    | 6 | 5 | 4 | 3   | 2   | 1   | 0   |
|---------|--------------------------------------|---|---|---|-----|-----|-----|-----|
| Name    | Attention indicator control register |   |   |   |     |     |     |     |
| Type    | R                                    | R | R | R | R/W | R/W | R/W | R/W |
| Default | 0                                    | 0 | 0 | 0 | 0   | 0   | 0   | 0   |

Register: Attention indicator control  
 Type: Read-only, Read/Write  
 Offset: 03 (slot 0), 0Bh (slot 1), 13h (slot 2), 1Bh (slot 3)  
 Default: 00h  
 Description: This register controls the attention indicators. The timing for the indicators is based upon the PCI clock and the M66EN input.

**Table 11. Attention Indicator Control Register**

| BIT | TYPE | NAME      | FUNCTION                                                                                                                                                                                                                           |
|-----|------|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | R    | RSVD      | Reserved. This bit returns 0 when read.                                                                                                                                                                                            |
| 6   | R    | RSVD      | Reserved. This bit returns 0 when read.                                                                                                                                                                                            |
| 5   | R    | RSVD      | Reserved. This bit returns 0 when read.                                                                                                                                                                                            |
| 4   | R    | RSVD      | Reserved. This bit returns 0 when read.                                                                                                                                                                                            |
| 3–2 | R/W  | ATTN1_CTL | Attention indicator 1 control. These bits control the state of ATTN1 per slot and are programmed as follows:<br>00 = Drive low<br>01 = Slow blink – 1 cycle per second<br>10 = Fast blink – 2 cycles per second<br>11 = Drive high |
| 1–0 | R/W  | ATTN0_CTL | Attention indicator 0 control. These bits control the state of ATTN0 per slot and are programmed as follows:<br>00 = Drive low<br>01 = Slow blink – 1 cycle per second<br>10 = Fast blink – 2 cycles per second<br>11 = Drive high |

# HPC3130

## PCI HOT PLUG CONTROLLER

SCPS029B – DECEMBER1998

### interrupt event status register

| Bit     | 7                               | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|---------|---------------------------------|-----|-----|-----|-----|-----|-----|-----|
| Name    | Interrupt event status register |     |     |     |     |     |     |     |
| Type    | R                               | R/C | R/C | R/C | R/C | R/C | R/C | R/C |
| Default | 0                               | 0   | 0   | 0   | 0   | 0   | 0   | 0   |

Register: Interrupt event status  
 Type: Read-only, Read/Clear  
 Offset: 06h (slot 0), 0Eh (slot 1), 16h (slot 2), 1Eh (slot 3)  
 Default: 00h  
 Description: This register reads interrupt status, and clears the interrupt. All functional bits in this register are readable and cleared by a write back of 1. The HPC3130 can be programmed to generate an interrupt, signaled through the open-drain  $\overline{\text{INTR}}$ , after detecting various events. Each event is individually enabled through the interrupt event enable register.

**Table 12. Interrupt Event Status Register**

| BIT | TYPE | NAME       | FUNCTION                                                                                                                                                                                           |
|-----|------|------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | R    | RSVD       | Reserved. This bit returns 0 when read.                                                                                                                                                            |
| 6   | R/C  | BUS_S      | PCI Bus CBT switch status. This bit is set when the $\overline{\text{BUSON}}$ output is asserted, and is cleared by a write back of 1. The BUS event is intended for use with the idling protocol. |
| 5   | R/C  | PWRGOOD_S  | Power good status. This bit is set when the $\overline{\text{PWRGOOD}}$ input changes state.                                                                                                       |
| 4   | R/C  | PWRFAULT_S | Power fault status. This bit is set when the $\overline{\text{PWRFAULT}}$ input is asserted.                                                                                                       |
| 3   | R/C  | DETECT1_S  | Mechanical detect 1 status. This bit is set when the $\overline{\text{DETECT1}}$ input changes state.                                                                                              |
| 2   | R/C  | DETECT0_S  | Mechanical detect 0 status. This bit is set when the $\overline{\text{DETECT0}}$ input changes state.                                                                                              |
| 1   | R/C  | PRSNT2_S   | Card present 2 status. This bit is set when the $\overline{\text{PRSNT2}}$ input changes state.                                                                                                    |
| 0   | R/C  | PRSNT1_S   | Card present 1 status. This bit is set when the $\overline{\text{PRSNT1}}$ input changes state.                                                                                                    |

**interrupt event enable register**

| Bit     | 7                               | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|---------|---------------------------------|-----|-----|-----|-----|-----|-----|-----|
| Name    | Interrupt event enable register |     |     |     |     |     |     |     |
| Type    | R                               | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Default | 0                               | 0   | 0   | 0   | 0   | 0   | 0   | 0   |

Register: Interrupt event enable

Type: Read-only, Read/Write

Offset: 07h (slot 0), 0Fh (slot 1), 17h (slot 2), 1Fh (slot 3)

Default: 00h

Description: This register is used to enable interrupts, signaled through the open-drain  $\overline{\text{INTR}}$ , after detecting various events. Event status is reported through the interrupt event status register.

**Table 13. Interrupt Event Enable Register**

| BITS | TYPE | NAME       | FUNCTION                                                                                                                                                                                                            |
|------|------|------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7    | R    | RSVD       | Reserved. This bit returns 0 when read.                                                                                                                                                                             |
| 6    | R/W  | BUS_E      | PCI bus CBT switch event enable. When this bit is set, an $\overline{\text{INTR}}$ is signaled when the $\overline{\text{BUSON}}$ output is driven low. The BUS event is intended for use with the idling protocol. |
| 5    | R/W  | PWRGOOD_E  | Power good event enable. When this bit is set, an $\overline{\text{INTR}}$ is signaled when the $\overline{\text{PWRGOOD}}$ input changes state.                                                                    |
| 4    | R/W  | PWRFAULT_E | Power fault event enable. When this bit is set, an $\overline{\text{INTR}}$ is signaled when $\overline{\text{PWRFAULT}}$ input is asserted.                                                                        |
| 3    | R/W  | DETECT1_E  | Mechanical detect 1 event enable. Enables $\overline{\text{INTR}}$ events on $\overline{\text{DETECT1}}$ input state changes.                                                                                       |
| 2    | R/W  | DETECT0_E  | Mechanical detect 0 event enable. Enables $\overline{\text{INTR}}$ events on $\overline{\text{DETECT0}}$ input state changes.                                                                                       |
| 1    | R/W  | PRSNT2_E   | Card present 2 event enable. Enables $\overline{\text{INTR}}$ events on $\overline{\text{PRSNT2}}$ input state changes.                                                                                             |
| 0    | R/W  | PRSNT1_E   | Card present 1 event enable. Enables $\overline{\text{INTR}}$ events on $\overline{\text{PRSNT1}}$ input state changes.                                                                                             |

# HPC3130

## PCI HOT PLUG CONTROLLER

SCPS029B – DECEMBER1998

### absolute maximum ratings over operating free-air temperature<sup>†</sup>

|                                                                             |                              |
|-----------------------------------------------------------------------------|------------------------------|
| Supply voltage range, $V_{CC}$                                              | –0.5 V to 3.6 V              |
| $V_{CCP}$ and $V_{CC5V}$                                                    | –0.5 V to 5.5 V              |
| Input voltage range, $V_I$ :                                                |                              |
| PCI                                                                         | –0.5 V to $V_{CCP} + 0.5$ V  |
| SLOT                                                                        | –0.5 V to $V_{CC5V} + 0.5$ V |
| BUSON                                                                       | –0.5 V to $V_{CC5V} + 0.5$ V |
| Parallel                                                                    | –0.5 V to $V_{CC5V} + 0.5$ V |
| Parallel/Serial                                                             | –0.5 V to $V_{CC5V} + 0.5$ V |
| Miscellaneous                                                               | –0.5 V to $V_{CC5V} + 0.5$ V |
| Output voltage range, $V_O$ :                                               |                              |
| PCI                                                                         | –0.5 V to $V_{CCP} + 0.5$ V  |
| SLOT                                                                        | –0.5 V to $V_{CC5V} + 0.5$ V |
| BUSON                                                                       | –0.5 V to $V_{CC5V} + 0.5$ V |
| Parallel                                                                    | –0.5 V to $V_{CC5V} + 0.5$ V |
| Parallel/Serial                                                             | –0.5 V to $V_{CC5V} + 0.5$ V |
| Miscellaneous                                                               | –0.5 V to $V_{CC5V} + 0.5$ V |
| Input clamp current, $I_{IK}$ ( $V_I < 0$ or $V_I > V_{CC}$ ) (see Note 1)  | ±20 mA                       |
| Output clamp current, $I_{OK}$ ( $V_O < 0$ or $V_O > V_{CC}$ ) (see Note 2) | ±20 mA                       |
| Storage temperature range                                                   | –65°C to 150°C               |
| Junction temperature, $T_J$                                                 | 150°C                        |

<sup>†</sup> Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTES: 1. Applies to external input and bidirectional buffers. For 5-V tolerant use  $V_I > V_{CC5V}$ . For universal PCI, use  $V_I > V_{CCP}$ .  
2. Applies to external output and bidirectional buffers. For 5-V tolerant use  $V_O > V_{CC5V}$ . For universal PCI, use  $V_O > V_{CCP}$ .

**recommended operating conditions**

|                   |                                                                         |                 | MIN | NOM               | MAX | UNIT |
|-------------------|-------------------------------------------------------------------------|-----------------|-----|-------------------|-----|------|
| V <sub>CC</sub>   | Core voltage                                                            | Commercial      | 3   | 3.3               | 3.6 | V    |
| V <sub>CCP</sub>  | PCI I/O voltage                                                         | Commercial      | 3   | 5                 | 5.5 | V    |
| V <sub>CC5V</sub> | Slot I/O voltage                                                        | Commercial      | 3   | 5                 | 5.5 | V    |
| V <sub>CC5V</sub> | Parallel I/O voltage                                                    | Commercial      | 3   | 5                 | 5.5 | V    |
| V <sub>CC5V</sub> | Serial I/O voltage                                                      | Commercial      | 3   | 5                 | 5.5 | V    |
| V <sub>CC5V</sub> | Miscellaneous I/O voltage                                               | Commercial      | 3   | 5                 | 5.5 | V    |
| V <sub>I</sub>    | Input voltage                                                           | PCI             | 0   | V <sub>CCP</sub>  | V   |      |
|                   |                                                                         | Slot            | 0   | V <sub>CC5V</sub> |     |      |
|                   |                                                                         | BUSON           | 0   | V <sub>CC5V</sub> |     |      |
|                   |                                                                         | Parallel        | 0   | V <sub>CC5V</sub> |     |      |
|                   |                                                                         | Parallel/Serial | 0   | V <sub>CC5V</sub> |     |      |
|                   |                                                                         | Miscellaneous   | 0   | V <sub>CC5V</sub> |     |      |
| V <sub>O</sub>    | Output voltage <sup>†</sup>                                             | PCI             | 0   | V <sub>CC</sub>   | V   |      |
|                   |                                                                         | Slot            | 0   | V <sub>CC</sub>   |     |      |
|                   |                                                                         | BUSON           | 0   | V <sub>CC</sub>   |     |      |
|                   |                                                                         | Parallel        | 0   | V <sub>CC</sub>   |     |      |
|                   |                                                                         | Parallel/Serial | 0   | V <sub>CC</sub>   |     |      |
|                   |                                                                         | Miscellaneous   | 0   | V <sub>CC</sub>   |     |      |
| V <sub>IH</sub>   | High-level input voltage                                                | PCI             | 2   | V <sub>CCP</sub>  | V   |      |
|                   |                                                                         | Slot            | 2   | V <sub>CC5V</sub> |     |      |
|                   |                                                                         | BUSON           | 2   | V <sub>CC5V</sub> |     |      |
|                   |                                                                         | Parallel        | 2   | V <sub>CC5V</sub> |     |      |
|                   |                                                                         | Parallel/Serial | 2   | V <sub>CC5V</sub> |     |      |
|                   |                                                                         | Miscellaneous   | 2   | V <sub>CC5V</sub> |     |      |
| V <sub>IL</sub>   | Low-level input voltage                                                 | PCI             | 0   | 0.8               | V   |      |
|                   |                                                                         | Slot            | 0   | 0.8               |     |      |
|                   |                                                                         | BUSON           | 0   | 0.8               |     |      |
|                   |                                                                         | Parallel        | 0   | 0.8               |     |      |
|                   |                                                                         | Parallel/Serial | 0   | 0.8               |     |      |
|                   |                                                                         | Miscellaneous   | 0   | 0.8               |     |      |
| t <sub>t</sub>    | Input transition time (t <sub>r</sub> and t <sub>f</sub> ) (10% to 90%) | PCI             | 0   | 6                 | ns  |      |
|                   |                                                                         | Slot            | 0   | 6                 |     |      |
|                   |                                                                         | BUSON           | 0   | 6                 |     |      |
|                   |                                                                         | Parallel/Serial | 0   | 6                 |     |      |
|                   |                                                                         | Miscellaneous   | 0   | 6                 |     |      |
| T <sub>A</sub>    | Operating ambient temperature range                                     |                 | 0   | 25                | 70  | °C   |
| T <sub>J</sub>    | Virtual junction temperature <sup>‡</sup>                               |                 | 0   | 25                | 115 | °C   |

<sup>†</sup> Applies to external output buffers.

<sup>‡</sup> These junction temperatures reflect simulation conditions. Customer is responsible for verifying junction temperature.

1. Reference tables on page 35 for pin definitions of the 120-pin PBM, the 128-pin PBK, and 144-pin PGE packages.

# HPC3130 PCI HOT PLUG CONTROLLER

SCPS029B – DECEMBER1998

## serial bus interface

|          |                          |                               | STANDARD MODE       |                                                | FAST MODE           |                                                | UNIT |
|----------|--------------------------|-------------------------------|---------------------|------------------------------------------------|---------------------|------------------------------------------------|------|
|          |                          |                               | MIN                 | MAX                                            | MIN                 | MAX                                            |      |
| $V_{IL}$ | Low-level input voltage  | Fixed:<br>$V_{CC5V}$ related: | −0.5<br>−0.5        | 1.5<br>$0.3 V_{CC5V}$                          | −0.5<br>−0.5        | 1.5<br>$0.3 V_{CC5V}$                          | V    |
| $V_{IH}$ | High-level input voltage | Fixed:<br>$V_{CC5V}$ related: | 0<br>$0.7 V_{CC5V}$ | $V_{CC5V} \max + 0.5$<br>$V_{CC5V} \max + 0.5$ | 3<br>$0.7 V_{CC5V}$ | $V_{CC5V} \max + 0.5$<br>$V_{CC5V} \max + 0.5$ | V    |

## electrical characteristics over recommended operating conditions

| PARAMETER                                                 | PINS            | TEST CONDITIONS               | MIN            | MAX          | UNIT          |
|-----------------------------------------------------------|-----------------|-------------------------------|----------------|--------------|---------------|
| $V_{OH}$ High-level output voltage                        | PCI             | $I_{OH} = -2 \text{ mA}$      | $0.9 V_{CC}$   |              | V             |
|                                                           | Slot            | $I_{OH} = -8 \text{ mA}$      | $V_{CC}(\min)$ |              |               |
|                                                           | BUSON           | $I_{OH} = -12 \text{ mA}$     | $V_{CC}(\min)$ |              |               |
|                                                           | Parallel        | $I_{OH} = -4 \text{ mA}$      | $V_{CC}(\min)$ |              |               |
|                                                           | Parallel/Serial | $I_{OH} = -4 \text{ mA}$      | $V_{CC}(\min)$ |              |               |
|                                                           | Miscellaneous   | $I_{OH} = -2 \text{ mA}$      | $V_{CC}(\min)$ |              |               |
| $V_{OL}$ Low-level output voltage                         | PCI             | $I_{OL} = 2 \text{ mA}$       |                | $0.1 V_{CC}$ | V             |
|                                                           | Slot            | $I_{OL} = 8 \text{ mA}$       |                | 0.5          |               |
|                                                           | BUSON           | $I_{OL} = 12 \text{ mA}$      |                | 0.5          |               |
|                                                           | Parallel        | $I_{OL} = 4 \text{ mA}$       |                | 0.5          |               |
|                                                           | Parallel/Serial | $I_{OL} = 4 \text{ mA}$       |                | 0.5          |               |
|                                                           | Miscellaneous   | $I_{OL} = 2 \text{ mA}$       |                | 0.5          |               |
| $I_{IL}$ Low-level input current <sup>†</sup>             | PCI             | $V_{in} = \text{GND}$         |                | $\pm 20$     | $\mu\text{A}$ |
|                                                           | Slot            | $V_{in} = \text{GND}$         |                | $\pm 20$     |               |
|                                                           | BUSON           | $V_{in} = \text{GND}$         |                | $\pm 20$     |               |
|                                                           | Parallel        | $V_{in} = \text{GND}$         |                | $\pm 20$     |               |
|                                                           | Parallel/Serial | $V_{in} = \text{GND}$         |                | $\pm 20$     |               |
|                                                           | Miscellaneous   | $V_{in} = \text{GND}$         |                | $\pm 20$     |               |
| $I_{IH}$ High-level input current <sup>‡</sup>            | PCI             | $V_I = V_{CC}$                |                | $\pm 1$      | $\mu\text{A}$ |
|                                                           | Slot            | $V_I = V_{CC}$                |                | $\pm 20$     |               |
|                                                           | BUSON           | $V_I = V_{CC}$                |                | $\pm 20$     |               |
|                                                           | Parallel        | $V_I = V_{CC}$                |                | $\pm 20$     |               |
|                                                           | Parallel/Serial | $V_I = V_{CC}$                |                | $\pm 20$     |               |
|                                                           | Miscellaneous   | $V_I = V_{CC}$                |                | $\pm 20$     |               |
| $I_{OZ}$ High-impedance state output current <sup>§</sup> | PCI             | $V_I = V_{CC} \text{ or GND}$ |                | $\pm 20$     | $\mu\text{A}$ |
|                                                           | Slot            | $V_I = V_{CC} \text{ or GND}$ |                | $\pm 20$     |               |
|                                                           | BUSON           | $V_I = V_{CC} \text{ or GND}$ |                | $\pm 20$     |               |
|                                                           | Parallel        | $V_I = V_{CC} \text{ or GND}$ |                | $\pm 20$     |               |
|                                                           | Parallel/Serial | $V_I = V_{CC} \text{ or GND}$ |                | $\pm 20$     |               |
|                                                           | Miscellaneous   | $V_I = V_{CC} \text{ or GND}$ |                | $\pm 20$     |               |

<sup>†</sup> Specifications apply only when pull-up terminator is turned off.

<sup>‡</sup> Specifications apply only when pull-down terminator is turned off.

<sup>§</sup> F 3-state or open drain output must be in the high impedance mode.

2. Reference tables on page 32 for pin definitions of both the 120-pin PBM and the 128-pin PBK packages.

**PCI clock/reset timing requirements over recommended ranges of supply voltage and operating free-air temperature**

| PARAMETER |                                  | ALTERNATE SYMBOL | TEST CONDITIONS | MIN | MAX | UNITS |
|-----------|----------------------------------|------------------|-----------------|-----|-----|-------|
| $t_c$     | PCLK cycle time                  | $t_{cyc}$        |                 | 15  |     | ns    |
| $t_{wH}$  | PCLK high time                   | $t_{high}$       |                 | 6   |     | ns    |
| $t_{wL}$  | PCLK low time                    | $t_{low}$        |                 | 6   |     | ns    |
| dv/dt     | PCLK slew rate                   | $t_r, t_f$       |                 | 1.5 | 4   | V/ns  |
| $t_w$     | RSTIN pulse width                | $t_{rst}$        |                 | 1   |     | ms    |
| $t_{su}$  | PCLK active time at end of RSTIN | $t_{rst-clk}$    |                 | 100 |     | ms    |

**Pin definitions for 120-pin PBM package**

| PARAMETER       | PIN NUMBER                                                                                                                                                                                                                                            |
|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PCI             | 14, 16, 18, 19, 20, 21, 25, 27                                                                                                                                                                                                                        |
| Slot            | 1, 2, 3, 4, 5, 7, 8, 9, 10, 52, 53, 54, 55, 57, 58, 59, 60, 64, 65, 66, 67, 69, 70, 71, 72, 73, 75, 76, 77, 78, 80, 82, 83, 84, 86, 87, 88, 91, 92, 93, 94, 96, 97, 98, 99, 102, 103, 104, 105, 106, 108, 109, 110, 111, 113, 114, 115, 116, 118, 120 |
| BUSON           | 63, 81, 100, 119                                                                                                                                                                                                                                      |
| Parallel        | 34, 35, 37, 38, 39, 40, 42                                                                                                                                                                                                                            |
| Parallel/Serial | 23, 24, 29, 30, 43, 44, 45, 47, 48, 49, 50                                                                                                                                                                                                            |
| Miscellaneous   | 12, 13                                                                                                                                                                                                                                                |

**Pin definitions for 128-pin PBK package**

| PARAMETER       | PIN NUMBER                                                                                                                                                                                                                                                   |
|-----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PCI             | 15, 17, 19, 20, 21, 22, 26, 28,                                                                                                                                                                                                                              |
| Slot            | 2, 3, 4, 5, 6, 8, 9, 10, 11, 55, 56, 57, 58, 60, 61, 62, 63, 69, 70, 71, 72, 74, 75, 76, 77, 78, 80, 81, 82, 83, 85, 87, 88, 89, 91, 92, 93, 98, 99, 100, 101, 103, 104, 105, 106, 109, 110, 111, 112, 113, 115, 116, 117, 118, 120, 121, 122, 123, 125, 127 |
| BUSON           | 68, 86, 107, 126                                                                                                                                                                                                                                             |
| Parallel        | 37, 38, 40, 41, 42, 43, 45,                                                                                                                                                                                                                                  |
| Parallel/Serial | 24, 25, 30, 31, 46, 47, 48, 50, 51, 52, 53                                                                                                                                                                                                                   |
| Miscellaneous   | 13, 14                                                                                                                                                                                                                                                       |

**Pin definitions for 144-pin PGE package**

| PARAMETER       | PIN NUMBER                                                                                                                                                                                                                                                          |
|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PCI             | 17, 19, 21, 22, 23, 24, 28, 30                                                                                                                                                                                                                                      |
| Slot            | 1, 3, 5, 7, 8, 10, 11, 12, 13, 61, 62, 63, 64, 66, 68, 70, 72, 79, 80, 81, 82, 84, 85, 86, 87, 88, 90, 91, 92, 93, 95, 97, 98, 99, 101, 102, 104, 109, 111, 113, 115, 117, 118, 119, 120, 123, 124, 125, 126, 127, 129, 130, 131, 132, 134, 135, 136, 137, 140, 144 |
| BUSON           | 77, 96, 121, 142                                                                                                                                                                                                                                                    |
| Parallel        | 43, 44, 46, 47, 48, 49, 51                                                                                                                                                                                                                                          |
| Parallel/Serial | 26, 27, 34, 36, 52, 53, 54, 56, 57, 58, 59                                                                                                                                                                                                                          |
| Miscellaneous   | 15, 16                                                                                                                                                                                                                                                              |

# HPC3130

## PCI HOT PLUG CONTROLLER

SCPS029B – DECEMBER1998

**PCI timing requirements over recommended ranges of supply voltage and operating free-air temperature<sup>†</sup>** (see Note 3)

| PARAMETER |                                                             |                                        | ALTERNATE SYMBOL | TEST CONDITIONS                        | MIN | MAX | UNITS |
|-----------|-------------------------------------------------------------|----------------------------------------|------------------|----------------------------------------|-----|-----|-------|
| $t_{pd}$  | Propagation delay time                                      | PCLK to shared signal valid delay time | $t_{val}$        | $C_L = 50$ pF,<br>See Note 4,<br>1,2,3 | 2   | 11  | ns    |
| $t_{en}$  | Enable time, high-impedance-to-active delay time from PCLK  |                                        | $t_{on}$         |                                        | 2   |     | ns    |
| $t_{dis}$ | Disable time, active-to-high-impedance delay time from PCLK |                                        | $t_{off}$        |                                        |     | 28  | ns    |
| $t_{su}$  | Valid setup time, before PCLK                               |                                        | $t_{su}$         | 3,4                                    | 3   |     | ns    |
| $t_h$     | Hold time, after PCLK high                                  |                                        | $t_h$            | 4                                      | 0   |     | ns    |

<sup>†</sup> Applies to external output buffers.

- NOTES: 3. This data sheet uses the following conventions to describe time (t) intervals. The format is:  $t_A$ , where *subscript A* indicates the type of dynamic parameter being represented. One of the following is used:  $t_{pd}$  = propagation delay time,  $t_d$  = delay time,  $t_{su}$  = setup time, and  $t_h$  = hold time.
4. PCI shared signals are AD31–AD0, C/BE3–C/BE0, PCIFRAME, PCITRDY, PCIIRDY, PCISTOP, IDSEL, PCIDEVSEL, and PCIPAR.

### serial bus interface<sup>†</sup>

|               |                                                                                             | STANDARD MODE                |      | FAST MODE        |                  | UNIT    |
|---------------|---------------------------------------------------------------------------------------------|------------------------------|------|------------------|------------------|---------|
|               |                                                                                             | MIN                          | MAX  | MIN              | MAX              |         |
| $f_{SCL}$     | SCL clock frequency (see Note 5)                                                            | 0                            | 100  | 0                | 400              | kHz     |
| $t_{BUF}$     | Bus free time between a STOP and START condition                                            | 4.7                          |      | 1.3              |                  | $\mu$ s |
| $t_{HD;STA}$  | Hold time (repeated) START condition. After this period, the first clock pulse is generated | 4                            |      | 0.6              |                  | $\mu$ s |
| $t_{LOW}$     | LOW period of the SCL clock                                                                 | 4.7                          |      | 1.3              |                  | $\mu$ s |
| $t_{HIGH}$    | HIGH period of the SCL clock                                                                | 4                            |      | 0.6              |                  | $\mu$ s |
| $t_{SU;STA}$  | Setup time for a repeated START condition                                                   | 4.7                          |      | 0.6              |                  | $\mu$ s |
| $t_{HD;DAT}$  | Data hold time (see Note 6)                                                                 | For CBUS compatible masters: |      |                  |                  | $\mu$ s |
|               |                                                                                             | For Serial bus devices:      |      | 0 <sub>1</sub>   | 0.9 <sub>2</sub> |         |
| $t_{SU;DAT}$  | Data set-up time (see Note 7)                                                               | 250                          |      | 100 <sub>3</sub> |                  | $\mu$ s |
| $t_R$         | Rise time of both SDA and SCL signals                                                       |                              | 1000 | 20               | 300              | $\mu$ s |
| $t_F$         | Fall time of both SDA and SCL signals                                                       |                              | 300  | 20               | 300              | $\mu$ s |
| $t_{FSU;STO}$ | Setup time for STOP condition                                                               | 4                            |      | 0.6              |                  | $\mu$ s |

<sup>†</sup> All values refer to serial bus interface  $V_{IH}$  MIN and  $V_{IL}$  MAX levels


- NOTES: 5. A device must internally provide a hold time of at least 300 ns for the SDA signal (referred to the  $V_{IH}$  MIN of the SCL signal) in order to bridge the undefined region of the falling edge of SCL.
6. The maximum  $t_{HD;DAT}$  has only to be met if the device does not stretch the LOW period ( $t_{LOW}$ ) of the SDL signal.
7. A fast mode serial bus device can be used in a standard mode serial bus system, but the requirement  $t_{SU;DAT} \geq 250$  ns must then be met. This will automatically be the case if the device does not stretch the LOW period of the SCL signal. If such a device does stretch the LOW period of the SCL signal, it must output the next data bit to the SDA line  $t_R \text{ MAX} + t_{SU;DAT} = 1000 + 250 = 1250$  ns (according to the *Standard Mode Serial Bus Specification*) before the SCL line is released.

MECHANICAL DATA

PBM (S-PQFP-G\*\*\*)

PLASTIC QUAD FLATPACK

120-PIN SHOWN

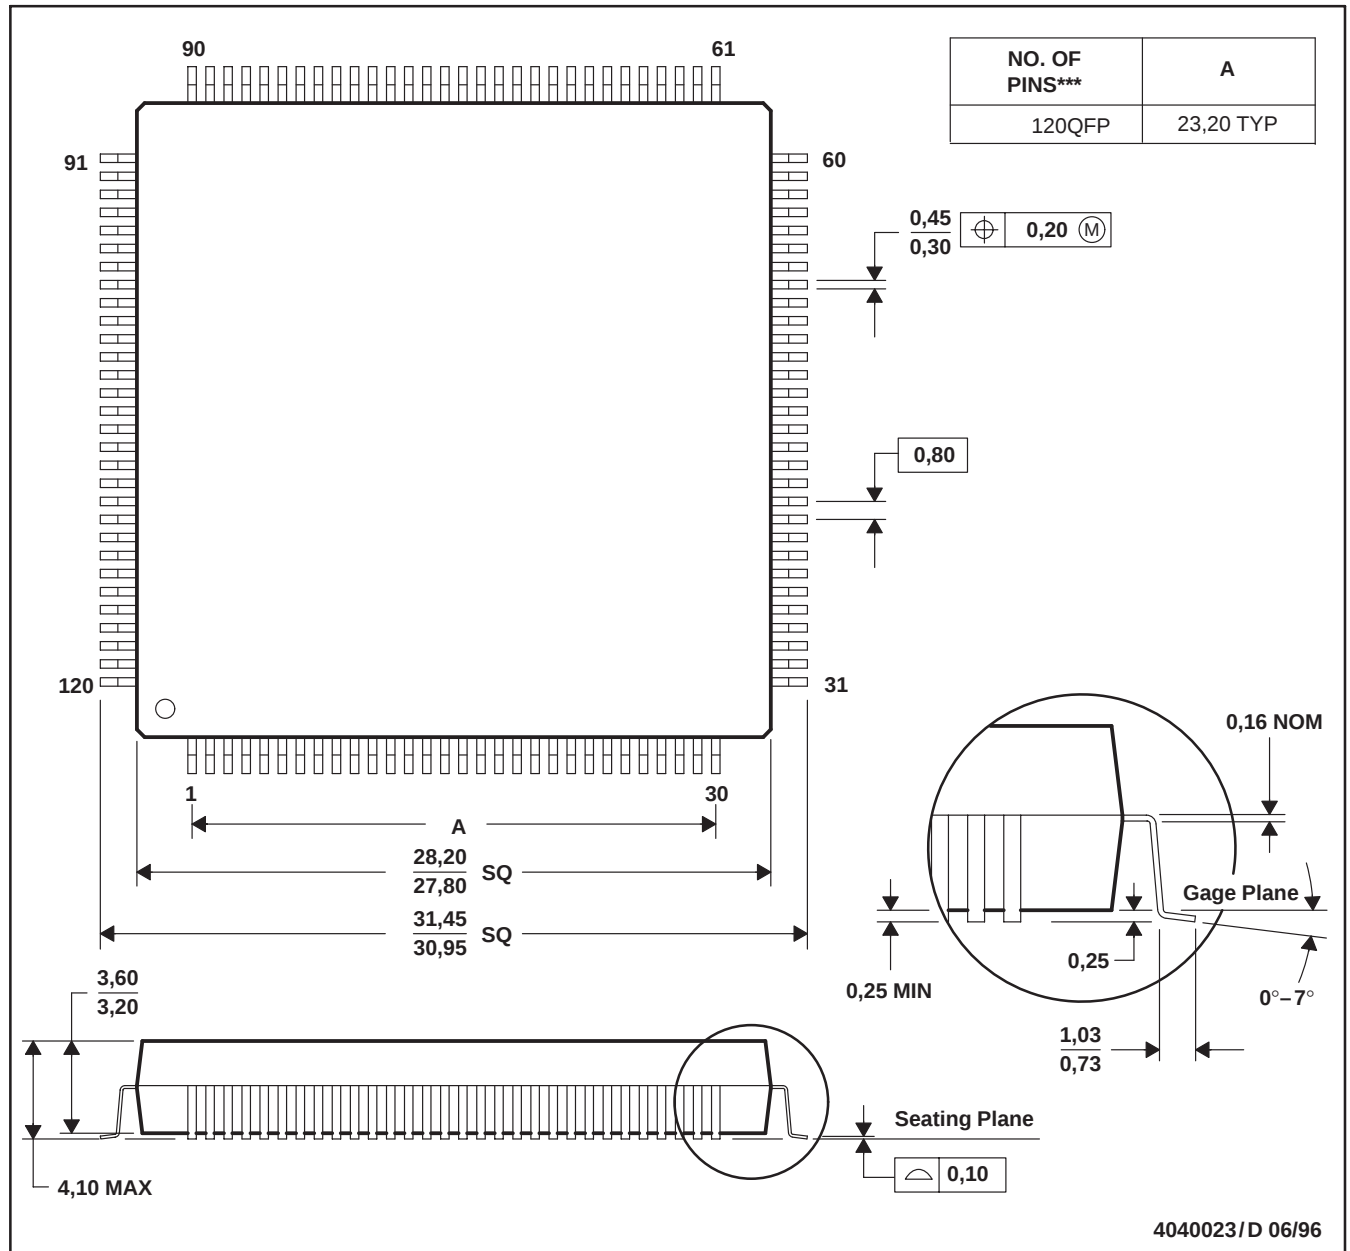

4040023/D 06/96

- NOTES: A. All linear dimensions are in millimeters.  
B. This drawing is subject to change without notice.  
C. Falls within JEDEC MS-022

HPC3130  
PCI HOT PLUG CONTROLLER


SCPS029B – DECEMBER1998

MECHANICAL DATA

PBK (S-PQFP-G128)

PLASTIC QUAD FLATPACK

128-PIN SHOWN

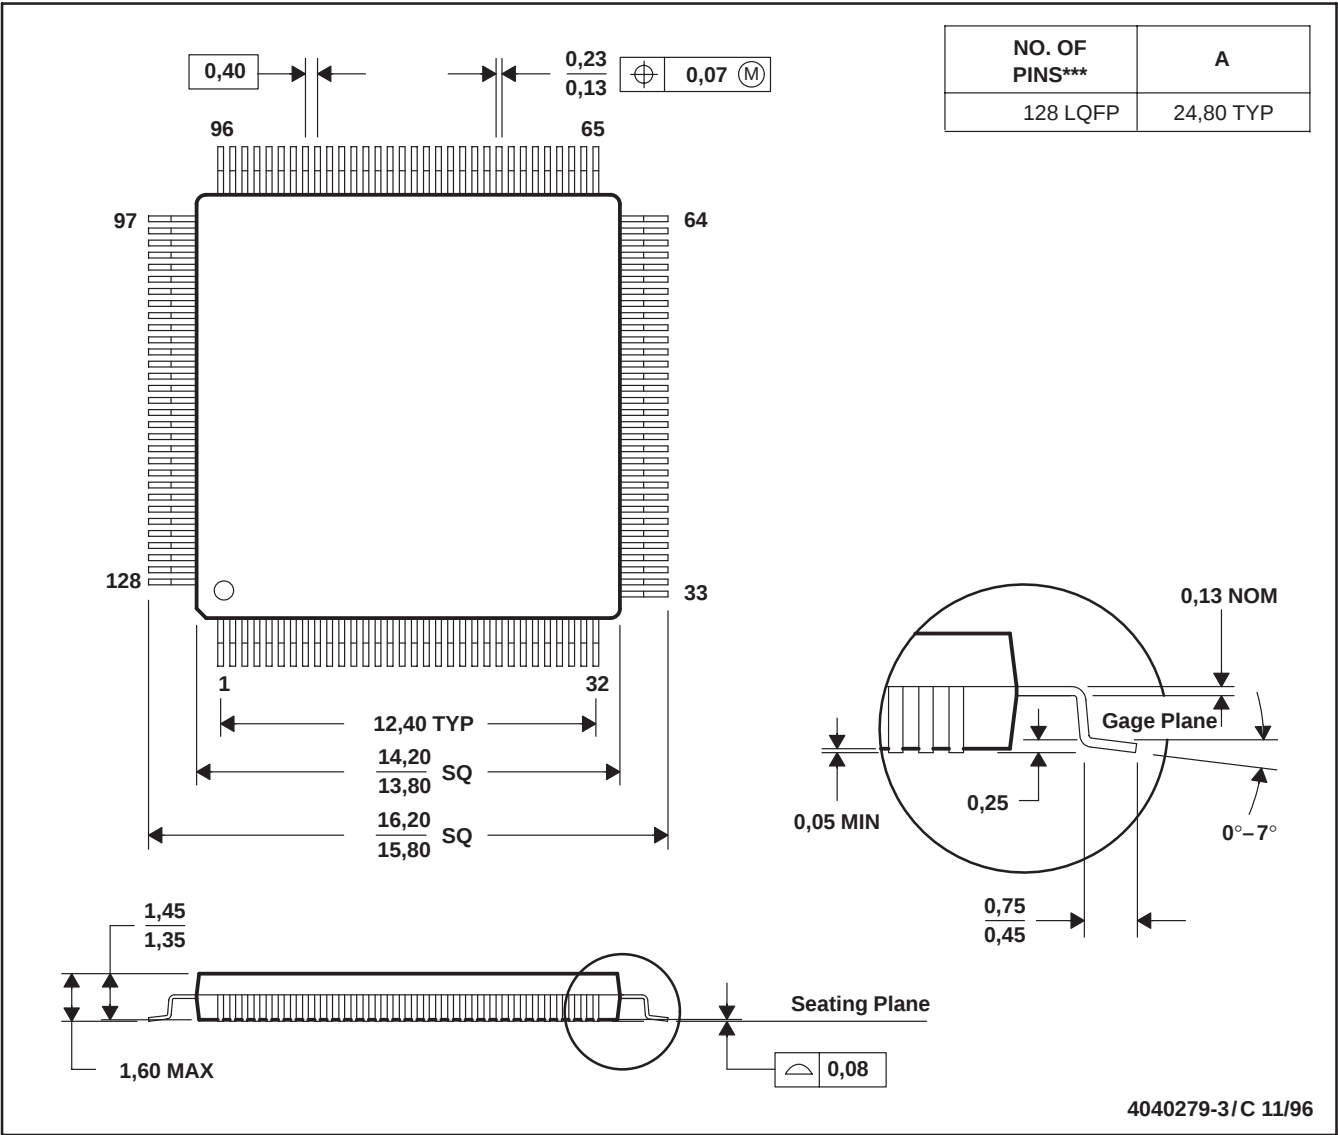


NOTES: A. All linear dimensions are in millimeters.  
B. This drawing is subject to change without notice.  
C. Falls within JEDEC MS-026

MECHANICAL DATA

PGE (S-PQFP-G144)

PLASTIC QUAD FLATPACK

144-PIN SHOWN

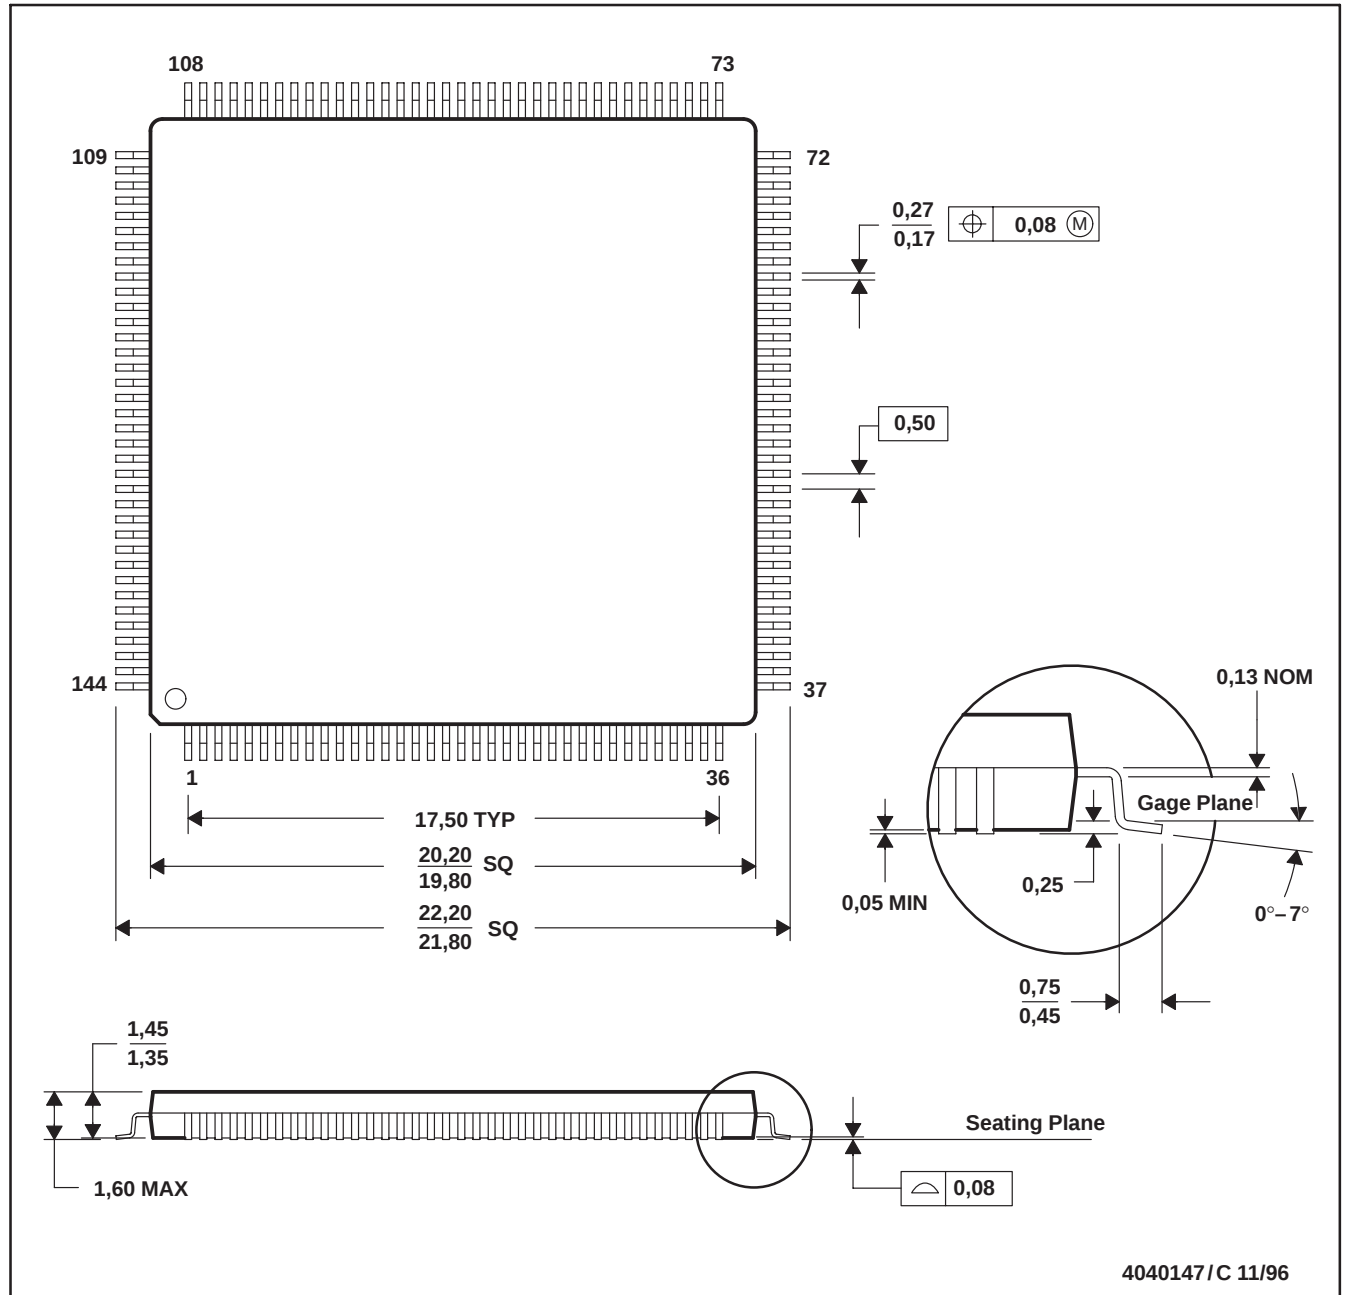

- NOTES: A. All linear dimensions are in millimeters.  
B. This drawing is subject to change without notice.  
C. Falls within JEDEC MS-026

## **IMPORTANT NOTICE**

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.