

# Manual Motor Starters

- Complete Ranges up to 100 Amps
- ON-OFF-Trip Three Position Operator
- Unique Handle Lock in the OFF Position
- Class 10, 20 Overload Trip Characteristics
- DIN Rail or Back Panel Mounting
- Finger Safe Terminals
- Trip Test



With  
Extended  
Warranty



Switch



# Carlo Gavazzi GMS Manual Motor Starters provide complete ranges up to 100A



## 32AF

0.1~0.16... 22~32A (16 step)


**GMS 32S**



• Standard

**GMS 32H  
GMS 32HI**

• High break  
• Magnetic release

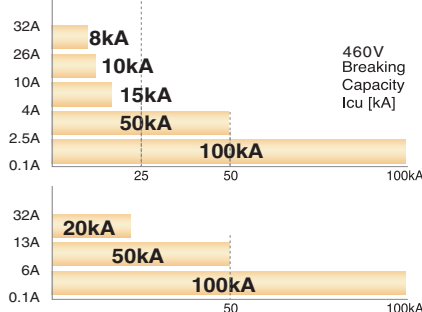

6~10... 45~63A (9 step)

**GMS 63S**




• Standard

**GMS 63H  
GMS 63HI  
GMS 63HL**

• High break  
• Magnetic release  
• Class 20




up to 100A

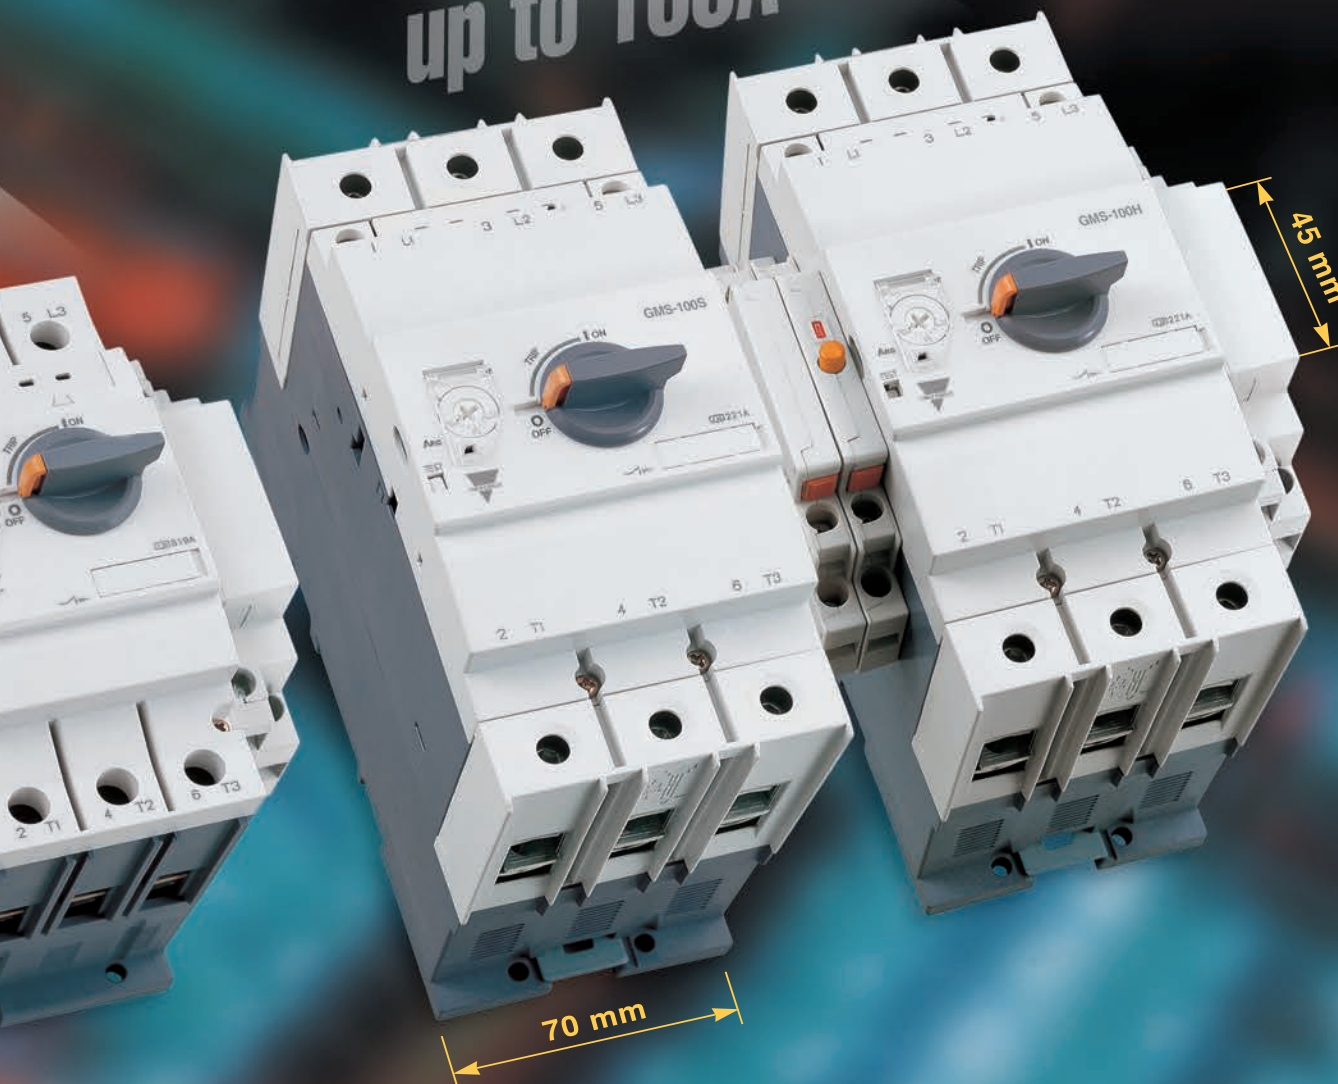

GMS

## 63AF

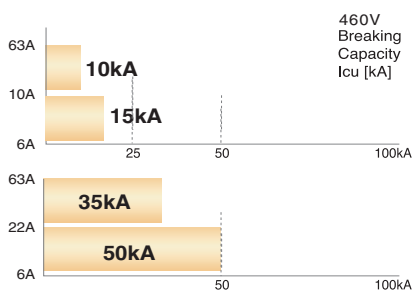

11~17... 80~100A (10 step)

GMS 100S


GMS 100H  
GMS 100HI  
GMS 100HL



Standard

- High break
- Magnetic release
- Class 20


## 100AF

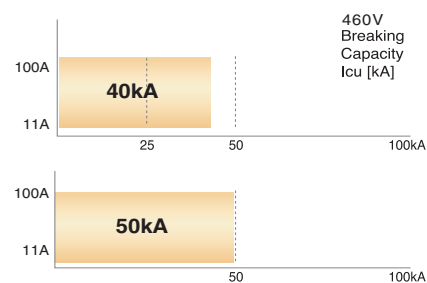

Specifications are subject to change without notice.

# Carlo Gavazzi GMS Manual Motor Starters deliver more efficiency through various functions and compact design

[ Scale 1:1 ]

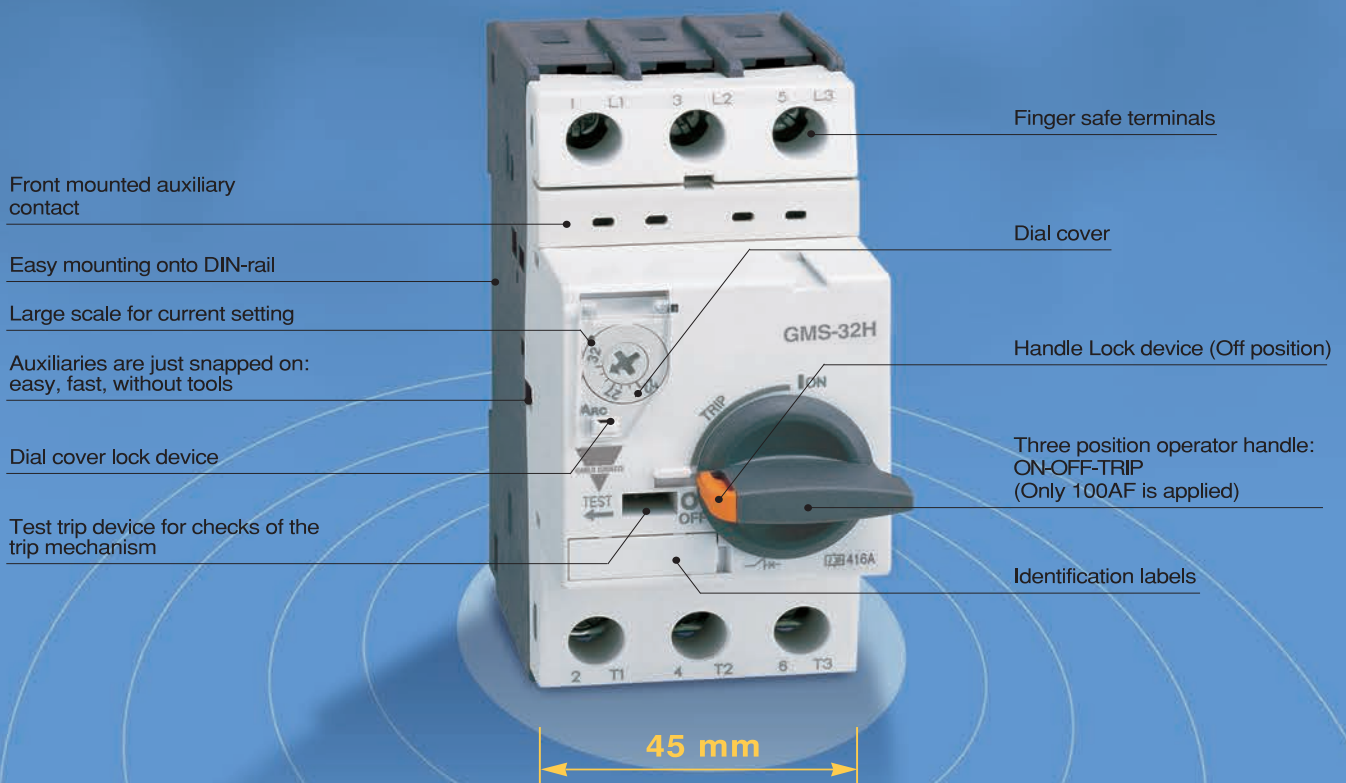

## Handle Lock



## Dial cover



## Terminals

GMS32



GMS63



GMS100






Common use from 32 to 100AF



A wide variety of accessories enables a flexible response to changes in specifications

Accessories  
Accessories  
Accessories

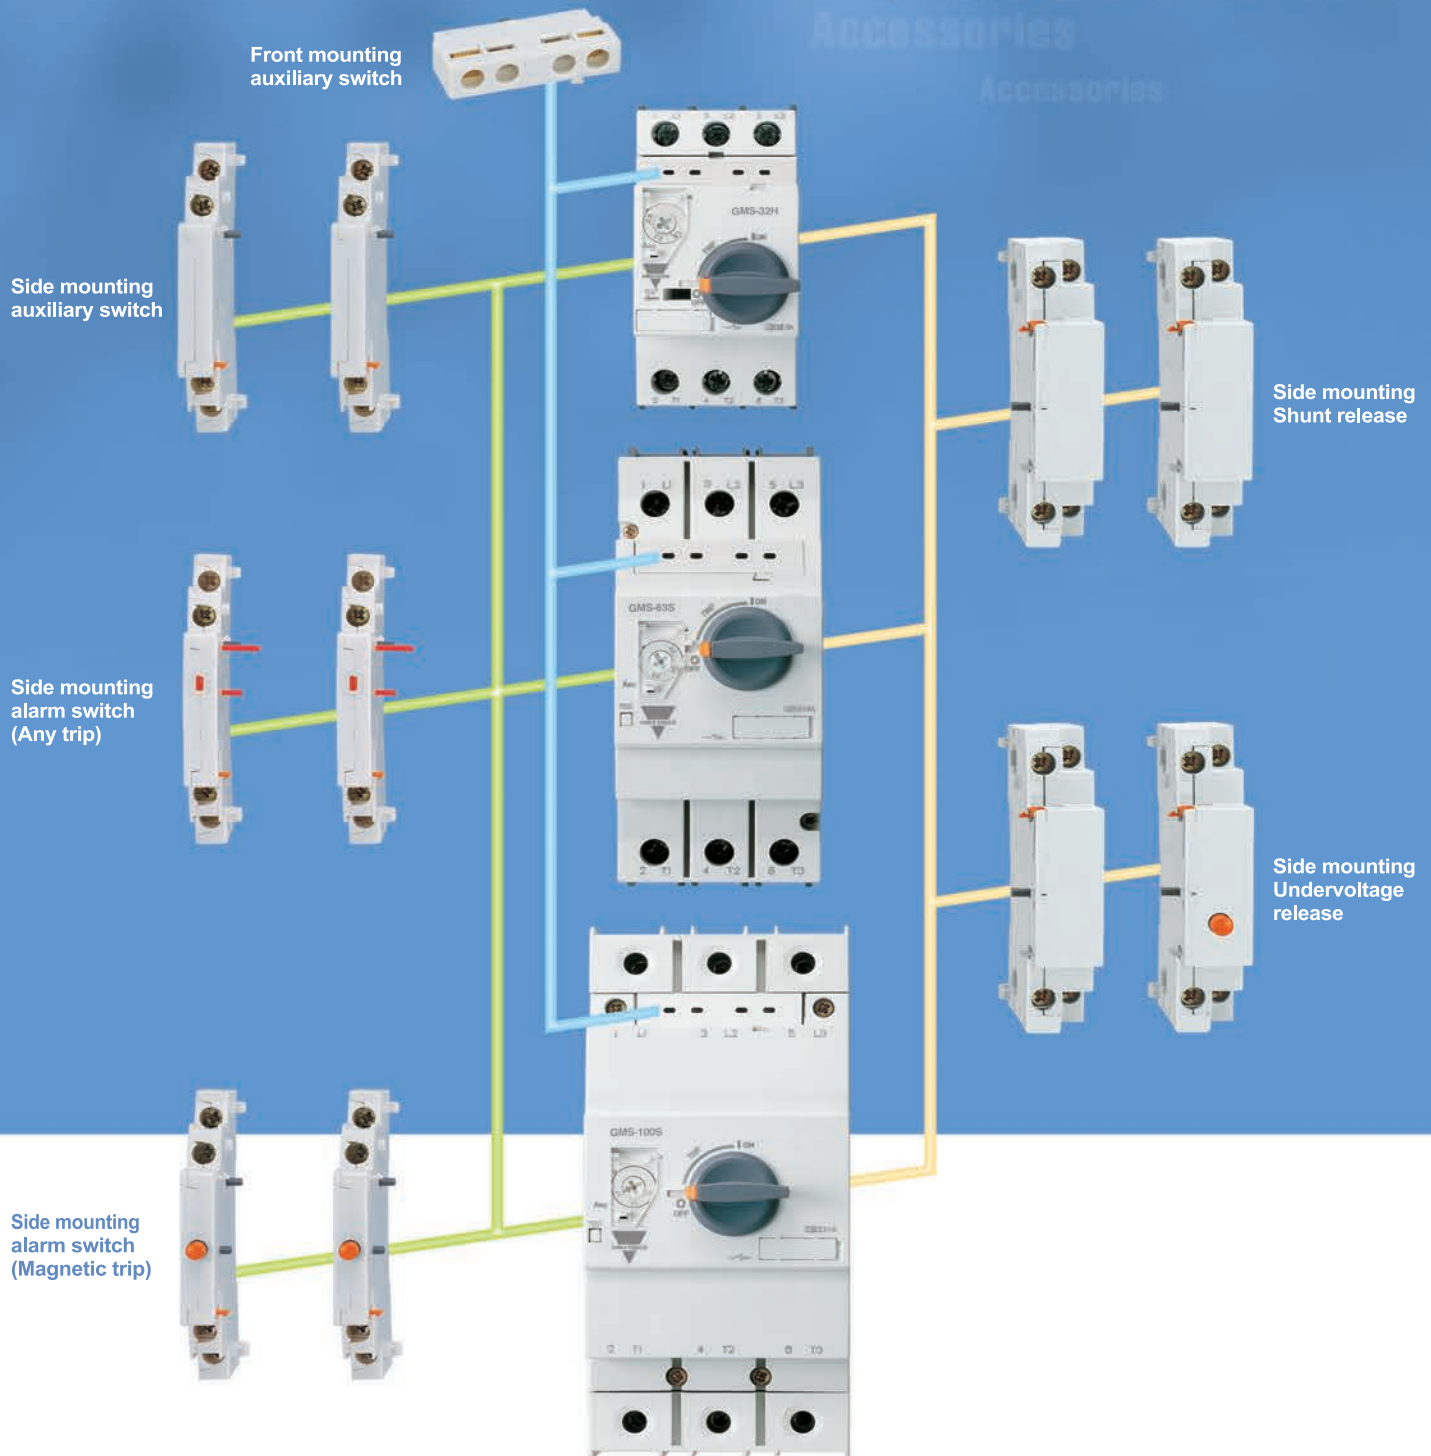

## Function

- Protection of group installation
- Protection of circuits
- Motor protection
- Starter protection
- Wide range of ambient temperature compensation
- Phase failure protection



## Feature

- 45mm width up to 32A, 55mm width up to 63A and 70mm width rated to 100 amps
- Three position operator: ON-OFF-TRIP (Only 100AF is applied)
- Complete range of common accessories
- Handle lock in the OFF position
- Class 10,20 overload trip characteristics
- Trip test
- Finger safe terminal
- DIN rail and screw mounting

## Standard

- The components fulfill the international standard IEC 60947
- The devices can be used as Manual Motor Starter in Group Installations According to UL508.



**KEMA**



**IEC 60947**

**UL 508, UL 508 Type E**



# Contents

## Product Selection Guide

|                                             |    |
|---------------------------------------------|----|
| Quick selection table ...IEC rating .....   | 8  |
| Motor protection .....                      | 10 |
| Short-circuit protection for starters ..... | 12 |
| Accessories .....                           | 14 |
| Busbar Accessories .....                    | 16 |

## Technical Information

|                                                              |    |
|--------------------------------------------------------------|----|
| IEC performance data (motor protection).....                 | 18 |
| IEC performance data (Short-circuit protection for starters) | 21 |
| IEC Performance data (Motor protection: Class 20) .....      | 22 |
| UL/CSA performance data (Motor protection) .....             | 23 |
| Manual Motor Controller (UL508) .....                        | 26 |
| General data .....                                           | 28 |
| Type 'Z' coordination according to IEC 947-4-1 .....         | 32 |
| Time/Current characteristic .....                            | 33 |
| Dimensions .....                                             | 34 |



# Product Selection Guide

## Quick selection table ... IEC rating



| Frame                                     |                                             |                                      | 32AF                     |                 |                 |                 |                 |                 |                 |                 |                 |                 |                          |                 |                 |                 |                 |                 |                 |                 |                 |                 |
|-------------------------------------------|---------------------------------------------|--------------------------------------|--------------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|--------------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Type                                      | Current adjustable type                     |                                      | GMS-32S                  |                 |                 |                 |                 |                 |                 |                 |                 |                 | GMS-32H                  |                 |                 |                 |                 |                 |                 |                 |                 |                 |
|                                           | Instantaneous type                          |                                      | -                        |                 |                 |                 |                 |                 |                 |                 |                 |                 | GMS-32HI                 |                 |                 |                 |                 |                 |                 |                 |                 |                 |
|                                           | Class 20                                    |                                      | -                        |                 |                 |                 |                 |                 |                 |                 |                 |                 | -                        |                 |                 |                 |                 |                 |                 |                 |                 |                 |
| Breaking capacity                         |                                             |                                      | Standard                 |                 |                 |                 |                 |                 |                 |                 |                 |                 | High break               |                 |                 |                 |                 |                 |                 |                 |                 |                 |
| Handle Type                               |                                             |                                      | Rocker                   |                 |                 |                 |                 |                 |                 |                 |                 |                 | Rotary                   |                 |                 |                 |                 |                 |                 |                 |                 |                 |
| Number of poles                           |                                             |                                      | 3                        |                 |                 |                 |                 |                 |                 |                 |                 |                 | 3                        |                 |                 |                 |                 |                 |                 |                 |                 |                 |
| Rated operational voltage (Ue)            |                                             |                                      | Up to 690V               |                 |                 |                 |                 |                 |                 |                 |                 |                 | Up to 690V               |                 |                 |                 |                 |                 |                 |                 |                 |                 |
| Rated frequency                           |                                             |                                      | 50/60 Hz                 |                 |                 |                 |                 |                 |                 |                 |                 |                 | 50/60 Hz                 |                 |                 |                 |                 |                 |                 |                 |                 |                 |
| Rated insulation voltage (Ui)             |                                             |                                      | 690V                     |                 |                 |                 |                 |                 |                 |                 |                 |                 | 690V                     |                 |                 |                 |                 |                 |                 |                 |                 |                 |
| Rated impulse voltage (Uimp)              |                                             |                                      | 6kV                      |                 |                 |                 |                 |                 |                 |                 |                 |                 | 6kV                      |                 |                 |                 |                 |                 |                 |                 |                 |                 |
| Utilization category                      | IEC 60 947-2 (Breaker )                     |                                      | Cat. A                   |                 |                 |                 |                 |                 |                 |                 |                 |                 | Cat. A                   |                 |                 |                 |                 |                 |                 |                 |                 |                 |
|                                           | IEC 60 947-4 (Motor starter)                |                                      | AC 3                     |                 |                 |                 |                 |                 |                 |                 |                 |                 | AC 3                     |                 |                 |                 |                 |                 |                 |                 |                 |                 |
| Shock resistance (IEC 68 Part 2-27)       |                                             |                                      | 25g                      |                 |                 |                 |                 |                 |                 |                 |                 |                 | 25g                      |                 |                 |                 |                 |                 |                 |                 |                 |                 |
| Degree of protection (IEC 60 529)         |                                             |                                      | IP 20                    |                 |                 |                 |                 |                 |                 |                 |                 |                 | IP 20                    |                 |                 |                 |                 |                 |                 |                 |                 |                 |
| Instantaneous short circuit release       |                                             |                                      | 13 × I <sub>e</sub> max. |                 |                 |                 |                 |                 |                 |                 |                 |                 | 13 × I <sub>e</sub> max. |                 |                 |                 |                 |                 |                 |                 |                 |                 |
| Mechanical endurance (Operating)          |                                             |                                      | 100,000                  |                 |                 |                 |                 |                 |                 |                 |                 |                 | 100,000                  |                 |                 |                 |                 |                 |                 |                 |                 |                 |
| Electrical endurance (Cycles)             |                                             |                                      | 100,000                  |                 |                 |                 |                 |                 |                 |                 |                 |                 | 100,000                  |                 |                 |                 |                 |                 |                 |                 |                 |                 |
| Max operating frequency per hour (Ope./h) |                                             |                                      | 25                       |                 |                 |                 |                 |                 |                 |                 |                 |                 | 25                       |                 |                 |                 |                 |                 |                 |                 |                 |                 |
| Temperature compensation (Operation)      |                                             |                                      | -20 ~ +60 ℃              |                 |                 |                 |                 |                 |                 |                 |                 |                 | -20 ~ +60 ℃              |                 |                 |                 |                 |                 |                 |                 |                 |                 |
| Phase failure function                    |                                             |                                      | ○                        |                 |                 |                 |                 |                 |                 |                 |                 |                 | ○                        |                 |                 |                 |                 |                 |                 |                 |                 |                 |
| Trip indicating function                  |                                             |                                      | ×                        |                 |                 |                 |                 |                 |                 |                 |                 |                 | ×                        |                 |                 |                 |                 |                 |                 |                 |                 |                 |
| Test function                             |                                             |                                      | ○                        |                 |                 |                 |                 |                 |                 |                 |                 |                 | ○                        |                 |                 |                 |                 |                 |                 |                 |                 |                 |
| Rated breaking capacity (kA)              | Rated operational current (I <sub>e</sub> ) | Thermal release Adjustment range (A) | 240V 230V                |                 | 415V 400V       |                 | 460V 440V       |                 | 525V 500V       |                 | 690V 600V       |                 | 240V 230V                |                 | 415V 400V       |                 | 460V 440V       |                 | 525V 500V       |                 | 690V 600V       |                 |
|                                           |                                             |                                      | I <sub>cu</sub>          | I <sub>cs</sub> | I <sub>cu</sub> | I <sub>cs</sub> | I <sub>cu</sub> | I <sub>cs</sub> | I <sub>cu</sub> | I <sub>cs</sub> | I <sub>cu</sub> | I <sub>cs</sub> | I <sub>cu</sub>          | I <sub>cs</sub> | I <sub>cu</sub> | I <sub>cs</sub> | I <sub>cu</sub> | I <sub>cs</sub> | I <sub>cu</sub> | I <sub>cs</sub> | I <sub>cu</sub> | I <sub>cs</sub> |
|                                           | 0.16                                        | 0.1~0.16                             | 100                      | 100             | 100             | 100             | 100             | 100             | 100             | 100             | 100             | 100             | 100                      | 100             | 100             | 100             | 100             | 100             | 100             | 100             | 100             | 100             |
|                                           | 0.25                                        | 0.16~0.25                            | 100                      | 100             | 100             | 100             | 100             | 100             | 100             | 100             | 100             | 100             | 100                      | 100             | 100             | 100             | 100             | 100             | 100             | 100             | 100             | 100             |
|                                           | 0.4                                         | 0.25~0.4                             | 100                      | 100             | 100             | 100             | 100             | 100             | 100             | 100             | 100             | 100             | 100                      | 100             | 100             | 100             | 100             | 100             | 100             | 100             | 100             | 100             |
|                                           | 0.63                                        | 0.4~0.63                             | 100                      | 100             | 100             | 100             | 100             | 100             | 100             | 100             | 100             | 100             | 100                      | 100             | 100             | 100             | 100             | 100             | 100             | 100             | 100             | 100             |
|                                           | 1                                           | 0.63~1                               | 100                      | 100             | 100             | 100             | 100             | 100             | 100             | 100             | 100             | 100             | 100                      | 100             | 100             | 100             | 100             | 100             | 100             | 100             | 100             | 100             |
|                                           | 1.6                                         | 1~1.6                                | 100                      | 100             | 100             | 100             | 100             | 100             | 100             | 100             | 3               | 3               | 100                      | 100             | 100             | 100             | 100             | 100             | 100             | 100             | 100             | 100             |
|                                           | 2.5                                         | 1.6~2.5                              | 100                      | 100             | 100             | 100             | 100             | 100             | 50              | 38              | 3               | 3               | 100                      | 100             | 100             | 100             | 100             | 100             | 100             | 100             | 8               | 8               |
|                                           | 4                                           | 2.5~4                                | 100                      | 100             | 100             | 100             | 50              | 38              | 15              | 11              | 3               | 3               | 100                      | 100             | 100             | 100             | 100             | 100             | 100             | 100             | 8               | 8               |
|                                           | 6                                           | 4~6                                  | 100                      | 100             | 100             | 100             | 15              | 11              | 10              | 8               | 3               | 3               | 100                      | 100             | 100             | 100             | 100             | 100             | 100             | 100             | 6               | 6               |
|                                           | 8                                           | 5~8                                  | 100                      | 100             | 100             | 100             | 15              | 11              | 10              | 8               | 3               | 3               | 100                      | 100             | 100             | 100             | 50              | 38              | 50              | 38              | 6               | 6               |
|                                           | 10                                          | 6~10                                 | 100                      | 100             | 50              | 38              | 15              | 11              | 6               | 5               | 3               | 3               | 100                      | 100             | 100             | 100             | 50              | 38              | 50              | 38              | 6               | 6               |
|                                           | 13                                          | 9~13                                 | 100                      | 100             | 50              | 38              | 10              | 8               | 6               | 5               | 3               | 3               | 100                      | 100             | 100             | 100             | 50              | 38              | 42              | 32              | 6               | 6               |
|                                           | 17                                          | 11~17                                | 50                       | 38              | 20              | 15              | 10              | 8               | 6               | 5               | 3               | 3               | 100                      | 100             | 50              | 38              | 20              | 15              | 10              | 8               | 4               | 4               |
|                                           | 22                                          | 14~22                                | 40                       | 30              | 15              | 11              | 8               | 6               | 6               | 5               | 3               | 3               | 100                      | 100             | 50              | 38              | 20              | 15              | 10              | 8               | 4               | 4               |
|                                           | 26                                          | 18~26                                | 40                       | 30              | 15              | 11              | 8               | 6               | 6               | 5               | 3               | 3               | 100                      | 100             | 50              | 38              | 20              | 15              | 10              | 8               | 4               | 4               |
|                                           | 32                                          | 22~32                                | 30                       | 22              | 15              | 11              | 6               | 4               | 5               | 4               | 3               | 3               | 100                      | 100             | 50              | 38              | 20              | 15              | 10              | 8               | 4               | 4               |
|                                           | 40                                          | 28~40                                | -                        | -               | -               | -               | -               | -               | -               | -               | -               | -               | -                        | -               | -               | -               | -               | -               | -               | -               | -               | -               |
|                                           | 50                                          | 34~50                                | -                        | -               | -               | -               | -               | -               | -               | -               | -               | -               | -                        | -               | -               | -               | -               | -               | -               | -               | -               | -               |
|                                           | 63                                          | 45~63                                | -                        | -               | -               | -               | -               | -               | -               | -               | -               | -               | -                        | -               | -               | -               | -               | -               | -               | -               | -               | -               |
|                                           | 75                                          | 55~75                                | -                        | -               | -               | -               | -               | -               | -               | -               | -               | -               | -                        | -               | -               | -               | -               | -               | -               | -               | -               | -               |
| 90                                        | 70~90                                       | -                                    | -                        | -               | -               | -               | -               | -               | -               | -               | -               | -               | -                        | -               | -               | -               | -               | -               | -               | -               | -               |                 |
| 100                                       | 80~100                                      | -                                    | -                        | -               | -               | -               | -               | -               | -               | -               | -               | -               | -                        | -               | -               | -               | -               | -               | -               | -               | -               |                 |

### Ordering Example: Specify Rated Operational Current

GMS-32S-0.16 (0.1 to 0.16)

GMS-32S-0.25 (0.16 to 0.25)



9

# Product Selection Guide

## Motor protection


- Adjustable thermal release
- Magnetic release  $13 \times I_e$  max.
- Trip class 10
- Ambient temperature compensation
- Phase-failure protection



GMS-32S



GMS-32H



(Circuit diagram)

| Type                 | Rated operational current $I_e$ [A] | Thermal release Adjustment range [A] | Magnetic release Operating current [A] | Switching of 3 phase AC motors, AC-2, AC-3 |      |      |                     |       |       | 440/460V      |               |
|----------------------|-------------------------------------|--------------------------------------|----------------------------------------|--------------------------------------------|------|------|---------------------|-------|-------|---------------|---------------|
|                      |                                     |                                      |                                        | 3-phase [kW] (50/60Hz)                     |      |      | 3-phase [HP] (60Hz) |       |       | $I_{cu}$ [kA] | $I_{cs}$ [kA] |
|                      |                                     |                                      |                                        | 230V                                       | 400V | 690V | 230V                | 460V  | 575V  |               |               |
| GMS-32S (Standard)   | 0.16                                | 0.1...0.16                           | 2.1                                    | -                                          | 0.02 | -    | -                   | -     | -     | 100           | 100           |
|                      | 0.25                                | 0.16...0.25                          | 3.3                                    | 0.03                                       | 0.06 | -    | -                   | -     | -     | 100           | 100           |
|                      | 0.4                                 | 0.25...0.4                           | 5.2                                    | 0.06                                       | 0.09 | -    | -                   | -     | -     | 100           | 100           |
|                      | 0.63                                | 0.4...0.63                           | 8.2                                    | 0.09                                       | 0.12 | 0.25 | -                   | -     | -     | 100           | 100           |
|                      | 1                                   | 0.63...1.0                           | 13                                     | 0.12                                       | 0.25 | 0.55 | -                   | 1/2   | 1/2   | 100           | 100           |
|                      | 1.6                                 | 1.0...1.6                            | 20.8                                   | 0.25                                       | 0.55 | 1.1  | 1/3                 | 3/4   | 1     | 100           | 100           |
|                      | 2.5                                 | 1.6...2.5                            | 32.5                                   | 0.37                                       | 0.75 | 1.5  | 1/2                 | 1 1/2 | 1 1/2 | 100           | 100           |
|                      | 4                                   | 2.5...4.0                            | 52                                     | 0.75                                       | 1.5  | 3    | 1                   | 2     | 3     | 50            | 38            |
|                      | 6                                   | 4...6                                | 78                                     | 1.5                                        | 2.2  | 4    | 1 1/2               | 5     | 5     | 15            | 11            |
|                      | 8                                   | 5...8                                | 104                                    | 1.5                                        | 3    | 5.5  | 2                   | 5     | 5     | 15            | 11            |
|                      | 10                                  | 6...10                               | 130                                    | 3                                          | 4    | 7.5  | 3                   | 7 1/2 | 10    | 15            | 11            |
|                      | 13                                  | 9...13                               | 169                                    | 3                                          | 5.5  | 11   | 3                   | 7 1/2 | 10    | 10            | 8             |
|                      | 17                                  | 11...17                              | 221                                    | 4                                          | 7.5  | 11   | 5                   | 10    | 15    | 10            | 8             |
|                      | 22                                  | 14...22                              | 286                                    | 4                                          | 7.5  | 15   | 7 1/2               | 15    | 20    | 8             | 6             |
| GMS-32H (High break) | 0.16                                | 0.1...0.16                           | 2.1                                    | -                                          | 0.02 | -    | -                   | -     | -     | 100           | 100           |
|                      | 0.25                                | 0.16...0.25                          | 3.3                                    | 0.03                                       | 0.06 | -    | -                   | -     | -     | 100           | 100           |
|                      | 0.4                                 | 0.25...0.4                           | 5.2                                    | 0.06                                       | 0.09 | -    | -                   | -     | -     | 100           | 100           |
|                      | 0.63                                | 0.4...0.63                           | 8.2                                    | 0.09                                       | 0.12 | 0.25 | -                   | -     | -     | 100           | 100           |
|                      | 1                                   | 0.63...1.0                           | 13                                     | 0.12                                       | 0.25 | 0.55 | -                   | 1/2   | 1/2   | 100           | 100           |
|                      | 1.6                                 | 1.0...1.6                            | 20.8                                   | 0.25                                       | 0.55 | 1.1  | 1/3                 | 3/4   | 1     | 100           | 100           |
|                      | 2.5                                 | 1.6...2.5                            | 32.5                                   | 0.37                                       | 0.75 | 1.5  | 1/2                 | 1 1/2 | 1 1/2 | 100           | 100           |
|                      | 4                                   | 2.5...4.0                            | 52                                     | 0.75                                       | 1.5  | 3    | 1                   | 2     | 3     | 100           | 100           |
|                      | 6                                   | 4...6                                | 78                                     | 1.5                                        | 2.2  | 4    | 1 1/2               | 5     | 5     | 100           | 100           |
|                      | 8                                   | 5...8                                | 104                                    | 1.5                                        | 3    | 5.5  | 2                   | 5     | 5     | 50            | 38            |
|                      | 10                                  | 6...10                               | 130                                    | 3                                          | 4    | 7.5  | 3                   | 7 1/2 | 10    | 50            | 38            |
|                      | 13                                  | 9...13                               | 169                                    | 3                                          | 5.5  | 11   | 3                   | 7 1/2 | 10    | 50            | 38            |
|                      | 17                                  | 11...17                              | 221                                    | 4                                          | 7.5  | 11   | 5                   | 10    | 15    | 20            | 15            |
|                      | 22                                  | 14...22                              | 286                                    | 4                                          | 7.5  | 15   | 7 1/2               | 15    | 20    | 20            | 15            |
|                      | 26                                  | 18...26                              | 338                                    | 5.5                                        | 11   | 18.5 | 7 1/2               | 15    | 20    | 20            | 15            |
|                      | 32                                  | 22...32                              | 416                                    | 7.5                                        | 15   | 22   | 10                  | 20    | 30    | 20            | 15            |


- Adjustable thermal release
- Magnetic release  $13 \times I_e$  max.
- Trip class 10
- Ambient temperature compensation
- Phase-failure protection



GMS-63H



GMS-100H



(Circuit diagram)

| Type                     | Rated operational current<br>$I_e$<br>[A] | Thermal release Adjustment range<br>[A] | Magnetic release Operating current<br>[A] | Switching of 3 phase AC motors, AC-2, AC-3 |      |      |                     |      |      | 440/460V         |                  |
|--------------------------|-------------------------------------------|-----------------------------------------|-------------------------------------------|--------------------------------------------|------|------|---------------------|------|------|------------------|------------------|
|                          |                                           |                                         |                                           | 3-phase [kW] (50/60Hz)                     |      |      | 3-phase [HP] (60Hz) |      |      | $I_{cu}$<br>[kA] | $I_{cs}$<br>[kA] |
|                          |                                           |                                         |                                           | 230V                                       | 400V | 690V | 230V                | 460V | 575V |                  |                  |
| GMS-63S<br>(Standard)    | 10                                        | 6~10                                    | 130                                       | 3                                          | 4    | 7.5  | 3                   | 7½   | 10   | 15               | 12               |
|                          | 13                                        | 9~13                                    | 169                                       | 3                                          | 5.5  | 11   | 3                   | 7½   | 10   | 10               | 8                |
|                          | 17                                        | 11~17                                   | 221                                       | 4                                          | 7.5  | 11   | 5                   | 10   | 15   | 10               | 8                |
|                          | 22                                        | 14~22                                   | 286                                       | 4                                          | 7.5  | 15   | 7½                  | 15   | 20   | 10               | 8                |
|                          | 26                                        | 18~26                                   | 338                                       | 5.5                                        | 11   | 18.5 | 10                  | 20   | 25   | 10               | 8                |
|                          | 32                                        | 22~32                                   | 416                                       | 7.5                                        | 15   | 22   | 10                  | 25   | 30   | 10               | 8                |
|                          | 40                                        | 28~40                                   | 520                                       | 7.5                                        | 18.5 | 30   | 15                  | 30   | 40   | 10               | 8                |
|                          | 50                                        | 34~50                                   | 650                                       | 11                                         | 22   | 45   | 15                  | 40   | 50   | 10               | 8                |
| GMS-63H<br>(High break)  | 63                                        | 45~63                                   | 819                                       | 15                                         | 30   | 55   | 20                  | 50   | 60   | 10               | 8                |
|                          | 10                                        | 6~10                                    | 130                                       | 3                                          | 4    | 7.5  | 3                   | 7½   | 10   | 50               | 38               |
|                          | 13                                        | 9~13                                    | 169                                       | 3                                          | 5.5  | 11   | 3                   | 7½   | 10   | 50               | 38               |
|                          | 17                                        | 11~17                                   | 221                                       | 4                                          | 7.5  | 11   | 5                   | 10   | 15   | 50               | 38               |
|                          | 22                                        | 14~22                                   | 286                                       | 4                                          | 7.5  | 15   | 7½                  | 15   | 20   | 50               | 38               |
|                          | 26                                        | 18~26                                   | 338                                       | 5.5                                        | 11   | 18.5 | 10                  | 20   | 25   | 35               | 27               |
|                          | 32                                        | 22~32                                   | 416                                       | 7.5                                        | 15   | 22   | 10                  | 25   | 30   | 35               | 27               |
|                          | 40                                        | 28~40                                   | 520                                       | 7.5                                        | 18.5 | 30   | 15                  | 30   | 40   | 35               | 27               |
| GMS-100S<br>(Standard)   | 50                                        | 34~50                                   | 650                                       | 11                                         | 22   | 45   | 15                  | 40   | 50   | 35               | 27               |
|                          | 63                                        | 45~63                                   | 819                                       | 15                                         | 30   | 55   | 20                  | 50   | 60   | 35               | 27               |
|                          | 17                                        | 11~17                                   | 221                                       | 4                                          | 7.5  | 11   | 5                   | 10   | 15   | 40               | 30               |
|                          | 22                                        | 14~22                                   | 286                                       | 4                                          | 7.5  | 15   | 7½                  | 15   | 20   | 40               | 30               |
|                          | 26                                        | 18~26                                   | 338                                       | 5.5                                        | 11   | 18.5 | 10                  | 20   | 25   | 40               | 30               |
|                          | 32                                        | 22~32                                   | 416                                       | 7.5                                        | 15   | 22   | 10                  | 25   | 30   | 40               | 30               |
|                          | 40                                        | 28~40                                   | 520                                       | 7.5                                        | 18.5 | 30   | 15                  | 30   | 40   | 40               | 30               |
|                          | 50                                        | 34~50                                   | 650                                       | 11                                         | 22   | 45   | 15                  | 40   | 50   | 40               | 30               |
| GMS-100H<br>(High break) | 63                                        | 45~63                                   | 819                                       | 15                                         | 30   | 55   | 20                  | 50   | 60   | 40               | 30               |
|                          | 75                                        | 55~75                                   | 975                                       | 22                                         | 37   | 63   | 25                  | 60   | 75   | 40               | 30               |
|                          | 90                                        | 70~90                                   | 1170                                      | 30                                         | 45   | 75   | 30                  | 75   | 100  | 40               | 30               |
|                          | 100                                       | 80~100                                  | 1300                                      | 30                                         | 45   | 90   | 40                  | 75   | 100  | 40               | 30               |
|                          | 17                                        | 11~17                                   | 221                                       | 4                                          | 7.5  | 11   | 5                   | 10   | 15   | 50               | 38               |
|                          | 22                                        | 14~22                                   | 286                                       | 4                                          | 7.5  | 15   | 7½                  | 15   | 20   | 50               | 38               |
|                          | 26                                        | 18~26                                   | 338                                       | 5.5                                        | 11   | 18.5 | 10                  | 20   | 25   | 50               | 38               |
|                          | 32                                        | 22~32                                   | 416                                       | 7.5                                        | 15   | 22   | 10                  | 25   | 30   | 50               | 38               |
| GMS-100H<br>(High break) | 40                                        | 28~40                                   | 520                                       | 7.5                                        | 18.5 | 30   | 15                  | 30   | 40   | 50               | 38               |
|                          | 50                                        | 34~50                                   | 650                                       | 11                                         | 22   | 45   | 15                  | 40   | 50   | 50               | 38               |
|                          | 63                                        | 45~63                                   | 819                                       | 15                                         | 30   | 55   | 20                  | 50   | 60   | 50               | 38               |
|                          | 75                                        | 55~75                                   | 975                                       | 22                                         | 37   | 63   | 25                  | 60   | 75   | 50               | 38               |
|                          | 90                                        | 70~90                                   | 1170                                      | 30                                         | 45   | 75   | 30                  | 75   | 100  | 50               | 38               |
|                          | 100                                       | 80~100                                  | 1300                                      | 30                                         | 45   | 90   | 40                  | 75   | 100  | 50               | 38               |
|                          | 17                                        | 11~17                                   | 221                                       | 4                                          | 7.5  | 11   | 5                   | 10   | 15   | 50               | 38               |
|                          | 22                                        | 14~22                                   | 286                                       | 4                                          | 7.5  | 15   | 7½                  | 15   | 20   | 50               | 38               |



# Product Selection Guide

## Short-circuit protection for starters

- Without thermal releases
- Magnetic release  $13 \times I_e$  max.




GMS-32HI



GMS-63HI



GMS-100HI



(Circuit diagram)

| Type                      | Rated operational current $I_e$ [A] | Thermal release Adjustment range [A] | Magnetic release Operating current [A] | Switching of 3 phase AC motors, AC-2, AC-3 |      |      |                     |       |       | 440/460V      |               |
|---------------------------|-------------------------------------|--------------------------------------|----------------------------------------|--------------------------------------------|------|------|---------------------|-------|-------|---------------|---------------|
|                           |                                     |                                      |                                        | 3-phase [kW] (50/60Hz)                     |      |      | 3-phase [HP] (60Hz) |       |       | $I_{cu}$ [kA] | $I_{cs}$ [kA] |
|                           |                                     |                                      |                                        | 230V                                       | 400V | 690V | 230V                | 460V  | 575V  |               |               |
| GMS-32HI<br>(High break)  | 0.16                                | -                                    | 2.1                                    | -                                          | 0.02 | -    | -                   | -     | -     | 100           | 100           |
|                           | 0.25                                | -                                    | 3.3                                    | 0.03                                       | 0.06 | -    | -                   | -     | -     | 100           | 100           |
|                           | 0.4                                 | -                                    | 5.2                                    | 0.06                                       | 0.09 | -    | -                   | -     | -     | 100           | 100           |
|                           | 0.63                                | -                                    | 8.2                                    | 0.09                                       | 0.12 | 0.25 | -                   | -     | -     | 100           | 100           |
|                           | 1                                   | -                                    | 13                                     | 0.12                                       | 0.25 | 0.55 | -                   | 1/2   | 1/2   | 100           | 100           |
|                           | 1.6                                 | -                                    | 20.8                                   | 0.25                                       | 0.55 | 1.1  | 1/3                 | 3/4   | 1     | 100           | 100           |
|                           | 2.5                                 | -                                    | 32.5                                   | 0.37                                       | 0.75 | 1.5  | 1/2                 | 1 1/2 | 1 1/2 | 100           | 100           |
|                           | 4                                   | -                                    | 52                                     | 0.75                                       | 1.5  | 3    | 1                   | 2     | 3     | 100           | 100           |
|                           | 6                                   | -                                    | 78                                     | 1.5                                        | 2.2  | 4    | 1 1/2               | 5     | 5     | 100           | 100           |
|                           | 8                                   | -                                    | 104                                    | 1.5                                        | 3    | 5.5  | 2                   | 5     | 5     | 50            | 38            |
|                           | 10                                  | -                                    | 130                                    | 3                                          | 4    | 7.5  | 3                   | 7 1/2 | 10    | 50            | 38            |
|                           | 13                                  | -                                    | 169                                    | 3                                          | 5.5  | 11   | 3                   | 7 1/2 | 10    | 50            | 38            |
|                           | 17                                  | -                                    | 221                                    | 4                                          | 7.5  | 11   | 5                   | 10    | 15    | 20            | 15            |
|                           | 22                                  | -                                    | 286                                    | 4                                          | 7.5  | 15   | 7 1/2               | 15    | 20    | 20            | 15            |
| GMS-63HI<br>(High break)  | 26                                  | -                                    | 338                                    | 5.5                                        | 11   | 18.5 | 7 1/2               | 15    | 20    | 20            | 15            |
|                           | 32                                  | -                                    | 416                                    | 7.5                                        | 15   | 22   | 10                  | 20    | 30    | 20            | 15            |
|                           | 10                                  | -                                    | 130                                    | 3                                          | 4    | 7.5  | 3                   | 7 1/2 | 10    | 50            | 38            |
|                           | 13                                  | -                                    | 169                                    | 3                                          | 5.5  | 11   | 3                   | 7 1/2 | 10    | 50            | 38            |
|                           | 17                                  | -                                    | 221                                    | 4                                          | 7.5  | 11   | 5                   | 10    | 15    | 50            | 38            |
|                           | 22                                  | -                                    | 286                                    | 4                                          | 7.5  | 15   | 7 1/2               | 15    | 20    | 50            | 38            |
|                           | 26                                  | -                                    | 338                                    | 5.5                                        | 11   | 18.5 | 10                  | 20    | 25    | 35            | 27            |
|                           | 32                                  | -                                    | 416                                    | 7.5                                        | 15   | 22   | 10                  | 25    | 30    | 35            | 27            |
| GMS-100HI<br>(High break) | 40                                  | -                                    | 520                                    | 7.5                                        | 18.5 | 30   | 15                  | 30    | 40    | 35            | 27            |
|                           | 50                                  | -                                    | 650                                    | 11                                         | 22   | 45   | 15                  | 40    | 50    | 35            | 27            |
|                           | 63                                  | -                                    | 819                                    | 15                                         | 30   | 55   | 20                  | 50    | 60    | 35            | 27            |
|                           | 17                                  | -                                    | 221                                    | 4                                          | 7.5  | 11   | 5                   | 10    | 15    | 50            | 38            |
|                           | 22                                  | -                                    | 286                                    | 4                                          | 7.5  | 15   | 7 1/2               | 15    | 20    | 50            | 38            |
|                           | 26                                  | -                                    | 338                                    | 5.5                                        | 11   | 18.5 | 10                  | 20    | 25    | 50            | 38            |
|                           | 32                                  | -                                    | 416                                    | 7.5                                        | 15   | 22   | 10                  | 25    | 30    | 50            | 38            |
|                           | 40                                  | -                                    | 520                                    | 7.5                                        | 18.5 | 30   | 15                  | 30    | 40    | 50            | 38            |
|                           | 50                                  | -                                    | 650                                    | 11                                         | 22   | 45   | 15                  | 40    | 50    | 50            | 38            |
|                           | 63                                  | -                                    | 819                                    | 15                                         | 30   | 55   | 20                  | 50    | 60    | 50            | 38            |
|                           | 75                                  | -                                    | 975                                    | 22                                         | 37   | 63   | 25                  | 60    | 75    | 50            | 38            |
|                           | 90                                  | -                                    | 1170                                   | 30                                         | 45   | 75   | 30                  | 75    | 100   | 50            | 38            |
|                           | 100                                 | -                                    | 1300                                   | 30                                         | 45   | 90   | 40                  | 75    | 100   | 50            | 38            |

# Motor protection ... Class 20


- Adjustable thermal release
- Magnetic release  $13 \times I_e$  max.
- Trip class 20
- Ambient temperature compensation
- Phase-failure protection



GMS-63H



GMS-100H















(Circuit diagram)

| Type                      | Rated<br>operational<br>current<br>$I_e$<br>[A] | Thermal<br>release<br>Adjustment<br>range<br>[A] | Magnetic<br>release<br>Operating<br>current<br>[A] | Switching of 3 phase AC motors, AC-2, AC-3 |      |      |                     |      |      | 440/460V         |                  |
|---------------------------|-------------------------------------------------|--------------------------------------------------|----------------------------------------------------|--------------------------------------------|------|------|---------------------|------|------|------------------|------------------|
|                           |                                                 |                                                  |                                                    | 3-phase [kW] (50/60Hz)                     |      |      | 3-phase [HP] (60Hz) |      |      | $I_{cu}$<br>[kA] | $I_{cs}$<br>[kA] |
|                           |                                                 |                                                  |                                                    | 230V                                       | 400V | 690V | 230V                | 460V | 575V |                  |                  |
| GMS-63HL<br>(High break)  | 10                                              | 6~10                                             | 130                                                | 3                                          | 4    | 7.5  | 3                   | 7½   | 10   | 50               | 38               |
|                           | 13                                              | 9~13                                             | 169                                                | 3                                          | 5.5  | 11   | 3                   | 7½   | 10   | 50               | 38               |
|                           | 17                                              | 11~17                                            | 221                                                | 4                                          | 7.5  | 11   | 5                   | 10   | 15   | 50               | 38               |
|                           | 22                                              | 14~22                                            | 286                                                | 4                                          | 7.5  | 15   | 7½                  | 15   | 20   | 50               | 38               |
|                           | 26                                              | 18~26                                            | 338                                                | 5.5                                        | 11   | 18.5 | 10                  | 20   | 25   | 35               | 27               |
|                           | 32                                              | 22~32                                            | 416                                                | 7.5                                        | 15   | 22   | 10                  | 25   | 30   | 35               | 27               |
|                           | 40                                              | 28~40                                            | 520                                                | 7.5                                        | 18.5 | 30   | 15                  | 30   | 40   | 35               | 27               |
|                           | 50                                              | 34~50                                            | 650                                                | 11                                         | 22   | 45   | 15                  | 40   | 50   | 35               | 27               |
| GMS-100HL<br>(High break) | 63                                              | 45~63                                            | 819                                                | 15                                         | 30   | 55   | 20                  | 50   | 60   | 35               | 27               |
|                           | 17                                              | 11~17                                            | 221                                                | 4                                          | 7.5  | 11   | 5                   | 10   | 15   | 50               | 38               |
|                           | 22                                              | 14~22                                            | 286                                                | 4                                          | 7.5  | 15   | 7½                  | 15   | 20   | 50               | 38               |
|                           | 26                                              | 18~26                                            | 338                                                | 5.5                                        | 11   | 18.5 | 10                  | 20   | 25   | 50               | 38               |
|                           | 32                                              | 22~32                                            | 416                                                | 7.5                                        | 15   | 22   | 10                  | 25   | 30   | 50               | 38               |
|                           | 40                                              | 28~40                                            | 520                                                | 7.5                                        | 18.5 | 30   | 15                  | 30   | 40   | 50               | 38               |
|                           | 50                                              | 34~50                                            | 650                                                | 11                                         | 22   | 45   | 15                  | 40   | 50   | 50               | 38               |
|                           | 63                                              | 45~63                                            | 819                                                | 15                                         | 30   | 55   | 20                  | 50   | 60   | 50               | 38               |
|                           | 75                                              | 55~75                                            | 975                                                | 22                                         | 37   | 63   | 25                  | 60   | 75   | 50               | 38               |
|                           | 90                                              | 70~90                                            | 1170                                               | 30                                         | 45   | 75   | 30                  | 75   | 100  | 50               | 38               |
|                           | 100                                             | 80~100                                           | 1300                                               | 30                                         | 45   | 90   | 40                  | 75   | 100  | 50               | 38               |

# Product Selection Guide

## Accessories

| Type                                                                                                 | Description                                                                                                                                                                                                       | Connection diagram                                                                                                     |                                                                                                                         |                                                                                                                          |
|------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| <b>GFX...</b><br>   | Auxiliary Switch<br>• Front mounting<br>• 2-pole<br>• One front mounting module per circuit breaker                                                                                                               | <b>1NO1NC</b><br><br><b>GFX-11</b>    | <b>2NO</b><br><br><b>GFX-20</b>       | <b>2NC</b><br><br><b>GFX-02</b>       |
| <b>GSX...</b><br>  | Auxiliary Switch<br>• Side mounting on the left<br>• 2-pole<br>• One side mounting module per circuit breaker                                                                                                     | <b>1NO1NC</b><br><br><b>GSX-11</b>    | <b>2NO</b><br><br><b>GSX-20</b>       | <b>2NC</b><br><br><b>GSX-02</b>       |
| <b>GSA...</b><br> | Any Trip Alarm Switch<br>• Side mounting on the left<br>• 2-pole<br>• One side mounting module per circuit breaker. (Always directly fitted to the circuit breaker).<br><br><b>GMS-32:<br/>GMS-63/100:</b>        | <br><b>GSA32-11<br/>GSA63100-11</b> | <br><b>GSA32-20<br/>GSA63100-20</b> | <br><b>GSA32-02<br/>GSA63100-02</b> |
| <b>GMA...</b><br> | Magnetic Trip Alarm Switch<br>• Side mounting on the left<br>• 2-pole<br>• One side mounting module per circuit breaker. (Always directly fitted to the circuit breaker except using with Any Trip Alarm Switch). | <br><b>GMA-11</b>                   | <br><b>GMA-20</b>                   | <br><b>GMA-02</b>                   |




### Ordering Example: Specify Contact Arrangement

GFX-11 (1NO 1NC)

GFX-20 (2NO)

GFX-02 (2NC)



| Type                                                                                                  | Description                                                                                                                                                                                                                                                                                 | Connection diagram                                                                   |                                                                                                                                                                              |
|-------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>GSR...</b><br>    | <b>Shunt release</b> <ul style="list-style-type: none"> <li>Side mounting on the right</li> <li>One side mounting module per circuit breaker. (Always directly fitted to the circuit breaker).</li> </ul>                                                                                   |    | 24V 50Hz / 28V 60Hz<br>110~127V 50Hz / 120V 60Hz<br>220~230V 50Hz / 240~260V 60Hz<br>240V 50Hz / 277V 60Hz<br>380~400V 50Hz / 440~460V 60Hz<br>415~440V 50Hz / 460~480V 60Hz |
| <b>GUR...</b><br>   | <b>Undervoltage release</b> <ul style="list-style-type: none"> <li>Side mounting on the right</li> <li>One side mounting module per circuit breaker. (Always directly fitted to the circuit breaker).</li> </ul>                                                                            |    | 24V 50Hz / 28V 60Hz<br>110~127V 50Hz / 120V 60Hz<br>220~230V 50Hz / 240~260V 60Hz<br>240V 50Hz / 277V 60Hz<br>380~400V 50Hz / 440~460V 60Hz<br>415~440V 50Hz / 460~480V 60Hz |
| <b>GURX...</b><br> | <b>Undervoltage release with Switch</b><br>(Rotary Handle Only) <ul style="list-style-type: none"> <li>Side mounting on the right</li> <li>Include 2NO Auxiliary contact</li> <li>One side mounting module per circuit breaker. (Always directly fitted to the circuit breaker).</li> </ul> |  | 24V 50Hz / 28V 60Hz<br>110~127V 50Hz / 120V 60Hz<br>220~230V 50Hz / 240~260V 60Hz<br>240V 50Hz / 277V 60Hz<br>380~400V 50Hz / 440~460V 60Hz<br>415~440V 50Hz / 460~480V 60Hz |

## Others

| Type                                                                                                | Description                                                                                                                                               | Applied Type                       |
|-----------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|
| <b>PIL32</b><br> | <b>Push-in lug</b> <ul style="list-style-type: none"> <li>For screwing the MMS on to mounting plates.</li> </ul>                                          | <b>GMS-32S</b><br><b>GMS-32H</b>   |
| <b>IB100</b><br> | <b>Insulation barriers</b> <ul style="list-style-type: none"> <li>Insulation barriers with increased creepage distances and clearances for UL.</li> </ul> | <b>GMS-100S</b><br><b>GMS-100H</b> |



## ● E-Handle (Rotary-type)

GMS E-Handle is a Rotary-type Handle accessory which can be attached to the front to control and verify the ON, TRIP, OFF condition of Manual Motor Starters under the situation of closing panel.

- Application Model : GMS-32H/HI, GMS-63S/H/HI, GMS-100S/H/HI
- Operation temp. : -20~ +60°C
- CE and UL certified
- Degree of protection : IP65
- Locking device : Lockable in on/off position
- Material of insulation : Plastic(PA66)

| Type   | Application MMS       | Remarks                           |
|--------|-----------------------|-----------------------------------|
| GEH32  | GMS-32H, 32HI         | Length of shaft :<br>115 or 315mm |
| GEH63  | GMS-63S, 63H, 63HI    |                                   |
| GEH100 | GMS-100S, 100H, 100HI |                                   |



## ● Enclosure

Case cover of GMS enclosure is specifically designed with dust-proof and corrosive-proof structure.

Therefore, it is the optimum product to use in dusty areas such as cement plants, cotton mills as well as in the presence of corrosive gas or liquid (excl. explosive, flammable gas) such as fertilizer, refinery, and plating plant.

- Application Model: GMS-32H/HI
- Operation temp. : -20~ +60°C
- CE and UL certified
- Degree of protection : IP65
- Material of insulation : Plastic(ABS)

| Type      | Application MMS | Remarks       |
|-----------|-----------------|---------------|
| GEP32A65S | GMS-32H, 32HI   | Surface mount |


## ● Direct adaptor and Mounting unit

### Direct adaptor , GDA

Direct adaptor is used to connect GMS directly with a contactor

### Mounting unit , GMU

This device allows for mounting joined contactor and GMS onto a common back plate.

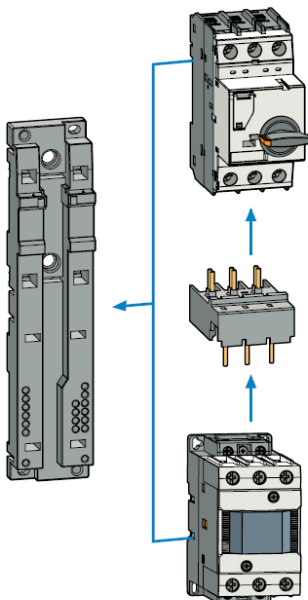


| Contactor                                          | Mounting Unit | Manual Motor Starter | Adapter |
|----------------------------------------------------|---------------|----------------------|---------|
| CGMS-6A, CGMS-9A,<br>CGMS-12A                      | GMU45         | GMS-32H              | GDA16HA |
| CGMS-6D, CGMS-9D,<br>CGMS-12D                      |               | GMS-32S              | GDA16SA |
|                                                    |               | GMS-32H              | GDA16HD |
| CC9SA, CC12SA,<br>CC18SA, CC22SA                   |               | GMS-32S              | GDA16SD |
|                                                    |               | GMS-32H              | GDA22HA |
| CC9SD, CC12SD,<br>CC18SD, CC22SD                   |               | GMS-32S              | GDA22SA |
|                                                    |               | GMS-32H              | GDA22HD |
| CC32SA,<br>CC40SA                                  |               | GMS-32S              | GDA22SD |
|                                                    |               | GMS-32H              | GDA32HA |
| CC32SD,<br>CC40SD                                  |               | GMS-32S              | GDA32SA |
|                                                    | GMS-32H       | GDA32HD              |         |
| CC50LA, CC65LA<br>CC50LD, CC65LS                   | GMU55         | GMS-32S              | GDA32SD |
|                                                    |               | GMS-63H, GMS-63S     | GDA63A  |
| CC75LA, CC85LA, CC100LA<br>CC75LD, CC85LD, CC100LD | GMU70         | GMS-63H, GMS-63S     | GDA63D  |
|                                                    |               | GMS-100H, GMS-100S   | GDA95A  |
|                                                    |               | GMS-100H, GMS-100S   | GDA95D  |

# Product Selection Guide

## Busbar accessories



|                    | 45mm Spacing<br>(rated 63A) | 54mm Spacing<br>(rated 63A)                            | 63mm Spacing<br>(rated 63A)                                                     | Jumper                                  |
|--------------------|-----------------------------|--------------------------------------------------------|---------------------------------------------------------------------------------|-----------------------------------------|
| <b>Type</b>        | <b>MSVGW45-14-2</b>         | <b>MSVGW54-14-2</b>                                    | <b>MSVGW63-14-2</b>                                                             | <b>MSVGW45-SH</b>                       |
| <b>Description</b> | For 2 GMS-32S/H             | For 2 GMS-32S/H<br>+ accessories<br>(side mnt aux sw)  | For 2 GMS-32S/H<br>+ accessories<br>(side mnt<br>undervoltage<br>or shunt trip) | For connecting<br>GMS-32S<br>W/ GMS-32H |
| <b>Type</b>        | <b>MSVGW45-14-3</b>         | <b>MSVGW54-14-3</b>                                    | <b>MSVGW63-14-3</b>                                                             |                                         |
| <b>Description</b> | For 3 GMS-32S/H             | For 3 GMS-32S/H<br>+ accessories<br>(side mnt aux. sw) | For 3 GMS-32S/H<br>+ accessories<br>(side mnt<br>undervoltage<br>or shunt trip) |                                         |
| <b>Type</b>        | <b>MSVGW45-14-4</b>         | <b>MSVGW54-14-4</b>                                    | <b>MSVGW63-14-4</b>                                                             |                                         |
| <b>Description</b> | For 4 GMS-32S/H             | For 4 GMS-32S/H<br>+ accessories<br>(side mnt aux. sw) | For 4 GMS-32S/H<br>+ accessories<br>(side mnt<br>undervoltage<br>or shunt trip) |                                         |
| <b>Type</b>        | <b>MSVGW45-14-5</b>         | <b>MSVGW54-14-5</b>                                    | <b>MSVGW63-14-5</b>                                                             |                                         |
| <b>Description</b> | For 5 GMS-32S/H             | For 5 GMS-32S/H<br>+ accessories<br>(side mnt aux. sw) | For 5 GMS-32S/H<br>+ accessories<br>(side mnt<br>undervoltage<br>or shunt trip) |                                         |

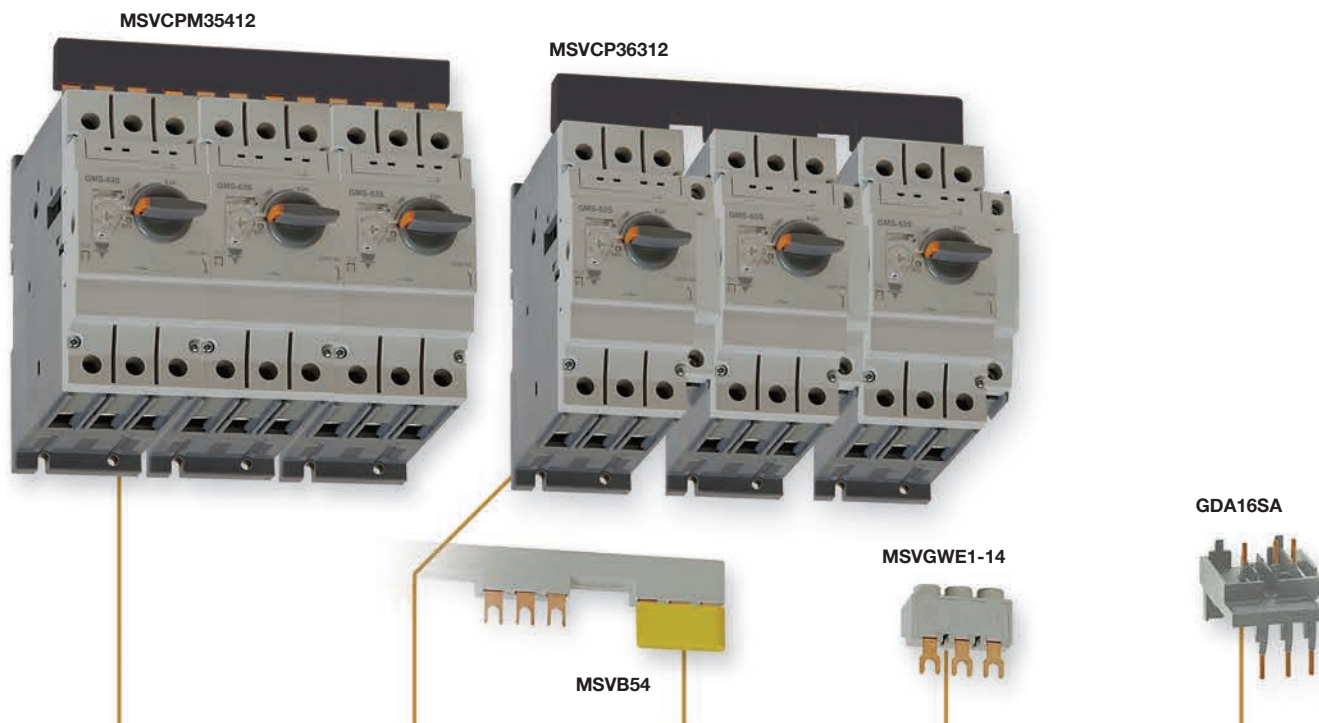

| 54mm Spacing<br>(rated 120A)       | 63mm Spacing<br>(rated 120A)                                             | Terminal cover                                               | Supply connector                                   | Connection<br>module                                                    |
|------------------------------------|--------------------------------------------------------------------------|--------------------------------------------------------------|----------------------------------------------------|-------------------------------------------------------------------------|
| <b>MSVCPM25412</b><br>For 2 GMS-63 | <b>MSVCP36312</b><br>For 2 GMS-63<br>+ accessories<br>(side mnt aux sw)  | <b>MSVB54</b><br>3 Pole<br>protective cover<br>for MSVGW..   | <b>MSVGWE1-14</b><br>3 Phase input<br>terminal 63A | <b>GDA16SA</b><br>For connecting<br>GMS-32S to<br>CGMS-6A -<br>CGMS-12A |
| <b>MSVCPM35412</b><br>For 3 GMS-63 | <b>MSVCP36312</b><br>For 3 GMS-63<br>+ accessories<br>(side mnt aux. sw) | <b>MSVTA120</b><br>3 Pole<br>protective cover<br>for MSVCP.. | <b>MSVBTC50E</b><br>3 Phase Input<br>terminal 120A | <b>GDA16SD</b><br>For connecting<br>GMS-32S to<br>CGMS-6D -<br>CGMS-12D |
| <b>MSVCPM45412</b><br>For 4 GMS-63 | <b>MSVCP46312</b><br>For 4 GMS-63<br>+ accessories<br>(side mnt aux. sw) |                                                              |                                                    | <b>GDA16HA</b><br>For connecting<br>GMS-32H to<br>CGMS-6A -<br>CGMS-12A |
|                                    |                                                                          |                                                              |                                                    | <b>GDA16HD</b><br>For connecting<br>GMS-32H to<br>CGMS-6D -<br>CGMS-12D |



# Technical Information

## IEC performance data (Motor protection)



### ● GMS-100S

| Rated operational current $I_e$ [A]                                                         | 17    | 22  | 26   | 32   | 40   | 50  | 63  | 75  | 90  | 100 |
|---------------------------------------------------------------------------------------------|-------|-----|------|------|------|-----|-----|-----|-----|-----|
| <b>Switching of standard three-phase motors</b><br>AC-2, AC-3                               |       |     |      |      |      |     |     |     |     |     |
| 230/240V [kW]                                                                               | 3.7/4 | 4   | 5.5  | 7.5  | 7.5  | 11  | 15  | 22  | 30  | 30  |
| 400/415V [kW]                                                                               | 7.5   | 7.5 | 11   | 15   | 18.5 | 22  | 30  | 37  | 45  | 45  |
| 500V [kW]                                                                                   | 11    | 11  | 15   | 18.5 | 22   | 30  | 37  | 45  | 55  | 63  |
| 690V [kW]                                                                                   | 11    | 15  | 18.5 | 22   | 30   | 45  | 55  | 63  | 75  | 90  |
| <b>Back-up fuses</b><br>gG, gL, only if $I_{cc} > I_{cu}$<br>(* = No back up fuse required) |       |     |      |      |      |     |     |     |     |     |
| 230/240V [A]                                                                                | *     | *   | *    | *    | *    | *   | *   | *   | *   | *   |
| 400/415V [A]                                                                                | 100   | 125 | 125  | 125  | 160  | 160 | 160 | 160 | 160 | 160 |
| 440/460V [A]                                                                                | 100   | 125 | 125  | 125  | 125  | 125 | 160 | 160 | 160 | 160 |
| 500V [A]                                                                                    | 100   | 100 | 100  | 100  | 100  | 100 | 100 | 125 | 125 | 125 |
| 690V [A]                                                                                    | 63    | 80  | 80   | 80   | 80   | 80  | 80  | 100 | 125 | 125 |
| <b>Ultimate short-circuit breaking capacity <math>I_{cu}</math></b>                         |       |     |      |      |      |     |     |     |     |     |
| 230/240V [kA]                                                                               | 100   | 100 | 100  | 100  | 100  | 100 | 100 | 100 | 100 | 100 |
| 400/415V [kA]                                                                               | 50    | 50  | 50   | 50   | 50   | 50  | 50  | 50  | 50  | 50  |
| 440/460V [kA]                                                                               | 40    | 40  | 40   | 40   | 40   | 40  | 40  | 40  | 40  | 40  |
| 500V [kA]                                                                                   | 25    | 25  | 25   | 15   | 15   | 12  | 12  | 8   | 8   | 8   |
| 690V [kA]                                                                                   | 10    | 10  | 10   | 10   | 6    | 6   | 6   | 5   | 5   | 5   |
| <b>Rated service short-circuit breaking capacity <math>I_{cs}</math></b>                    |       |     |      |      |      |     |     |     |     |     |
| 230/240V [kA]                                                                               | 100   | 100 | 100  | 100  | 100  | 100 | 100 | 100 | 100 | 100 |
| 400/415V [kA]                                                                               | 38    | 38  | 38   | 38   | 38   | 38  | 38  | 38  | 38  | 38  |
| 440/460V [kA]                                                                               | 30    | 30  | 30   | 30   | 30   | 30  | 30  | 30  | 30  | 30  |
| 500V [kA]                                                                                   | 19    | 19  | 19   | 11   | 11   | 9   | 9   | 6   | 6   | 6   |
| 690V [kA]                                                                                   | 8     | 8   | 8    | 8    | 5    | 5   | 5   | 4   | 4   | 4   |



### ● GMS-100H

| Rated operational current $I_e$ [A]                                                         | 17    | 22  | 26   | 32   | 40   | 50  | 63  | 75  | 90  | 100 |
|---------------------------------------------------------------------------------------------|-------|-----|------|------|------|-----|-----|-----|-----|-----|
| <b>Switching of standard three-phase motors</b><br>AC-2, AC-3                               |       |     |      |      |      |     |     |     |     |     |
| 230/240V [kW]                                                                               | 3.7/4 | 4   | 5.5  | 7.5  | 7.5  | 11  | 15  | 22  | 30  | 30  |
| 400/415V [kW]                                                                               | 7.5   | 7.5 | 11   | 15   | 18.5 | 22  | 30  | 37  | 45  | 45  |
| 500V [kW]                                                                                   | 11    | 11  | 15   | 18.5 | 22   | 30  | 37  | 45  | 55  | 63  |
| 690V [kW]                                                                                   | 11    | 15  | 18.5 | 22   | 30   | 45  | 55  | 63  | 75  | 90  |
| <b>Back-up fuses</b><br>gG, gL, only if $I_{cc} > I_{cu}$<br>(* = No back up fuse required) |       |     |      |      |      |     |     |     |     |     |
| 230/240V [A]                                                                                | *     | *   | *    | *    | *    | *   | *   | *   | *   | *   |
| 400/415V [A]                                                                                | *     | *   | *    | *    | *    | *   | *   | *   | *   | *   |
| 440/460V [A]                                                                                | 125   | 125 | 125  | 160  | 160  | 160 | 200 | 200 | 200 | 200 |
| 500V [A]                                                                                    | 100   | 125 | 125  | 125  | 160  | 160 | 160 | 160 | 160 | 160 |
| 690V [A]                                                                                    | 80    | 80  | 80   | 80   | 80   | 100 | 100 | 125 | 160 | 160 |
| <b>Ultimate short-circuit breaking capacity <math>I_{cu}</math></b>                         |       |     |      |      |      |     |     |     |     |     |
| 230/240V [kA]                                                                               | 100   | 100 | 100  | 100  | 100  | 100 | 100 | 100 | 100 | 100 |
| 400/415V [kA]                                                                               | 100   | 100 | 100  | 100  | 100  | 100 | 100 | 75  | 75  | 75  |
| 440/460V [kA]                                                                               | 50    | 50  | 50   | 50   | 50   | 50  | 50  | 50  | 50  | 50  |
| 500V [kA]                                                                                   | 35    | 35  | 35   | 25   | 20   | 15  | 15  | 12  | 12  | 12  |
| 690V [kA]                                                                                   | 12    | 12  | 12   | 12   | 12   | 10  | 8   | 6   | 6   | 6   |
| <b>Rated service short-circuit breaking capacity <math>I_{cs}</math></b>                    |       |     |      |      |      |     |     |     |     |     |
| 230/240V [kA]                                                                               | 100   | 100 | 100  | 100  | 100  | 100 | 100 | 100 | 100 | 100 |
| 400/415V [kA]                                                                               | 100   | 50  | 50   | 50   | 50   | 50  | 50  | 50  | 50  | 50  |
| 440/460V [kA]                                                                               | 38    | 38  | 38   | 38   | 38   | 38  | 38  | 38  | 38  | 38  |
| 500V [kA]                                                                                   | 27    | 27  | 27   | 19   | 15   | 11  | 11  | 9   | 9   | 9   |
| 690V [kA]                                                                                   | 9     | 9   | 9    | 9    | 9    | 8   | 6   | 6   | 6   | 6   |

Note) \* = Short circuit proof up to 50 or 100kA.  
No back up fuse required.

## IEC performance data (Short-circuit protection for starters)

CARLO GAVAZZI

## ● GMS-32HI

| Rated operational current $I_e$                                                             | [A]  | 0.16 | 0.25 | 0.4  | 0.63 | 1         | 1.6       | 2.5  | 4         | 6       | 8   | 10    | 13  | 17    | 22   | 26   | 32  |
|---------------------------------------------------------------------------------------------|------|------|------|------|------|-----------|-----------|------|-----------|---------|-----|-------|-----|-------|------|------|-----|
| AC-2, AC-3                                                                                  |      |      |      |      |      |           |           |      |           |         |     |       |     |       |      |      |     |
| 230/240V                                                                                    | [kW] | -    | 0.03 | 0.06 | 0.09 | 0.12      | 0.18/0.25 | 0.37 | 0.55/0.75 | 1.1/1.5 | 1.5 | 2.2/3 | 3   | 3.7/4 | 4    | 5.5  | 7.5 |
| 400/415V                                                                                    | [kW] | 0.02 | 0.06 | 0.09 | 0.12 | 0.18/0.25 | 0.37/0.55 | 0.75 | 1.1/1.5   | 2.2     | 3   | 3.7/4 | 5.5 | 7.5   | 11   | 15   | 22  |
| 500V                                                                                        | [kW] | -    | -    | -    | 0.25 | 0.37      | 0.55/0.75 | 1.1  | 1.5/2.2   | 3       | 3.7 | 4/5.5 | 7.5 | 11    | 15   | 18.5 | 22  |
| 690V                                                                                        | [kW] | -    | -    | -    | 0.25 | 0.37/0.55 | 0.75/1.1  | 1.5  | 2.2/3     | 3.7/4   | 5.5 | 7.5   | 11  | 15    | 18.5 | 22   |     |
| <b>Back-up fuses</b><br>gG, gL, only if $I_{cc} > I_{cu}$<br>(* = No back up fuse required) |      |      |      |      |      |           |           |      |           |         |     |       |     |       |      |      |     |
| 230/240V                                                                                    | [A]  | *    | *    | *    | *    | *         | *         | *    | *         | *       | *   | *     | *   | *     | *    | *    | *   |
| 400/415V                                                                                    | [A]  | *    | *    | *    | *    | *         | *         | *    | *         | *       | *   | *     | *   | 100   | 125  | 125  | 125 |
| 440/460V                                                                                    | [A]  | *    | *    | *    | *    | *         | *         | *    | *         | *       | 80  | 80    | 80  | 80    | 100  | 100  | 100 |
| 500V                                                                                        | [A]  | *    | *    | *    | *    | *         | *         | *    | *         | *       | 63  | 80    | 80  | 80    | 80   | 80   | 80  |
| 690V                                                                                        | [A]  | *    | *    | *    | *    | *         | *         | 35   | 40        | 50      | 63  | 63    | 63  | 63    | 63   | 63   | 63  |
| <b>Ultimate short-circuit breaking capacity <math>I_{cu}</math></b>                         |      |      |      |      |      |           |           |      |           |         |     |       |     |       |      |      |     |
| 230/240V                                                                                    | [kA] | 100  | 100  | 100  | 100  | 100       | 100       | 100  | 100       | 100     | 100 | 100   | 100 | 100   | 100  | 100  | 100 |
| 400/415V                                                                                    | [kA] | 100  | 100  | 100  | 100  | 100       | 100       | 100  | 100       | 100     | 100 | 100   | 100 | 50    | 50   | 50   | 50  |
| 440/460V                                                                                    | [kA] | 100  | 100  | 100  | 100  | 100       | 100       | 100  | 100       | 100     | 50  | 50    | 50  | 20    | 20   | 20   | 20  |
| 500V                                                                                        | [kA] | 100  | 100  | 100  | 100  | 100       | 100       | 100  | 100       | 100     | 50  | 50    | 42  | 10    | 10   | 10   | 10  |
| 690V                                                                                        | [kA] | 100  | 100  | 100  | 100  | 100       | 100       | 8    | 8         | 6       | 6   | 6     | 6   | 4     | 4    | 4    | 4   |
| <b>Rated service short-circuit breaking capacity <math>I_{cs}</math></b>                    |      |      |      |      |      |           |           |      |           |         |     |       |     |       |      |      |     |
| 230/240V                                                                                    | [kA] | 100  | 100  | 100  | 100  | 100       | 100       | 100  | 100       | 100     | 100 | 100   | 100 | 100   | 100  | 100  | 100 |
| 400/415V                                                                                    | [kA] | 100  | 100  | 100  | 100  | 100       | 100       | 100  | 100       | 100     | 100 | 100   | 100 | 38    | 38   | 38   | 38  |
| 440/460V                                                                                    | [kA] | 100  | 100  | 100  | 100  | 100       | 100       | 100  | 100       | 100     | 38  | 38    | 38  | 15    | 15   | 15   | 15  |
| 500V                                                                                        | [kA] | 100  | 100  | 100  | 100  | 100       | 100       | 100  | 100       | 100     | 38  | 38    | 32  | 8     | 8    | 8    | 8   |
| 690V                                                                                        | [kA] | 100  | 100  | 100  | 100  | 100       | 100       | 8    | 8         | 6       | 6   | 6     | 6   | 4     | 4    | 4    | 4   |

## ● GMS-63HI

| Rated operational current $I_e$                                                             | [A]  | 10    | 13  | 17    | 22  | 26   | 32   | 40   | 50  | 63  |
|---------------------------------------------------------------------------------------------|------|-------|-----|-------|-----|------|------|------|-----|-----|
| AC-2, AC-3                                                                                  |      |       |     |       |     |      |      |      |     |     |
| 230/240V                                                                                    | [kW] | 2.2/3 | 3   | 3.7/4 | 4   | 5.5  | 7.5  | 7.5  | 11  | 15  |
| 400/415V                                                                                    | [kW] | 3.7/4 | 5.5 | 7.5   | 7.5 | 11   | 15   | 18.5 | 22  | 30  |
| 500V                                                                                        | [kW] | 4/5.5 | 7.5 | 11    | 11  | 15   | 18.5 | 22   | 30  | 37  |
| 690V                                                                                        | [kW] | 7.5   | 11  | 11    | 15  | 18.5 | 22   | 30   | 45  | 55  |
| <b>Back-up fuses</b><br>gG, gL, only if $I_{cc} > I_{cu}$<br>(* = No back up fuse required) |      |       |     |       |     |      |      |      |     |     |
| 230/240V                                                                                    | [A]  | *     | *   | *     | *   | *    | *    | *    | *   | *   |
| 400/415V                                                                                    | [A]  | *     | *   | 100   | 125 | 125  | 125  | 160  | 160 | 160 |
| 440/460V                                                                                    | [A]  | 100   | 100 | 100   | 125 | 125  | 125  | 125  | 125 | 160 |
| 500V                                                                                        | [A]  | 100   | 100 | 100   | 100 | 100  | 100  | 100  | 100 | 100 |
| 690V                                                                                        | [A]  | 63    | 63  | 63    | 80  | 80   | 80   | 80   | 80  | 80  |
| <b>Ultimate short-circuit breaking capacity <math>I_{cu}</math></b>                         |      |       |     |       |     |      |      |      |     |     |
| 230/240V                                                                                    | [kA] | 100   | 100 | 100   | 100 | 100  | 100  | 100  | 100 | 100 |
| 400/415V                                                                                    | [kA] | 100   | 100 | 50    | 50  | 50   | 50   | 50   | 50  | 50  |
| 440/460V                                                                                    | [kA] | 50    | 50  | 50    | 50  | 35   | 35   | 35   | 35  | 35  |
| 500V                                                                                        | [kA] | 50    | 42  | 12    | 12  | 10   | 10   | 10   | 10  | 10  |
| 690V                                                                                        | [kA] | 6     | 6   | 5     | 5   | 5    | 5    | 5    | 5   | 5   |
| <b>Rated service short-circuit breaking capacity <math>I_{cs}</math></b>                    |      |       |     |       |     |      |      |      |     |     |
| 230/240V                                                                                    | [kA] | 100   | 100 | 100   | 100 | 100  | 100  | 100  | 100 | 100 |
| 400/415V                                                                                    | [kA] | 100   | 100 | 50    | 50  | 50   | 50   | 50   | 50  | 50  |
| 440/460V                                                                                    | [kA] | 38    | 38  | 38    | 38  | 27   | 27   | 27   | 27  | 27  |
| 500V                                                                                        | [kA] | 38    | 32  | 9     | 9   | 8    | 8    | 8    | 8   | 8   |
| 690V                                                                                        | [kA] | 5     | 5   | 5     | 5   | 5    | 5    | 5    | 5   | 5   |

## ● GMS-100HI

| Rated operational current $I_e$                                                             | [A]  | 17    | 22  | 26   | 32   | 40   | 50  | 63  | 75  | 90  | 100 |
|---------------------------------------------------------------------------------------------|------|-------|-----|------|------|------|-----|-----|-----|-----|-----|
| AC-2, AC-3                                                                                  |      |       |     |      |      |      |     |     |     |     |     |
| 230/240V                                                                                    | [kW] | 3.7/4 | 4   | 5.5  | 7.5  | 7.5  | 11  | 15  | 22  | 30  | 30  |
| 400/415V                                                                                    | [kW] | 7.5   | 7.5 | 11   | 15   | 18.5 | 22  | 30  | 37  | 45  | 45  |
| 500V                                                                                        | [kW] | 11    | 11  | 15   | 18.5 | 22   | 30  | 37  | 45  | 55  | 63  |
| 690V                                                                                        | [kW] | 11    | 15  | 18.5 | 22   | 30   | 45  | 55  | 63  | 75  | 90  |
| <b>Back-up fuses</b><br>gG, gL, only if $I_{cc} > I_{cu}$<br>(* = No back up fuse required) |      |       |     |      |      |      |     |     |     |     |     |
| 230/240V                                                                                    | [A]  | *     | *   | *    | *    | *    | *   | *   | *   | *   | *   |
| 400/415V                                                                                    | [A]  | *     | *   | *    | *    | *    | *   | *   | *   | *   | *   |
| 440/460V                                                                                    | [A]  | 125   | 125 | 125  | 160  | 160  | 160 | 200 | 200 | 200 | 200 |
| 500V                                                                                        | [A]  | 100   | 125 | 125  | 125  | 160  | 160 | 160 | 160 | 160 | 160 |
| 690V                                                                                        | [A]  | 80    | 80  | 80   | 80   | 80   | 100 | 100 | 125 | 160 | 160 |
| <b>Ultimate short-circuit breaking capacity <math>I_{cu}</math></b>                         |      |       |     |      |      |      |     |     |     |     |     |
| 230/240V                                                                                    | [kA] | 100   | 100 | 100  | 100  | 100  | 100 | 100 | 100 | 100 | 100 |
| 400/415V                                                                                    | [kA] | 100   | 100 | 100  | 100  | 100  | 100 | 100 | 75  | 75  | 75  |
| 440/460V                                                                                    | [kA] | 50    | 50  | 50   | 50   | 50   | 50  | 50  | 50  | 50  | 50  |
| 500V                                                                                        | [kA] | 35    | 35  | 35   | 25   | 20   | 15  | 15  | 12  | 12  | 12  |
| 690V                                                                                        | [kA] | 12    | 12  | 12   | 12   | 12   | 10  | 8   | 6   | 6   | 6   |
| <b>Rated service short-circuit breaking capacity <math>I_{cs}</math></b>                    |      |       |     |      |      |      |     |     |     |     |     |
| 230/240V                                                                                    | [kA] | 100   | 100 | 100  | 100  | 100  | 100 | 100 | 100 | 100 | 100 |
| 400/415V                                                                                    | [kA] | 100   | 50  | 50   | 50   | 50   | 50  | 50  | 50  | 50  | 50  |
| 440/460V                                                                                    | [kA] | 38    | 38  | 38   | 38   | 38   | 38  | 38  | 38  | 38  | 38  |
| 500V                                                                                        | [kA] | 27    | 27  | 27   | 19   | 15   | 11  | 11  | 9   | 9   | 9   |
| 690V                                                                                        | [kA] | 9     | 9   | 9    | 9    | 9    | 8   | 6   | 6   | 6   | 6   |

# Technical Information

## IEC performance data (Motor protection)



### ● GMS-100S

| Rated operational current $I_e$ [A]                                      | 17    | 22  | 26   | 32   | 40   | 50  | 63  | 75  | 90  | 100 |
|--------------------------------------------------------------------------|-------|-----|------|------|------|-----|-----|-----|-----|-----|
| <b>Switching of standard three-phase motors</b>                          |       |     |      |      |      |     |     |     |     |     |
| AC-2, AC-3                                                               |       |     |      |      |      |     |     |     |     |     |
| 230/240V [kW]                                                            | 3.7/4 | 4   | 5.5  | 7.5  | 7.5  | 11  | 15  | 22  | 30  | 30  |
| 400/415V [kW]                                                            | 7.5   | 7.5 | 11   | 15   | 18.5 | 22  | 30  | 37  | 45  | 45  |
| 500V [kW]                                                                | 11    | 11  | 15   | 18.5 | 22   | 30  | 37  | 45  | 55  | 63  |
| 690V [kW]                                                                | 11    | 15  | 18.5 | 22   | 30   | 45  | 55  | 63  | 75  | 90  |
| <b>Back-up fuses</b>                                                     |       |     |      |      |      |     |     |     |     |     |
| gG, gL, only if $I_{cc} > I_{cu}$                                        |       |     |      |      |      |     |     |     |     |     |
| (* = No back up fuse required)                                           |       |     |      |      |      |     |     |     |     |     |
| 230/240V [A]                                                             | *     | *   | *    | *    | *    | *   | *   | *   | *   | *   |
| 400/415V [A]                                                             | 100   | 125 | 125  | 125  | 160  | 160 | 160 | 160 | 160 | 160 |
| 440/460V [A]                                                             | 100   | 125 | 125  | 125  | 125  | 125 | 160 | 160 | 160 | 160 |
| 500V [A]                                                                 | 100   | 100 | 100  | 100  | 100  | 100 | 100 | 125 | 125 | 125 |
| 690V [A]                                                                 | 63    | 80  | 80   | 80   | 80   | 80  | 80  | 100 | 125 | 125 |
| <b>Ultimate short-circuit breaking capacity <math>I_{cu}</math></b>      |       |     |      |      |      |     |     |     |     |     |
| 230/240V [kA]                                                            | 100   | 100 | 100  | 100  | 100  | 100 | 100 | 100 | 100 | 100 |
| 400/415V [kA]                                                            | 50    | 50  | 50   | 50   | 50   | 50  | 50  | 50  | 50  | 50  |
| 440/460V [kA]                                                            | 40    | 40  | 40   | 40   | 40   | 40  | 40  | 40  | 40  | 40  |
| 500V [kA]                                                                | 25    | 25  | 25   | 15   | 15   | 12  | 12  | 8   | 8   | 8   |
| 690V [kA]                                                                | 10    | 10  | 10   | 10   | 6    | 6   | 6   | 5   | 5   | 5   |
| <b>Rated service short-circuit breaking capacity <math>I_{cs}</math></b> |       |     |      |      |      |     |     |     |     |     |
| 230/240V [kA]                                                            | 100   | 100 | 100  | 100  | 100  | 100 | 100 | 100 | 100 | 100 |
| 400/415V [kA]                                                            | 38    | 38  | 38   | 38   | 38   | 38  | 38  | 38  | 38  | 38  |
| 440/460V [kA]                                                            | 30    | 30  | 30   | 30   | 30   | 30  | 30  | 30  | 30  | 30  |
| 500V [kA]                                                                | 19    | 19  | 19   | 11   | 11   | 9   | 9   | 6   | 6   | 6   |
| 690V [kA]                                                                | 8     | 8   | 8    | 8    | 5    | 5   | 5   | 4   | 4   | 4   |



### ● GMS-100H

| Rated operational current $I_e$ [A]                                      | 17    | 22  | 26   | 32   | 40   | 50  | 63  | 75  | 90  | 100 |
|--------------------------------------------------------------------------|-------|-----|------|------|------|-----|-----|-----|-----|-----|
| <b>Switching of standard three-phase motors</b>                          |       |     |      |      |      |     |     |     |     |     |
| AC-2, AC-3                                                               |       |     |      |      |      |     |     |     |     |     |
| 230/240V [kW]                                                            | 3.7/4 | 4   | 5.5  | 7.5  | 7.5  | 11  | 15  | 22  | 30  | 30  |
| 400/415V [kW]                                                            | 7.5   | 7.5 | 11   | 15   | 18.5 | 22  | 30  | 37  | 45  | 45  |
| 500V [kW]                                                                | 11    | 11  | 15   | 18.5 | 22   | 30  | 37  | 45  | 55  | 63  |
| 690V [kW]                                                                | 11    | 15  | 18.5 | 22   | 30   | 45  | 55  | 63  | 75  | 90  |
| <b>Back-up fuses</b>                                                     |       |     |      |      |      |     |     |     |     |     |
| gG, gL, only if $I_{cc} > I_{cu}$                                        |       |     |      |      |      |     |     |     |     |     |
| (* = No back up fuse required)                                           |       |     |      |      |      |     |     |     |     |     |
| 230/240V [A]                                                             | *     | *   | *    | *    | *    | *   | *   | *   | *   | *   |
| 400/415V [A]                                                             | *     | *   | *    | *    | *    | *   | *   | *   | *   | *   |
| 440/460V [A]                                                             | 125   | 125 | 125  | 160  | 160  | 160 | 200 | 200 | 200 | 200 |
| 500V [A]                                                                 | 100   | 125 | 125  | 125  | 160  | 160 | 160 | 160 | 160 | 160 |
| 690V [A]                                                                 | 80    | 80  | 80   | 80   | 80   | 100 | 100 | 125 | 160 | 160 |
| <b>Ultimate short-circuit breaking capacity <math>I_{cu}</math></b>      |       |     |      |      |      |     |     |     |     |     |
| 230/240V [kA]                                                            | 100   | 100 | 100  | 100  | 100  | 100 | 100 | 100 | 100 | 100 |
| 400/415V [kA]                                                            | 100   | 100 | 100  | 100  | 100  | 100 | 100 | 75  | 75  | 75  |
| 440/460V [kA]                                                            | 50    | 50  | 50   | 50   | 50   | 50  | 50  | 50  | 50  | 50  |
| 500V [kA]                                                                | 35    | 35  | 35   | 25   | 20   | 15  | 15  | 12  | 12  | 12  |
| 690V [kA]                                                                | 12    | 12  | 12   | 12   | 12   | 10  | 8   | 6   | 6   | 6   |
| <b>Rated service short-circuit breaking capacity <math>I_{cs}</math></b> |       |     |      |      |      |     |     |     |     |     |
| 230/240V [kA]                                                            | 100   | 100 | 100  | 100  | 100  | 100 | 100 | 100 | 100 | 100 |
| 400/415V [kA]                                                            | 100   | 50  | 50   | 50   | 50   | 50  | 50  | 50  | 50  | 50  |
| 440/460V [kA]                                                            | 38    | 38  | 38   | 38   | 38   | 38  | 38  | 38  | 38  | 38  |
| 500V [kA]                                                                | 27    | 27  | 27   | 19   | 15   | 11  | 11  | 9   | 9   | 9   |
| 690V [kA]                                                                | 9     | 9   | 9    | 9    | 9    | 8   | 6   | 6   | 6   | 6   |

Note) \* = Short circuit proof up to 50 or 100kA.  
No back up fuse required.

## IEC performance data (Short-circuit protection for starters)

CARLO GAVAZZI

## ● GMS-32HI

| Rated operational current $I_e$                                                             | [A]  | 0.16 | 0.25 | 0.4  | 0.63 | 1         | 1.6       | 2.5  | 4         | 6       | 8   | 10    | 13  | 17    | 22   | 26   | 32   |
|---------------------------------------------------------------------------------------------|------|------|------|------|------|-----------|-----------|------|-----------|---------|-----|-------|-----|-------|------|------|------|
| AC-2, AC-3                                                                                  |      |      |      |      |      |           |           |      |           |         |     |       |     |       |      |      |      |
| 230/240V                                                                                    | [kW] | -    | 0.03 | 0.06 | 0.09 | 0.12      | 0.18/0.25 | 0.37 | 0.55/0.75 | 1.1/1.5 | 1.5 | 2.2/3 | 3   | 3.7/4 | 4    | 5.5  | 7.5  |
| 400/415V                                                                                    | [kW] | 0.02 | 0.06 | 0.09 | 0.12 | 0.18/0.25 | 0.37/0.55 | 0.75 | 1.1/1.5   | 2.2     | 3   | 3.7/4 | 5.5 | 7.5   | 11   | 15   | 18.5 |
| 500V                                                                                        | [kW] | -    | -    | -    | 0.25 | 0.37      | 0.55/0.75 | 1.1  | 1.5/2.2   | 3       | 3.7 | 4/5.5 | 7.5 | 11    | 15   | 18.5 | 22   |
| 690V                                                                                        | [kW] | -    | -    | -    | 0.25 | 0.37/0.55 | 0.75/1.1  | 1.5  | 2.2/3     | 3.7/4   | 5.5 | 7.5   | 11  | 15    | 18.5 | 22   |      |
| <b>Back-up fuses</b><br>gG, gL, only if $I_{cc} > I_{cu}$<br>(* = No back up fuse required) |      |      |      |      |      |           |           |      |           |         |     |       |     |       |      |      |      |
| 230/240V                                                                                    | [A]  | *    | *    | *    | *    | *         | *         | *    | *         | *       | *   | *     | *   | *     | *    | *    | *    |
| 400/415V                                                                                    | [A]  | *    | *    | *    | *    | *         | *         | *    | *         | *       | *   | *     | *   | 100   | 125  | 125  | 125  |
| 440/460V                                                                                    | [A]  | *    | *    | *    | *    | *         | *         | *    | *         | *       | 80  | 80    | 80  | 80    | 100  | 100  | 100  |
| 500V                                                                                        | [A]  | *    | *    | *    | *    | *         | *         | *    | *         | *       | 63  | 80    | 80  | 80    | 80   | 80   | 80   |
| 690V                                                                                        | [A]  | *    | *    | *    | *    | *         | *         | 35   | 40        | 50      | 63  | 63    | 63  | 63    | 63   | 63   | 63   |
| <b>Ultimate short-circuit breaking capacity <math>I_{cu}</math></b>                         |      |      |      |      |      |           |           |      |           |         |     |       |     |       |      |      |      |
| 230/240V                                                                                    | [kA] | 100  | 100  | 100  | 100  | 100       | 100       | 100  | 100       | 100     | 100 | 100   | 100 | 100   | 100  | 100  | 100  |
| 400/415V                                                                                    | [kA] | 100  | 100  | 100  | 100  | 100       | 100       | 100  | 100       | 100     | 100 | 100   | 100 | 50    | 50   | 50   | 50   |
| 440/460V                                                                                    | [kA] | 100  | 100  | 100  | 100  | 100       | 100       | 100  | 100       | 100     | 50  | 50    | 50  | 20    | 20   | 20   | 20   |
| 500V                                                                                        | [kA] | 100  | 100  | 100  | 100  | 100       | 100       | 100  | 100       | 100     | 50  | 50    | 42  | 10    | 10   | 10   | 10   |
| 690V                                                                                        | [kA] | 100  | 100  | 100  | 100  | 100       | 100       | 8    | 8         | 6       | 6   | 6     | 6   | 4     | 4    | 4    | 4    |
| <b>Rated service short-circuit breaking capacity <math>I_{cs}</math></b>                    |      |      |      |      |      |           |           |      |           |         |     |       |     |       |      |      |      |
| 230/240V                                                                                    | [kA] | 100  | 100  | 100  | 100  | 100       | 100       | 100  | 100       | 100     | 100 | 100   | 100 | 100   | 100  | 100  | 100  |
| 400/415V                                                                                    | [kA] | 100  | 100  | 100  | 100  | 100       | 100       | 100  | 100       | 100     | 100 | 100   | 100 | 38    | 38   | 38   | 38   |
| 440/460V                                                                                    | [kA] | 100  | 100  | 100  | 100  | 100       | 100       | 100  | 100       | 100     | 38  | 38    | 38  | 15    | 15   | 15   | 15   |
| 500V                                                                                        | [kA] | 100  | 100  | 100  | 100  | 100       | 100       | 100  | 100       | 100     | 38  | 38    | 32  | 8     | 8    | 8    | 8    |
| 690V                                                                                        | [kA] | 100  | 100  | 100  | 100  | 100       | 100       | 8    | 8         | 6       | 6   | 6     | 6   | 4     | 4    | 4    | 4    |

## ● GMS-63HI

| Rated operational current $I_e$                                                             | [A]  | 10    | 13  | 17    | 22  | 26   | 32   | 40   | 50  | 63  |
|---------------------------------------------------------------------------------------------|------|-------|-----|-------|-----|------|------|------|-----|-----|
| AC-2, AC-3                                                                                  |      |       |     |       |     |      |      |      |     |     |
| 230/240V                                                                                    | [kW] | 2.2/3 | 3   | 3.7/4 | 4   | 5.5  | 7.5  | 7.5  | 11  | 15  |
| 400/415V                                                                                    | [kW] | 3.7/4 | 5.5 | 7.5   | 7.5 | 11   | 15   | 18.5 | 22  | 30  |
| 500V                                                                                        | [kW] | 4/5.5 | 7.5 | 11    | 11  | 15   | 18.5 | 22   | 30  | 37  |
| 690V                                                                                        | [kW] | 7.5   | 11  | 11    | 15  | 18.5 | 22   | 30   | 45  | 55  |
| <b>Back-up fuses</b><br>gG, gL, only if $I_{cc} > I_{cu}$<br>(* = No back up fuse required) |      |       |     |       |     |      |      |      |     |     |
| 230/240V                                                                                    | [A]  | *     | *   | *     | *   | *    | *    | *    | *   | *   |
| 400/415V                                                                                    | [A]  | *     | *   | 100   | 125 | 125  | 125  | 160  | 160 | 160 |
| 440/460V                                                                                    | [A]  | 100   | 100 | 100   | 125 | 125  | 125  | 125  | 125 | 160 |
| 500V                                                                                        | [A]  | 100   | 100 | 100   | 100 | 100  | 100  | 100  | 100 | 100 |
| 690V                                                                                        | [A]  | 63    | 63  | 63    | 80  | 80   | 80   | 80   | 80  | 80  |
| <b>Ultimate short-circuit breaking capacity <math>I_{cu}</math></b>                         |      |       |     |       |     |      |      |      |     |     |
| 230/240V                                                                                    | [kA] | 100   | 100 | 100   | 100 | 100  | 100  | 100  | 100 | 100 |
| 400/415V                                                                                    | [kA] | 100   | 100 | 50    | 50  | 50   | 50   | 50   | 50  | 50  |
| 440/460V                                                                                    | [kA] | 50    | 50  | 50    | 50  | 35   | 35   | 35   | 35  | 35  |
| 500V                                                                                        | [kA] | 50    | 42  | 12    | 12  | 10   | 10   | 10   | 10  | 10  |
| 690V                                                                                        | [kA] | 6     | 6   | 5     | 5   | 5    | 5    | 5    | 5   | 5   |
| <b>Rated service short-circuit breaking capacity <math>I_{cs}</math></b>                    |      |       |     |       |     |      |      |      |     |     |
| 230/240V                                                                                    | [kA] | 100   | 100 | 100   | 100 | 100  | 100  | 100  | 100 | 100 |
| 400/415V                                                                                    | [kA] | 100   | 100 | 50    | 50  | 50   | 50   | 50   | 50  | 50  |
| 440/460V                                                                                    | [kA] | 38    | 38  | 38    | 38  | 27   | 27   | 27   | 27  | 27  |
| 500V                                                                                        | [kA] | 38    | 32  | 9     | 9   | 8    | 8    | 8    | 8   | 8   |
| 690V                                                                                        | [kA] | 5     | 5   | 5     | 5   | 5    | 5    | 5    | 5   | 5   |

## ● GMS-100HI

| Rated operational current $I_e$                                                             | [A]  | 17    | 22  | 26   | 32   | 40   | 50  | 63  | 75  | 90  | 100 |
|---------------------------------------------------------------------------------------------|------|-------|-----|------|------|------|-----|-----|-----|-----|-----|
| AC-2, AC-3                                                                                  |      |       |     |      |      |      |     |     |     |     |     |
| 230/240V                                                                                    | [kW] | 3.7/4 | 4   | 5.5  | 7.5  | 7.5  | 11  | 15  | 22  | 30  | 30  |
| 400/415V                                                                                    | [kW] | 7.5   | 7.5 | 11   | 15   | 18.5 | 22  | 30  | 37  | 45  | 45  |
| 500V                                                                                        | [kW] | 11    | 11  | 15   | 18.5 | 22   | 30  | 37  | 45  | 55  | 63  |
| 690V                                                                                        | [kW] | 11    | 15  | 18.5 | 22   | 30   | 45  | 55  | 63  | 75  | 90  |
| <b>Back-up fuses</b><br>gG, gL, only if $I_{cc} > I_{cu}$<br>(* = No back up fuse required) |      |       |     |      |      |      |     |     |     |     |     |
| 230/240V                                                                                    | [A]  | *     | *   | *    | *    | *    | *   | *   | *   | *   | *   |
| 400/415V                                                                                    | [A]  | *     | *   | *    | *    | *    | *   | *   | *   | *   | *   |
| 440/460V                                                                                    | [A]  | 125   | 125 | 125  | 160  | 160  | 160 | 200 | 200 | 200 | 200 |
| 500V                                                                                        | [A]  | 100   | 125 | 125  | 125  | 160  | 160 | 160 | 160 | 160 | 160 |
| 690V                                                                                        | [A]  | 80    | 80  | 80   | 80   | 80   | 100 | 100 | 125 | 160 | 160 |
| <b>Ultimate short-circuit breaking capacity <math>I_{cu}</math></b>                         |      |       |     |      |      |      |     |     |     |     |     |
| 230/240V                                                                                    | [kA] | 100   | 100 | 100  | 100  | 100  | 100 | 100 | 100 | 100 | 100 |
| 400/415V                                                                                    | [kA] | 100   | 100 | 100  | 100  | 100  | 100 | 100 | 75  | 75  | 75  |
| 440/460V                                                                                    | [kA] | 50    | 50  | 50   | 50   | 50   | 50  | 50  | 50  | 50  | 50  |
| 500V                                                                                        | [kA] | 35    | 35  | 35   | 25   | 20   | 15  | 15  | 12  | 12  | 12  |
| 690V                                                                                        | [kA] | 12    | 12  | 12   | 12   | 12   | 10  | 8   | 6   | 6   | 6   |
| <b>Rated service short-circuit breaking capacity <math>I_{cs}</math></b>                    |      |       |     |      |      |      |     |     |     |     |     |
| 230/240V                                                                                    | [kA] | 100   | 100 | 100  | 100  | 100  | 100 | 100 | 100 | 100 | 100 |
| 400/415V                                                                                    | [kA] | 100   | 50  | 50   | 50   | 50   | 50  | 50  | 50  | 50  | 50  |
| 440/460V                                                                                    | [kA] | 38    | 38  | 38   | 38   | 38   | 38  | 38  | 38  | 38  | 38  |
| 500V                                                                                        | [kA] | 27    | 27  | 27   | 19   | 15   | 11  | 11  | 9   | 9   | 9   |
| 690V                                                                                        | [kA] | 9     | 9   | 9    | 9    | 9    | 8   | 6   | 6   | 6   | 6   |



# Technical Information

## IEC performance data (Motor protection ; Class 20)



### ● GMS-63HL

| Rated operational current $I_e$ [A]                                               | 10    | 13  | 17    | 22  | 26   | 32   | 40   | 50  | 63  |
|-----------------------------------------------------------------------------------|-------|-----|-------|-----|------|------|------|-----|-----|
| <b>Switching of standard three-phase motors</b>                                   |       |     |       |     |      |      |      |     |     |
| AC-2, AC-3                                                                        |       |     |       |     |      |      |      |     |     |
| 230/240V [kW]                                                                     | 2.2/3 | 3   | 3.7/4 | 4   | 5.5  | 7.5  | 7.5  | 11  | 15  |
| 400/415V [kW]                                                                     | 3.7/4 | 5.5 | 7.5   | 7.5 | 11   | 15   | 18.5 | 22  | 30  |
| 500V [kW]                                                                         | 4/5.5 | 7.5 | 11    | 11  | 15   | 18.5 | 22   | 30  | 37  |
| 690V [kW]                                                                         | 7.5   | 11  | 11    | 15  | 18.5 | 22   | 30   | 45  | 55  |
| <b>Back-up fuses</b>                                                              |       |     |       |     |      |      |      |     |     |
| gG, gL <sub>+</sub> , only if $I_{cc} > I_{cu}$<br>(* = No back up fuse required) |       |     |       |     |      |      |      |     |     |
| 230/240V [A]                                                                      | *     | *   | *     | *   | *    | *    | *    | *   | *   |
| 400/415V [A]                                                                      | *     | *   | 100   | 125 | 125  | 125  | 160  | 160 | 160 |
| 440/460V [A]                                                                      | 100   | 100 | 100   | 125 | 125  | 125  | 125  | 125 | 160 |
| 500V [A]                                                                          | 100   | 100 | 100   | 100 | 100  | 100  | 100  | 100 | 100 |
| 690V [A]                                                                          | 63    | 63  | 63    | 80  | 80   | 80   | 80   | 80  | 80  |
| <b>Ultimate short-circuit breaking capacity <math>I_{cu}</math></b>               |       |     |       |     |      |      |      |     |     |
| 230/240V [kA]                                                                     | 100   | 100 | 100   | 100 | 100  | 100  | 100  | 100 | 100 |
| 400/415V [kA]                                                                     | 100   | 100 | 50    | 50  | 50   | 50   | 50   | 50  | 50  |
| 440/460V [kA]                                                                     | 50    | 50  | 50    | 50  | 35   | 35   | 35   | 35  | 35  |
| 500V [kA]                                                                         | 50    | 42  | 12    | 12  | 10   | 10   | 10   | 10  | 10  |
| 690V [kA]                                                                         | 6     | 6   | 5     | 5   | 5    | 5    | 5    | 5   | 5   |
| <b>Rated service short-circuit breaking capacity <math>I_{cs}</math></b>          |       |     |       |     |      |      |      |     |     |
| 230/240V [kA]                                                                     | 100   | 100 | 100   | 100 | 100  | 100  | 100  | 100 | 100 |
| 400/415V [kA]                                                                     | 100   | 100 | 50    | 50  | 50   | 50   | 50   | 50  | 50  |
| 440/460V [kA]                                                                     | 38    | 38  | 38    | 38  | 27   | 27   | 27   | 27  | 27  |
| 500V [kA]                                                                         | 38    | 32  | 9     | 9   | 8    | 8    | 8    | 8   | 8   |
| 690V [kA]                                                                         | 5     | 5   | 5     | 5   | 5    | 5    | 5    | 5   | 5   |



### ● GMS-100HL

| Rated operational current $I_e$ [A]                                               | 17    | 22  | 26   | 32   | 40   | 50  | 63  | 75  | 90  | 100 |
|-----------------------------------------------------------------------------------|-------|-----|------|------|------|-----|-----|-----|-----|-----|
| <b>Switching of standard three-phase motors</b>                                   |       |     |      |      |      |     |     |     |     |     |
| AC-2, AC-3                                                                        |       |     |      |      |      |     |     |     |     |     |
| 230/240V [kW]                                                                     | 3.7/4 | 4   | 5.5  | 7.5  | 7.5  | 11  | 15  | 22  | 30  | 30  |
| 400/415V [kW]                                                                     | 7.5   | 7.5 | 11   | 15   | 18.5 | 22  | 30  | 37  | 45  | 45  |
| 500V [kW]                                                                         | 11    | 11  | 15   | 18.5 | 22   | 30  | 37  | 45  | 55  | 63  |
| 690V [kW]                                                                         | 11    | 15  | 18.5 | 22   | 30   | 45  | 55  | 63  | 75  | 90  |
| <b>Back-up fuses</b>                                                              |       |     |      |      |      |     |     |     |     |     |
| gG, gL <sub>+</sub> , only if $I_{cc} > I_{cu}$<br>(* = No back up fuse required) |       |     |      |      |      |     |     |     |     |     |
| 230/240V [A]                                                                      | *     | *   | *    | *    | *    | *   | *   | *   | *   | *   |
| 400/415V [A]                                                                      | *     | *   | *    | *    | *    | *   | *   | *   | *   | *   |
| 440/460V [A]                                                                      | 125   | 125 | 125  | 160  | 160  | 160 | 200 | 200 | 200 | 200 |
| 500V [A]                                                                          | 100   | 125 | 125  | 125  | 160  | 160 | 160 | 160 | 160 | 160 |
| 690V [A]                                                                          | 80    | 80  | 80   | 80   | 80   | 100 | 100 | 125 | 160 | 160 |
| <b>Ultimate short-circuit breaking capacity <math>I_{cu}</math></b>               |       |     |      |      |      |     |     |     |     |     |
| 230/240V [kA]                                                                     | 100   | 100 | 100  | 100  | 100  | 100 | 100 | 100 | 100 | 100 |
| 400/415V [kA]                                                                     | 100   | 100 | 100  | 100  | 100  | 100 | 100 | 75  | 75  | 75  |
| 440/460V [kA]                                                                     | 50    | 50  | 50   | 50   | 50   | 50  | 50  | 50  | 50  | 50  |
| 500V [kA]                                                                         | 35    | 35  | 35   | 25   | 20   | 15  | 15  | 12  | 12  | 12  |
| 690V [kA]                                                                         | 12    | 12  | 12   | 12   | 12   | 10  | 8   | 6   | 6   | 6   |
| <b>Rated service short-circuit breaking capacity <math>I_{cs}</math></b>          |       |     |      |      |      |     |     |     |     |     |
| 230/240V [kA]                                                                     | 100   | 100 | 100  | 100  | 100  | 100 | 100 | 100 | 100 | 100 |
| 400/415V [kA]                                                                     | 100   | 50  | 50   | 50   | 50   | 50  | 50  | 50  | 50  | 50  |
| 440/460V [kA]                                                                     | 38    | 38  | 38   | 38   | 38   | 38  | 38  | 38  | 38  | 38  |
| 500V [kA]                                                                         | 27    | 27  | 27   | 19   | 15   | 11  | 11  | 9   | 9   | 9   |
| 690V [kA]                                                                         | 9     | 9   | 9    | 9    | 9    | 8   | 6   | 6   | 6   | 6   |

Note) \* = Short circuit proof up to 50 or 100kA.  
No back up fuse required.

# UL/CSA performance data (Motor protection)

Manual motor controller

(UL 508, CSA C22.2 as Manual motor controllers)

## ● GMS-32S

| Rated operational current $I_e$ [A]             |      |      | 0.16 | 0.25 | 0.4 | 0.63 | 1   | 1.6  | 2.5 | 4   | 6   | 8   | 10  | 13  | 17  | 22  | 26  | 32  |
|-------------------------------------------------|------|------|------|------|-----|------|-----|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| <b>Max. short-circuit current</b>               |      |      |      |      |     |      |     |      |     |     |     |     |     |     |     |     |     |     |
| 240V                                            | [kA] |      | 100  | 100  | 100 | 100  | 100 | 100  | 100 | 100 | 100 | 100 | 50  | 50  | 40  | 30  | 30  | 20  |
| 480Y/277V                                       | [kA] |      | 50   | 50   | 50  | 50   | 50  | 50   | 50  | 50  | 25  | 25  | 10  | 10  | 10  | 10  | 7.5 | 7.5 |
| 600Y/347V                                       | [kA] |      | 10   | 10   | 10  | 10   | 10  | 10   | 10  | 5   | 5   | 5   | 5   | 5   | 5   | 5   | 5   | 5   |
| <b>Motor load</b>                               |      |      |      |      |     |      |     |      |     |     |     |     |     |     |     |     |     |     |
| 1 Phase                                         | 115V | [HP] | -    | -    | -   | -    | -   | -    | -   | 1/8 | 1/4 | 1/3 | 1/2 | 1/2 | 1   | 2   | 2   | 2   |
|                                                 | 230V | [HP] | -    | -    | -   | -    | -   | 1/10 | 1/6 | 1/3 | 3/4 | 1   | 1½  | 2   | 3   | 3   | 5   | 5   |
| 3 Phase                                         | 230V | [HP] | -    | -    | -   | -    | -   | 1/3  | 1/2 | 1   | 1½  | 2   | 3   | 3   | 5   | 7½  | 7½  | 10  |
|                                                 | 460V | [HP] | -    | -    | -   | -    | 1/2 | 3/4  | 1½  | 2   | 5   | 5   | 7½  | 7½  | 10  | 15  | 15  | 20  |
|                                                 | 575V | [HP] | -    | -    | -   | -    | 1/2 | 1    | 1½  | 3   | 5   | 5   | 10  | 10  | 15  | 20  | 20  | 30  |
| <b>Maximum rated current of fuse or breaker</b> |      |      | [A]  | 500  | 500 | 500  | 500 | 500  | 500 | 500 | 500 | 500 | 500 | 500 | 500 | 500 | 500 | 500 |

Manual motor controller "group installation" or "Type E starter"

(UL 508, CSA C22.2 No..14, for group installation, in connection with a short-circuit protection device)

## ● GMS-32H

| Rated operational current $I_e$ [A]             |      |      | 0.16 | 0.25 | 0.4 | 0.63 | 1   | 1.6  | 2.5 | 4   | 6   | 8   | 10  | 13  | 17  | 22  | 26  | 32  |
|-------------------------------------------------|------|------|------|------|-----|------|-----|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| <b>Max. short-circuit current</b>               |      |      |      |      |     |      |     |      |     |     |     |     |     |     |     |     |     |     |
| 240V                                            | [kA] |      | 100  | 100  | 100 | 100  | 100 | 100  | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 |
| 480Y/277V                                       | [kA] |      | 65   | 65   | 65  | 65   | 65  | 65   | 65  | 65  | 65  | 65  | 65  | 65  | 30  | 30  | 30  | 30  |
| 600Y/347V                                       | [kA] |      | 25   | 25   | 25  | 25   | 25  | 25   | 25  | 25  | 25  | 25  | 25  | 25  | 10  | 10  | 10  | 10  |
| <b>Motor load</b>                               |      |      |      |      |     |      |     |      |     |     |     |     |     |     |     |     |     |     |
| 1 Phase                                         | 115V | [HP] | -    | -    | -   | -    | -   | -    | -   | 1/8 | 1/4 | 1/3 | 1/2 | 1/2 | 1   | 2   | 2   | 2   |
|                                                 | 230V | [HP] | -    | -    | -   | -    | -   | 1/10 | 1/6 | 1/3 | 3/4 | 1   | 1½  | 2   | 3   | 3   | 5   | 5   |
| 3 Phase                                         | 230V | [HP] | -    | -    | -   | -    | -   | 1/3  | 1/2 | 1   | 1½  | 2   | 3   | 3   | 5   | 7½  | 7½  | 10  |
|                                                 | 460V | [HP] | -    | -    | -   | -    | 1/2 | 3/4  | 1½  | 2   | 5   | 5   | 7½  | 7½  | 10  | 15  | 15  | 20  |
|                                                 | 575V | [HP] | -    | -    | -   | -    | 1/2 | 1    | 1½  | 3   | 5   | 5   | 10  | 10  | 15  | 20  | 20  | 30  |
| <b>Maximum rated current of fuse or breaker</b> |      |      | [A]  | 500  | 500 | 500  | 500 | 500  | 500 | 500 | 500 | 500 | 500 | 500 | 500 | 500 | 500 | 500 |



# Technical Information

## UL/CSA performance data (Motor protection)

Manual motor controller "group installation" or "Type E starter"  
(UL 508, CSA C22.2 No.14, for group installation, in connection with a short-circuit protection device)



### ● GMS-63S

| Rated operational current I <sub>e</sub> [A]        |           | 10  | 13  | 17  | 22  | 26  | 32  | 40  | 50  | 63  |
|-----------------------------------------------------|-----------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| <b>Max. short-circuit current</b>                   |           |     |     |     |     |     |     |     |     |     |
| 240V                                                | [kA]      | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 |
| 480Y/277V                                           | [kA]      | 50  | 50  | 40  | 40  | 40  | 40  | 40  | 40  | 40  |
| 600Y/347V                                           | [kA]      | 10  | 10  | 10  | 10  | 10  | 10  | 10  | 10  | 10  |
| <b>Motor load</b>                                   |           |     |     |     |     |     |     |     |     |     |
| 1 Phase                                             | 115V [HP] | 1/2 | 1/2 | 1   | 2   | 2   | 3   | 3   | 5   | 5   |
|                                                     | 230V [HP] | 1½  | 2   | 3   | 3   | 5   | 5   | 7½  | 10  | 15  |
| 3 Phase                                             | 230V [HP] | 3   | 3   | 5   | 7½  | 10  | 10  | 15  | 15  | 20  |
|                                                     | 460V [HP] | 7½  | 7½  | 10  | 15  | 20  | 25  | 30  | 40  | 50  |
|                                                     | 575V [HP] | 10  | 10  | 15  | 20  | 25  | 30  | 40  | 50  | 60  |
| <b>Maximum rated current of fuse or breaker</b> [A] |           | 600 | 600 | 600 | 600 | 600 | 600 | 600 | 600 | 600 |



### ● GMS-63H

| Rated operational current I <sub>e</sub> [A]        |           | 10  | 13  | 17  | 22  | 26  | 32  | 40  | 50  | 63  |
|-----------------------------------------------------|-----------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| <b>Max. short-circuit current</b>                   |           |     |     |     |     |     |     |     |     |     |
| 240V                                                | [kA]      | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 |
| 480Y/277V                                           | [kA]      | 65  | 65  | 50  | 50  | 50  | 50  | 50  | 50  | 50  |
| 600Y/347V                                           | [kA]      | 25  | 25  | 10  | 10  | 10  | 10  | 10  | 10  | 10  |
| <b>Motor load</b>                                   |           |     |     |     |     |     |     |     |     |     |
| 1 Phase                                             | 115V [HP] | 1/2 | 1/2 | 1   | 2   | 2   | 3   | 3   | 5   | 5   |
|                                                     | 230V [HP] | 1½  | 2   | 3   | 3   | 5   | 5   | 7½  | 10  | 15  |
| 3 Phase                                             | 230V [HP] | 3   | 3   | 5   | 7½  | 10  | 10  | 15  | 15  | 20  |
|                                                     | 460V [HP] | 7½  | 7½  | 10  | 15  | 20  | 25  | 30  | 40  | 50  |
|                                                     | 575V [HP] | 10  | 10  | 15  | 20  | 25  | 30  | 40  | 50  | 60  |
| <b>Maximum rated current of fuse or breaker</b> [A] |           | 600 | 600 | 600 | 600 | 600 | 600 | 600 | 600 | 600 |

Manual motor controller "group installation" or "Type E starter"  
(UL 508, CSA C22.2 No..14, for group installation, in connection with a  
short-circuit protection device)



## ● GMS-100S

| Rated operational current I <sub>e</sub> [A]    |      |      | 17  | 22   | 26   | 32   | 40   | 50   | 63   | 75   | 90   | 100  |
|-------------------------------------------------|------|------|-----|------|------|------|------|------|------|------|------|------|
| <b>Max. short-circuit current</b>               |      |      |     |      |      |      |      |      |      |      |      |      |
| 240V                                            | [kA] |      | 100 | 100  | 100  | 100  | 100  | 100  | 100  | 100  | 100  | 100  |
| 480Y/277V                                       | [kA] |      | 50  | 50   | 50   | 50   | 50   | 50   | 40   | 40   | 40   | 40   |
| 600Y/347V                                       | [kA] |      | 10  | 10   | 10   | 10   | 10   | 10   | 10   | 10   | 10   | 10   |
| <b>Motor load</b>                               |      |      |     |      |      |      |      |      |      |      |      |      |
| 1 Phase                                         | 115V | [HP] | 1   | 1½   | 2    | 3    | 3    | 5    | 5    | 7½   | 10   | 10   |
|                                                 | 230V | [HP] | 3   | 3    | 5    | 5    | 7½   | 10   | 15   | 15   | 20   | 20   |
| 3 Phase                                         | 230V | [HP] | 5   | 7½   | 10   | 10   | 15   | 15   | 20   | 25   | 30   | 40   |
|                                                 | 460V | [HP] | 10  | 15   | 20   | 25   | 30   | 40   | 50   | 60   | 75   | 75   |
|                                                 | 575V | [HP] | 15  | 20   | 25   | 30   | 40   | 50   | 60   | 75   | 100  | 100  |
| <b>Maximum rated current of fuse or breaker</b> |      |      | [A] | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 |



## ● GMS-100H

| Rated operational current I <sub>e</sub> [A]    |      |      | 17  | 22   | 26   | 32   | 40   | 50   | 63   | 75   | 90   | 100  |
|-------------------------------------------------|------|------|-----|------|------|------|------|------|------|------|------|------|
| <b>Max. short-circuit current</b>               |      |      |     |      |      |      |      |      |      |      |      |      |
| 240V                                            | [kA] |      | 100 | 100  | 100  | 100  | 100  | 100  | 100  | 100  | 100  | 100  |
| 480Y/277V                                       | [kA] |      | 65  | 65   | 65   | 65   | 65   | 65   | 50   | 50   | 50   | 50   |
| 600Y/347V                                       | [kA] |      | 25  | 20   | 20   | 20   | 20   | 20   | 10   | 10   | 10   | 10   |
| <b>Motor load</b>                               |      |      |     |      |      |      |      |      |      |      |      |      |
| 1 Phase                                         | 115V | [HP] | 1   | 1½   | 2    | 3    | 3    | 5    | 5    | 7½   | 10   | 10   |
|                                                 | 230V | [HP] | 3   | 3    | 5    | 5    | 7½   | 10   | 15   | 15   | 20   | 20   |
| 3 Phase                                         | 230V | [HP] | 5   | 7½   | 10   | 10   | 15   | 15   | 20   | 25   | 30   | 40   |
|                                                 | 460V | [HP] | 10  | 15   | 20   | 25   | 30   | 40   | 50   | 60   | 75   | 75   |
|                                                 | 575V | [HP] | 15  | 20   | 25   | 30   | 40   | 50   | 60   | 75   | 100  | 100  |
| <b>Maximum rated current of fuse or breaker</b> |      |      | [A] | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 |



# Technical Information

## Manual Motor Controller (UL508)

### ● GMS-32S

| Rated operational current I <sub>e</sub> [A] |           |      | 0.16 | 0.25 | 0.4 | 0.63 | 1   | 1.6  | 2.5 | 4   | 6   | 8   | 10  | 13  | 17 | 22 | 26  | 32  |
|----------------------------------------------|-----------|------|------|------|-----|------|-----|------|-----|-----|-----|-----|-----|-----|----|----|-----|-----|
| <b>Max. short-circuit current</b>            |           |      |      |      |     |      |     |      |     |     |     |     |     |     |    |    |     |     |
|                                              | 240V      | [kA] | 100  | 100  | 100 | 100  | 100 | 100  | 100 | 100 | 100 | 100 | 50  | 50  | 40 | 30 | 30  | 20  |
|                                              | 480Y/277V | [kA] | 50   | 50   | 50  | 50   | 50  | 50   | 50  | 50  | 25  | 25  | 10  | 10  | 10 | 10 | 7.5 | 7.5 |
|                                              | 600Y/347V | [kA] | 10   | 10   | 10  | 10   | 10  | 10   | 10  | 5   | 5   | 5   | 5   | 5   | 5  | 5  | 5   | 5   |
| <b>Motor load</b>                            |           |      |      |      |     |      |     |      |     |     |     |     |     |     |    |    |     |     |
| 1 Phase                                      | 115V      | [HP] | -    | -    | -   | -    | -   | -    | -   | 1/8 | 1/4 | 1/3 | 1/2 | 1/2 | 1  | 2  | 2   | 2   |
|                                              | 230V      | [HP] | -    | -    | -   | -    | -   | 1/10 | 1/6 | 1/3 | 3/4 | 1   | 1½  | 2   | 3  | 3  | 5   | 5   |
| 3 Phase                                      | 230V      | [HP] | -    | -    | -   | -    | -   | 1/3  | 1/2 | 1   | 1½  | 2   | 3   | 3   | 5  | 7½ | 7½  | 10  |
|                                              | 460V      | [HP] | -    | -    | -   | -    | 1/2 | 3/4  | 1½  | 2   | 5   | 5   | 7½  | 7½  | 10 | 15 | 15  | 20  |
|                                              | 575V      | [HP] | -    | -    | -   | -    | 1/2 | 1    | 1½  | 3   | 5   | 5   | 10  | 10  | 15 | 20 | 20  | 30  |
| <b>Max. fuse size</b>                        |           |      | [A]  | 1    | 1   | 1    | 1   | 3    | 6   | 10  | 15  | 20  | 30  | 40  | 50 | 60 | 80  | 100 |
| <b>Max. breaker size</b>                     |           |      | [A]  | 15   | 15  | 15   | 15  | 15   | 15  | 15  | 20  | 30  | 40  | 50  | 60 | 80 | 100 | 125 |

### ● GMS-32H

| Rated operational current I <sub>e</sub> [A] |           |      | 0.16 | 0.25 | 0.4 | 0.63 | 1   | 1.6  | 2.5 | 4   | 6   | 8   | 10  | 13  | 17  | 22  | 26  | 32  |
|----------------------------------------------|-----------|------|------|------|-----|------|-----|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| <b>Max. short-circuit current</b>            |           |      |      |      |     |      |     |      |     |     |     |     |     |     |     |     |     |     |
|                                              | 240V      | [kA] | 100  | 100  | 100 | 100  | 100 | 100  | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 |
|                                              | 480Y/277V | [kA] | 50   | 50   | 50  | 50   | 50  | 50   | 50  | 50  | 50  | 50  | 50  | 50  | 30  | 30  | 30  | 30  |
|                                              | 600Y/347V | [kA] | 10   | 10   | 10  | 10   | 10  | 10   | 10  | 10  | 10  | 10  | 10  | 10  | 10  | 10  | 10  | 10  |
| <b>Motor load</b>                            |           |      |      |      |     |      |     |      |     |     |     |     |     |     |     |     |     |     |
| 1 Phase                                      | 115V      | [HP] | -    | -    | -   | -    | -   | -    | -   | 1/8 | 1/4 | 1/3 | 1/2 | 1/2 | 1   | 2   | 2   | 2   |
|                                              | 230V      | [HP] | -    | -    | -   | -    | -   | 1/10 | 1/6 | 1/3 | 3/4 | 1   | 1½  | 2   | 3   | 3   | 5   | 5   |
| 3 Phase                                      | 230V      | [HP] | -    | -    | -   | -    | -   | 1/3  | 1/2 | 1   | 1½  | 2   | 3   | 3   | 5   | 7½  | 7½  | 10  |
|                                              | 460V      | [HP] | -    | -    | -   | -    | 1/2 | 3/4  | 1½  | 2   | 5   | 5   | 7½  | 7½  | 10  | 15  | 15  | 20  |
|                                              | 575V      | [HP] | -    | -    | -   | -    | 1/2 | 1    | 1½  | 3   | 5   | 5   | 10  | 10  | 15  | 20  | 20  | 30  |
| <b>Max. fuse size</b>                        |           |      | [A]  | 1    | 1   | 1    | 1   | 3    | 6   | 10  | 15  | 20  | 30  | 40  | 50  | 60  | 80  | 100 |
| <b>Max. breaker size</b>                     |           |      | [A]  | 15   | 15  | 15   | 15  | 15   | 15  | 15  | 20  | 30  | 40  | 50  | 60  | 80  | 100 | 125 |

### ● GMS-63S

| Rated operational current I <sub>e</sub> [A] |           |      | 10  | 13  | 17  | 22  | 26  | 32  | 40  | 50  | 63  |
|----------------------------------------------|-----------|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| <b>Max. short-circuit current</b>            |           |      |     |     |     |     |     |     |     |     |     |
|                                              | 240V      | [kA] | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 |
|                                              | 480Y/277V | [kA] | 25  | 25  | 25  | 25  | 25  | 25  | 25  | 25  | 25  |
|                                              | 600Y/347V | [kA] | 10  | 10  | 10  | 10  | 10  | 10  | 10  | 10  | 10  |
| <b>Motor load</b>                            |           |      |     |     |     |     |     |     |     |     |     |
| 1 Phase                                      | 115V      | [HP] | 1/2 | 1/2 | 1   | 2   | 2   | 3   | 3   | 5   | 5   |
|                                              | 230V      | [HP] | 1½  | 2   | 3   | 3   | 5   | 5   | 7½  | 10  | 15  |
| 3 Phase                                      | 230V      | [HP] | 3   | 3   | 5   | 7½  | 10  | 10  | 15  | 15  | 20  |
|                                              | 460V      | [HP] | 7½  | 7½  | 10  | 15  | 20  | 25  | 30  | 40  | 50  |
|                                              | 575V      | [HP] | 10  | 10  | 15  | 20  | 25  | 30  | 40  | 50  | 60  |
| <b>Max. fuse size</b>                        |           |      | [A] | 40  | 50  | 60  | 80  | 100 | 125 | 150 | 200 |
| <b>Max. breaker size</b>                     |           |      | [A] | 40  | 50  | 60  | 80  | 100 | 125 | 150 | 200 |



## ● GMS-63H

| Rated operational current I <sub>e</sub> [A] |      |      | 10  | 13  | 17  | 22  | 26  | 32  | 40  | 50  | 63  |
|----------------------------------------------|------|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| <b>Max. short-circuit current</b>            |      |      |     |     |     |     |     |     |     |     |     |
| 240V                                         | [kA] |      | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 |
| 480Y/277V                                    | [kA] |      | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 50  |
| 600Y/347V                                    | [kA] |      | 10  | 10  | 10  | 10  | 10  | 10  | 10  | 10  | 10  |
| <b>Motor load</b>                            |      |      |     |     |     |     |     |     |     |     |     |
| 1 Phase                                      | 115V | [HP] | 1/2 | 1/2 | 1   | 2   | 2   | 3   | 3   | 5   | 5   |
|                                              | 230V | [HP] | 1½  | 2   | 3   | 3   | 5   | 5   | 7½  | 10  | 15  |
| 3 Phase                                      | 230V | [HP] | 3   | 3   | 5   | 7½  | 10  | 10  | 15  | 15  | 20  |
|                                              | 460V | [HP] | 7½  | 7½  | 10  | 15  | 20  | 25  | 30  | 40  | 50  |
|                                              | 575V | [HP] | 10  | 10  | 15  | 20  | 25  | 30  | 40  | 50  | 60  |
| <b>Max. fuse size</b>                        |      |      | [A] | 40  | 50  | 60  | 80  | 100 | 125 | 150 | 200 |
| <b>Max. breaker size</b>                     |      |      | [A] | 40  | 50  | 60  | 80  | 100 | 125 | 150 | 200 |



## ● GMS-100S

| Rated operational current I <sub>e</sub> [A] |      |      | 17  | 22  | 26  | 32  | 40  | 50  | 63  | 75  | 90  | 100 |
|----------------------------------------------|------|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| <b>Max. short-circuit current</b>            |      |      |     |     |     |     |     |     |     |     |     |     |
| 240V                                         | [kA] |      | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 |
| 480Y/277V                                    | [kA] |      | 25  | 25  | 25  | 25  | 25  | 25  | 25  | 25  | 25  | 25  |
| 600Y/347V                                    | [kA] |      | 10  | 10  | 10  | 10  | 10  | 10  | 10  | 10  | 10  | 10  |
| <b>Motor load</b>                            |      |      |     |     |     |     |     |     |     |     |     |     |
| 1 Phase                                      | 115V | [HP] | 1   | 1½  | 2   | 3   | 3   | 5   | 5   | 7½  | 10  | 10  |
|                                              | 230V | [HP] | 3   | 3   | 5   | 5   | 7½  | 10  | 15  | 15  | 20  | 20  |
| 3 Phase                                      | 230V | [HP] | 5   | 7½  | 10  | 10  | 15  | 15  | 20  | 25  | 30  | 40  |
|                                              | 460V | [HP] | 10  | 15  | 20  | 25  | 30  | 40  | 50  | 60  | 75  | 75  |
|                                              | 575V | [HP] | 15  | 20  | 25  | 30  | 40  | 50  | 60  | 75  | 100 | 100 |
| <b>Max. fuse size</b>                        |      |      | [A] | 60  | 80  | 100 | 125 | 150 | 200 | 250 | 300 | 400 |
| <b>Max. breaker size</b>                     |      |      | [A] | 60  | 80  | 100 | 125 | 150 | 200 | 250 | 300 | 400 |



## ● GMS-100H

| Rated operational current I <sub>e</sub> [A] |      |      | 17  | 22  | 26  | 32  | 40  | 50  | 63  | 75  | 90  | 100 |
|----------------------------------------------|------|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| <b>Max. short-circuit current</b>            |      |      |     |     |     |     |     |     |     |     |     |     |
| 240V                                         | [kA] |      | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 |
| 480Y/277V                                    | [kA] |      | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 50  |
| 600Y/347V                                    | [kA] |      | 10  | 10  | 10  | 10  | 10  | 10  | 10  | 10  | 10  | 10  |
| <b>Motor load</b>                            |      |      |     |     |     |     |     |     |     |     |     |     |
| 1 Phase                                      | 115V | [HP] | 1   | 1½  | 2   | 3   | 3   | 5   | 5   | 7½  | 10  | 10  |
|                                              | 230V | [HP] | 3   | 3   | 5   | 5   | 7½  | 10  | 15  | 15  | 20  | 20  |
| 3 Phase                                      | 230V | [HP] | 5   | 7½  | 10  | 10  | 15  | 15  | 20  | 25  | 30  | 40  |
|                                              | 460V | [HP] | 10  | 15  | 20  | 25  | 30  | 40  | 50  | 60  | 75  | 75  |
|                                              | 575V | [HP] | 15  | 20  | 25  | 30  | 40  | 50  | 60  | 75  | 100 | 100 |
| <b>Max. fuse size</b>                        |      |      | [A] | 60  | 80  | 100 | 125 | 150 | 200 | 250 | 300 | 400 |
| <b>Max. breaker size</b>                     |      |      | [A] | 60  | 80  | 100 | 125 | 150 | 200 | 250 | 300 | 400 |

# Technical Information

## General data



| Type                                                                                |            | GMS-32S                            |
|-------------------------------------------------------------------------------------|------------|------------------------------------|
| <b>Rated insulation voltage</b>                                                     |            |                                    |
| IEC                                                                                 |            | 690V                               |
| UL, CSA                                                                             |            | 600V                               |
| <b>Rated impulse withstand voltage</b>                                              |            |                                    |
| Uimp/Pollution degree                                                               |            | 6kV / 3                            |
| <b>Rated frequency</b>                                                              |            | 50 / 60 Hz                         |
| <b>Utilization category:</b>                                                        |            |                                    |
| IEC 947-2 (Circuit breaker)                                                         |            | Cat. A                             |
| IEC 947-4-1 (Motor starter)                                                         |            | AC 3                               |
| <b>Life span</b>                                                                    |            |                                    |
| Mechanical                                                                          | Operations | 100,000                            |
| Electrical(I <sub>e</sub> max.)                                                     | Operations | 100,000                            |
| <b>Switching frequency</b>                                                          |            |                                    |
| Ope./h                                                                              |            | 25                                 |
| <b>Ambient temperature</b>                                                          |            |                                    |
| Storage                                                                             | °C         | -50 ~ +80                          |
| Operation                                                                           | °C         | -20 ~ +60                          |
| <b>Operation altitude</b>                                                           |            |                                    |
| m                                                                                   |            | Up to 2000 (6500 Feet)             |
| <b>Protection class</b>                                                             |            |                                    |
|                                                                                     |            | IP 20                              |
|                                                                                     |            | Safe from finger touch             |
| <b>Resistance to shock</b>                                                          |            |                                    |
| g                                                                                   |            | 25                                 |
| <b>Resistance to vibration</b>                                                      |            |                                    |
| Hz                                                                                  |            | 5 ~ 150                            |
| <b>Rated thermal current I<sub>th</sub></b>                                         |            |                                    |
| IEC                                                                                 | [A]        | 0.1 ... 32                         |
| up to 60 °C ambient temperature                                                     |            |                                    |
| <b>Overload protection</b>                                                          |            |                                    |
| Characteristics                                                                     |            | ○                                  |
| <b>Ambient temperature compensation, thermal current I<sub>th</sub> adjustments</b> |            |                                    |
| -20°C ~ -5°C                                                                        |            | set one point lower <sup>3)</sup>  |
| -5°C ~ +40°C                                                                        |            | automatic                          |
| +40°C ~ +60°C                                                                       |            | set one point higher <sup>3)</sup> |
| <b>Phase-failure protection</b>                                                     |            |                                    |
|                                                                                     |            | ○                                  |
| <b>Trip class</b>                                                                   |            |                                    |
| IEC 60947-4-1                                                                       |            | 10                                 |
| <b>Magnetic release</b>                                                             |            |                                    |
| Response current                                                                    |            | 13 × I <sub>n</sub> <sup>2)</sup>  |
| <b>Total power loss P<sub>v</sub></b>                                               |            |                                    |
| Circuit breaker at rated load                                                       | [W]        | I <sub>n</sub> = 0.16~4A : 9.8     |
| Operating temperature                                                               |            | I <sub>n</sub> = 6~26A : 8         |
|                                                                                     |            | I <sub>n</sub> = 32A : 3.9         |

Note = 1) Class20; GMS-63HL, GMS-100HL

2) I<sub>n</sub> = Max. rated operational current I<sub>e</sub>

3) use Thermal Current dial to adjust accordingly



|  | GMS-32H                                                                              | GMS-63S, 63H                                                                         | GMS-100S, 100H                                                                       |
|--|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|  | 690V                                                                                 | 1000V                                                                                | 1000V                                                                                |
|  | 600V                                                                                 | 600V                                                                                 | 600V                                                                                 |
|  | 6kV / 3                                                                              | 8kV / 3                                                                              | 8kV / 3                                                                              |
|  | 50 / 60 Hz                                                                           | 50 / 60 Hz                                                                           | 50 / 60 Hz                                                                           |
|  | Cat. A                                                                               | Cat. A                                                                               | Cat. A                                                                               |
|  | AC 3                                                                                 | AC 3                                                                                 | AC 3                                                                                 |
|  | 100,000                                                                              | 50,000                                                                               | 50,000                                                                               |
|  | 100,000                                                                              | 25,000                                                                               | 25,000                                                                               |
|  | 25                                                                                   | 25                                                                                   | 25                                                                                   |
|  | -50 ~ +80                                                                            | -50 ~ +80                                                                            | -50 ~ +80                                                                            |
|  | -20 ~ +60                                                                            | -20 ~ +60                                                                            | -20 ~ +60                                                                            |
|  | Up to 2000 (6500 Feet)                                                               | Up to 2000 (6500 Feet)                                                               | Up to 2000 (6500 Feet)                                                               |
|  | IP 20                                                                                | IP 20                                                                                | IP 20                                                                                |
|  | Safe from finger touch                                                               | Safe from finger touch                                                               | Safe from finger touch                                                               |
|  | 25                                                                                   | 25                                                                                   | 25                                                                                   |
|  | 5 ~ 150                                                                              | 5 ~ 150                                                                              | 5 ~ 150                                                                              |
|  | 0.1 ... 32                                                                           | 6 ... 63                                                                             | 11 ... 100                                                                           |
|  | ○                                                                                    | ○                                                                                    | ○                                                                                    |
|  | set one point lower <sup>3)</sup><br>automatic<br>set one point higher <sup>3)</sup> | set one point lower <sup>3)</sup><br>automatic<br>set one point higher <sup>3)</sup> | set one point lower <sup>3)</sup><br>automatic<br>set one point higher <sup>3)</sup> |
|  | ○                                                                                    | ○                                                                                    | ○                                                                                    |
|  | 10                                                                                   | 10 <sup>1)</sup>                                                                     | 10 <sup>1)</sup>                                                                     |
|  | 13 × In <sup>2)</sup>                                                                | 13 × In <sup>2)</sup>                                                                | 13 × In <sup>2)</sup>                                                                |
|  | In = 0.16~4A : 9.8<br>In = 6~26A : 8<br>In = 32A : 3.9                               | In = 10~22A : 13.3<br>In = 26~63A : 12.6                                             | In = 17~63A : 11.9<br>In = 75~100A : 15                                              |

### ● Manual Motor Starter GMS-32...100

|                                  |                           | GMS-32S                                                                           | GMS-32H                                                                           | GMS-32S, 63H                                                                        | GMS-100S, 100H                                                                      |
|----------------------------------|---------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>Conformity to standards</b>   |                           | IEC60947<br>UL508, UL508 Type E                                                   |                                                                                   |                                                                                     |                                                                                     |
| <b>Approvals</b>                 |                           | CE, UL                                                                            |                                                                                   |                                                                                     |                                                                                     |
| <b>Terminal parts</b>            |                           |                                                                                   |                                                                                   |                                                                                     |                                                                                     |
|                                  |                           |  |  |  |  |
| Screwdriver                      |                           |                                                                                   |                                                                                   |                                                                                     |                                                                                     |
| Single-core                      | 1.conductor [mm²] / [AWG] | 1...10 / 18...8                                                                   | 1...10 / 18...8                                                                   | 0.75...35 / 18...2                                                                  | 2.5...70 / 12...2/0                                                                 |
|                                  | 2.conductor [mm²] / [AWG] | 1...6 / 18...10                                                                   | 1...6 / 18...10                                                                   | 0.75...25 / 18...4                                                                  | 2.5...50 / 12...1/0                                                                 |
| Stranded                         | 1.conductor [mm²] / [AWG] | 1...6 / 18...10                                                                   | 1...6 / 18...10                                                                   | 0.75...35 / 18...2                                                                  | 2.5...70 / 12...2/0                                                                 |
|                                  | 2.conductor [mm²] / [AWG] | 1...6 / 18...10                                                                   | 1...6 / 18...10                                                                   | 0.75...25 / 18...4                                                                  | 2.5...50 / 12...1/0                                                                 |
| Flexible                         | 1.conductor [mm²] / [AWG] | 1...6 / 18...10                                                                   | 1...6 / 18...10                                                                   | 0.75...25 / 18...4                                                                  | 2.5...50 / 12...1/0                                                                 |
|                                  | 2.conductor [mm²] / [AWG] | 0.75...4 / 18...10                                                                | 0.75...4 / 18...10                                                                | 0.75...16 / 18...6                                                                  | 2.5...35 / 10...2                                                                   |
| Tightening torque [Nm] / [lb-in] |                           | 0.8...2.5 / 7...22                                                                | 0.8...2.5 / 7...22                                                                | 3...4.5 / 26...39                                                                   | 4...6 / 35...53                                                                     |

### ● Accessories for Manual Motor Starter GMS-32...100

|                                                                        |                           | Auxiliary contacts for front mounting<br>GFX...                                      |     | Auxiliary contacts for left side mounting<br>GSX... |      | Alarm switch for left side mounting<br>GSA... |      |
|------------------------------------------------------------------------|---------------------------|--------------------------------------------------------------------------------------|-----|-----------------------------------------------------|------|-----------------------------------------------|------|
| <b>Rated thermal current / th</b>                                      |                           |                                                                                      |     |                                                     |      |                                               |      |
| at 40 °C ambient temperature                                           | [A]                       | 5                                                                                    |     | 1 0                                                 |      | 1 0                                           |      |
| at 60 °C ambient temperature                                           | [A]                       | 3                                                                                    |     | 6                                                   |      | 6                                             |      |
| <b>Contact class coordination according to NEMA (UL/CSA-Standards)</b> |                           |                                                                                      |     |                                                     |      |                                               |      |
| AC                                                                     |                           | B 600 Standard Pilot Duty                                                            |     | A 600 Standard Pilot Duty                           |      | A 600 Standard Pilot Duty                     |      |
|                                                                        | DC                        | R 300 Light Pilot Duty                                                               |     | Q 300 Light Pilot Duty                              |      | Q 300 Light Pilot Duty                        |      |
| <b>Back-up fuses gG, gL</b>                                            | [A]                       | 16                                                                                   |     | 1 6                                                 |      | 1 6                                           |      |
| <b>Rated supply current</b>                                            |                           | 24                                                                                   | 240 | 24                                                  | 240  | 24                                            | 240  |
| AC-15:                                                                 | [A]                       | 3                                                                                    | 2   | 6                                                   | 4    | 6                                             | 4    |
| DC-13:                                                                 | [V]                       | 24                                                                                   | 220 | 24                                                  | 220  | 24                                            | 220  |
|                                                                        | [A]                       | 1                                                                                    | 0.1 | 2                                                   | 0.25 | 2                                             | 0.25 |
| <b>Terminal parts</b>                                                  |                           |                                                                                      |     |                                                     |      |                                               |      |
| Type of terminals                                                      |                           |  |     |                                                     |      |                                               |      |
| Screwdriver                                                            |                           | Pozidriv size 2                                                                      |     |                                                     |      |                                               |      |
| Single-core                                                            | 1.conductor [mm²] / [AWG] | 0.5...2.5 / 20...14                                                                  |     |                                                     |      |                                               |      |
|                                                                        | 2.conductor [mm²] / [AWG] | 0.5...2.5 / 20...14                                                                  |     |                                                     |      |                                               |      |
| Flexible                                                               | 1.conductor [mm²] / [AWG] | 0.5...4 / 20...10                                                                    |     |                                                     |      |                                               |      |
|                                                                        | 2.conductor [mm²] / [AWG] | 0.75...2.5 / 18...14                                                                 |     |                                                     |      |                                               |      |
| <b>Tightening torque</b>                                               |                           | [Nm] / [lb-in]                                                                       |     | 0.8...1.2 / 7...10                                  |      |                                               |      |



## ● Accessories for Manual Motor Starter GMS-32...100

|                              | Undervoltage release<br>for right side mounting<br><b>GUR...</b>                   | Undervoltage release with 2 auxiliary<br>contacts for right side mounting<br><b>GURX...</b> | Shunt release<br>for right side mounting<br><b>GSR...</b> |
|------------------------------|------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|-----------------------------------------------------------|
| <b>Actuating voltage</b>     |                                                                                    |                                                                                             |                                                           |
| Pull-in                      | 0.85...1.1 × Us                                                                    | 0.85...1.1 × Us                                                                             | 0.7...1.1 × Us                                            |
| Drop-out                     | 0.7...0.35 × Us                                                                    | 0.7...0.35 × Us                                                                             |                                                           |
| <b>Rated control voltage</b> |                                                                                    |                                                                                             |                                                           |
| min.:                        | 24V 50Hz / 28V 60Hz                                                                | 24V 50Hz / 28V 60Hz                                                                         | 24V 50Hz / 28V 60Hz                                       |
| max.:                        | 415~440V 50Hz / 460~480V 60Hz                                                      | 415~440V 50Hz / 460~480V 60Hz                                                               | 415~440V 50Hz / 460~480V 60Hz                             |
| <b>Coil rating</b>           |                                                                                    |                                                                                             |                                                           |
| Pull-in                      | 8.5VA, 6W                                                                          | 8.5VA, 6W                                                                                   | 8.5VA, 6W                                                 |
| Hold                         | 3VA, 1.2W                                                                          | 3VA, 1.2W                                                                                   | 3VA, 1.2W                                                 |
| On-Time                      | 100%                                                                               | 100%                                                                                        | 100%                                                      |
| <b>Terminal parts</b>        |  |                                                                                             |                                                           |
| Type of terminals            |                                                                                    |                                                                                             |                                                           |
| Screwdriver                  |                                                                                    |                                                                                             |                                                           |
| 1.conductor [mm] / [AWG]     |                                                                                    |                                                                                             |                                                           |
| 2.conductor [mm] / [AWG]     |                                                                                    |                                                                                             |                                                           |
| 1.conductor [mm] / [AWG]     | Pozidriv size 2                                                                    |                                                                                             |                                                           |
| 2.conductor [mm] / [AWG]     | 0.5...2.5 / 20...14                                                                |                                                                                             |                                                           |
|                              | 0.5...2.5 / 20...14                                                                |                                                                                             |                                                           |
|                              | 0.5...4 / 20...10                                                                  |                                                                                             |                                                           |
|                              | 0.75...2.5 / 18...14                                                               |                                                                                             |                                                           |
|                              | 0.8...1.2 / 7...10                                                                 |                                                                                             |                                                           |
| <b>Tightening torque</b>     | [Nm] / [lb-in]                                                                     |                                                                                             |                                                           |

## ● Weights

| Description                 | Type                                                            | Weight [g] |
|-----------------------------|-----------------------------------------------------------------|------------|
| <b>Circuit breaker</b>      | <b>GMS-32S</b>                                                  | 320        |
|                             | <b>GMS-32H</b>                                                  | 360        |
|                             | <b>GMS-63S</b>                                                  | 1,000      |
|                             | <b>GMS-100S</b>                                                 | 2,200      |
| <b>Auxiliary switch</b>     | <b>GFX...</b> (Front Auxiliary Switch)                          | 18         |
|                             | <b>GSX...</b> (Side Auxiliary Switch)                           | 30         |
|                             | <b>GSA...</b> (Alarm Switch)                                    | 40         |
| <b>Undervoltage release</b> | <b>GUR...</b> (Undervoltage release)                            | 110        |
|                             | <b>GURX...</b> (Undervoltage release with 2 auxiliary contacts) | 120        |
| <b>Shunt release</b>        | <b>GSR...</b> (Shunt release)                                   | 110        |

## Type '2' coordination according to IEC 947-4-1


- **Short-circuit current  $I_k = 50\text{kA}$**   
**Voltage : 400/415V, 50/60Hz**

| Standard motors                |      | Manual motor starter |                                              |                                      | Contactor      |     |
|--------------------------------|------|----------------------|----------------------------------------------|--------------------------------------|----------------|-----|
| AC-3<br>at 400/415V<br>1500rpm |      | Circuit breaker      | Thermal overload<br>release<br>setting range | Magnetic release<br>response current |                |     |
| [kW]                           | [A]  | Type                 | [A]                                          | [A]                                  | Type           | [A] |
| 0.06                           | 0.24 | GMS-32S 0.25A        | 0.16 ~0.25                                   | 3.25                                 | CGMS-6         | 6   |
| 0.09                           | 0.33 | GMS-32S 0.4A         | 0.25~0.4                                     | 5.2                                  | CGMS-6         | 6   |
| 0.12                           | 0.43 | GMS-32S 0.63A        | 0.4~0.63                                     | 8.19                                 | CGMS-6         | 6   |
| 0.18                           | 0.61 | GMS-32S 0.63A        | 0.4~0.63                                     | 8.19                                 | CGMS-6         | 6   |
| 0.25                           | 0.8  | GMS-32S 1A           | 0.63~1                                       | 13                                   | CGMS-6         | 6   |
| 0.37                           | 1.1  | GMS-32S 1.6A         | 1~1.6                                        | 20.8                                 | CGMS-6         | 6   |
| 0.55                           | 1.5  | GMS-32S 1.6A         | 1~1.6                                        | 20.8                                 | CGMS-6         | 6   |
| 0.75                           | 1.9  | GMS-32S 2.5A         | 1.6~2.5                                      | 32.5                                 | CGMS-9/CGC-9   | 9   |
| 1.1                            | 2.7  | GMS-32S 4A           | 2.5~4                                        | 52                                   | CGMS-9/CGC-9   | 9   |
| 1.5                            | 3.5  | GMS-32S 4A           | 2.5~4                                        | 52                                   | CGMS-12/CGC-12 | 12  |
| 2.2                            | 5.0  | GMS-32S 6A           | 4~6                                          | 78                                   | CGC-18         | 18  |
| 3.0                            | 6.6  | GMS-32S 8A           | 5~8                                          | 104                                  | CGC-18         | 18  |
| 4.0                            | 8.5  | GMS-32S 10A          | 6~10                                         | 130                                  | CGC-18         | 18  |
| 5.5                            | 11.0 | GMS-32S 13A          | 9~13                                         | 169                                  | CGC-22         | 22  |
| 7.5                            | 15.0 | GMS-32H 17A          | 11~17                                        | 221                                  | CGC-22         | 22  |
| 10.0                           | 20.0 | GMS-32H 22A          | 14~22                                        | 286                                  | CGC-32         | 32  |
| 11.0                           | 22.0 | GMS-32H 26A          | 18~26                                        | 338                                  | CGC-32         | 32  |
| 15.0                           | 29.0 | GMS-32H 32A          | 22~32                                        | 416                                  | CGC-32         | 32  |
| 18.5                           | 36.0 | GMS-63S 40A          | 28~40                                        | 520                                  | CGC-50         | 50  |
| 22.0                           | 41.0 | GMS-63S 50A          | 34~50                                        | 650                                  | CGC-50         | 50  |
| 30.0                           | 56.0 | GMS-63S 63A          | 45~63                                        | 819                                  | CGC-65         | 65  |
| 37.0                           | 68.0 | GMS-100S 75A         | 55~75                                        | 975                                  | CGC-75         | 75  |
| -                              | -    | GMS-100S 90A         | 70~90                                        | 1170                                 | CGC-85         | 85  |
| 45.0                           | 81.0 | GMS-100S 100A        | 80~100                                       | 1300                                 | CGC-85         | 85  |

### Definition type '2' coordination according to IEC 947-4-1

- The contactor or the starter must not endanger persons or systems in the event of a short-circuit.
- The contactor or the starter must be suitable for further use.
- No damage to the overload relay or other parts may occur with the exception of welding of the contactor or starter contacts provided that these can be easily separated without significant deformation (such as with a screwdriver).

# Time/Current characteristic

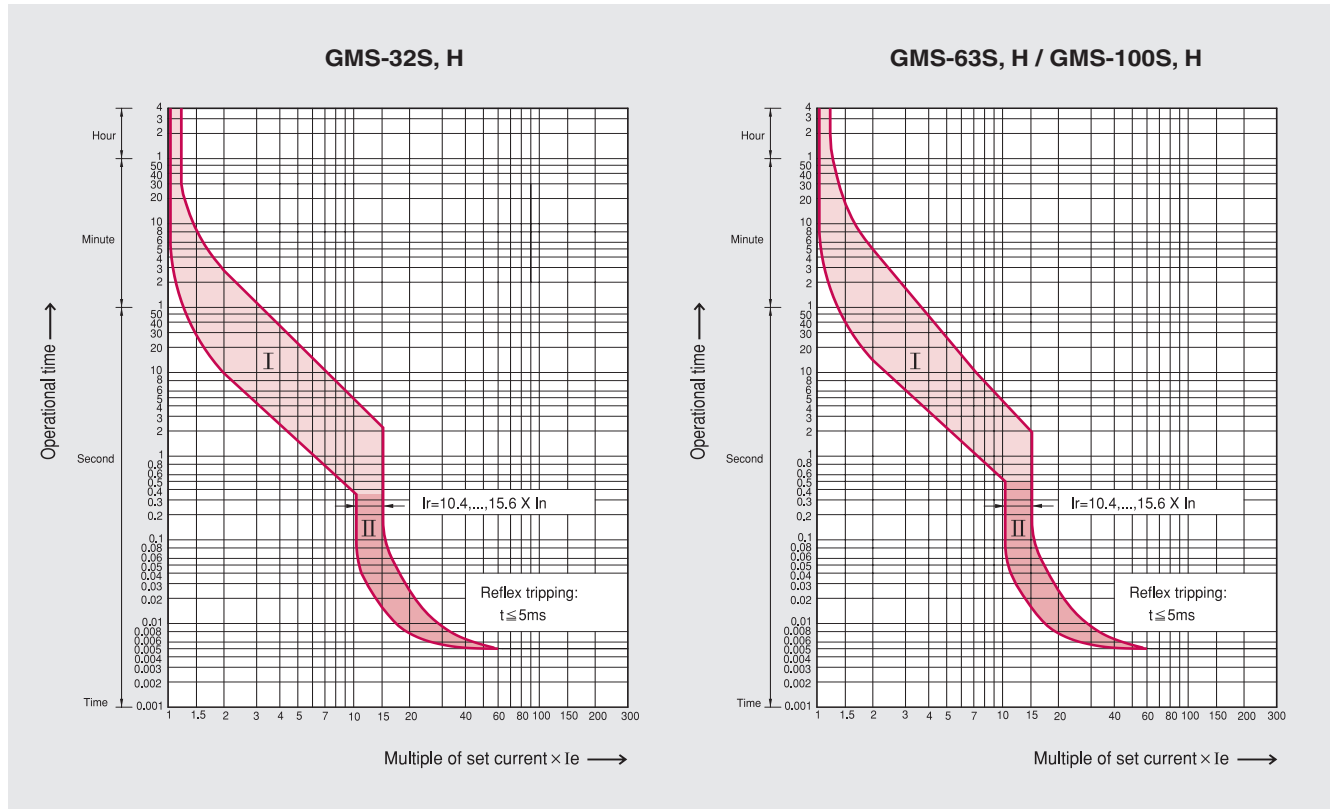

## I ) Thermal release trip current :

The adjustable inverse bimetal trip reliability protects motors against overloads.  
The curve shows the mean operating current at an ambient temperature of 20 °C starting from cold.  
Careful testing and setting ensures effective motor protection even in the case of single-phasing.

## II ) Magnetic release trip current :




The instantaneous magnetic trip has a fixed operating current setting.  
This corresponds to 13 times the maximum value of setting range,  
at a lower setting it is correspondingly higher.

## Current setting $I_e$ :

The overload trip corresponds to a thermal overload relay in a motor starter conforming to IEC 947-4-1.  
If a different value is prescribed (e.g. reduced  $I_e$  for cooling medium having a temperature higher than 40 °C or a place of installation higher than 2000m above sea level),  
the setting current is equal to the reduced rated current  $I_e$  of the motor.

### ● GMS-32S

[mm]

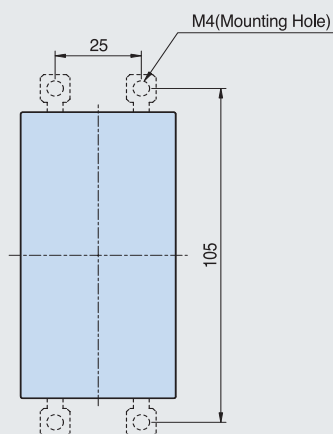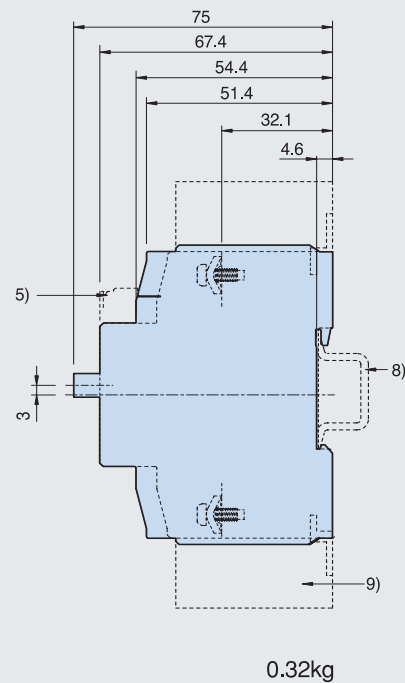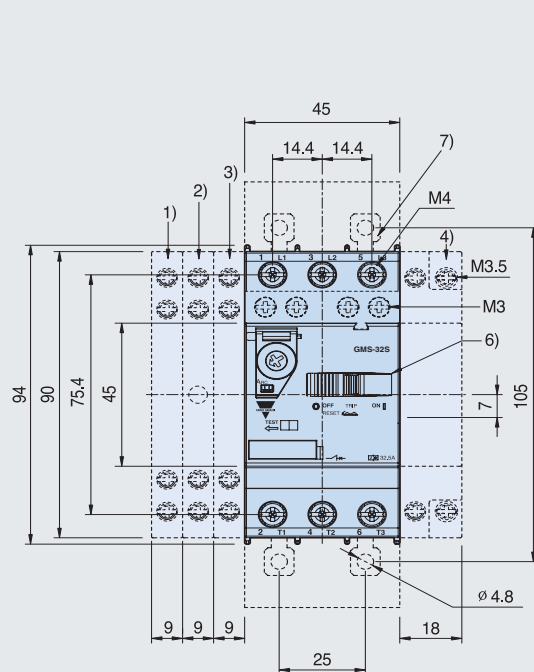

- 1) Side auxiliary switch
- 2) Side magnetic trip alarm switch
- 3) Side any trip alarm switch
- 4) Side shunt release or Side undervoltage release
- 5) Front auxiliary switch
- 6) Handle lock in OFF position( ø 5mm)
- 7) Push-in Lugs for screw mounting
- 8) 35mm standard mounting rail acc. to EN 50 022
- 9) Arcing space

Height of arcing spaces  
(Clearance from earthed parts)



| Ue[V] | 240 | 415 | 460 | 525 | 690 |
|-------|-----|-----|-----|-----|-----|
| [mm]  | 20  | 20  | 20  | 20  | 20  |

Arcing spaces for limiter function


| Ue[V] | 525        |            | 690        |            |
|-------|------------|------------|------------|------------|
|       | left/right | top/bottom | left/right | top/bottom |
| [mm]  | 10         | 40         | 30         | 50         |

## ● GMS-32H, 32HI

[mm]

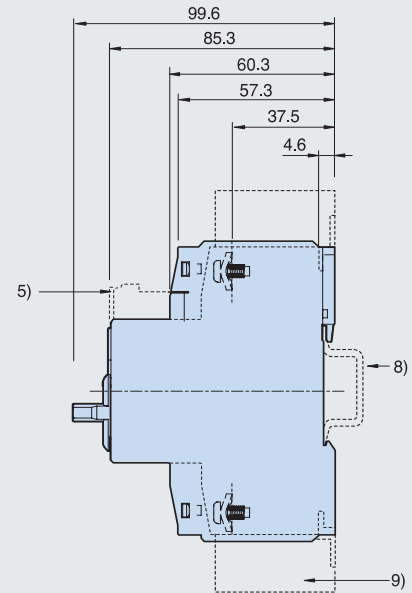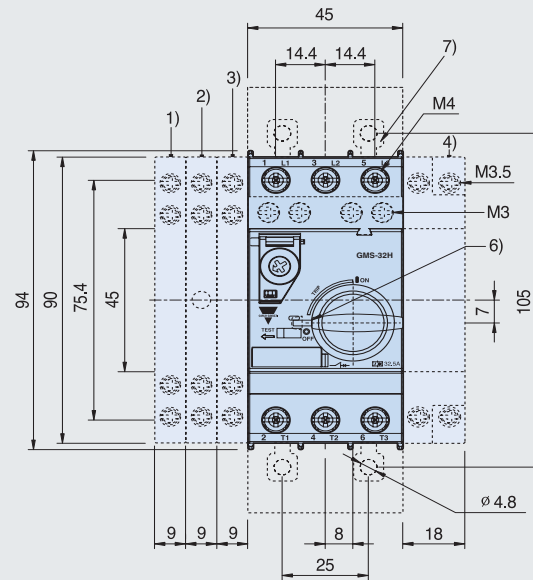

0.36kg

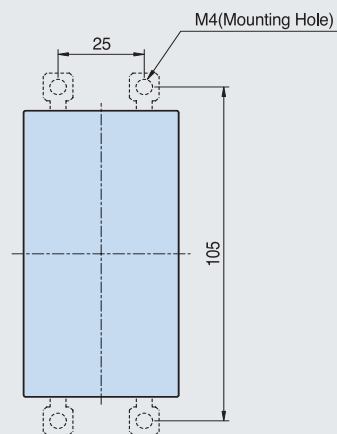

- 1) Side auxiliary switch
- 2) Side magnetic trip alarm switch
- 3) Side any trip alarm switch
- 4) Side shunt release or Side undervoltage release
- 5) Front auxiliary switch
- 6) Handle lock in OFF position(  $\varnothing 5\text{mm}$ )
- 7) Push-in Lugs for screw mounting
- 8) 35mm standard mounting rail acc. to EN 50 022
- 9) Arcing space

Height of arcing spaces  
(Clearance from earthed parts)

| Ue[V] | 240 | 415 | 460 | 525 | 690 |
|-------|-----|-----|-----|-----|-----|
| [mm]  | 30  | 30  | 30  | 30  | 50  |


Arcing spaces for limiter function

| Ue[V] | 525        |            | 690        |            |
|-------|------------|------------|------------|------------|
|       | left/right | top/bottom | left/right | top/bottom |
| [mm]  | 10         | 40         | 30         | 50         |




### ● GMS-63S, 63H, 63HI, 63HL

[mm]

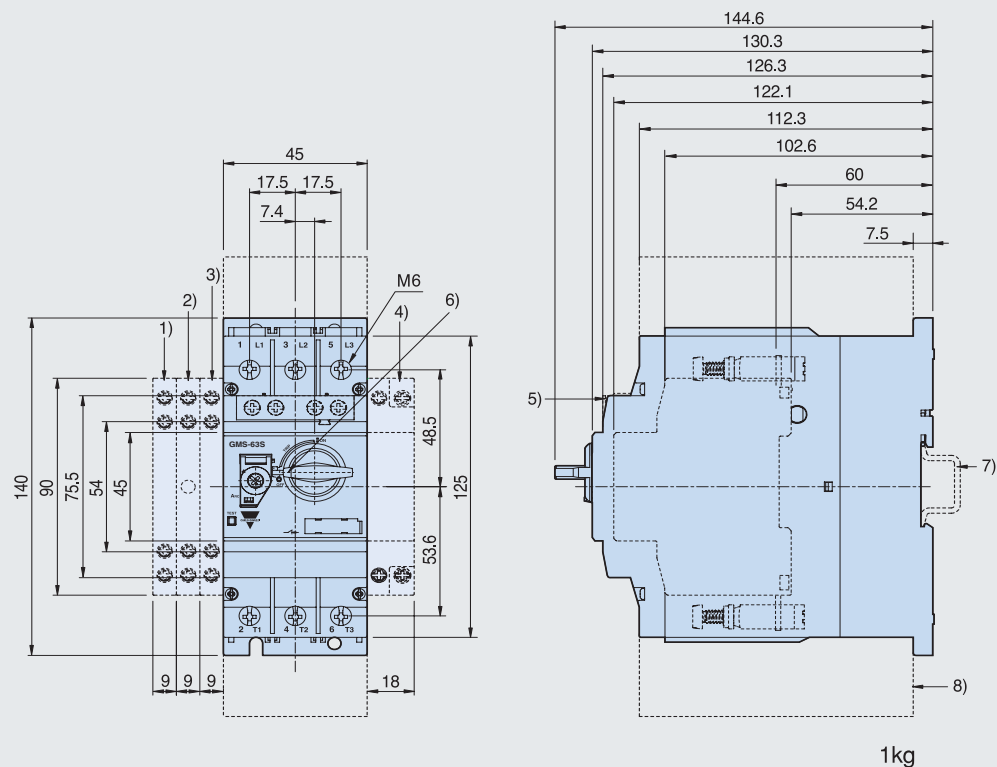

1kg

- 1) Side auxiliary switch
- 2) Side magnetic trip alarm switch
- 3) Side any trip alarm switch
- 4) Side shunt release or Side undervoltage release
- 5) Front auxiliary switch
- 6) Handle lock in OFF position (ø 5mm)
- 7) 35mm standard mounting rail acc. to EN 50 022
- 8) Arcing space

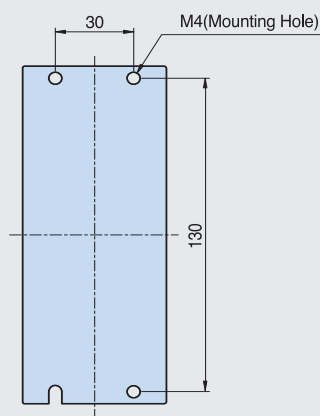

Height of arcing spaces  
(Clearance from earthed parts)


| Ue[V] | 240 | 415 | 460 | 525 | 690 |
|-------|-----|-----|-----|-----|-----|
| [mm]  | 50  | 50  | 50  | 50  | 50  |

Arcing spaces for limiter function

| Ue[V] | 525        |            | 690        |            |
|-------|------------|------------|------------|------------|
|       | left/right | top/bottom | left/right | top/bottom |
| [mm]  | 10         | 50         | 10         | 50         |

## ● GMS-100S, 100H, 100HI, 100HL

[mm]

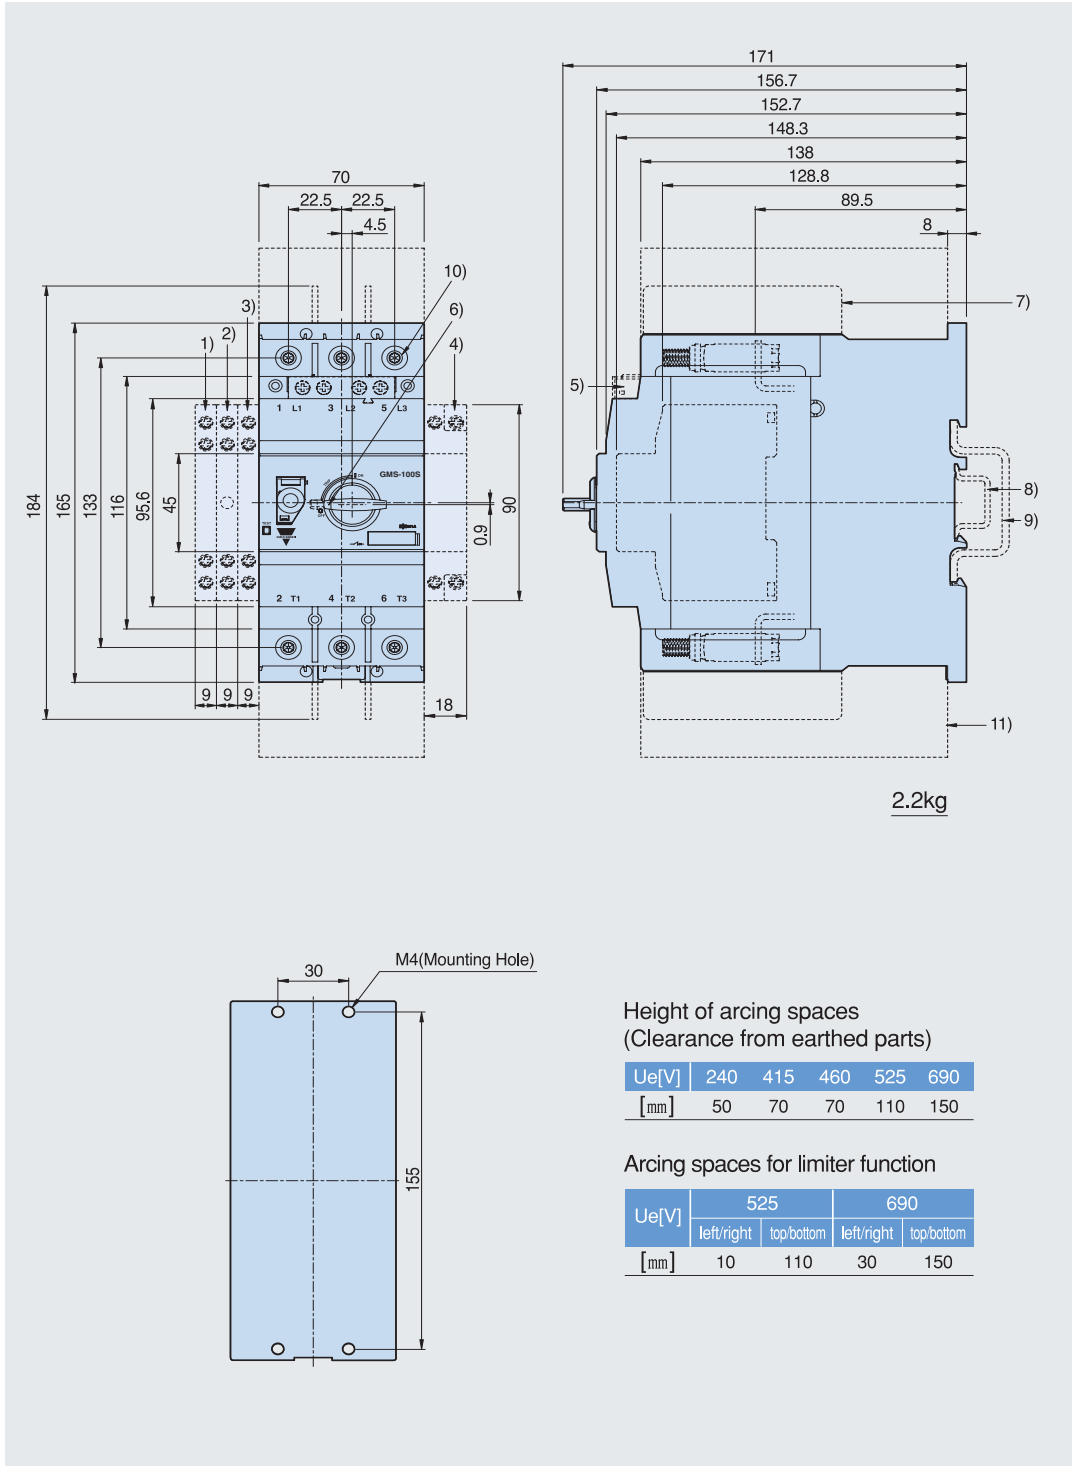

# Notes:





www.GavazziOnline.com



**CARLO GAVAZZI**  
Automotive Components

Back

Home

WELCOME TO

# GavazziOnline

Solid State Relays Selection Guide



**Load Type** Heaters

**Load Voltage** 128 VAC

**Input Signal** 100V

**Load Current** 10 Amps

**Type** 1 Pin

**Heatsink** Dispenser

**Ambient Temp.** Celsius

Select parameters and click Submit.

Submit

No values matches your chosen parameters

The screenshot shows the GavazziOnline website. At the top, there is a navigation bar with the Gavazzi logo and the text "GavazziOnline". Below the navigation bar, there is a section titled "Download Brochures" with a list of brochures available for download. The brochures are categorized by sensor type: Capacitive Sensors, Photoelectric Sensors, Ultrasonic Sensors, Inductive Sensors, and Mechanical Relays. Each category has a corresponding icon and a link to download the brochure. The background of the website is a light blue gradient with a subtle pattern of small dots.

WELCOME TO  
**GavazziOnline**  
Download Brochures

**Capacitive Sensors**  
(145 MB)

**Photoelectric Sensors**  
(124 MB)

**Ultrasonic Sensors**  
(2.7 MB)

**Inductive Sensors**  
(14.5 MB)

**Mechanical Relays**  
(4.4 MB)

**Solid State Relays**  
(0.4 MB)

**Centimars**  
(11.5 MB)

**CARLO GAVAZZI**  
Automotive Components

Website: [www.carlogavazzi.com](http://www.carlogavazzi.com) E-Mail: [carlogavazzi@carlogavazzi.com](mailto:carlogavazzi@carlogavazzi.com)

**FOR IMMEDIATE RELEASE:**

**Solid State Relays  
with Integrated Heat  
Sink**

November 23, 2003 • Buffalo Grove, IL • CARLO GAVAZZI's new R] Series SolidState relays are ideally suited to replace electromechanical contactors in high switching frequency applications. The Solitrons feature an integral heat sink, and they can be snugged onto DIN-rail or mounted to a back chassis. Other product features include LED indication of control input and over-

**Product Releases**

Installation is simplified via self-wiring terminals (for contactor or SSR) type wiring technology, which was popularized over one or decades ago. The Solitrons are the "Mits" can switch up to 30 amps at 75 amps and the "Power" can switch up to 50 amps at 600V AC.

Any questions regarding this press release should be directed to Chet Malachuk, Product Manager. 847.604.4500 x114 or [cmalachuk@carlogavazzi.com](mailto:cmalachuk@carlogavazzi.com)



**CARLO GAVAZZI**



# Automation *Solutions* for the Plastics Industry

**CARLO GÖVATZ**

**SOLID STATE RELAYS** for on / off and proportional control of heaters

**CAPACITIVE PROXIMITY SENSORS** for level detection in hoppers and silos

**PID CONTROLLERS** for single zone temperature control

**CONTACTORS**

**INDUCTIVE PROXIMITY SENSORS** for mold position detection

**Industry Special Brochures/Fl**

**www.GovatzOnline.com/Plastics**

**Sales@CarloGovatz.com**



**CARLO GAVAZZI**  
Automation Components

WELCOME TO

# GavazziOnline

Carlo Gavazzi Events



---

## National Manufacturing Week

CARLO GAVAZZI exhibited at National Manufacturing Week, which took place in Chicago, Illinois at McCormick Place from February 27<sup>th</sup> through 29<sup>th</sup>.



## Latest



**CARLO GAVAZZI**  
Automation Components

WELCOME TO

# GavazziOnline

Pictured above (left to right):

[illegible]

CARLO GAVAZZI  
AUTOMATICA COMPONENTI

WELCOME TO  
**GavazziOnline**

**Automation  
Solutions**  
for the Elevator Industry

Home Page   Applications   Products   About Carlo Gavazzi

[illegible]

## User Manuals

# The Complete Product Package

## Sensors

Inductive and Capacitive Sensors  
Photoelectric Sensors  
Ultrasonic Sensors  
Wind Sensors  
Radar Sensors  
Motion/Presence Vision Sensors  
Conductive Level Sensors  
Magnetic Switches  
Safety Interlocks and Light Curtains

## Switches

Solid State Relays  
Contactors and Overloads  
Manual Motor Starters/Protectors  
Soft Starters  
Variable Frequency Drives  
Hybrid Relays  
Electromechanical Relays  
Limit Switches  
Push Buttons and Pilot Lights

## Controls

Energy Management  
Switching Power Supplies  
Timers and Counters  
Monitoring Controls and CTs  
Human Machine Interfaces  
Digital Panel Meters  
PID Controllers  
PV String Monitoring  
Safety Control Modules  
Solar Monitoring and Control

## Fieldbuses

Dupline® Field and Installation Bus  
Building Automation Systems  
Parking Guidance Systems  
Elevator Systems  
DuplineSafe Mining Systems  
Irrigation Systems

## A Global Force in Industrial and Building Automation

CARLO GAVAZZI has a multitude of sales offices spanning North America (*not to mention our hundreds of distributors*). Therefore, we can be viewed as "your local automation resource" - assisting you every step of the way in finding the proper solution for your various application requirements. Naturally, our job is greatly simplified as we have such a vast range of solutions to offer you via our comprehensive *product package*.

Our worldwide sales offices make us an ideal business partner, *especially for manufacturers of exported machinery*, as our products are available locally and they are RoHS and CE marked.

### USA

**CARLO GAVAZZI INC.**  
750 Hastings Lane  
Buffalo Grove, IL 60089  
Tel: 847.465.6100  
Fax: 800.222.2659  
[Sales@CarloGavazzi.com](mailto:Sales@CarloGavazzi.com)

### CANADA

**CARLO GAVAZZI (CANADA) INC.**  
2660 Meadowvale Boulevard  
Mississauga, ON L5N 6M6  
Tel: 888.575.2275  
Fax: 905.542.2248  
[Gavazzi@CarloGavazzi.com](mailto:Gavazzi@CarloGavazzi.com)

### MEXICO

**CARLO GAVAZZI MEXICO S.A. de C.V.**  
Calle La Montaña no. 28, Fracc. Los Pastores  
Naucalpan de Juárez, EDOMEX CP 53340  
Tel & Fax: 55.5373.7042  
[MexicoSales@CarloGavazzi.com](mailto:MexicoSales@CarloGavazzi.com)

Regional / Area Sales Office  
District Sales Office

Argentina • Australia • Austria • Bahrain • Belgium • Bolivia • Bosnia • Brazil • Brunei • Bulgaria • Canada  
Chile • China • Columbia • Croatia • Cyprus • Czech • Denmark • Dominican Republic • Egypt • Estonia  
Finland • France • Germany • Greece • Hungary • Hong Kong • Iceland • India • Indonesia • Iran • Ireland  
Italy • Japan • Jordan • Kenya • Korea • Kuwait • Lebanon • Malaysia • Malta • Morocco • Mauritius • Mexico  
Netherlands • New Zealand • Norway • Pakistan • Papua New Guinea • Paraguay • Peru • Philippines  
Poland • Portugal • Qatar • Romania • Russia • Saudi Arabia • Serbia • Singapore • Slovakia • Slovenia  
South Africa • Spain • Sultanate of Oman • Sweden • Switzerland • Taiwan • Thailand • Tunisia • Turkey  
Ukraine • United Arab Emirates • United Kingdom • Uruguay • United States • Venezuela • Vietnam • and many more countries

Your Authorized Distributor:

**CARLO GAVAZZI**  
Automation Components

**USA** Tel: 847.465.6100 Fax: 800.222.2659

**Canada** Tel: 888.575.2275 Fax: 905.542.2248

**Mexico** Tel and Fax: 55.5373.7042

[www.GavazziOnline.com](http://www.GavazziOnline.com) • [Info@CarloGavazzi.com](mailto:Info@CarloGavazzi.com)

[twitter.com/CarloGavazziNA](https://twitter.com/CarloGavazziNA) [facebook.com/CarloGavazziNA](https://facebook.com/CarloGavazziNA)



Download the **CARLO GAVAZZI Mobile APP**

