

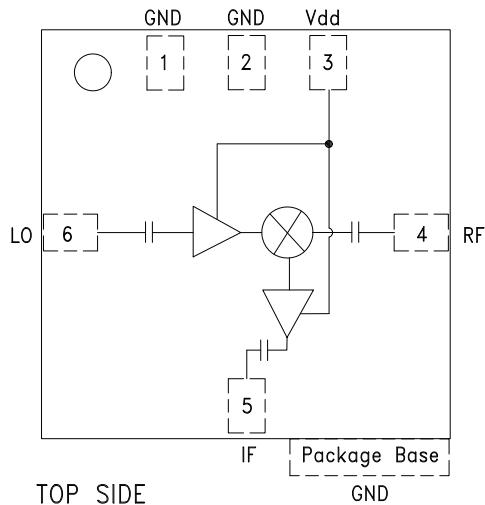

**GaAs MMIC SUB-HARMONIC
SMT MIXER, 20 - 31 GHz**
Typical Applications

The HMC265LM3 is ideal for:

- 20 and 31 GHz Microwave Radios
- Downconverter for Point to Point Radios
- LMDS and SATCOM

Features

- Integrated LO Amplifier: -4 dBm Input
- Sub-Harmonically Pumped (x2) LO
- High 2LO/RF Isolation: > 28 dB
- LM3 SMT Package

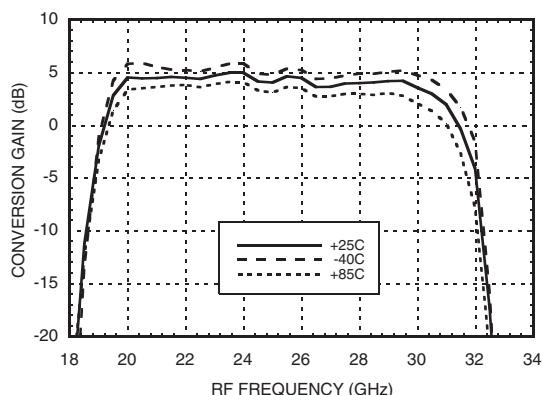
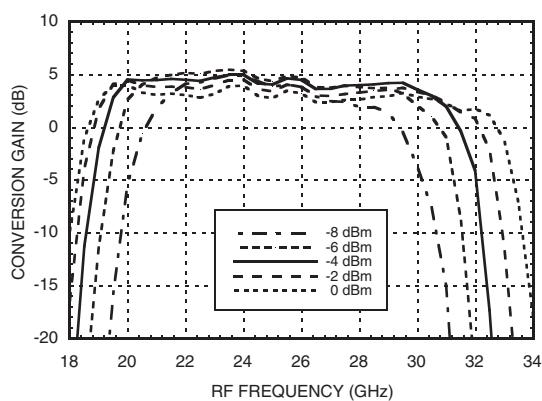
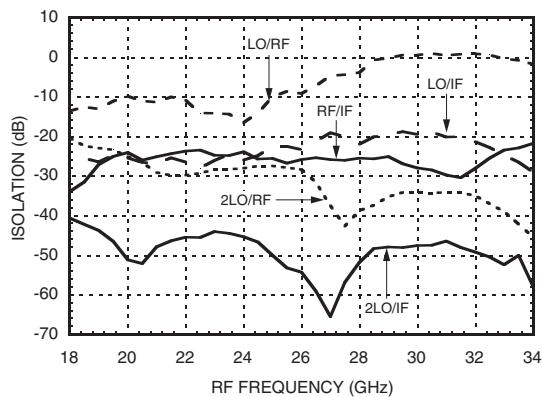
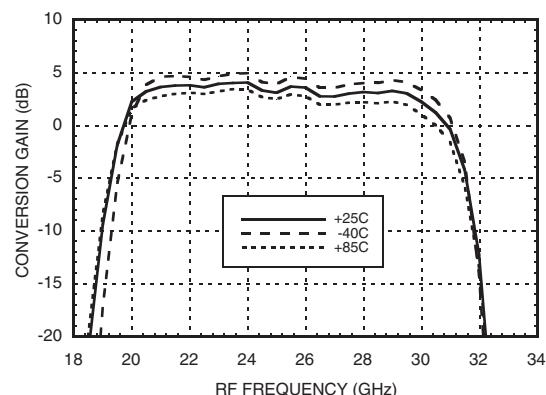
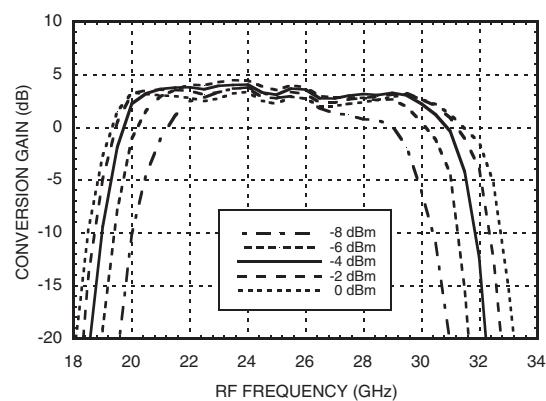
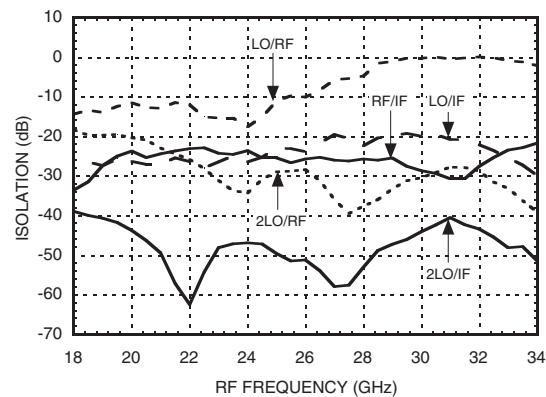
Functional Diagram

General Description

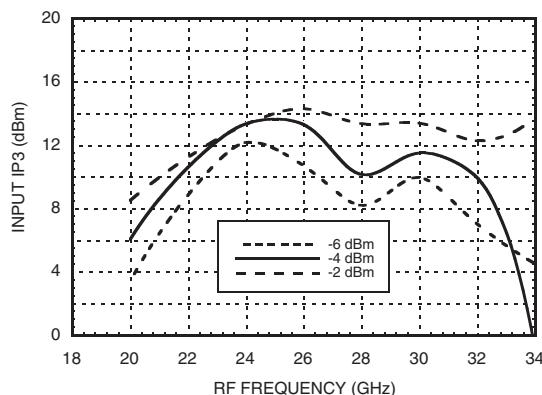
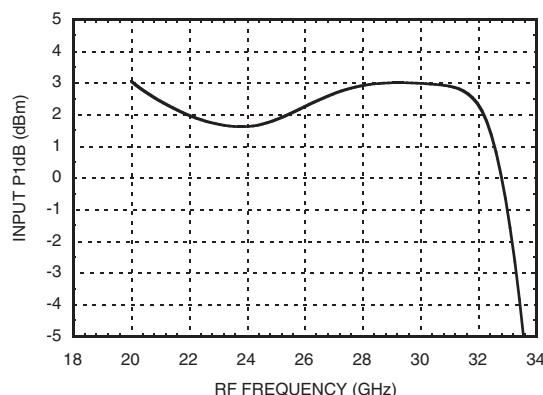
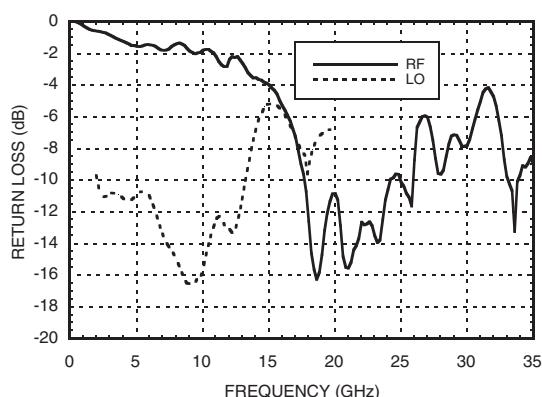
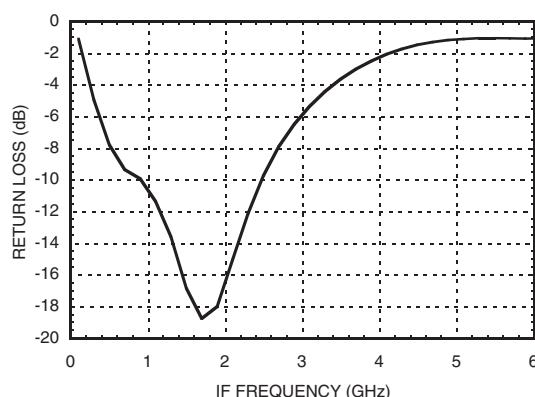
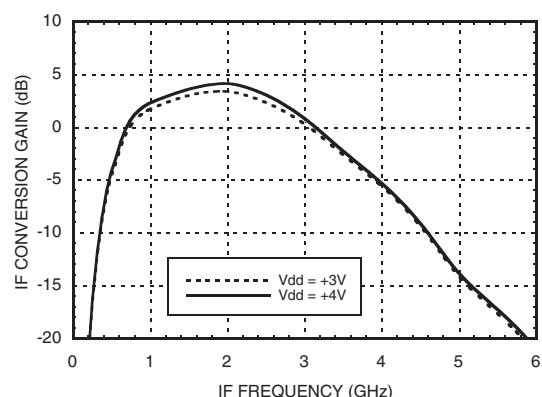
The HMC265LM3 is a 20 - 31 GHz surface mount sub-harmonically pumped (x2) MMIC mixer down-converter with integrated LO and IF amplifiers in a SMT leadless chip carrier package. The 2LO to RF and IF isolations are an excellent 28 to 47 dB, eliminating the need for additional filtering. The LO amplifier is a single bias (+3V to +4V) two stage design with only -4 dBm drive requirement. All data is with the non-hermetic, epoxy sealed LM3 packaged device mounted in a 50 ohm test fixture. Utilizing the HMC265LM3 eliminates the need for wirebonding, thereby providing a consistent connection interface for the customer.

Electrical Specifications, $T_A = +25^\circ C$, As a Function of Vdd

| Parameter | IF = 2 GHz LO = -4 dBm & Vdd = +4V | | | IF = 2 GHz LO = -4 dBm & Vdd = +4V | | | IF = 2 GHz LO = -4 dBm & Vdd = +3V | | | Units |
|----------------------------|---------------------------------------|------|------|---------------------------------------|------|------|---------------------------------------|------|------|-------|
| | Min. | Typ. | Max. | Min. | Typ. | Max. | Min. | Typ. | Max. | |
| Frequency Range, RF | 20 - 31 | | | 27 - 30 | | | 21 - 30 | | | GHz |
| Frequency Range, LO | 10 - 15.5 | | | 13.5 - 15 | | | 10.5 - 15 | | | GHz |
| Frequency Range, IF | 0.7 - 3 | | | 0.7 - 3 | | | 0.8 - 2.8 | | | GHz |
| Conversion Gain (RF to IF) | -2 | 3 | | 0 | 4 | | -1 | 3 | | dB |
| Noise Figure (SSB) | | 13 | | | 13 | | | 13 | | dB |
| 2LO to RF Isolation | 21 | 28 | | 28 | 35 | | 20 | 28 | | dB |
| 2LO to IF Isolation | 39 | 47 | | 40 | 48 | | 38 | 47 | | dB |
| IP3 (Input) | 2 | 8 | | 6 | 10 | | 2 | 8 | | dBm |
| 1 dB Compression (Input) | -1 | +2 | | 0 | +3 | | | 0 | | dBm |
| Supply Current (Idd) | | 50 | | | 50 | | | 40 | | mA |

*Unless otherwise noted, all measurements performed as downconverter, IF= 2 GHz.


**Conversion Gain vs.
Temperature @ LO = -4 dBm, Vdd= +4V**

**Conversion Gain
vs. LO Drive @ Vdd = +4V**

Isolation @ LO = -4 dBm, Vdd = +4V

**GaAs MMIC SUB-HARMONIC
SMT MIXER, 20 - 31 GHz**
**Conversion Gain vs.
Temperature @ LO = -4 dBm, Vdd= +3V**

**Conversion Gain
vs. LO Drive @ Vdd = +3V**

Isolation @ LO = -4 dBm, Vdd = +3V



**GaAs MMIC SUB-HARMONIC
SMT MIXER, 20 - 31 GHz**
∞
MIXERS - SUB-HARMONIC - SMT
Input IP3 vs. LO Drive @ $V_{dd} = +4V$ *

Input P1dB @ LO = -4 dBm, $V_{dd} = +4V$

RF & LO Return Loss
@ LO = -4 dBm, $V_{dd} = +4V$

IF Return Loss
@ LO = -4 dBm, $V_{dd} = +4V$

IF Bandwidth @ LO = -4 dBm


* Two-tone input power = -10 dBm each tone, 1 MHz spacing.

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106
Phone: 781-329-4700 • Order online at www.analog.com
Application Support: Phone: 1-800-ANALOG-D

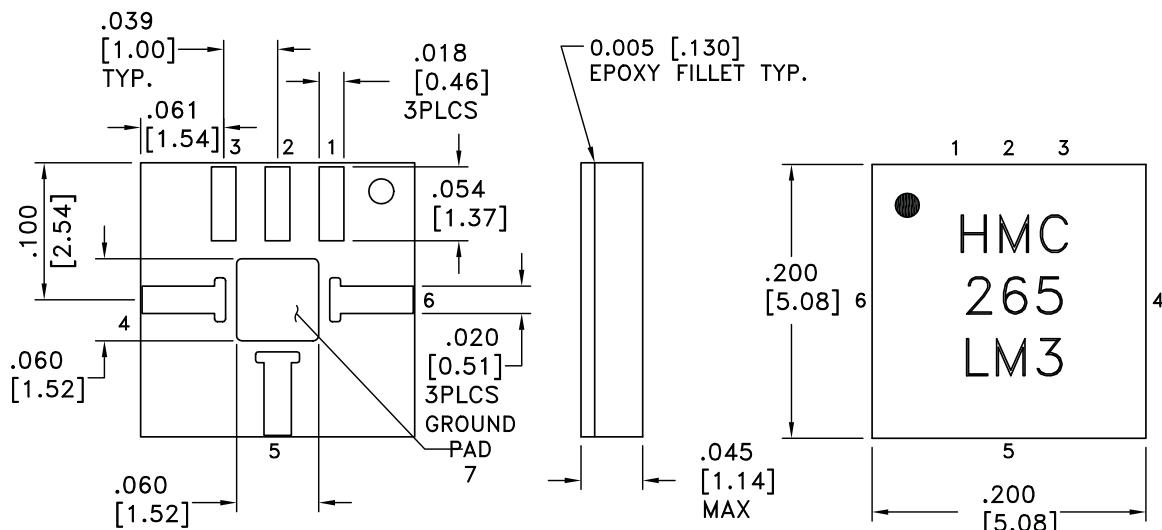


Absolute Maximum Ratings

| | |
|--|----------------|
| RF / IF Input (Vdd = +5V) | +13 dBm |
| LO Drive (Vdd = +5V) | +13 dBm |
| Vdd | 5.5V |
| Continuous Pdiss (Ta = 85 °C) (derate 2.52 mW/°C above 85 °C) | 227 mW |
| Storage Temperature | -65 to +150 °C |
| Operating Temperature | -40 to +85 °C |


**ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS**

Outline Drawing


NOTES:

1. MATERIAL: PLASTIC
2. PLATING: GOLD OVER NICKEL
3. DIMENSIONS ARE IN INCHES [MILLIMETERS].
4. ALL TOLERANCES ARE ± 0.005 [± 0.13].
5. ALL GROUNDS MUST BE SOLDERED TO PCB RF GROUND.
6. • INDICATES PIN 1

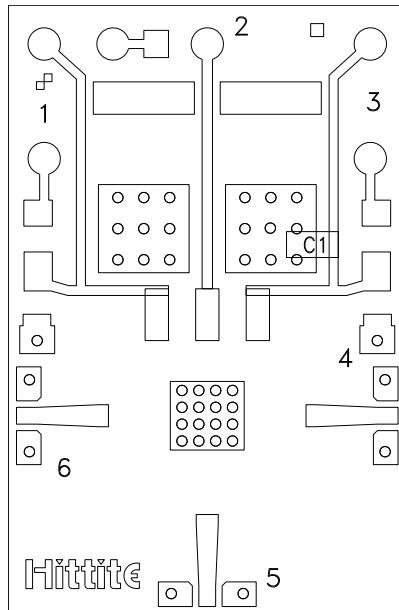

**GaAs MMIC SUB-HARMONIC
SMT MIXER, 20 - 31 GHz**

8

MIXERS - SUB-HARMONIC - SMT

Pin Description

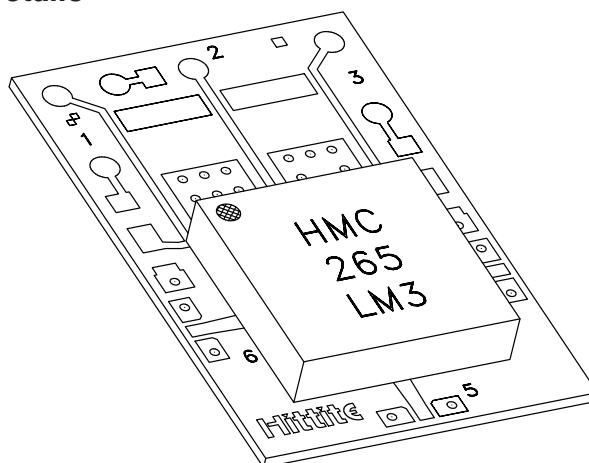
| Pin Number | Function | Description | Interface Schematic |
|------------|----------|---|---------------------|
| 1, 2 | N/C | This pin may be connected to the housing ground or left unconnected. | |
| 3 | Vdd | Power supply for the LO Amplifier. An external RF bypass capacitor of 100 - 330 pF is required as close to the package as possible. | |
| 4 | RF | This pin is AC coupled and matched to 50 Ohm from 20 - 30 GHz. | RF |
| 5 | IF | This pin is AC coupled and matched to 50 Ohm from 0.7 - 3 GHz. | IF |
| 6 | LO | This pin is AC coupled and matched to 50 Ohm from 10 - 15 GHz. | LO |
| 7 | GND | Must be soldered to PCB RF ground. | |


Evaluation PCB


The grounded Co-Planar Wave Guide (CPWG) PCB input/output transitions allow use of Ground-Signal-Ground (GSG) probes for testing. Suggested probe pitch is 400mm (16 mils). Alternatively, the board can be mounted in a metal housing with 2.4 mm coaxial connectors.

Evaluation Circuit Board Layout Design Details

| | |
|--------------------------|-----------------------------|
| Layout Technique | Micro Strip to CPWG |
| Material | Rogers 4003 with 1/2 oz. Cu |
| Dielectric Thickness | 0.008" (0.20 mm) |
| Microstrip Line Width | 0.018" (0.46 mm) |
| CPWG Line Width | 0.016" (0.41 mm) |
| CPWG Line to GND Gap | 0.005" (0.13 mm) |
| Ground Via Hole Diameter | 0.008" (0.20 mm) |
| C1 | 100 pF Capacitor, 0402 Pkg. |


LM3 package mounted to evaluation PCB



GaAs MMIC SUB-HARMONIC SMT MIXER, 20 - 31 GHz

Suggested LM3-01 PCB Land Pattern Tolerance: $\pm 0.003"$ (± 0.08 mm)

8

MIXERS - SUB-HARMONIC - SMT

FOOTPRINT LM3-01

UPDATED 12-06-01



GaAs MMIC SUB-HARMONIC SMT MIXER, 20 - 31 GHz

HMC265LM3 Recommended SMT Attachment Technique

Preparation & Handling of the LM3 Millimeterwave Package for Surface Mounting

The HMC LM3 package was designed to be compatible with high volume surface mount PCB assembly processes. The LM3 package requires a specific mounting pattern to allow proper mechanical attachment and to optimize electrical performance at millimeterwave frequencies. This PCB layout pattern can be found on each LM3 product data sheet. It can also be provided as an electronic drawing upon request from Hittite Sales & Application Engineering.

Follow these precautions to avoid permanent damage:

Cleanliness: Observe proper handling procedures to ensure clean devices and PCBs. LM3 devices should remain in their original packaging until component placement to ensure no contamination or damage to RF, DC & ground contact areas.

Static Sensitivity: Follow ESD precautions to protect against ESD strikes.

General Handling: Handle the LM3 package on the top with a vacuum collet or along the edges with a sharp pair of bent tweezers. Avoiding damaging the RF, DC, & ground contacts on the package bottom. Do not apply excess pressure to the top of the lid.

Solder Materials & Temperature Profile: Follow the information contained in the application note. Hand soldering is not recommended. Conductive epoxy attachment is not recommended.

Solder Paste

Solder paste should be selected based on the user's experience and be compatible with the metallization systems used. See the LM3 data sheet Outline drawing for pin & ground contact metallization schemes.

Solder Paste Application

Solder paste is generally applied to the PCB using either a stencil printer or dot placement. The volume of solder paste will be dependent on PCB and component layout and should be controlled to ensure consistent mechanical & electrical performance. Excess solder may create unwanted electrical parasitics at high frequencies.

Solder Reflow

The soldering process is usually accomplished in a reflow oven but may also use a vapor phase process. A solder reflow profile is suggested above.

Prior to reflowing product, temperature profiles should be measured using the same mass as the actual assemblies. The thermocouple should be moved to various positions on the board to account for edge and corner effects and varying component masses. The final profile should be determined by mounting the thermocouple to the PCB at the location of the device.

Follow solder paste and oven vendor's recommendations when developing a solder reflow profile. A standard profile will have a steady ramp up from room temperature to the pre-heat temperature to avoid damage due to thermal shock. Allow enough time between reaching pre-heat temperature and reflow for the solvent in the paste to evaporate and the flux to completely activate. Reflow must then occur prior to the flux being completely driven off. The duration of peak reflow temperature should not exceed 15 seconds. Packages have been qualified to withstand a peak temperature of 235°C for 15 seconds. Verify that the profile will not expose device to temperatures in excess of 235°C.

Cleaning

A water-based flux wash may be used.

