

M64893AGP

SERIAL INPUT PLL FREQUENCY SYNTHESIZER FOR TV/VCR

REJ03F0008-0100Z

Rev.1.00

Jul.25.2003

Description

The M64093FP is a semiconductor integrated circuit consisting of PLL frequency synthesizer for TV/VCR using Bi-CMOS process. It contains prescaler with operating up to. 1.0 GHz, 4 band driver and a tuning amplifier for direct tuning.


Features

- 4 integrated PNP band switching drivers ($I_o = 40 \text{ mA}$, $V_{sat} = 0.2 \text{ V typ@Vcc1 to 13.2 V}$)
- Built-in tuning amplifier for direct tuning (33 V)
- Low power dissipation ($I_{cc} = 24 \text{ mA}$, at $V_{cc} = 5 \text{ V}$)
- Built-in prescaler with input amplifier ($F_{max} = 1.0 \text{ GHz}$)
- PLL lock/unlock status display output (built-in pull-up resistor)
- Reference driver (Division ratio 1/640)
- Serial data input (3 wire Bus)
- Built-in power on reset
- 16pin –plastic mold mini flat package (16pin SSOP)
- Without protection diode at CLK,DATA,ENA

Application

- TV,VCR tuners


Block Diagram

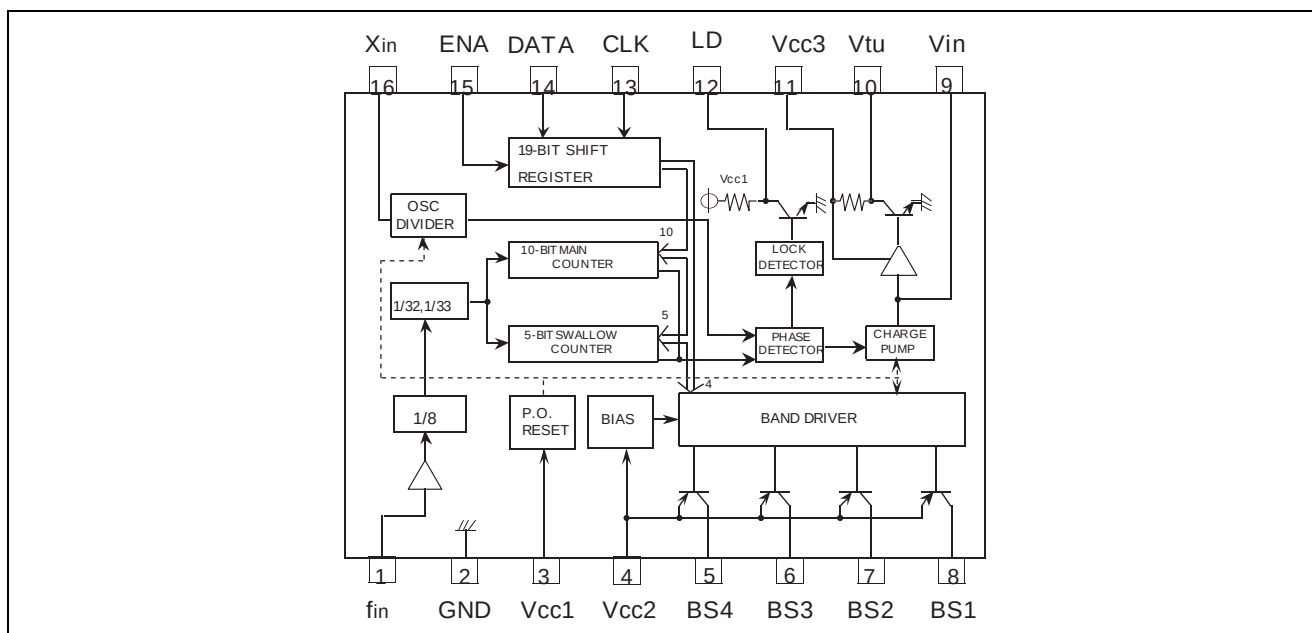

Pin Description

Symbol	Pin No.	Pin name	Function
fin	1	Prescaler input	Input for the VCO frequency.
GND	2	GND	Ground to 0 V
Vcc1	3	Power supply voltage 1	Power supply voltage terminal. 5.0 V+/-0.5 V
Vcc2	4	Power supply voltage 2	Power supply voltage terminal. Vcc1 to 13.2 V
BS4	5	Band switching outputs	PNP open collector method is used. When the band switching data is "H", the output is "ON". When it is "L", the output is "OFF".
BS3	6		
BS2	7		
BS1	8		
Vin	9	Filter input (Charge pump output)	This is the output terminal for the LPF input and charge pump output. When the phase of the programmable divider output (f_1/N) is lead compared to the reference frequency (f_{ref}), the "source" current state becomes active. If it is lag, the same, the high impedance state becomes active.
Vtu	10	Tuning output	This supplies the tuning voltage.
Vcc3	11	Power supply voltage 3	Power supply voltage for tuning voltage 28 to 35 V
LD	12	Lock detect output	When 19 bit data is input, lock detector is output. When 27 bit data is input, lock detector is output. the programmable divider output and reference divider output is selected by the test mode.
CLOCK	13	Clock input	Data is read into the shift register when the clock signal falls.
DATA	14	Data input	Input for band SW and programmable freq. divider set falls.
ENABLE	15	Enable input	This is normally at an "L". When this is at "H", data and clock signals are received. Data is read into the latch when the 19th pulse of the clock signal falls.
X in	16	This is connected to the Crystal oscillator.	4.0MHz crystal oscillator connected.

Pin Arrangement

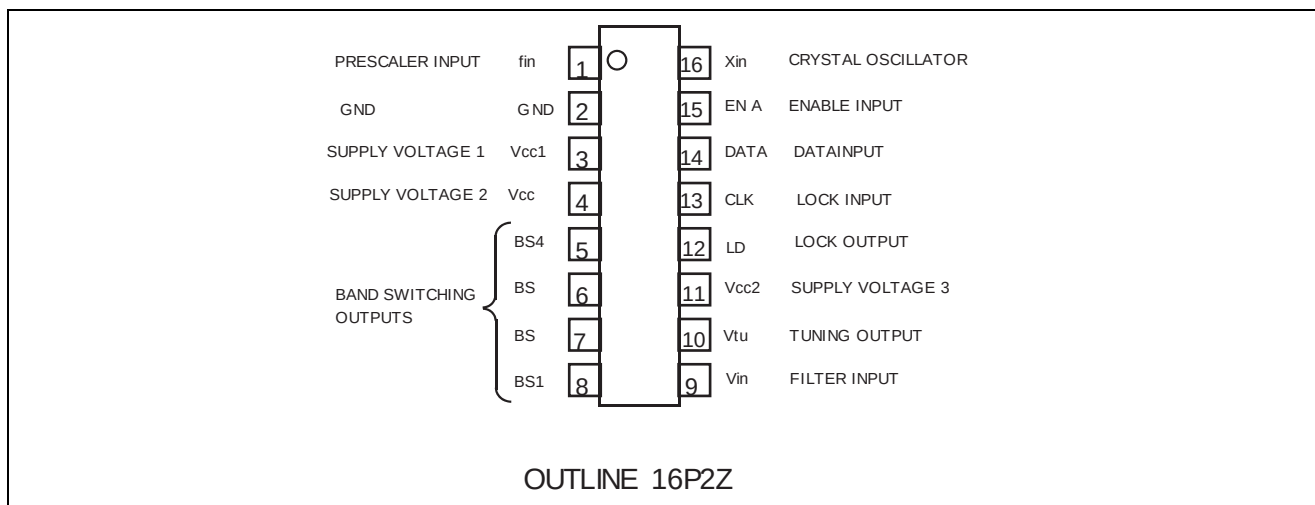


Method of Setting Data

The programmable divider uses 15bits Setting up the band switching output uses 4bits.

The test mode data use s 8bits. The total bits used is 27bits. Data is read in when the enable signal is “H” and the clock signal falls.

The band switching data is read in the 4th pulse of the clock signal. The programmable driver data is read into the fall of the 19th pulse of the clock signal .When the enable signal goes to “L” Before the 19th pulse of the enable signal, only the band switching data is updated and other data is ignored.

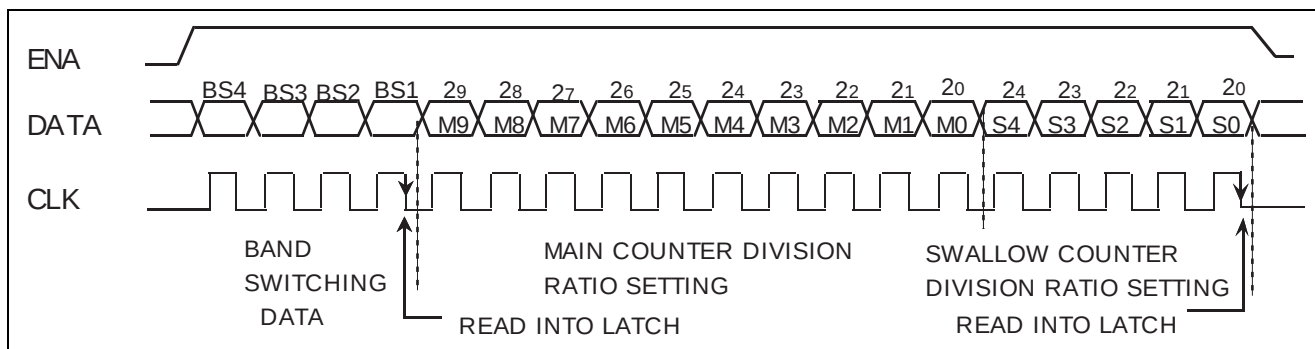

How to Set The Dividing Ratio of The Programmable Divider

Total division N is given by the following from formulas in addition to the prescaler used the previous stage.

$$N = 8 \cdot (32M + S) \quad \begin{array}{l} M: 10 \text{ bit main counter division} \\ S: 5 \text{ bit swallow counter division} \end{array}$$

The M and S counters are binary the possible ranges of division are follows.

$$32 \leq M \leq 1023$$

$$0 \leq S \leq 31$$

Therefore, the range of division N is 8,192 to 262,136.


The tuning frequency f_{vco} is given in the following equations.

$$\begin{aligned} f_{vco} &= f_{ref} \cdot N \\ &= 6.25 \cdot 8 \cdot (32M + S) \\ &= 50.0 \cdot 8 \cdot (32M + S) \quad [\text{KHz}] \end{aligned}$$

Therefore, the tuning frequency range is from 51.2 MHz to 1000 MHz

Test Mode Data Set Up Method

The data for the test mode uses from 20 to 27 bits. Data is latched when the 27th clock signal falls.

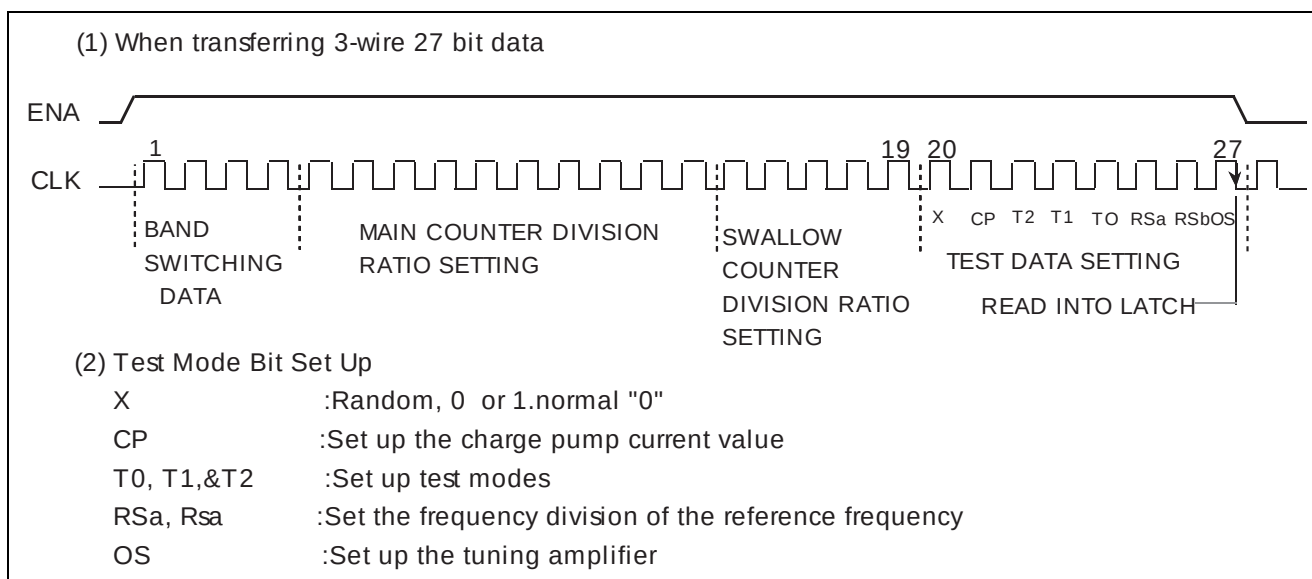

Setting Up the Charge Pump Current of The Phase Comparator

CP	Charge pump current	Mode
0	50 μ A	Normal
1	250 μ A	Test

Setting Up The Test Mode

T2	T1	T0	Charge pump	12 pin output	Mode
0	0	X	Normal operation	LD	Test
0	1	X	High impedance	LD	Test
1	1	0	Sink	LD	Test
1	1	1	Source	LD	Test
1	0	0	High impedance	fref	Test
1	0	1	High impedance	f1/N	Test

Set Up for The Reference Frequency Division Radio

RSa	RSb	Division radio
0	1	1/512
1	1	1/1024
X	0	1/640


Set Up The Tuning Amplifier

OS	Tuning voltage output	mode
0	ON	Normal
1	OFF	Test


Power On Reset Operation (Initial State The Power is Turned ON)

- BS4 to BS1 :OFF
- Charge pump :high impedance
- Tuning amplifier :OFF
- Charge pump current :250 μ A
- Frequency division radio :1/640
- Lock output :H

Timing Diagram

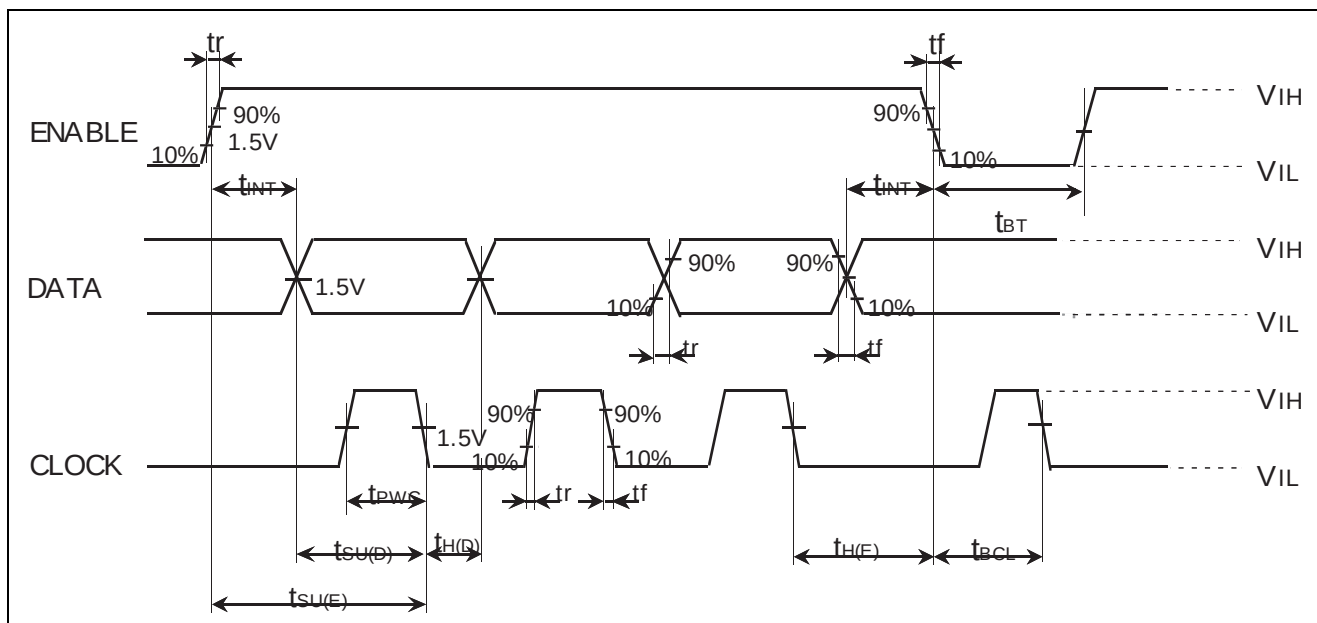

Crystal Oscillator Connection Diagram

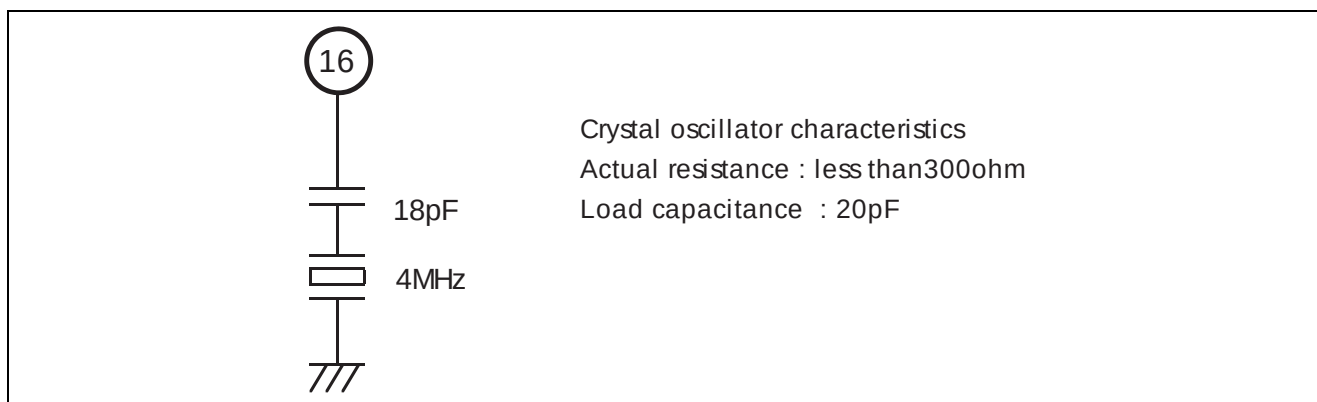

Absolute Maximum Ratings

(Ta = -20°C to 75°C unless otherwise noted)

Parameter	Symbols	Max.ratings	Units	Conditions
Standby voltage1	Vcc1	6.0	V	Pin3
Standby voltage2	Vcc2	14.4	V	Pin4
Standby voltage3	Vcc3	36.0	V	Pin11
Input voltage	VI	6.0	V	Not to exceed Vcc1
Output voltage	V _{BSOFF}	6.0	V	Pin 12
Voltage applied when the band output current is OFF	I _{BSON}	14.4	V	
Band output current	t _{BSON}	50.0	mA	Per 1 band output circuit
ON the time when the band output is ON	Pd	10	sec	50 mA per 1 band output circuit 3 circuits are on at same time
Power dissipation	Topr	350	mW	Ta = 75°C
Operating temperature	Tstg	-20 to +75	°C	
Storage temperature	Tstg	-40 to +125	°C	

Recommended Operating Conditions

(Ta = -20°C to 75°C unless otherwise noted)

Parameter	Symbols	Ratings	Units	Conditions
	Vcc1	4.5 to 5.5	V	
Standby voltage1	Vcc2	5.0 to 3.2	V	
Standby voltage2	Vcc3	30 to 35	V	
Standby voltage3	fopr2	4.0	MHz	Crystal oscillation circuit
Operating frequency(1)	fopr2	80 to 100	MHz	
Operating frequency(2) Band output current 5 to 8	I _{BDL}	0 to 40	mA	Normally 1 circuit is on. 2 circuits on at the same time is max. It is prohibited to have 3 or more circuits turned on at the same time.

Electrical Characteristics

(Ta = -20°C to 75°C unless otherwise noted) Vcc1 = 5.0 V, Vcc = 12 V, Vcc3 = 33 V

Parameters	Symbol	Test pin	Test conditions	Limits			Unit
				Min	Typ	Max	
input terminals							
"H" input voltage	V _{IH}	13 to 15		3.0	—	Vcc1+0.3	V
"L" input voltage	V _{IL}	13 to 15		—	—	1.5	V
"H" input voltage	I _{IH}	13 to 15	Vcc1 = 5.5 V, Vi = 4.0 V	—	—	10	μA
"L" input current	I _{IL}	13 to 15	Vcc1 = 5.5 V, Vi = 0.4 V	—	-2	-10	μA
Lock output							
"H" output voltage	V _{OH}	12	Vcc1 = 5.5 V	5.0	—	—	V
"L" output voltage	V _{OL}	12	Vcc1 = 5.5 V	—	0.3	0.5	V
Band SW							
output voltage	V _{BS}	5 to 8	Vcc2 = 12 V I _o = -40 mA	11.6	11.8	—	V
Leak current	I _{OIK1}	5 to 8	Vcc2 = 12 V Band SW is OFF	—	—	1	μA
Tuning output			Vcc3 = 33 V				
output voltage "H"	V to H	10	Vcc3 = 33 V	32.5	—	—	V
output voltage "L"	V to L	10		—	0.2	0.4	V
Charge pump			Vcc1 = 5.0 V Vo = 1 V				
"H" output current	I _{OH}	9	Vcc1 = 5.0 V Vo = 1 V	—	±250	±470	μA
"L" output current	I _{OL}	9	Vcc1 = 5.0 V Vo = 2.5 V	—	±50	±130	μA
Leak current	I _{cpLK}	9		—	—	±50	nA
Supply current 1	I _{CC1}		Vcc1 = 5.5 V	—	24	31	mA
Supply current 2							
4 circuits OFF	I _{CC2A}	4	Vcc2 = 12 V	—	—	0.5	mA
1 circuit ON,							
Output open	I _{CC2B}	4	Vcc2 = 12 V	—	5.0	6.0	mA
Output current 40mA	I _{CC2C}	4	Vcc2 = 12 V I _o = -40 mA	—	45.0	46.0	mA
Supply current 3	I _{CC3C}	11	Vcc3 = 33 V Output ON	—	3.6	4.5	mA


Note: The typical values are at Vcc1 = 5.0 V, Vcc2 = 12 V, Vcc3 = 33 V, Ta = 25°C

Switching Characteristics


(Ta = -20°C to 75°C, Vcc1 = 5.0 V, Vcc = 12 V, Vcc3 = 33 V, unless otherwise noted)

Parameter	Symbol	Test pin	Test conditions	Limits			Unit used
				Min	Min	Max	
Prescaler operating frequency	fopr	1	Vcc1 = 4.5 to 5.5 V	80		1000	MHz
		1	Vin = Vinmin to Vinmax				
Operating input voltage	Vin	13	Vcc = 4.5 to 5.5 V				dBm
			80 to 100 MHz	-24	—	4	
			100 to 200 MHz	-27	—	4	
			200 to 800 MHz	-30	—	4	
			800 to 1000 MHz	-27	—	4	
			1000 to 1300 MHz	-24	—	4	
Clock pulse width	t PWC	14	Vcc1 = 4.5 to 5.5 V	1	—	—	μs
Data setup time	t SU(D)	14	Vcc1 = 4.5 to 5.5 V	2	—	—	μs
Data hold time	t H(D)	15	Vcc1 = 4.5 to 5.5 V	1	—	—	μs
Enable setup time	t SU(E)	15	Vcc1 = 4.5 to 5.5 V	3	—	—	μs
Enable hold time	t H(E)	15,14	Vcc1 = 4.5 to 5.5 V	3	—	—	μs
Enable data interval time	t INT	13,14,15	Vcc1 = 4.5 to 5.5 V	1	—	—	μs
Rise time	tr	13,14,15	Vcc1 = 4.5 to 5.5 V	—	—	1	μs
Fall time	tf	15	Vcc1 = 4.5 to 5.5 V	—	—	1	μs
Next enable prohibit time	tbt	13,15	Vcc1 = 4.5 to 5.5 V	5	—	—	μs
Next clock prohibit time	tbcl		Vcc1 = 4.5 to 5.5 V	5	—	—	μs

Application Example

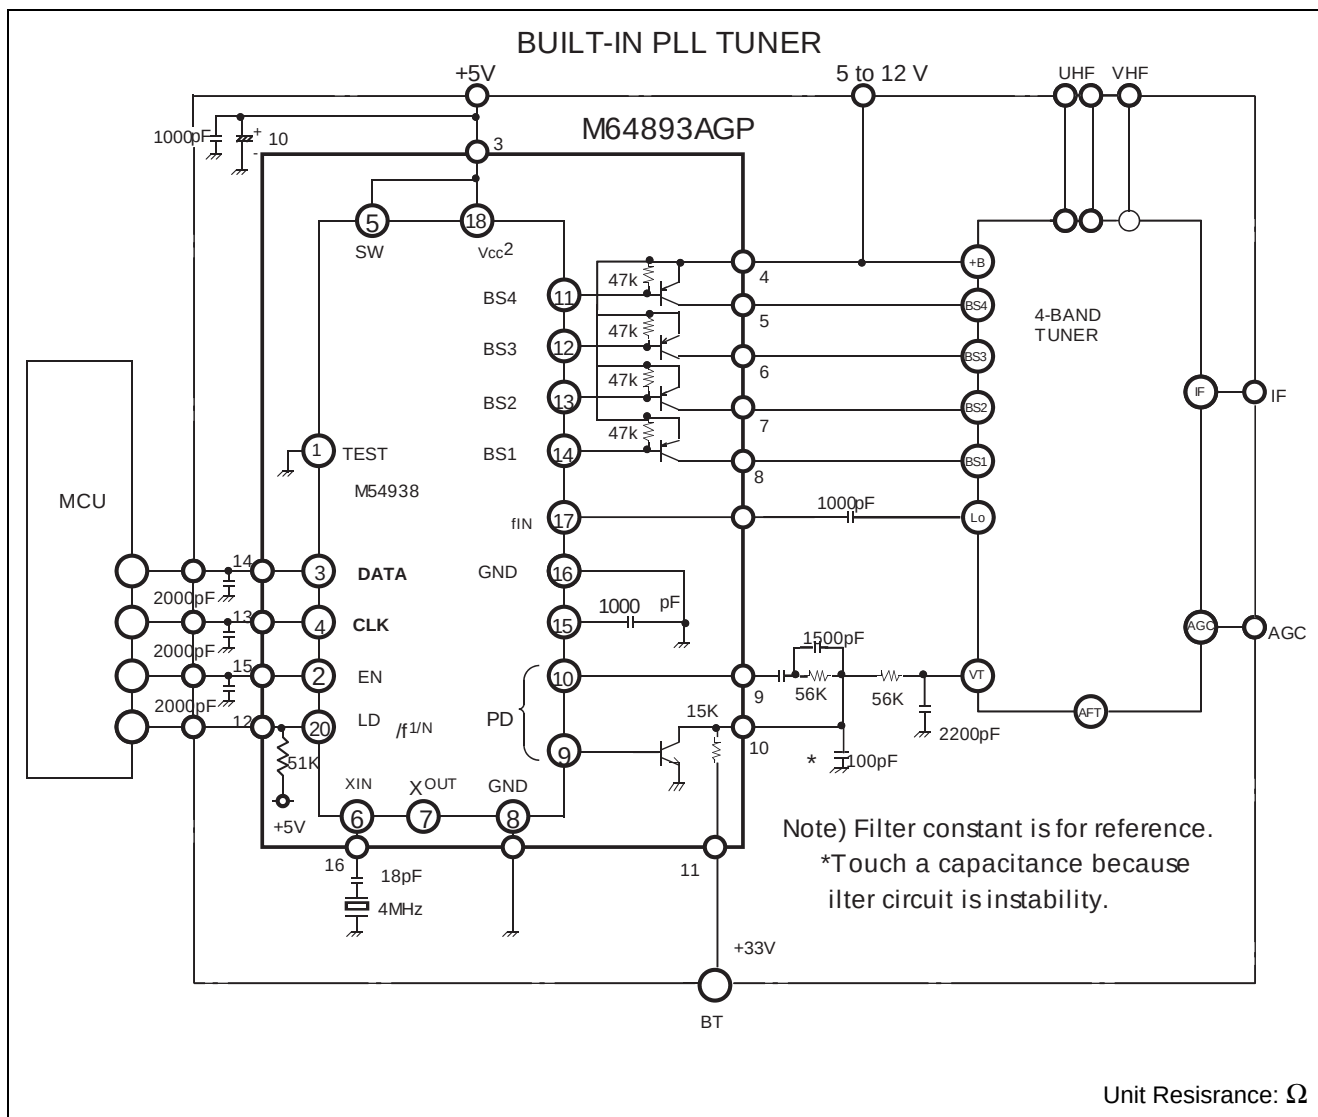

Package Dimensions

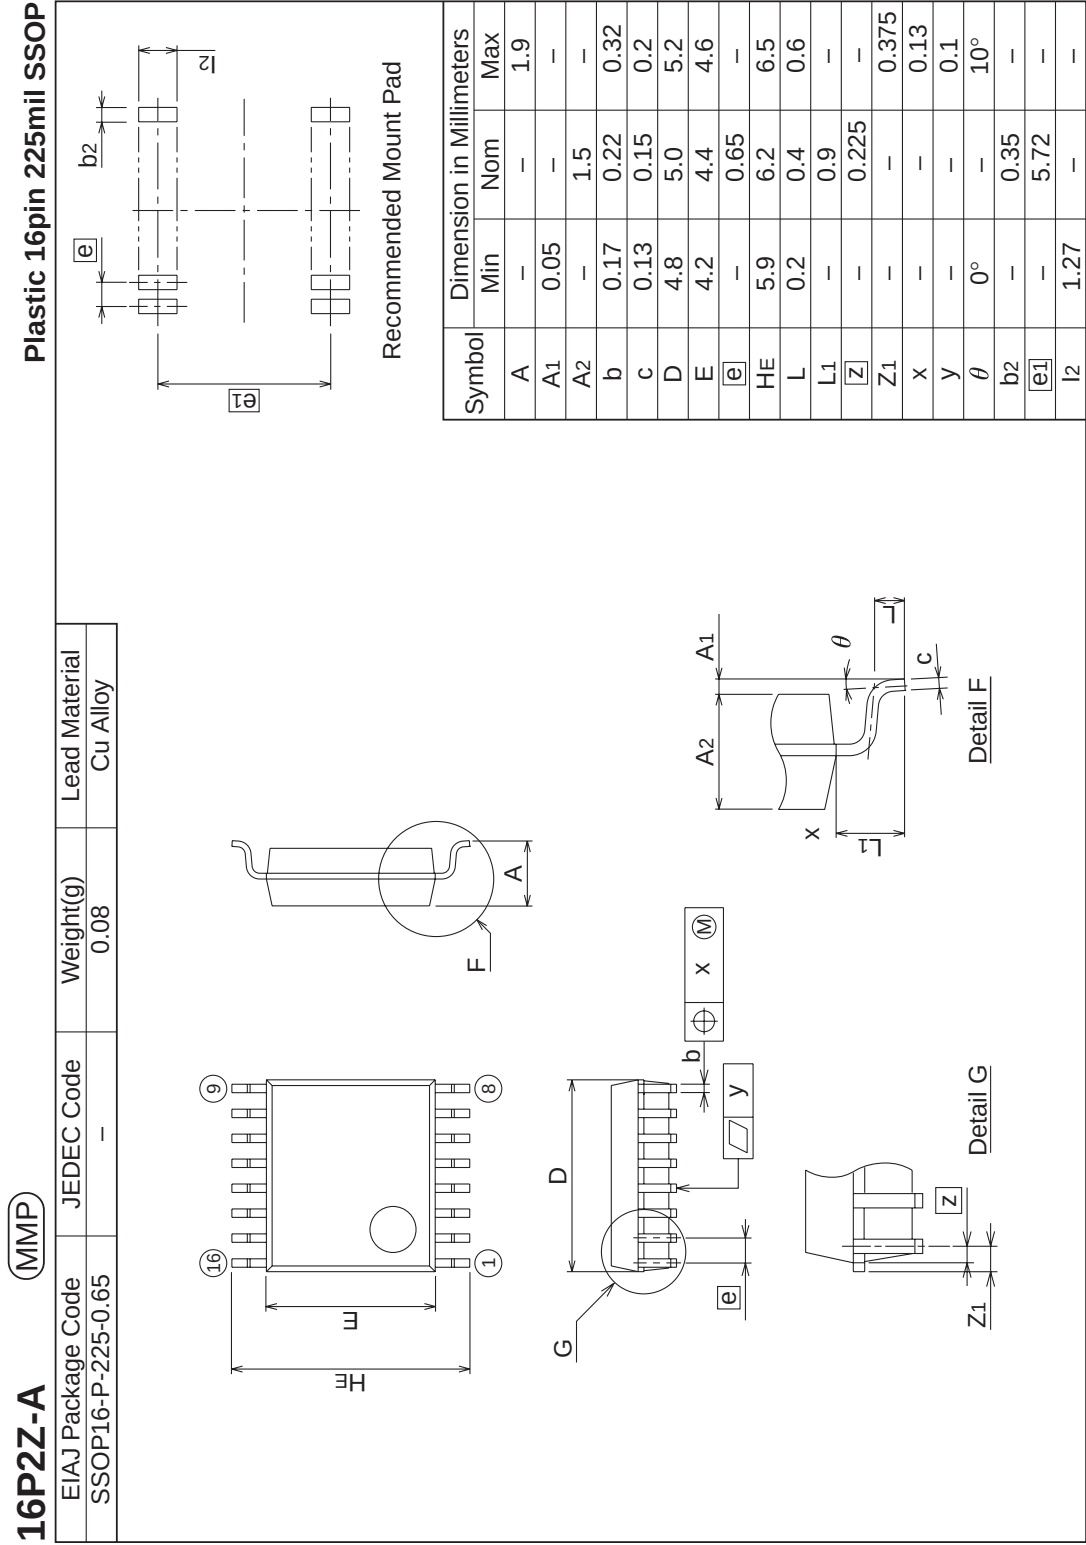

Renesas Technology Corp. Sales Strategic Planning Div. Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan

Keep safety first in your circuit designs!

1. Renesas Technology Corp. puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage.
Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of nonflammable material or (iii) prevention against any malfunction or mishap.

Notes regarding these materials

1. These materials are intended as a reference to assist our customers in the selection of the Renesas Technology Corp. product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Renesas Technology Corp. or a third party.
2. Renesas Technology Corp. assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.
3. All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Renesas Technology Corp. without notice due to product improvements or other reasons. It is therefore recommended that customers contact Renesas Technology Corp. or an authorized Renesas Technology Corp. product distributor for the latest product information before purchasing a product listed herein.
The information described here may contain technical inaccuracies or typographical errors.
Renesas Technology Corp. assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors.
Please also pay attention to information published by Renesas Technology Corp. by various means, including the Renesas Technology Corp. Semiconductor home page (<http://www.renesas.com>).
4. When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Renesas Technology Corp. assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.
5. Renesas Technology Corp. semiconductors are not designed or manufactured for use in a device or system that is used under circumstances in which human life is potentially at stake. Please contact Renesas Technology Corp. or an authorized Renesas Technology Corp. product distributor when considering the use of a product contained herein for any specific purposes, such as apparatus or systems for transportation, vehicular, medical, aerospace, nuclear, or undersea repeater use.
6. The prior written approval of Renesas Technology Corp. is necessary to reprint or reproduce in whole or in part these materials.
7. If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination.
Any diversion or reexport contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.
8. Please contact Renesas Technology Corp. for further details on these materials or the products contained therein.



RENESAS SALES OFFICES

<http://www.renesas.com>

Renesas Technology America, Inc.
450 Holger Way, San Jose, CA 95134-1368, U.S.A
Tel: <1> (408) 382-7500 Fax: <1> (408) 382-7501

Renesas Technology Europe Limited.
Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, United Kingdom
Tel: <44> (1628) 585 100, Fax: <44> (1628) 585 900

Renesas Technology Europe GmbH
Dornacher Str. 3, D-85622 Feldkirchen, Germany
Tel: <49> (89) 380 70 0, Fax: <49> (89) 929 30 11

Renesas Technology Hong Kong Ltd.
7/F., North Tower, World Finance Centre, Harbour City, Canton Road, Hong Kong
Tel: <852> 2265-6688, Fax: <852> 2375-6836

Renesas Technology Taiwan Co., Ltd.
FL 10, #99, Fu-Hsing N. Rd., Taipei, Taiwan
Tel: <886> (2) 2715-2888, Fax: <886> (2) 2713-2999

Renesas Technology (Shanghai) Co., Ltd.
26/F., Ruijin Building, No.205 Maoming Road (S), Shanghai 200020, China
Tel: <86> (21) 6472-1001, Fax: <86> (21) 6415-2952

Renesas Technology Singapore Pte. Ltd.
1, Harbour Front Avenue, #06-10, Keppel Bay Tower, Singapore 098632
Tel: <65> 6213-0200, Fax: <65> 6278-8001