



**MCP73X23**  
**Lithium Iron Phosphate (LiFePO<sub>4</sub>)**  
**Battery Charger**  
**Evaluation Board**  
**User's Guide**

---

**Note the following details of the code protection feature on Microchip devices:**

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as "unbreakable."

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

---

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights.

#### **Trademarks**

The Microchip name and logo, the Microchip logo, dsPIC, KEELOQ, KEELOQ logo, MPLAB, PIC, PICmicro, PICSTART, rfPIC and UNI/O are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

FilterLab, Hampshire, HI-TECH C, Linear Active Thermistor, MXDEV, MXLAB, SEEVAL and The Embedded Control Solutions Company are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Analog-for-the-Digital Age, Application Maestro, CodeGuard, dsPICDEM, dsPICDEM.net, dsPICworks, dsSPEAK, ECAN, ECONOMONITOR, FanSense, HI-TIDE, In-Circuit Serial Programming, ICSP, ICEPIC, Mindi, MiWi, MPASM, MPLAB Certified logo, MPLIB, MPLINK, mTouch, Omniscent Code Generation, PICC, PICC-18, PICKit, PICDEM, PICDEM.net, PICTail, PIC<sup>32</sup> logo, REAL ICE, rLAB, Select Mode, Total Endurance, TSHARC, WiperLock and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

All other trademarks mentioned herein are property of their respective companies.

© 2009, Microchip Technology Incorporated, Printed in the U.S.A., All Rights Reserved.

 Printed on recycled paper.

**QUALITY MANAGEMENT SYSTEM**  
**CERTIFIED BY DNV**  
**== ISO/TS 16949:2002 ==**

*Microchip received ISO/TS-16949:2002 certification for its worldwide headquarters, design and wafer fabrication facilities in Chandler and Tempe, Arizona; Gresham, Oregon and design centers in California and India. The Company's quality system processes and procedures are for its PIC® MCUs and dsPIC® DSCs, KEELOQ® code hopping devices, Serial EEPROMs, microperipherals, nonvolatile memory and analog products. In addition, Microchip's quality system for the design and manufacture of development systems is ISO 9001:2000 certified.*



# MCP73X23 LITHIUM IRON PHOSPHATE BATTERY CHARGER EVALUATION BOARD USER'S GUIDE

## Table of Contents

|                                                                                                              |           |
|--------------------------------------------------------------------------------------------------------------|-----------|
| <b>Preface</b> .....                                                                                         | <b>1</b>  |
| Introduction.....                                                                                            | 1         |
| Document Layout .....                                                                                        | 1         |
| Conventions Used in this Guide .....                                                                         | 2         |
| Recommended Reading.....                                                                                     | 2         |
| The Microchip Web Site .....                                                                                 | 3         |
| Customer Support .....                                                                                       | 3         |
| Document Revision History .....                                                                              | 3         |
| <b>Chapter 1. Product Overview</b>                                                                           |           |
| 1.1 Introduction .....                                                                                       | 5         |
| 1.2 What is the MCP73X23 Lithium Iron Phosphate Battery Battery Charger<br>Evaluation Board? .....           | 6         |
| 1.3 What the MCP73X23 Lithium Iron Phosphate Battery Battery Charger<br>Evaluation Board Kit Includes: ..... | 6         |
| <b>Chapter 2. Installation and Operation</b>                                                                 |           |
| 2.1 Introduction .....                                                                                       | 7         |
| 2.2 Features .....                                                                                           | 7         |
| 2.3 Getting Started .....                                                                                    | 8         |
| <b>Appendix A. Schematic and Layouts</b>                                                                     |           |
| A.1 Introduction .....                                                                                       | 11        |
| A.2 Board – Schematic .....                                                                                  | 12        |
| A.3 Board – Assembly Drawing .....                                                                           | 13        |
| A.4 Board – Top Layer .....                                                                                  | 14        |
| A.5 Board – Top Metal Layer .....                                                                            | 15        |
| A.6 Board – Bottom Layer .....                                                                               | 16        |
| <b>Appendix B. Bill Of Materials (BOM)</b>                                                                   |           |
| <b>Worldwide Sales and Service</b> .....                                                                     | <b>18</b> |

**NOTES:**



# MCP73X23 LITHIUM IRON PHOSPHATE BATTERY CHARGER EVALUATION BOARD USER'S GUIDE

## Preface

### NOTICE TO CUSTOMERS

All documentation becomes dated, and this manual is no exception. Microchip tools and documentation are constantly evolving to meet customer needs, so some actual dialogs and/or tool descriptions may differ from those in this document. Please refer to our web site ([www.microchip.com](http://www.microchip.com)) to obtain the latest documentation available.

Documents are identified with a “DS” number. This number is located on the bottom of each page, in front of the page number. The numbering convention for the DS number is “DSXXXXA”, where “XXXX” is the document number and “A” is the revision level of the document.

For the most up-to-date information on development tools, see the MPLAB® IDE on-line help. Select the Help menu, and then Topics to open a list of available on-line help files.

## INTRODUCTION

This chapter contains general information that will be useful to know before using the MCP73X23 Lithium Iron Phosphate Battery Charger Evaluation Board. Items discussed in this chapter include:

- Document Layout
- Conventions Used in this Guide
- Recommended Reading
- The Microchip Web Site
- Customer Support
- Document Revision History

## DOCUMENT LAYOUT

This document describes how to use the MCP73X23 Lithium Iron Phosphate Battery Charger Evaluation Board. The manual layout is as follows:

- **Chapter 1. “Product Overview”** – Important information about the MCP73X23 Lithium Iron Phosphate Battery Charger Evaluation Board.
- **Chapter 2. “Installation and Operation”** – Includes instructions on how to get started with this user's guide and a description of the user's guide.
- **Appendix A. “Schematic and Layouts”** – Shows the schematic and layout diagrams for the MCP73X23 Lithium Iron Phosphate Battery Charger Evaluation Board.
- **Appendix B. “Bill Of Materials (BOM)”** – Lists the parts used to build the MCP73X23 Lithium Iron Phosphate Battery Charger Evaluation Board.

## CONVENTIONS USED IN THIS GUIDE

This manual uses the following documentation conventions:

### DOCUMENTATION CONVENTIONS

| Description                                      | Represents                                                 | Examples                                                    |
|--------------------------------------------------|------------------------------------------------------------|-------------------------------------------------------------|
| <b>Arial font:</b>                               |                                                            |                                                             |
| Italic characters                                | Referenced books                                           | <i>MPLAB® IDE User's Guide</i>                              |
|                                                  | Emphasized text                                            | ...is the <i>only</i> compiler...                           |
| Initial caps                                     | A window                                                   | the Output window                                           |
|                                                  | A dialog                                                   | the Settings dialog                                         |
|                                                  | A menu selection                                           | select Enable Programmer                                    |
| Quotes                                           | A field name in a window or dialog                         | "Save project before build"                                 |
| Underlined, italic text with right angle bracket | A menu path                                                | <u>File&gt;Save</u>                                         |
| Bold characters                                  | A dialog button                                            | Click <b>OK</b>                                             |
|                                                  | A tab                                                      | Click the <b>Power</b> tab                                  |
| 'bnnnn'                                          | A binary number where <i>n</i> is a digit                  | 'b00100, 'b10                                               |
| Text in angle brackets < >                       | A key on the keyboard                                      | Press <Enter>, <F1>                                         |
| <b>Courier font:</b>                             |                                                            |                                                             |
| Plain Courier                                    | Sample source code                                         | #define START                                               |
|                                                  | Filenames                                                  | autoexec.bat                                                |
|                                                  | File paths                                                 | c:\mcc18\h                                                  |
|                                                  | Keywords                                                   | _asm, _endasm, static                                       |
|                                                  | Command-line options                                       | -Opa+, -Opa-                                                |
|                                                  | Bit values                                                 | 0, 1                                                        |
| Italic Courier                                   | A variable argument                                        | <i>file</i> .o, where <i>file</i> can be any valid filename |
| 0xn timer                                        | A hexadecimal number where <i>n</i> is a hexadecimal digit | 0xFFFF, 0x007A                                              |
| Square brackets [ ]                              | Optional arguments                                         | mcc18 [options] <i>file</i> [options]                       |
| Curly brackets and pipe character: {   }         | Choice of mutually exclusive arguments; an OR selection    | errorlevel {0 1}                                            |
| Ellipses...                                      | Replaces repeated text                                     | var_name [, var_name...]                                    |
|                                                  | Represents code supplied by user                           | void main (void)<br>{ ...<br>}                              |

## RECOMMENDED READING

This user's guide describes how to use MCP73X23 Lithium Iron Phosphate Battery Charger Evaluation Board. The following Microchip document is recommended as supplemental reference resources.

**MCP73123/223 Data Sheet, "Lithium Iron Phosphate (LiFePO<sub>4</sub>) Battery Charge Management Controller with Input Overvoltage Protection", DS22191**

This data sheet provides detailed information regarding the MCP73123/223 product family.

## THE MICROCHIP WEB SITE

Microchip provides online support via our web site at [www.microchip.com](http://www.microchip.com). This web site is used as a means to make files and information easily available to customers. Accessible by using your favorite Internet browser, the web site contains the following information:

- **Product Support** – Data sheets and errata, application notes and sample programs, design resources, user's guides and hardware support documents, latest software releases and archived software
- **General Technical Support** – Frequently Asked Questions (FAQs), technical support requests, online discussion groups, Microchip consultant program member listing
- **Business of Microchip** – Product selector and ordering guides, latest Microchip press releases, listing of seminars and events, listings of Microchip sales offices, distributors and factory representatives

## CUSTOMER SUPPORT

Users of Microchip products can receive assistance through several channels:

- Distributor or Representative
- Local Sales Office
- Field Application Engineer (FAE)
- Technical Support
- Development Systems Information Line

Customers should contact their distributor, representative or field application engineer (FAE) for support. Local sales offices are also available to help customers. A listing of sales offices and locations is included in the back of this document.

Technical support is available through the web site at: <http://support.microchip.com>

## DOCUMENT REVISION HISTORY

### Revision A (July 2009)

- Initial Release of this Document.

**NOTES:**


## Chapter 1. Product Overview

### 1.1 INTRODUCTION

The MCP73123/223 product family is highly integrated linear charge management controllers for lithium iron phosphate (LiFePO<sub>4</sub>) batteries. The MCP73123/223 product family operates with minimum external components, which is ideal for use in space-limited and cost-effective applications. The maximum 18V rated input over voltage protection and battery short circuit protection offer designers a secondary protection in addition to the Li-Ion battery protection circuit.

This chapter provides an overview of the MCP73X23 Lithium Iron Phosphate Battery Charger Evaluation Board and covers the following topics:

- “What is the MCP73X23 Lithium Iron Phosphate Battery Charger Evaluation Board?”
- “What the MCP73X23 Lithium Iron Phosphate Battery Charger Evaluation Board Kit Includes”

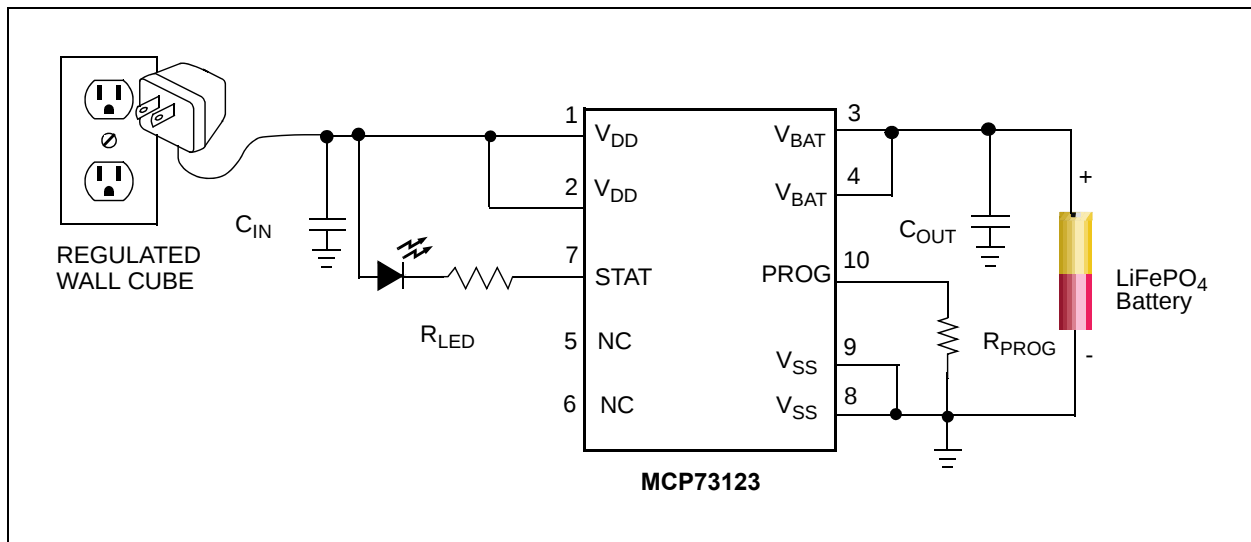

**FIGURE 1-1:** MCP73123 Typical Application.

### 1.2 WHAT IS THE MCP73X23 LITHIUM IRON PHOSPHATE BATTERY CHARGER EVALUATION BOARD?

The MCP73X23 Lithium Iron Phosphate Battery Charger Evaluation Board demonstrates the features of Microchip's MCP73123 and MCP73223 "**Lithium Iron Phosphate (LiFePO<sub>4</sub>) Battery Charge Management Controller with Input Overvoltage Protection**".

The MCP73X23 Lithium Iron Phosphate Battery Charger Evaluation Board is designed with two independent circuits. The MCP73123 is designed to charge a single-cell LiFePO<sub>4</sub> battery, while the MCP73223 charges a dual-cell LiFePO<sub>4</sub> battery. Both circuits offer two different fast charging currents. The default value of fast charging current is 500 mA and when PROG via is tie to ground, the two parallel resistors output 1000 mA fast charging current to a battery pack. One blue LED status output allows user to learn if the MCP73123/223 is in charging state or not.

|                                                                                                                                   |
|-----------------------------------------------------------------------------------------------------------------------------------|
| <b>Note:</b> Please refer to Table 2-2 for Charge Status Outputs and Table 2-1 for Fast Charge Current vs. Resistor Lookup Table. |
|-----------------------------------------------------------------------------------------------------------------------------------|

The MCP73X23 Lithium Iron Phosphate Battery Charger Evaluation Board comes with installed MCP73123 and MCP73223 devices in 3 mm x 3 mm DFN packages. The factory preset battery regulation voltage is 3.6V for the MCP73123 and 7.2V for the MCP73223 with 10% precondition current, 10% termination current set point, automatic recharge and 6.5V over voltage protection threshold voltage.

The MCP73X23 Lithium Iron Phosphate Battery Charger Evaluation Board is designed to observe the performance and features of Microchip's MCP73123 and MCP73223. Circuits can also be implemented into suitable applications without extra work.

### 1.3 WHAT THE MCP73X23 LITHIUM IRON PHOSPHATE BATTERY CHARGER EVALUATION BOARD KIT INCLUDES

The MCP73X23 Lithium Iron Phosphate Battery Charger Evaluation Board kit includes:

- MCP73X23 Lithium Iron Phosphate Battery Charger Evaluation Board, 102-00262
- Important Information Sheet.

---

## Chapter 2. Installation and Operation

---

### 2.1 INTRODUCTION

The MCP73123/223 is a highly integrated Li-Ion battery charge management controller for use in space-limited and cost-sensitive applications. The MCP73123/223 provides specific charge algorithms for Lithium Iron Phosphate batteries to achieve optimal capacity and safety in the shortest charging time possible. Along with its small physical size, the low number of external components makes the MCP73123/223 ideally suitable for low-cost and small-capacity (less than 2000 mAh) LiFePO<sub>4</sub> battery applications. It will take longer time to complete a charge cycle for larger capacity LiFePO<sub>4</sub> battery packs.

The absolute maximum voltage, up to 18V over voltage protection, allows the use of MCP73123/223 in harsh environments, such as low cost ac-dc adapter.

The MCP73123/223 employs a constant current / constant voltage (CC-CV) charge algorithm and 3.6V per cell voltage regulations. The fast charge, constant current value is set with one external resistor from 130 mA to 1100 mA. The MCP73123/223 also limits the charge current based on die temperature during high power or high ambient conditions. This thermal regulation optimizes the charge cycle time while maintaining device reliability.

The PROG pin of the MCP73123/223 also serves as enable pin. When high impedance (typ. 200 kΩ) is applied, the MCP73123/223 will be in standby mode.

Typical applications for the reference design are Toys, Power Tools, Uninterrupt Power Supply, Backup Power Storage and applications in wider temperature range than typical Li-Ion batteries.

### 2.2 FEATURES

The MCP73X23 Lithium Iron Phosphate Battery Charger Evaluation Board has the following features:

- Input Over Voltage Protection:
  - 6.5V for the MCP73123,
  - 13V for the MCP73223
- Charge Regulation Voltage:
  - 3.6V for the MCP73123,
  - 7.2V for the MCP73223
- 10% Preconditioning of Deeply Depleted Cells
- 32-Minute Preconditioning Timer
- 6-Hour Safety Timer
- 10% Automatic Charge Termination
- 500 mA and 1000 mA Preset Fast Charge Current
- Automatic Recharge
- Thermal Regulation
- One Blue LED Charge Status Indicator For Each Circuit
- Pre-installed MCP73123 and MCP73223 Devices

## 2.3 GETTING STARTED

The MCP73X23 Lithium Iron Phosphate Battery Charger Evaluation Board is fully assembled and tested for charging LiFePO<sub>4</sub> batteries.

### 2.3.1 Power Input and Output Connection

#### 2.3.1.1 POWERING THE MCP73X23 LITHIUM IRON PHOSPHATE BATTERY CHARGER EVALUATION BOARD


1. Connect the positive battery terminal to V<sub>BAT+</sub> and negative battery terminal to V<sub>BAT-</sub>.
2. Connect the DC power supply Negative Terminal to V<sub>SS</sub>.
3. Connect the DC power supply Positive Terminal to V<sub>DD</sub>.
4. It should initiate the battery charging cycle when the power source is present and V<sub>BAT</sub> is below recharge threshold. For example, When V<sub>REG</sub> is 3.6V, V<sub>BAT</sub> needs to be lower than 3.42V to initiate the charge cycle.

**Note 1:** The MCP73123 circuit is designed to charge one-cell LiFePO<sub>4</sub> battery and the MCP73223 circuit is designed to charge two-cell LiFePO<sub>4</sub> battery.


**2:** The LiFePO<sub>4</sub> battery can be replaced with test circuit or electronic load that can sink current with DC power supply. Refer to Figure 2-3.

5. The charging status table is available on Table 2-2.
6. The fast charge current is preset at 500 mA and can be increased to 1A by connecting PROG via to ground.

**Note:** Fast Charge Current can be programmed with various resistors based on Figure 2-2 and Table 2-2.

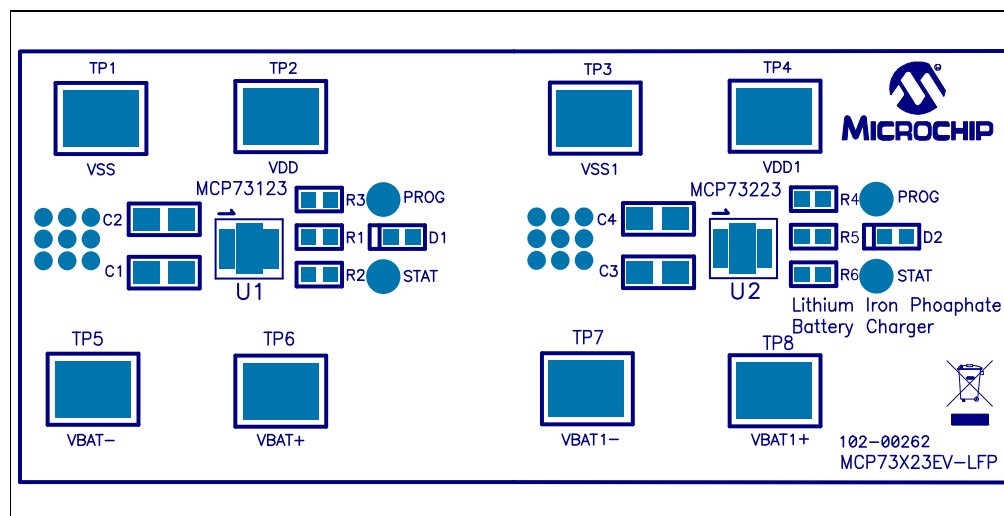


**FIGURE 2-1:** Board Top Assembly.

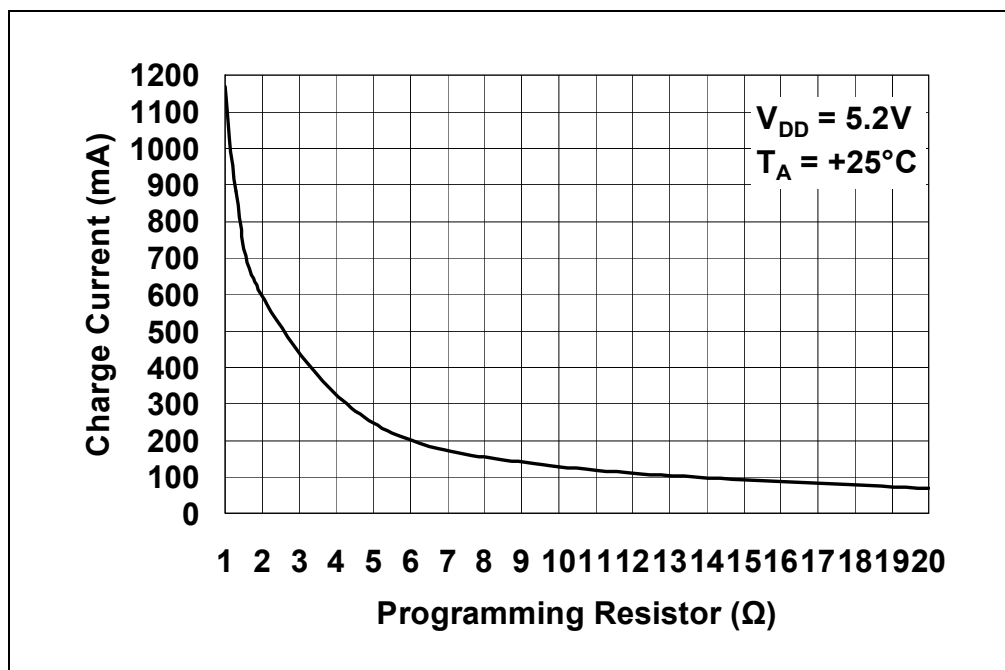

**FIGURE 2-2:** MCP73123/223 Charge Current ( $I_{OUT}$ ) vs. Programming Resistor ( $R_{PROG}$ ).

**TABLE 2-1: MCP73123/223 RESISTOR LOOKUP TABLE**

| Charge Current (mA) | Recommended E96 Resistor ( $\Omega$ ) | Recommended E24 Resistor ( $\Omega$ ) |
|---------------------|---------------------------------------|---------------------------------------|
| 130                 | 10k                                   | 10k                                   |
| 150                 | 8.45k                                 | 8.20k                                 |
| 200                 | 6.20k                                 | 6.20k                                 |
| 250                 | 4.99k                                 | 5.10k                                 |
| 300                 | 4.02k                                 | 3.90k                                 |
| 350                 | 3.40k                                 | 3.30k                                 |
| 400                 | 3.00k                                 | 3.00k                                 |
| 450                 | 2.61k                                 | 2.70k                                 |
| 500                 | 2.32k                                 | 2.37k                                 |
| 550                 | 2.10k                                 | 2.20k                                 |
| 600                 | 1.91k                                 | 2.00k                                 |
| 650                 | 1.78k                                 | 1.80k                                 |
| 700                 | 1.62k                                 | 1.60k                                 |
| 750                 | 1.50k                                 | 1.50k                                 |
| 800                 | 1.40k                                 | 1.50k                                 |
| 850                 | 1.33k                                 | 1.30k                                 |
| 900                 | 1.24k                                 | 1.20k                                 |
| 950                 | 1.18k                                 | 1.20k                                 |
| 1000                | 1.10k                                 | 1.10k                                 |
| 1100                | 1.00k                                 | 1.00k                                 |

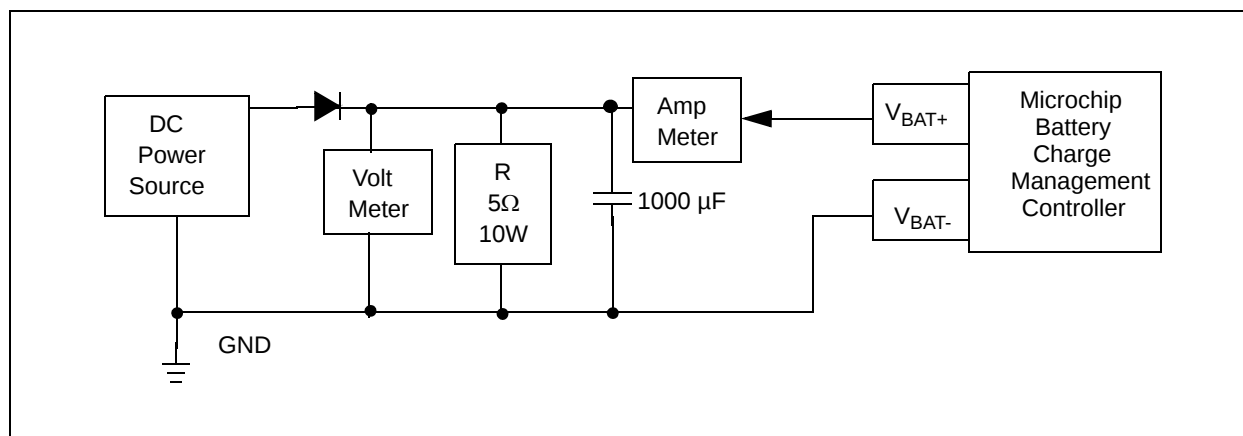

**FIGURE 2-3:** Simulated Battery Load for MCP73123/223.

**TABLE 2-2: MCP73123/223 CHARGE STATUS OUTPUTS**

| CHARGE CYCLE STATE           | STAT                                                   |
|------------------------------|--------------------------------------------------------|
| Shutdown                     | Hi-Z                                                   |
| Standby                      | Hi-Z                                                   |
| Preconditioning              | L                                                      |
| Constant Current Fast Charge | L                                                      |
| Constant Voltage             | L                                                      |
| Charge Complete - Standby    | Hi-Z                                                   |
| Temperature Fault            | 1.6 second 50% D.C. Flashing (Type 1)<br>Hi-Z (Type 2) |
| Timer Fault                  | 1.6 second 50% D.C. Flashing (Type 1)<br>Hi-Z (Type 2) |
| Preconditioning Timer Fault  | 1.6 second 50% D.C. Flashing (Type 1)<br>Hi-Z (Type 2) |



# MCP73X23 LITHIUM IRON PHOSPHATE BATTERY CHARGER EVALUATION BOARD USER'S GUIDE

---

## Appendix A. Schematic and Layouts


---

### A.1 INTRODUCTION


This appendix contains the following schematics and layouts for the MCP73X23 Lithium Iron Phosphate Battery Charger Evaluation Board:

- Board – Schematic
- Board – Top Layer
- Board – Top Metal Layer
- Board – Bottom Layer


A.2 BOARD – SCHEMATIC

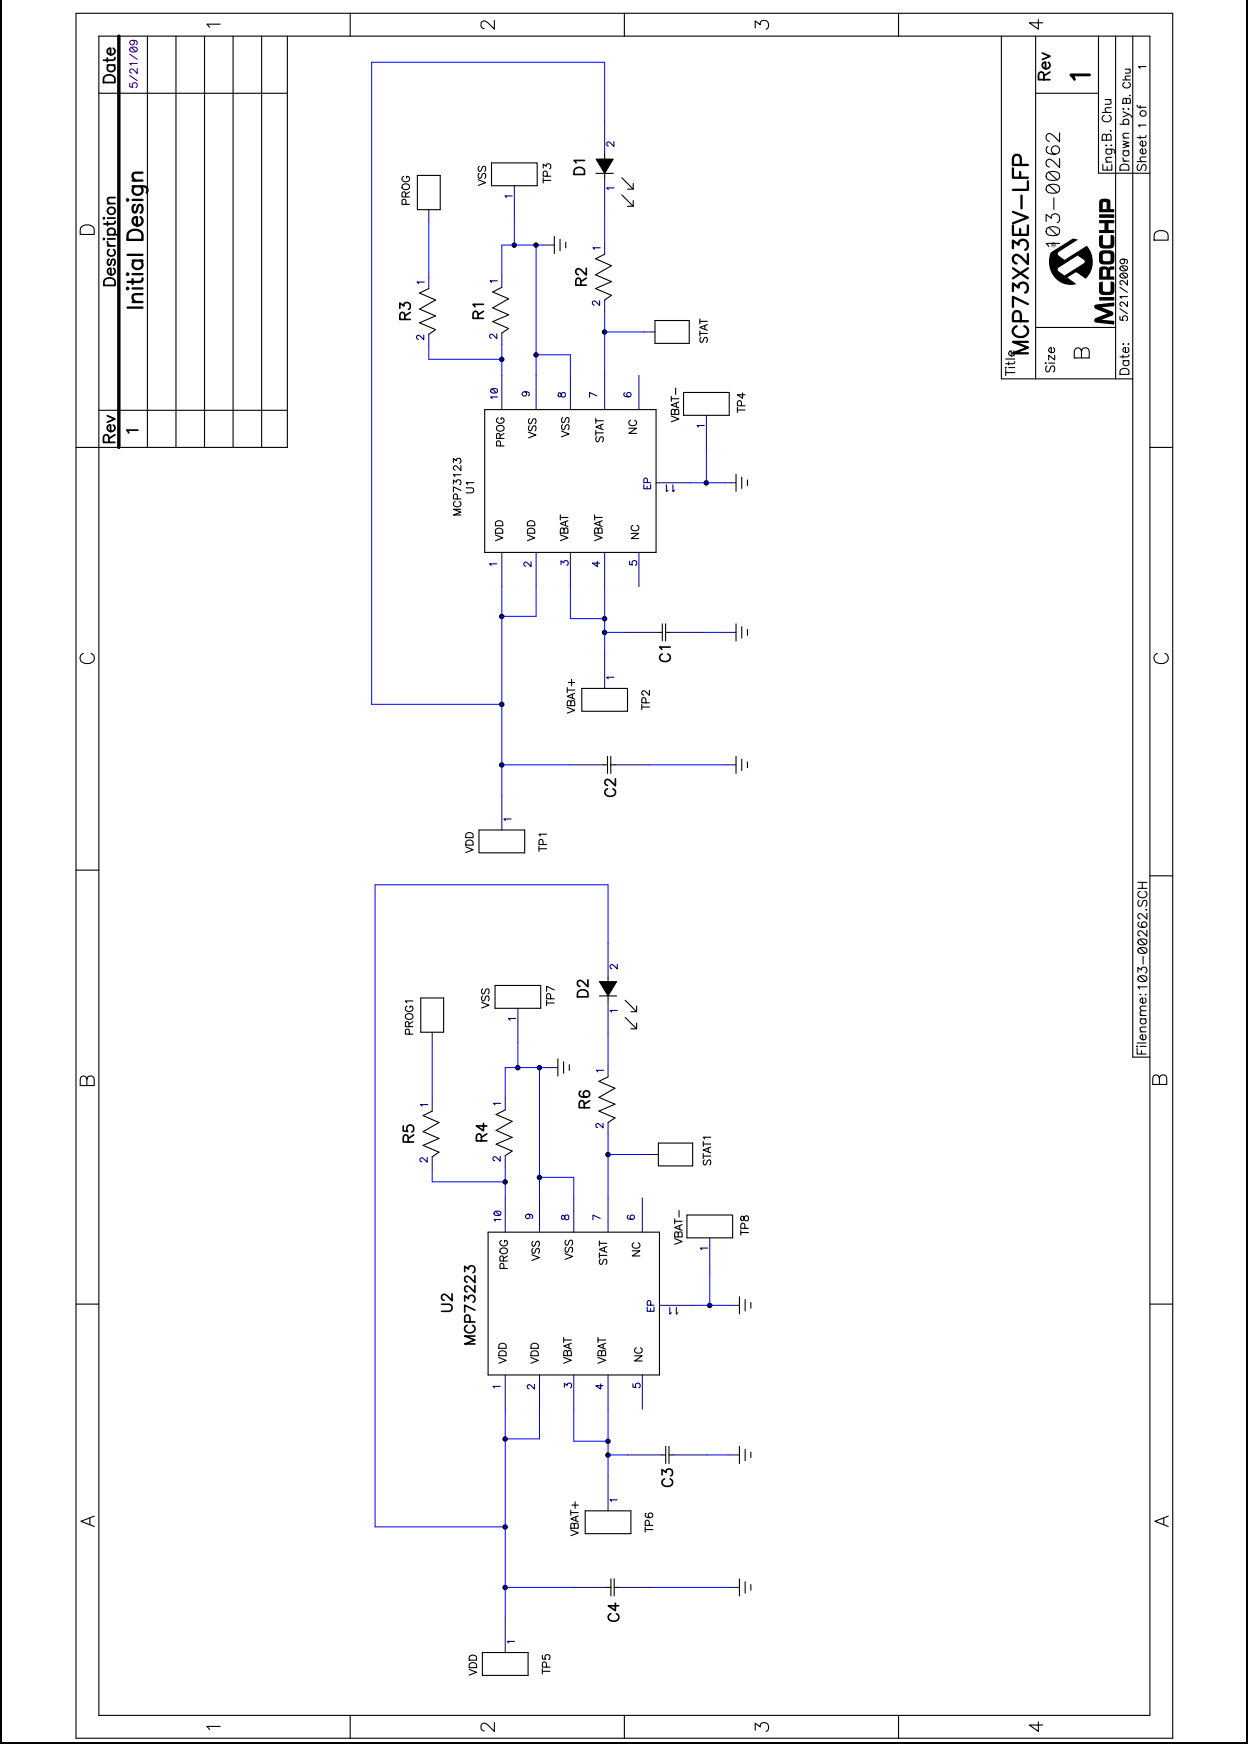


## A.3 BOARD – TOP LAYER

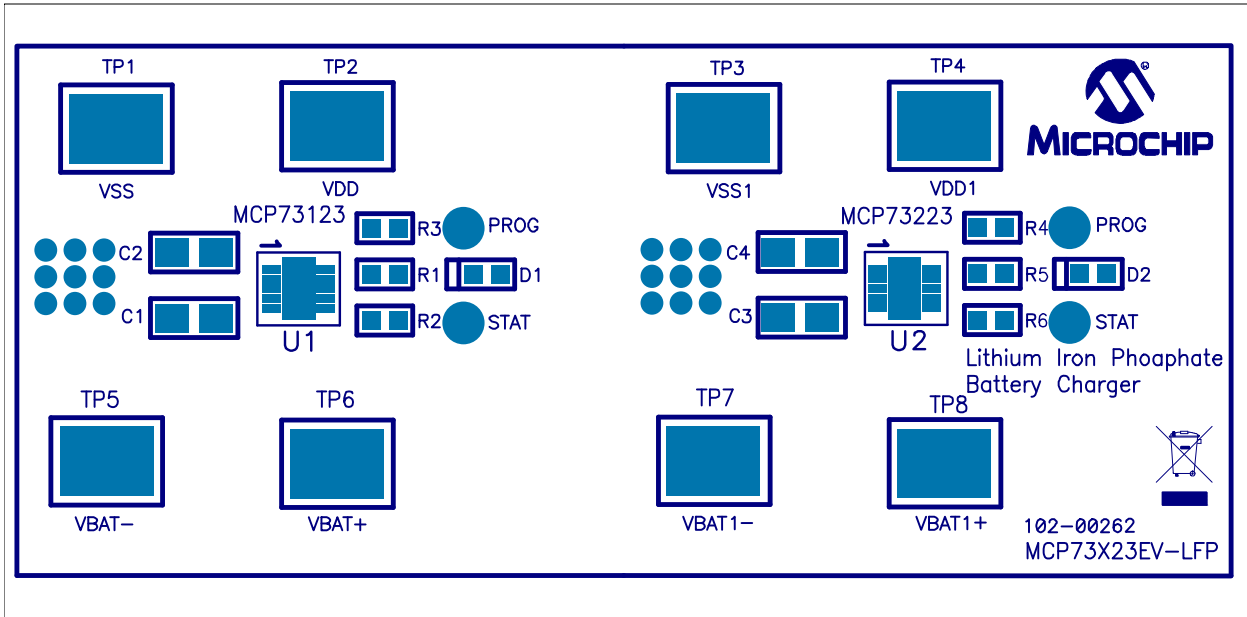

#### **A.4 BOARD – TOP METAL LAYER**

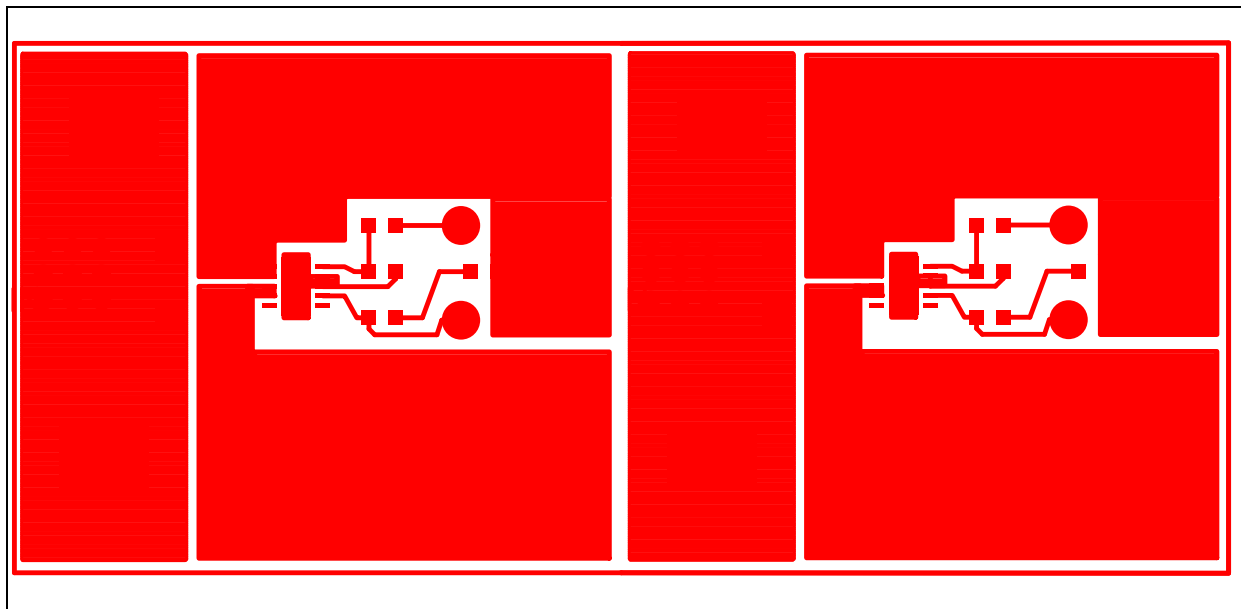

## A.5 BOARD – BOTTOM LAYER

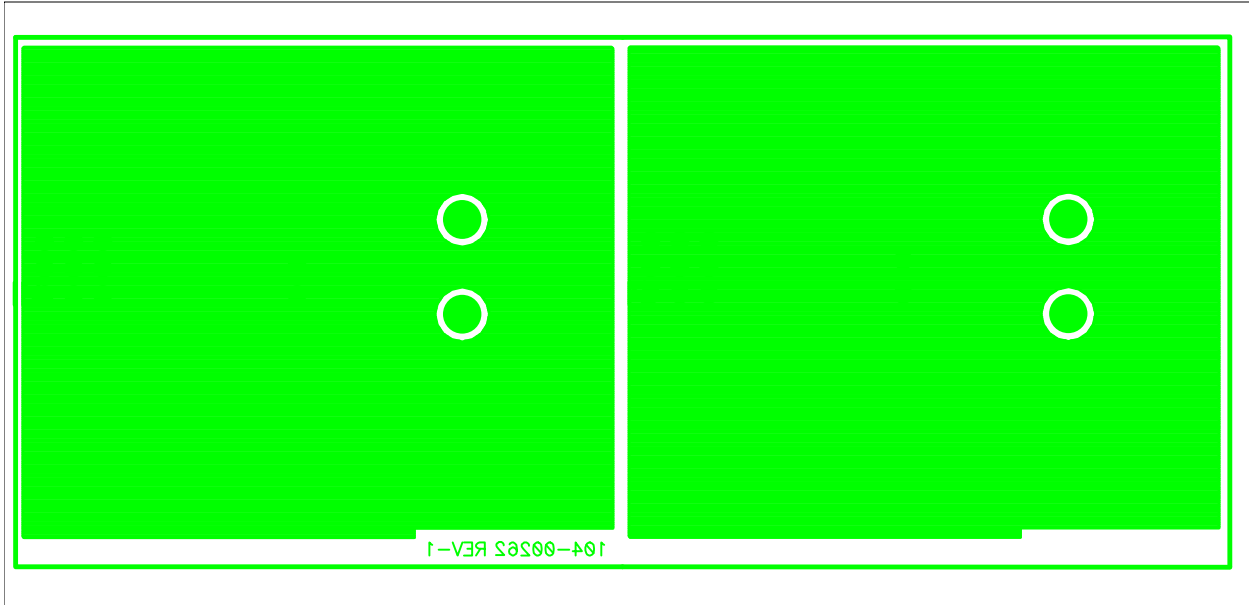

**NOTES:**



# MCP73X23 LITHIUM IRON PHOSPHATE BATTERY CHARGER EVALUATION BOARD USER'S GUIDE

## Appendix B. Bill Of Materials (BOM)

**TABLE B-1: BILL OF MATERIALS**

| Qty | Reference                              | Description                                                 | Manufacturer              | Part Number     |
|-----|----------------------------------------|-------------------------------------------------------------|---------------------------|-----------------|
| 4   | Bump                                   | BUMPON HEMISPHERE .44X.20 WHITE                             | 3M                        | SJ5003-9-ND     |
| 4   | C1, C2, C3, C4                         | CAP CERAMIC 4.7 $\mu$ F 25V X5R 1206                        | TDK                       | C2012X5R1E475M  |
| 2   | D1, D2                                 | Blue Water Clear 0603 SMD LED                               | Para Light USA            | L-C191LBCT-U1   |
| 1   | PCB                                    | RoHS Compliant Bare PCB, MCP73X23 Evaluation Board          | Microchip Technology Inc. | 104-00262       |
| 4   | R1, R3, R4, R5                         | RES 2.37K OHM 1/10W 1% 0603 SMD                             | Panasonic® - ECG          | ERJ-3EKF2371V   |
| 2   | R2, R6                                 | RES 1K OHM 1/10W 1% 0603 SMD                                | Panasonic - ECG           | ERJ-3EKF1001V   |
| 8   | TP1, TP2, TP3, TP4, TP5, TP6, TP7, TP8 | PC Test Point Compact SMT                                   | Keystone Electronics®     | 5016            |
| 1   | U1                                     | Single-Cell Lithium Iron Phosphate Battery Charger with OVP | Microchip Technology Inc. | MCP73123-22S/MF |
| 1   | U2                                     | Dual-Cell Lithium Iron Phosphate Battery Charger with OVP   | Microchip Technology Inc. | MCP73223-C2S/MF |

**Note 1:** The components listed in this Bill of Materials are representative of the PCB assembly. The released BOM used in manufacturing uses all RoHS-compliant components.



---

## WORLDWIDE SALES AND SERVICE

---

### AMERICAS

#### Corporate Office

2355 West Chandler Blvd.  
Chandler, AZ 85224-6199  
Tel: 480-792-7200  
Fax: 480-792-7277  
Technical Support:  
<http://support.microchip.com>  
Web Address:  
[www.microchip.com](http://www.microchip.com)

#### Atlanta

Duluth, GA  
Tel: 678-957-9614  
Fax: 678-957-1455

#### Boston

Westborough, MA  
Tel: 774-760-0087  
Fax: 774-760-0088

#### Chicago

Itasca, IL  
Tel: 630-285-0071  
Fax: 630-285-0075

#### Cleveland

Independence, OH  
Tel: 216-447-0464  
Fax: 216-447-0643

#### Dallas

Addison, TX  
Tel: 972-818-7423  
Fax: 972-818-2924

#### Detroit

Farmington Hills, MI  
Tel: 248-538-2250  
Fax: 248-538-2260

#### Kokomo

Kokomo, IN  
Tel: 765-864-8360  
Fax: 765-864-8387

#### Los Angeles

Mission Viejo, CA  
Tel: 949-462-9523  
Fax: 949-462-9608

#### Santa Clara

Santa Clara, CA  
Tel: 408-961-6444  
Fax: 408-961-6445

#### Toronto

Mississauga, Ontario,  
Canada  
Tel: 905-673-0699  
Fax: 905-673-6509

### ASIA/PACIFIC

#### Asia Pacific Office

Suites 3707-14, 37th Floor  
Tower 6, The Gateway  
Harbour City, Kowloon  
Hong Kong  
Tel: 852-2401-1200  
Fax: 852-2401-3431

#### Australia - Sydney

Tel: 61-2-9868-6733  
Fax: 61-2-9868-6755

#### China - Beijing

Tel: 86-10-8528-2100  
Fax: 86-10-8528-2104

#### China - Chengdu

Tel: 86-28-8665-5511  
Fax: 86-28-8665-7889

#### China - Hong Kong SAR

Tel: 852-2401-1200  
Fax: 852-2401-3431

#### China - Nanjing

Tel: 86-25-8473-2460  
Fax: 86-25-8473-2470

#### China - Qingdao

Tel: 86-532-8502-7355  
Fax: 86-532-8502-7205

#### China - Shanghai

Tel: 86-21-5407-5533  
Fax: 86-21-5407-5066

#### China - Shenyang

Tel: 86-24-2334-2829  
Fax: 86-24-2334-2393

#### China - Shenzhen

Tel: 86-755-8203-2660  
Fax: 86-755-8203-1760

#### China - Wuhan

Tel: 86-27-5980-5300  
Fax: 86-27-5980-5118

#### China - Xiamen

Tel: 86-592-2388138  
Fax: 86-592-2388130

#### China - Xian

Tel: 86-29-8833-7252  
Fax: 86-29-8833-7256

#### China - Zhuhai

Tel: 86-756-3210040  
Fax: 86-756-3210049

### ASIA/PACIFIC

#### India - Bangalore

Tel: 91-80-3090-4444  
Fax: 91-80-3090-4080

#### India - New Delhi

Tel: 91-11-4160-8631  
Fax: 91-11-4160-8632

#### India - Pune

Tel: 91-20-2566-1512  
Fax: 91-20-2566-1513

#### Japan - Yokohama

Tel: 81-45-471- 6166  
Fax: 81-45-471-6122

#### Korea - Daegu

Tel: 82-53-744-4301  
Fax: 82-53-744-4302

#### Korea - Seoul

Tel: 82-2-554-7200  
Fax: 82-2-558-5932 or  
82-2-558-5934

#### Malaysia - Kuala Lumpur

Tel: 60-3-6201-9857  
Fax: 60-3-6201-9859

#### Malaysia - Penang

Tel: 60-4-227-8870  
Fax: 60-4-227-4068

#### Philippines - Manila

Tel: 63-2-634-9065  
Fax: 63-2-634-9069

#### Singapore

Tel: 65-6334-8870  
Fax: 65-6334-8850

#### Taiwan - Hsin Chu

Tel: 886-3-6578-300  
Fax: 886-3-6578-370

#### Taiwan - Kaohsiung

Tel: 886-7-536-4818  
Fax: 886-7-536-4803

#### Taiwan - Taipei

Tel: 886-2-2500-6610  
Fax: 886-2-2508-0102

#### Thailand - Bangkok

Tel: 66-2-694-1351  
Fax: 66-2-694-1350

### EUROPE

#### Austria - Wels

Tel: 43-7242-2244-39  
Fax: 43-7242-2244-393

#### Denmark - Copenhagen

Tel: 45-4450-2828  
Fax: 45-4485-2829

#### France - Paris

Tel: 33-1-69-53-63-20  
Fax: 33-1-69-30-90-79

#### Germany - Munich

Tel: 49-89-627-144-0  
Fax: 49-89-627-144-44

#### Italy - Milan

Tel: 39-0331-742611  
Fax: 39-0331-466781

#### Netherlands - Drunen

Tel: 31-416-690399  
Fax: 31-416-690340

#### Spain - Madrid

Tel: 34-91-708-08-90  
Fax: 34-91-708-08-91

#### UK - Wokingham

Tel: 44-118-921-5869  
Fax: 44-118-921-5820

03/26/09

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Microchip:](#)

[MCP73X23EV-LFP](#)