

TOSHIBA CMOS LINEAR INTEGRATED CIRCUIT SILICON MONOLITHIC

**TC75W55FU, TC75W55FK****DUAL OPERATIONAL AMPLIFIER**

TC75W55 is a CMOS operational amplifier with low supply voltage, low supply current.


**FEATURES**

- Low supply voltage :  $V_{DD} = \pm 0.9 \sim 3.5V$  or  $1.8 \sim 7V$
- Low supply current :  $I_{DD} (V_{DD} = 3V) = 20 \mu A$  (Typ.)
- The internally phase compensated operational amplifier.
- Small package

**MAXIMUM RATINGS** ( $T_a = 25^\circ C$ )


| CHARACTERISTIC             | SYMBOL           | RATING               | N          |
|----------------------------|------------------|----------------------|------------|
| Supply Voltage             | $V_{DD}, V_{SS}$ | 7                    | V          |
| Differential Input Voltage | $DV_{IN}$        | $\pm 7$              | V          |
| Input Voltage              | $V_{IN}$         | $V_{DD} \sim V_{SS}$ | V          |
| Power Dissipation          | $P_D$            | 250 (SM8)            | mW         |
|                            |                  | 200 (US8)            |            |
| Operating Temperature      | $T_{opr}$        | $-40 \sim 85$        | $^\circ C$ |
| Storage Temperature        | $T_{stg}$        | $-55 \sim 125$       | $^\circ C$ |

TC75W55FU






SSOP8-P-0.65

TC75W55FK



SSOP8-P-0.50A

Weight  
 SSOP8-P-0.65 : 0.021g (Typ.)  
 SSOP8-P-0.50A : 0.01g (Typ.)

**MARKING (TOP VIEW)****PIN CONNECTION (TOP VIEW)**

980508EBA1

- TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.
- The products described in this document are subject to foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

## ELECTRICAL CHARACTERISTICS

DC CHARACTERISTICS ( $V_{DD} = 3.0V$ ,  $V_{SS} = GND$ ,  $T_a = 25^\circ C$ )

| CHARACTERISTIC                           | SYMBOL       | TEST CIR-CUIT | TEST CONDITION           | MIN. | TYP. | MAX. | UNIT    |
|------------------------------------------|--------------|---------------|--------------------------|------|------|------|---------|
| Input Offset Voltage                     | $V_{IO}$     | 1             | $R_S = 10k\Omega$        | —    | 2    | 10   | mV      |
| Input Offset Current                     | $I_{IO}$     | —             | —                        | —    | 1    | —    | pA      |
| Input Bias Current                       | $I_I$        | —             | —                        | —    | 1    | —    | pA      |
| Common Mode Input Voltage                | $CMV_{IN}$   | 2             | —                        | 0.0  | —    | 2.1  | V       |
| Voltage Gain (Open Loop)                 | $G_V$        | —             | —                        | 60   | 70   | —    | dB      |
| Maximum Output Voltage                   | $V_{OH}$     | 3             | $R_L \geq 1M\Omega$      | 2.9  | —    | —    | V       |
|                                          | $V_{OL}$     | 4             | $R_L \geq 1M\Omega$      | —    | —    | 0.1  |         |
| Common Mode Input Signal Rejection Ratio | CMRR         | 2             | $V_{IN} = 0.0 \sim 2.1V$ | 60   | 70   | —    | dB      |
| Supply Voltage Rejection Ratio           | SVRR         | 1             | $V_{DD} = 1.8 \sim 7.0V$ | 60   | 70   | —    | dB      |
| Supply Current                           | $I_{DD}$     | 5             | —                        | —    | 20   | 40   | $\mu A$ |
| Source Current                           | $I_{source}$ | 6             | —                        | 10   | 20   | —    | $\mu A$ |
| Sink Current                             | $I_{sink}$   | 7             | —                        | 100  | 450  | —    | $\mu A$ |

DC CHARACTERISTICS ( $V_{DD} = 1.8V$ ,  $V_{SS} = GND$ ,  $T_a = 25^\circ C$ )


| CHARACTERISTIC            | SYMBOL       | TEST CIR-CUIT | TEST CONDITION      | MIN. | TYP. | MAX. | UNIT    |
|---------------------------|--------------|---------------|---------------------|------|------|------|---------|
| Input Offset Voltage      | $V_{IO}$     | 1             | $R_S = 100k\Omega$  | —    | 2    | 10   | mV      |
| Input Offset Current      | $I_{IO}$     | —             | —                   | —    | 1    | —    | pA      |
| Input Bias Current        | $I_I$        | —             | —                   | —    | 1    | —    | pA      |
| Common Mode Input Voltage | $CMV_{IN}$   | 2             | —                   | 0.0  | —    | 0.9  | V       |
| Voltage Gain (Open Loop)  | $G_V$        | —             | —                   | 60   | 70   | —    | dB      |
| Maximum Output Voltage    | $V_{OH}$     | 3             | $R_L \geq 1M\Omega$ | 1.7  | —    | —    | V       |
|                           | $V_{OL}$     | 4             | $R_L \geq 1M\Omega$ | —    | —    | 0.1  |         |
| Supply Current            | $I_{DD}$     | 5             | —                   | —    | 16   | 32   | $\mu A$ |
| Source Current            | $I_{source}$ | 6             | —                   | 8    | 16   | —    | $\mu A$ |
| Sink Current              | $I_{sink}$   | 7             | —                   | 100  | 400  | —    | $\mu A$ |

AC CHARACTERISTICS ( $V_{DD} = 3.0V$ ,  $V_{SS} = GND$ ,  $T_a = 25^\circ C$ )

| CHARACTERISTIC             | SYMBOL | TEST CIR-CUIT | TEST CONDITION | MIN. | TYP. | MAX. | UNIT        |
|----------------------------|--------|---------------|----------------|------|------|------|-------------|
| Slew Rate                  | SR     | —             | —              | —    | 0.08 | —    | V / $\mu s$ |
| Unity Gain Cross Frequency | $f_T$  | —             | —              | —    | 160  | —    | kHz         |

AC CHARACTERISTICS ( $V_{DD} = 1.8V$ ,  $V_{SS} = GND$ ,  $T_a = 25^\circ C$ )


| CHARACTERISTIC             | SYMBOL | TEST CIR-CUIT | TEST CONDITION | MIN. | TYP. | MAX. | UNIT        |
|----------------------------|--------|---------------|----------------|------|------|------|-------------|
| Slew Rate                  | SR     | —             | —              | —    | 0.06 | —    | V / $\mu s$ |
| Unity Gain Cross Frequency | $f_T$  | —             | —              | —    | 140  | —    | kHz         |

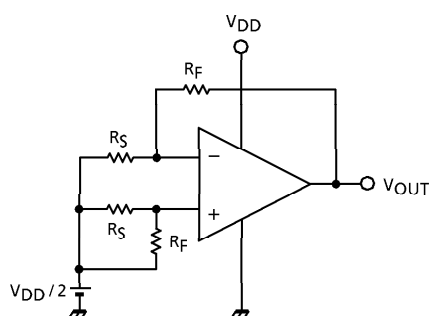**TEST CIRCUIT**
**1. SVRR,  $V_{IO}$** 

**• SVRR**
 $V_{DD} = 1.8V : V_{DD} = V_{DD1}, V_{OUT} = V_{OUT1}$ 
 $V_{DD} = 7.0V : V_{DD} = V_{DD2}, V_{OUT} = V_{OUT2}$ 


$$SVRR = 20 \log \left( \left| \frac{V_{OUT1} - V_{OUT2}}{V_{DD1} - V_{DD2}} \right| \times \frac{R_S}{R_F + R_S} \right)$$

**•  $V_{IO}$** 
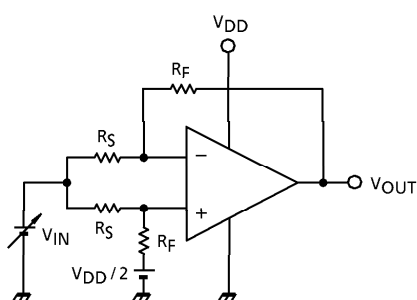
$$V_{IO} = \left( V_{OUT} - \frac{V_{DD}}{2} \right) \times \frac{R_S}{R_F + R_S}$$

**2. CMRR,  $CMV_{IN}$** 

**• CMRR**
 $V_{IN} = 0.0V : V_{IN} = V_{IN1}, V_{OUT} = V_{OUT1}$ 
 $V_{IN} = 2.1V : V_{IN} = V_{IN2}, V_{OUT} = V_{OUT2}$ 

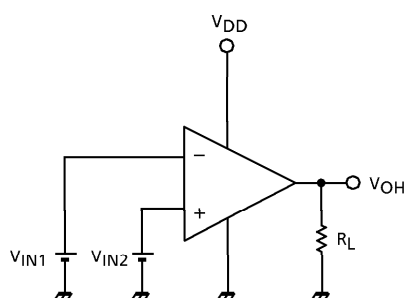
$$CMRR = 20 \log \left( \left| \frac{V_{OUT1} - V_{OUT2}}{V_{IN1} - V_{IN2}} \right| \times \frac{R_S}{R_F + R_S} \right)$$

**•  $CMV_{IN}$** 
**3.  $V_{OH}$** 

**•  $V_{OH}$** 

$$V_{IN1} = \frac{V_{DD}}{2} - 0.05V$$

$$V_{IN2} = \frac{V_{DD}}{2} + 0.05V$$

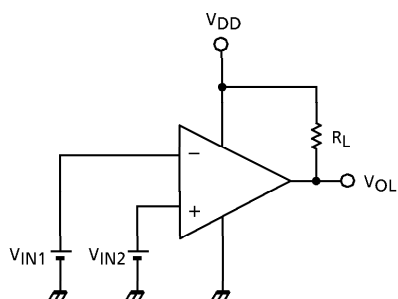4.  $V_{OL}$




- $V_{OL}$


$$V_{IN1} = \frac{V_{DD}}{2} + 0.05V$$

$$V_{IN2} = \frac{V_{DD}}{2} - 0.05V$$


5.  $I_{DD}$















6.  $I_{source}$





7.  $I_{sink}$



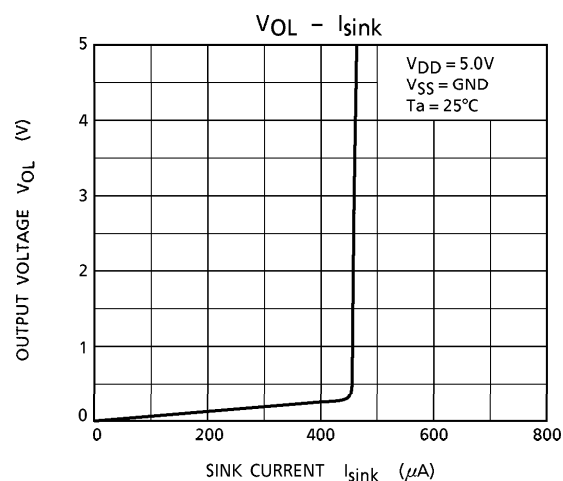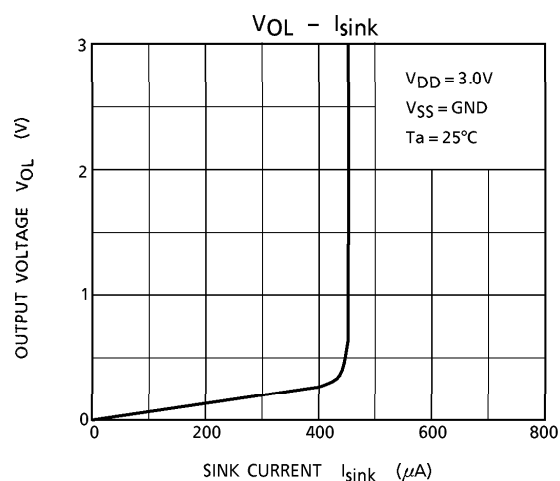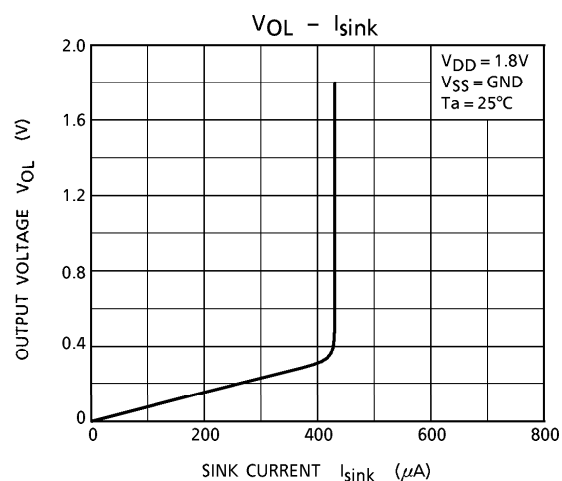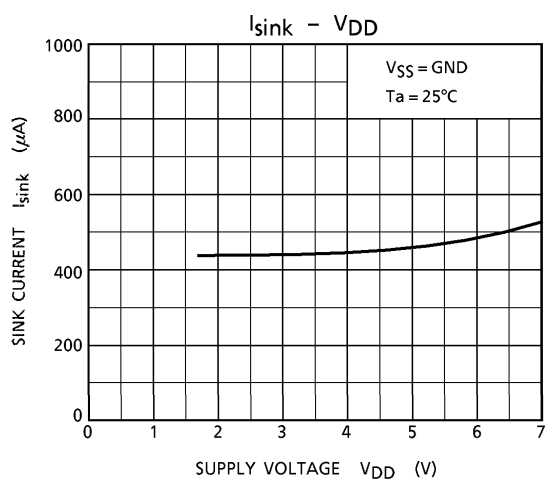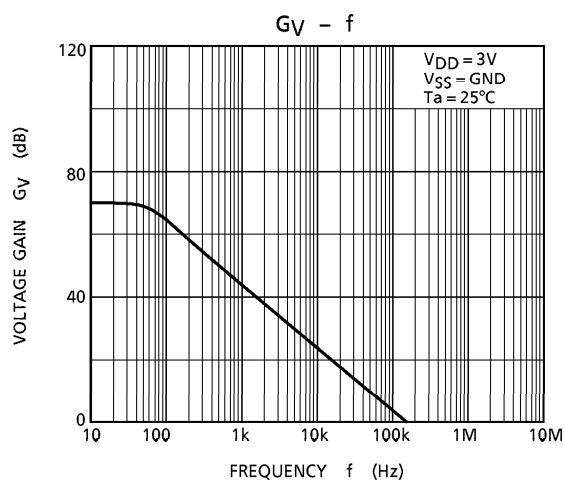
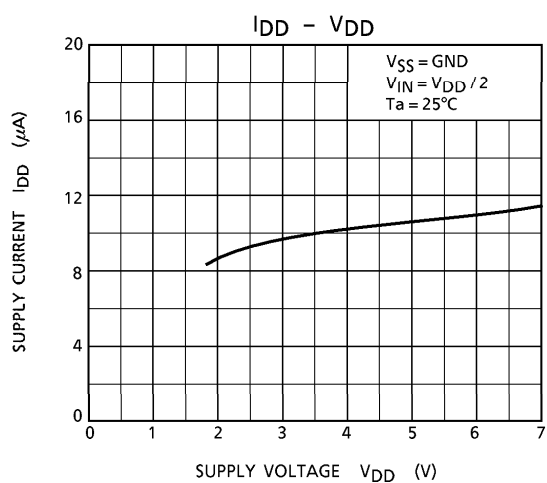


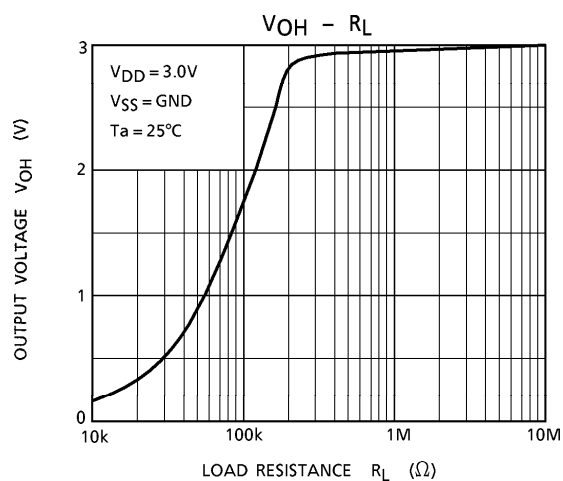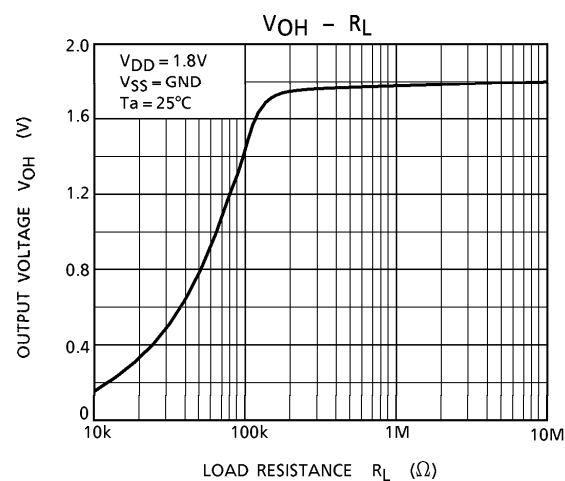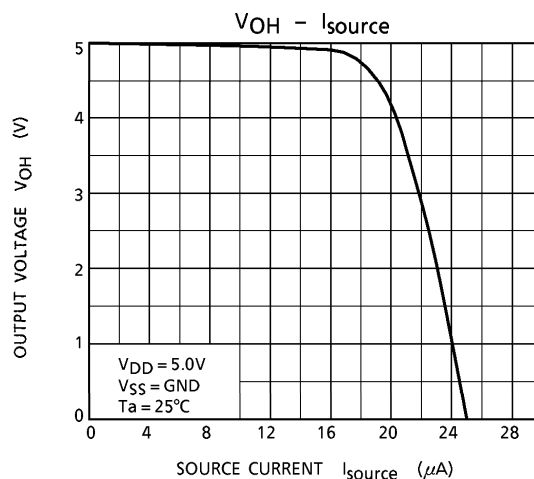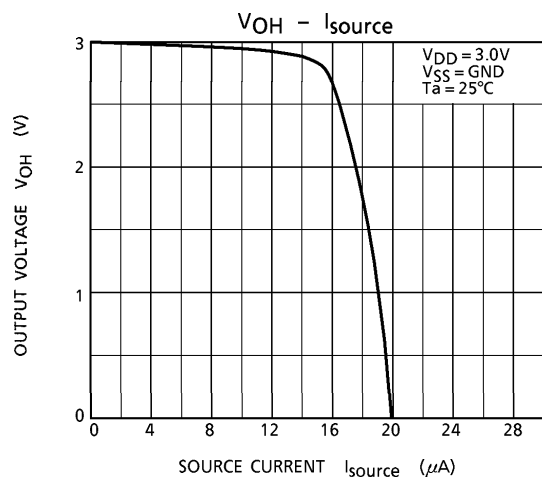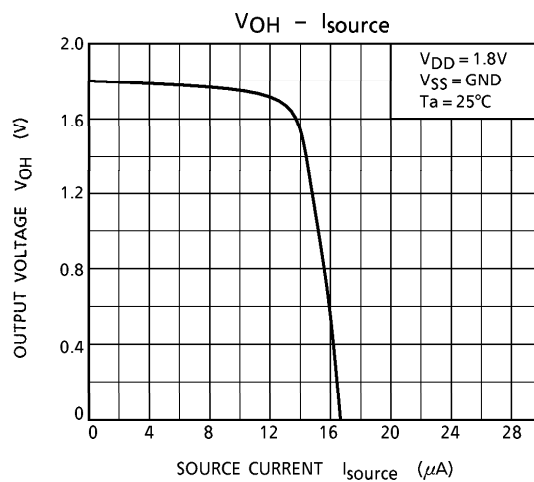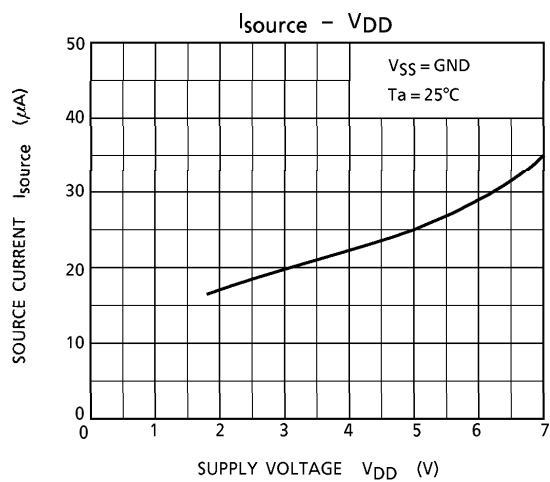

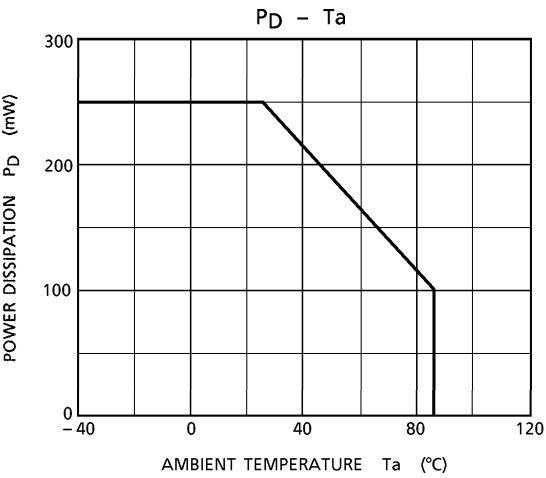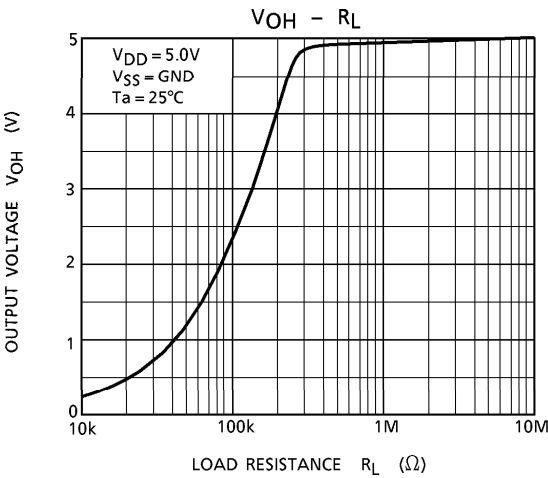

OUTLINE DRAWING  
SSOP8-P-0.65

Unit : mm

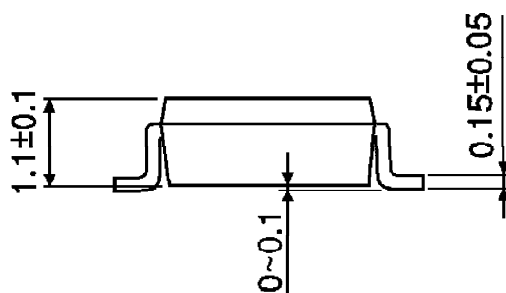
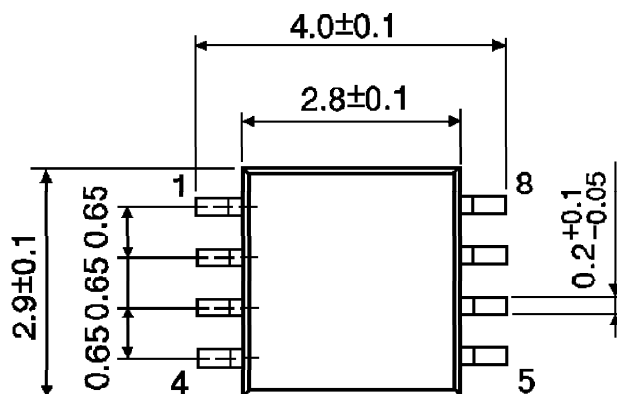


Weight : 0.021g (Typ.)



OUTLINE DRAWING  
SSOP8-P-0.50A

Unit : mm

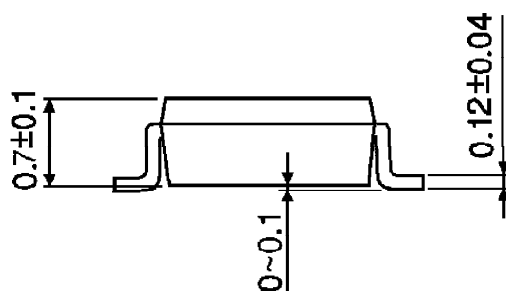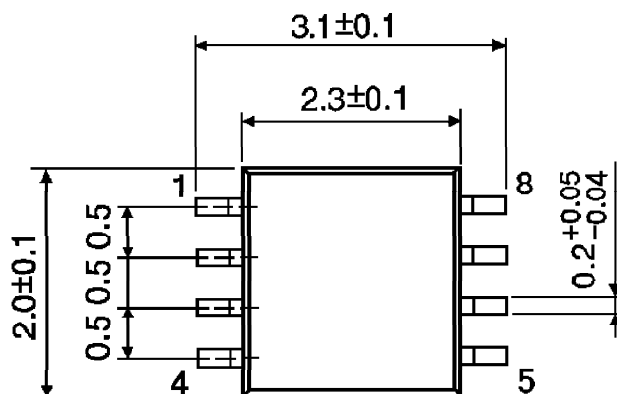

Weight : 0.01g (Typ.)