

Evaluating the AD1974 Four ADC with PLL 192 kHz, 24-Bit Codec

EVAL-AD1974AZ PACKAGE CONTENTS

AD1974 evaluation board
USBi control interface board
USB cable

OTHER SUPPORTING DOCUMENTATION

[AD1974 data sheet](#)

EVALUATION BOARD OVERVIEW

This document explains the design and setup of the evaluation board for the AD1974. The evaluation board must be connected to an external ± 12 V dc power supply and ground. On-board regulators derive the 3.3 V supplies for the AD1974. The AD1974 is controlled through an SPI interface. A small external

interface board, EVAL-ADUSB2EBZ (also called USBi), connects to a PC USB port and provides SPI access to the evaluation board through a ribbon cable. A graphical user interface (GUI) program is provided for easy programming of the chip in a Microsoft® Windows® PC environment. The evaluation board allows demonstration and performance testing of most AD1974 features, including the four ADCs, as well as the digital audio ports.

Additional analog circuitry (ADC input filter/buffer) and digital interfaces such as S/PDIF are provided to ease product evaluation.

All analog audio interfaces are accessible with stereo audio 3.5 mm TRS connectors.

FUNCTIONAL BLOCK DIAGRAM

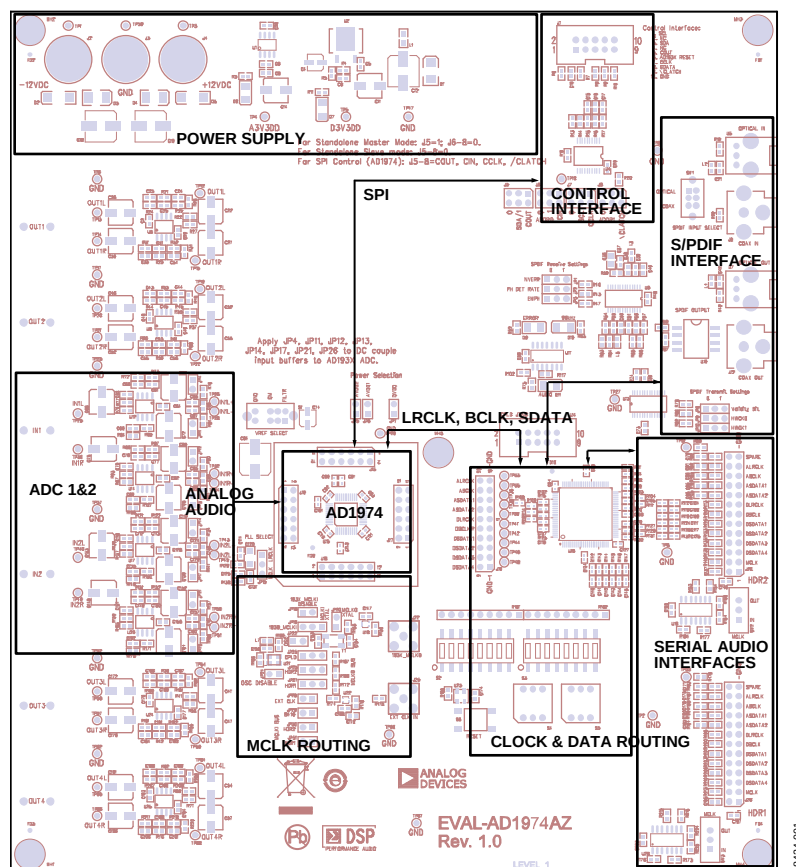


Figure 1.

TABLE OF CONTENTS

EVAL-AD1974AZ Package Contents	1	Powering the Board.....	3
Other Supporting Documentation.....	1	Setting Up the Master Clock (MCLK).....	4
Evaluation Board Overview	1	Configuring the PLL Filter.....	5
Functional Block Diagram	1	Connecting Audio Cables	5
Revision History	2	Switch and Jumper Settings	5
Setting Up the Evaluation Board	3	Rotary and DIP Switch Settings	7
Standalone Mode.....	3	Schematics and Artwork	9
SPI control	3	CPLD Code	20
Automated Register Window Builder Software Installation ..	3	Ordering Information.....	26
Hardware Setup, USBi.....	3	Bill of Materials.....	26

REVISION HISTORY

2/10—Revision 0: Initial Version

SETTING UP THE EVALUATION BOARD

STANDALONE MODE

It is possible to run the board and the AD1974 ADC in stand-alone mode, which fixes the functionality of the AD1974 into the I²S data format, running at $256 \times f_s$ (default register condition). The ADC BCLK and LRCLK ports are flipped between slave and master (input and output) by tying COUT (Pin 24) to low or high. This is accomplished by moving the J5 jumper to either 0 or SDA/1 (see Figure 2 and Figure 3 for the correct settings).




Figure 2. Standalone Slave Mode




Figure 3. Standalone Master Mode

With the control jumpers set to standalone master mode, the S2 DIP switches set to on, the S3 DIP switch sets to off, and both rotary hex mode switches, S4 and S5, set to 0, the AD1974 is the LRCLK, BCLK, and SDATA source. The default MCLK jumper setting uses the on-board oscillator as MCLK for the AD1974 as well as the S/PDIF transmitter and HDR1 port. The board passes analog audio from the IN1 stereo to the S/PDIF and HDR1 output ports. IN2 can be selected by changing S3, Position 8, to on. Other serial audio clock and data routing configurations are described in the Switch and Jumper Settings section.

SPI CONTROL

The evaluation board can be configured for interactive control of the registers in the AD1974 by connecting the SPI port to the USBi. The SPI jumper settings are shown in Figure 4.




Figure 4. SPI Control

The **Automated Register Window Builder** software controls the AD1974 and is available at www.analog.com/AD1974.

AUTOMATED REGISTER WINDOW BUILDER SOFTWARE INSTALLATION

The **Automated Register Window Builder** is a program that launches a graphical user interface for direct, live control of the AD1974 registers. The GUI content for the part is defined in a part-specific .xml file; this file is included in the software

installation. To install the **Automated Register Window Builder** software, follow these steps:

1. At www.analog.com/AD1974, find the **Resources & Tools** list.
2. In the list, find **Evaluation Boards & Development Kits** and click **Evaluation Boards/Tools** to open the provided **ARWBvXX.zip** file.
3. Double-click the provided .msi file to extract the files to an empty folder on your PC.
4. Then double-click **setup.exe** and follow the prompts to install the **Automated Register Window Builder**. A computer restart is not required.
5. Copy the .xml file for the AD1974 from the extraction folder into the C:\Program Files\Analog Devices Inc\AutomatedRegWin folder, if it does not appear in the folder after installation.

HARDWARE SETUP, USBi

To set up the USBi hardware, follow these steps:

1. Plug the USBi ribbon cable into the J1 control interface header.
2. Connect the USB cable to your computer and to the USBi.
3. When prompted for drivers, follow these steps:
 - a. Choose **Install from a list or a specific location**.
 - b. Choose **Search for the best driver in these locations**.
 - c. Check the box for **Include this location in the search**.
 - d. Find the USBi driver in C:\Program Files\ Analog Devices Inc\AutomatedRegWin\USB drivers.
 - e. Click **Next**.
 - f. If prompted to choose a driver, select **CyUSB.sys**.
 - g. If the PC is running Windows XP and you receive a message that the software has not passed Windows logo testing, click **Continue Anyway**.

You can now open the **Automated Register Window Builder** application and load the .xml file for the part onto your evaluation board.

POWERING THE BOARD

The AD1974 evaluation board requires power supply input of ± 12 V dc and ground to the three binding posts; +12 V draws ~250 mA and -12 V draws ~100mA. The on-board regulators provide two 3.3 V rails, one each for AVDD and DVDD for the AD1974. DVDD also supplies power for the active peripheral components on the board. Jumpers are provided to allow access to the power connections of the AD1974. These are convenient points to insert a current measuring device. The only components on the AD1974 side of the jumper are the part itself and the local power supply decoupling. The jumper blocks are shown in Figure 5.





Figure 5. AD1974 Power Jumpers

SETTING UP THE MASTER CLOCK (MCLK)

The AD1974 evaluation board has a series of jumpers that give the user great flexibility in the MCLK clock source for the AD1974. MCLK can come from five sources: passive crystal, active oscillator, external clock in, and two header connections. Note that the CPLD on the board must have a valid clock source; the frequency is not critical. These jumper blocks can assign this CPLD clock. Most applications of the board use MCLK from either the oscillator or one of the header (HDR) inputs. Figure 6 to Figure 7 show the on-board active oscillator disabled so that it does not interfere with the selected clock. The clock feed to the CPLD comes directly from the clock source.

Note that, if the HDR connectors are to be driven with MCLK from a source on the evaluation board, SW2 and/or SW3 must be switched from the IN position to the OUT position.

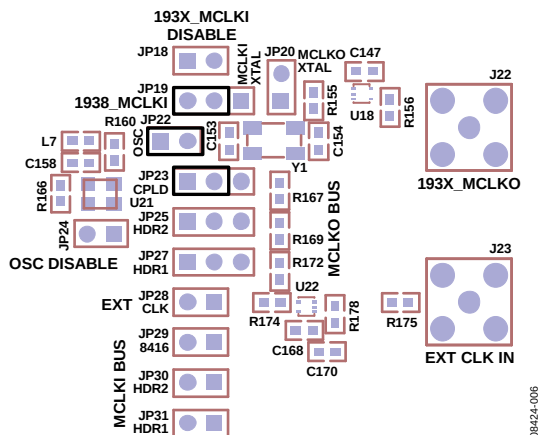

CONFIGURING THE PLL FILTER

The PLL for the AD1974 can run from either MCLK or LRCLK, according to its setting in the PLL and Clock Control 0 register, Bits[6:5]. The matching RC loop filter must be connected to LF (Pin 47) using JP15. See Figure 11 and Figure 12 for the jumper positions.



Figure 11. MCLK Loop Filter Selected




Figure 12. LRCLK Loop Filter Selected


Normally, the MCLK filter is the default selection; it is also possible to use the register control window to program the PLL to run from the LRCLK. In this case, the jumper must be changed as shown in Figure 12.

CONNECTING AUDIO CABLES

Analog Audio

The analog inputs and outputs use 3.5 mm TRS jacks; they are configured in the standard configuration: tip = left, ring = right, sleeve = ground. The analog inputs to IN1 and IN2 generate 0 dBFS from a 1 V rms analog signal. The on-board buffer circuit creates the differential signal to drive the ADC with 2 V rms at the maximum level. There are test points that allow direct access to the ADC pins; note that the ADC pins have a common mode voltage of 1.5 V dc. These test points require proper care so that improper loading does not drag down the common-mode voltage, and the headroom and performance of the part do not suffer.

The ADC buffer circuit has been designed with a switch (S1) that allows the user to change the voltage reference for all of the amplifiers. GND, CM and FILTR can be selected as a reference; it is advisable to shut down the power to the board before changing this switch. The CM and FILTR lines are very sensitive and do not react well to a change in load while the AD1974 is active. A series of jumpers allows the user to dc-couple the buffer circuit to the ADC analog port in when CM and FILTR are selected (see Figure 13).

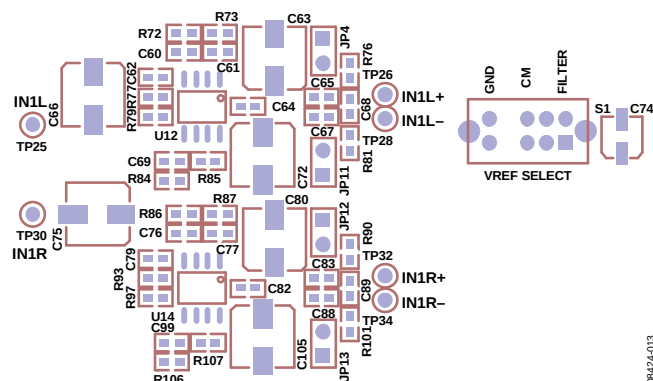

As an example, to set the ADC port as master, switch the ADC Control Register 2 bits for BCLK and LRCLK to master and change S2, Position 2, and S2, Position 5, to on. In this mode, the board is configured so that the ADC BCLK and LRCLK pins are the clock source for both the ADC destination and the DAC data source. For the DAC port to be the master, the DAC Control Register 1 bits for BCLK and LRCLK must be changed to master, and S2, Position 2 and Position 3, and S2, Position 5 and Position 6, must all be on. On this evaluation board, these settings allow the master port on the [AD1974](#) to drive both the S/PDIF and the HDR connections. Many combinations of master and slave are possible (see Figure 14 and Figure 15 for the correct settings).

S/PDIF Audio

The settings in Figure 14 and Figure 15 show the details of clock routing and control for the ADC port. The board is shipped with the IN1 analog port selected as default feed to the S/PDIF transmitter; the hex switches are set to 0 and only the S2, Position 2, DIP switch is on. All other switches are set to off. The evaluation board is shipped in standalone master mode

(see Figure 3); the BCLK and LRCLK signals run from the ADC port of the AD1974 to the S/PDIF transmitter and HDR1.

In this default configuration, IN1 analog is routed through the AD1974 ADC ASDATA1 path to the S/PDIF output. By changing DIP switch S3, Position 8, from 0 to 1, IN2 is selected.

HDR Connectors—Serial Audio

Routing of serial audio to the HDR1 connector is controlled by DIP S3, Position 6 and Position 7. The default condition routes IN1 to ASDATA1 and IN2 to ASDATA2.

Other Options

To use other f_s rates, the USBi must be connected and the AD1974 registers must be programmed accordingly. For example, adjusting the f_s rate to 96 kHz requires that the ADC Control 0 register have the sample rate set to 96 kHz (see Figure 14 and Figure 15 for the complete list of options).

The CPLD code is presented in the CPLD Code section and is included with the evaluation board; alterations and additions to the functionality of the CPLD are possible by altering the code and reprogramming the CPLD.

ROTARY AND DIP SWITCH SETTINGS

AD1974/ADAU132X Rev-E Evaluation Board Configuration: (* indicates default setting)

- 1) DIP Switch S2 Position-8 (SPDIF_RX_TX reset) must be toggled after power-up for proper operation of the SPDIF receiver and transmitter.
 - 2) The AD1974 evaluation board defaults the AD1974 codec to standalone mode preventing SPI/I²C operation. The J5, J6, J7, and J8 header jumpers can be changed for SPI/I²C operation.
- ADC and DAC Serial Clock (BCLK, LRCLK) Source Selection and Routing (Switch S2)**
- 1) DIP Switch S2 controls the AD1974 ADC and DAC serial clock source selection. One of four clock sources is selected based on the setting. SPDIF Receiver CS8416, Header Connector HDR1, ADC serial clocks, or DAC serial clock can be the clock source. ADC and DAC serial clock selection is controlled independently.
 - 2) The AD1974 master clock source should be selected using the JP28, JP29, JP30, and JP31 header jumpers such that the MCLK source is in sync with the DAC/ADC serial clock and data source.

DIP Switch S2 position:

Position-1	Description
ADC - ABCLK, ALRCLK Clock Disable	
Off*	Enable ADC clocks
On	Tristate ADC clocks

Position-2	Position-3	ABCLK Source	ALRCLK Source	SPDIF_Rx Clocks	SPDIF_Tx Clocks	HDR1 Clocks	ADC Clocks	DAC Clocks
ADC - ABCLK, ALRCLK Source Selection	Off*	SPDIF_RX_8416	SPDIF_RX_8416	Master	Slave	Slave	Slave	N/A
Off	On	HDR1_ABCLK	HDR1_ALRCLK	Slave	Slave	Master	Slave	N/A
On	Off	ADC-ABCLK	ADC-ALRCLK	Slave	Slave	Slave	Master	N/A
On	On	DAC-DBCLK	DAC-ALRCLK	Slave	Slave	Slave	Slave	Master

Position-4

DAC - DBCLK, DLRLCLK Clock Disable	Description
Off*	Enable DAC clocks
On	Tristate DAC clocks

Position-5	Position-6	DBCLK Source	DLRCLK Source	SPDIF_Rx Clocks	SPDIF_Tx Clocks	HDR1 Clocks	ADC Clocks	DAC Clocks
DAC - DBCLK, DLRCLK Source Selection	Off*	SPDIF_RX_8416	SPDIF_RX_8416	Master	Slave	Slave	N/A	Slave
Off	On	HDR1_DBCLK	HDR1_DLRCLK	Slave	Slave	Master	N/A	Slave
On	Off	ADC-DBCLK	ADC-ALRCLK	Slave	Slave	Slave	Master	Slave
On	On	DAC-DBCLK	DAC-ALRCLK	Slave	Slave	Slave	N/A	Master

Position-7

SPDIF_RX_TX Clock Rate Selection	Description
Off*	SPDIF_RX_TX MCLK Rate = 256xfs
On	SPDIF_RX_TX MCLK Rate = 128xfs

(Note: This position must be toggled after power-up for proper operation.)

Position-8

SPDIF_RX_TX /RESET	Description
Off*	SPDIF_RX_TX in active mode
On	SPDIF_RX_TX in reset mode

SPDIF_RX - CS8416 Jumpers

JP1	JP2	JP3
0 = Normal update rate phase detector, increased clock jitter	0 = NVERR selected	0 = Emphasis audio match off
1 = High update rate phase detector, low clock jitter	1 = RERR selected	1 = Emphasis audio match on

SPDIF_TX - CS8406 Jumpers

JP18	JP10	JP9
0 = the V pin input determines the state of the validity bit in the outgoing AES3 transmitted data	0	0
1 = the V pin input determines the state of the validity bit in the outgoing AES3 transmitted data	1	1

SPDIF_TX MCLK Rate = 256xfs
SPDIF_TX MCLK Rate = 128xfs

Figure 14. Settings Chart 1

DAC and ADC Serial Data (DSDATA/ASDATA) Source Selection and Routing (Switch S4 and Switch S3)


Rotary hex Switch S4 selects the AD1974 DAC serial data source. The DAC data source can be either SPDIF Receiver CS8416 or can be provided by the Header Connector HDR1. It is important to note that the DAC data source should be in sync with the DAC serial port clock source(set by DIP Switch S2, Positions [5:6]. DIP Switch S3 routes the ADC serial data among AD193x, SPDIF Transmitter CS8406, and Header Connector HDR1 in stereo, TDM, and aux mode.

***** Signal sources to the DAC data lines (DSDATA1/2/3/4) fill the columns, column header is the destination *****									
S4 Position	DAC Serial Format	DAC1 (DSDATA1)	DAC2 (DSDATA2)	DAC3 (DSDATA3)	DAC4 (DSDATA4)	Description			
0*	Stereo	SPDIF_RX_8416	SPDIF_RX_8416	SPDIF_RX_8416	SPDIF_RX_8416	SPDIF_RX_8416 stereo data to all eight DAC channels			
1	Stereo	SPDIF_RX_8416	HDR1_DSDATA2	HDR1_DSDATA3	HDR1_DSDATA4	SPDIF_RX_8416 stereo data to DAC1 only, rest DACs2/3/4 data from HDR1 connector			
2	Stereo	HDR1_DSDATA1	SPDIF_RX_8416	HDR1_DSDATA3	HDR1_DSDATA4	SPDIF_RX_8416 data to DAC2 only, rest DACs1/3/4 data from HDR1 connector			
3	Stereo	HDR1_DSDATA1	HDR1_DSDATA2	SPDIF_RX_8416	HDR1_DSDATA4	SPDIF_RX_8416 data to DAC3 only, rest DACs1/2/4 data from HDR1 connector			
4	N/A	N/A	N/A	HDR1_DSDATA1	SPDIF_RX_8416	SPDIF_RX_8416 data to DAC4 only, rest DACs1/2/3 data from HDR1 connector			
5	N/A	N/A	N/A	N/A	N/A	Source zero data to all eight DAC channels			
6	Stereo/TDM	ZERO DATA	ZERO DATA	ZERO DATA	ZERO DATA	HDR1 Connector Signal HDR1_DSDATA1 drives all four DAC pairs			
7	Stereo	HDR1_DSDATA1	HDR1_DSDATA2	HDR1_DSDATA3	HDR1_DSDATA4	HDR1 Connector Data Lines DSDATA1, DSDATA2... so on drive corresponding DAC data lines			
8	Stereo	HDR1_DSDATA1	HDR1_DSDATA2	HDR1_DSDATA3	HDR1_DSDATA4	HDR1 Connector Data Lines DSDATA1, DSDATA2... so on drive/receive corresponding DAC data lines in TDM mode			
A	Dual-Line TDM	HDR1_DSDATA1	DAC_TDM_OUT	HDR1_DSDATA3	DAC_TDM_OUT	HDR1 Connector Data Lines DSDATA1, DSDATA2... so on drive/receive corresponding DAC data lines in TDM mode			
B	Dual-Line TDM	HDR1_DSDATA1	DAC_TDM_OUT	HDR1_DSDATA3	DAC_TDM_OUT	HDR1 Connector Data Lines DSDATA1, DSDATA2... so on drive/receive corresponding DAC data lines in TDM mode			
C	DAC aux mode	HDR1_DSDATA1	Aux ADC1 Input	Aux ADC2 Input	Aux DAC2 output	HDR1 Connector Data Lines DSDATA1, DSDATA2... so on drive/receive corresponding DAC data lines in TDM mode			
D									
E									
F	Stereo/TDM	TRISTATE	TRISTATE	TRISTATE	TRISTATE	Tristate all DAC data lines, DSDATA1, DSDATA2, DSDATA3, and DSDATA4			

***** Column content indicates the direction of the DAC data pins and corresponding HDR1 connector DAC data pins *****									
S4 Position	DAC1 (DSDATA1)	DAC2 (DSDATA2)	DAC3 (DSDATA3)	DAC4 (DSDATA4)	HDR1_DSDATA1	HDR1_DSDATA2	HDR1_DSDATA3	HDR1_DSDATA4	SPDIF_Rx Data
0*	Input	Input	Input	Input	N/A	N/A	N/A	N/A	Master
1	Input	Input	Input	Input	N/A	Input	Input	Input	Master
2	Input	Input	Input	Input	N/A	N/A	Input	Input	Master
3	Input	Input	Input	Input	Input	Input	N/A	Input	Master
4	Input	Input	Input	Input	Input	Input	Input	N/A	Master
5	Input	Input	Input	Input	Input	Input	Input	Input	Master
6	Input	Input	Input	Input	Output	Output	Output	Output	N/A
7	Input	Input	Input	Input	Input	Input	Input	Input	Master
8	Input	Input	Input	Input	Input	Input	Input	Input	Master
9	Input	Input	Input	Input	Input	Input	Input	Input	Master
A	Output	Output	Output	Output	Input	Input	Input	Input	Master
B	Output	Output	Output	Output	Input	Input	Input	Input	Master
C	Input	Input	Input	Input	Input	Input	Input	Input	Master
D	Input	Input	Input	Input	Input	Input	Input	Input	Master
E	TRISTATE	TRISTATE	TRISTATE	TRISTATE	TRISTATE	TRISTATE	TRISTATE	TRISTATE	TRISTATE

Figure 15. Settings Chart 2

SCHEMATICS AND ARTWORK

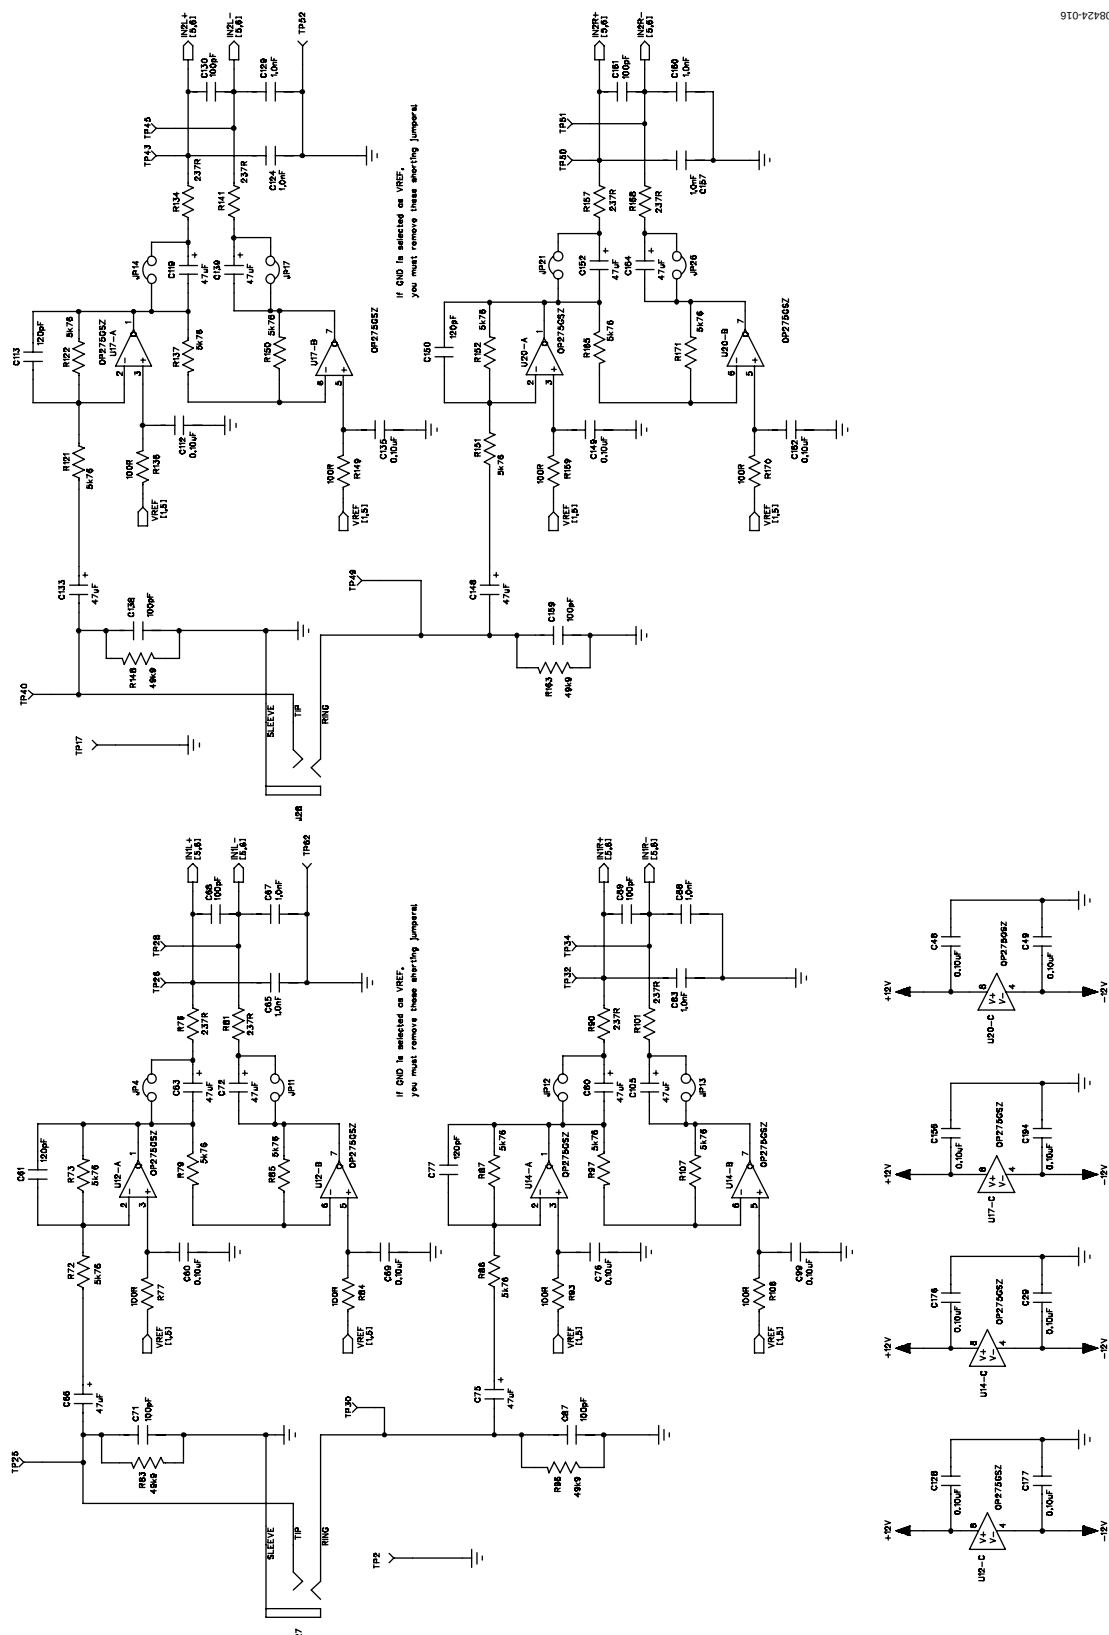

08424-017

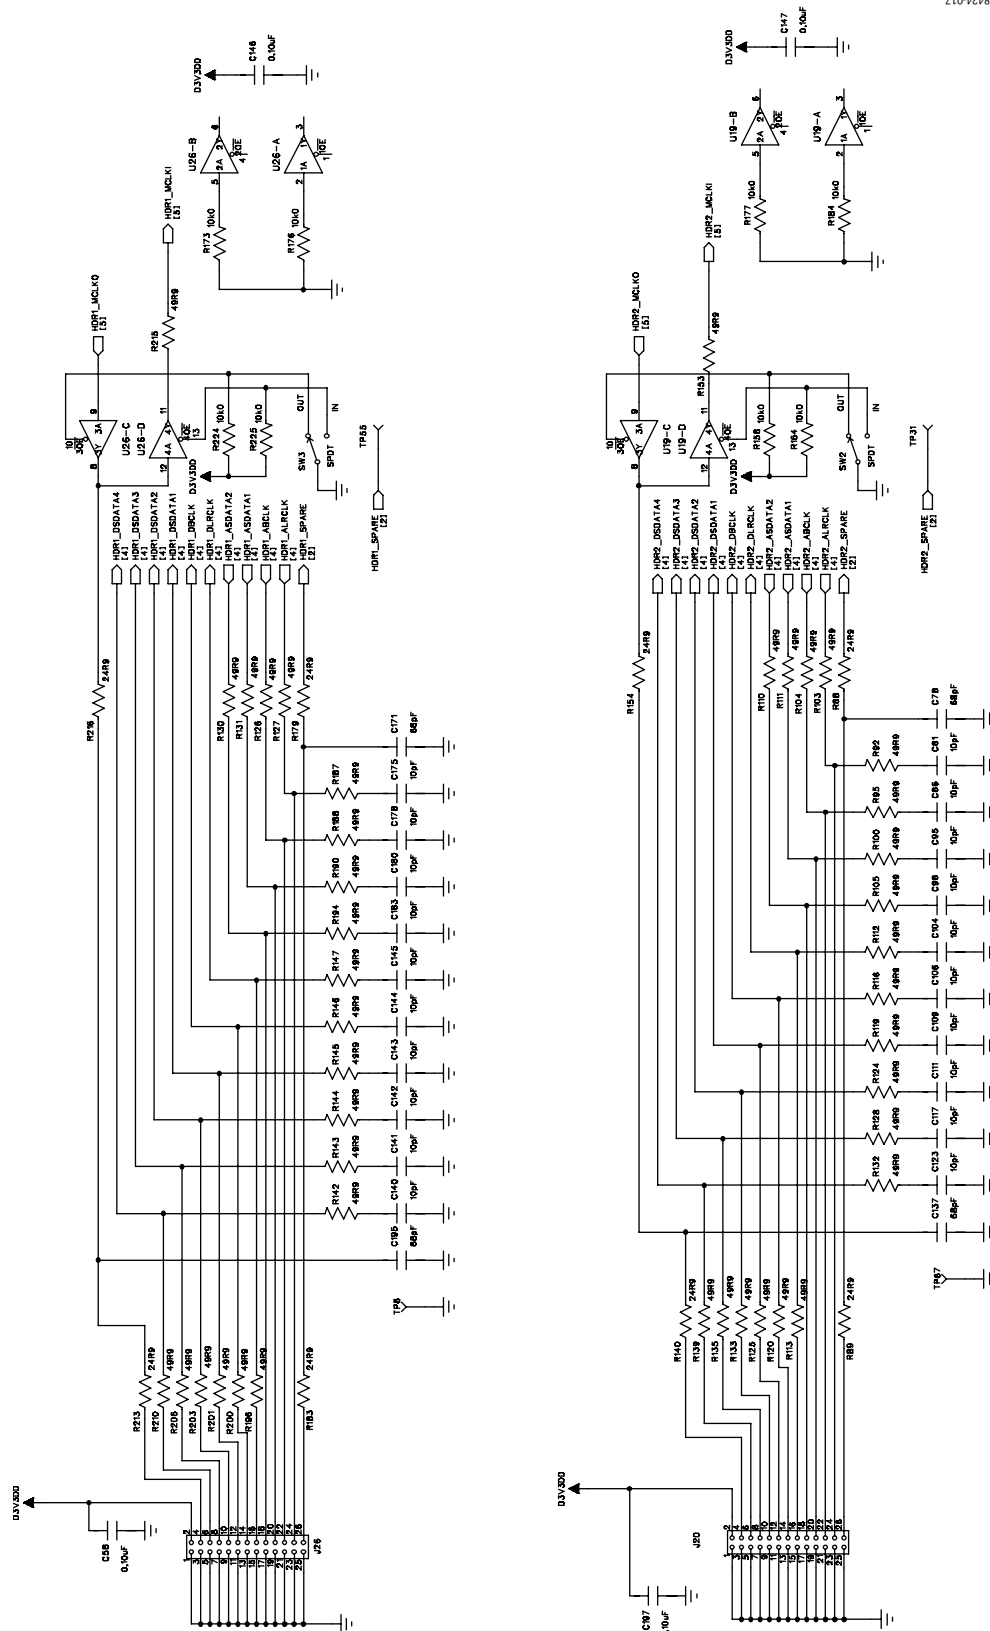


Figure 17. Board Schematics, Page 2—Serial Digital Audio Interface Headers with MCLK Direction Switching

09A24-018

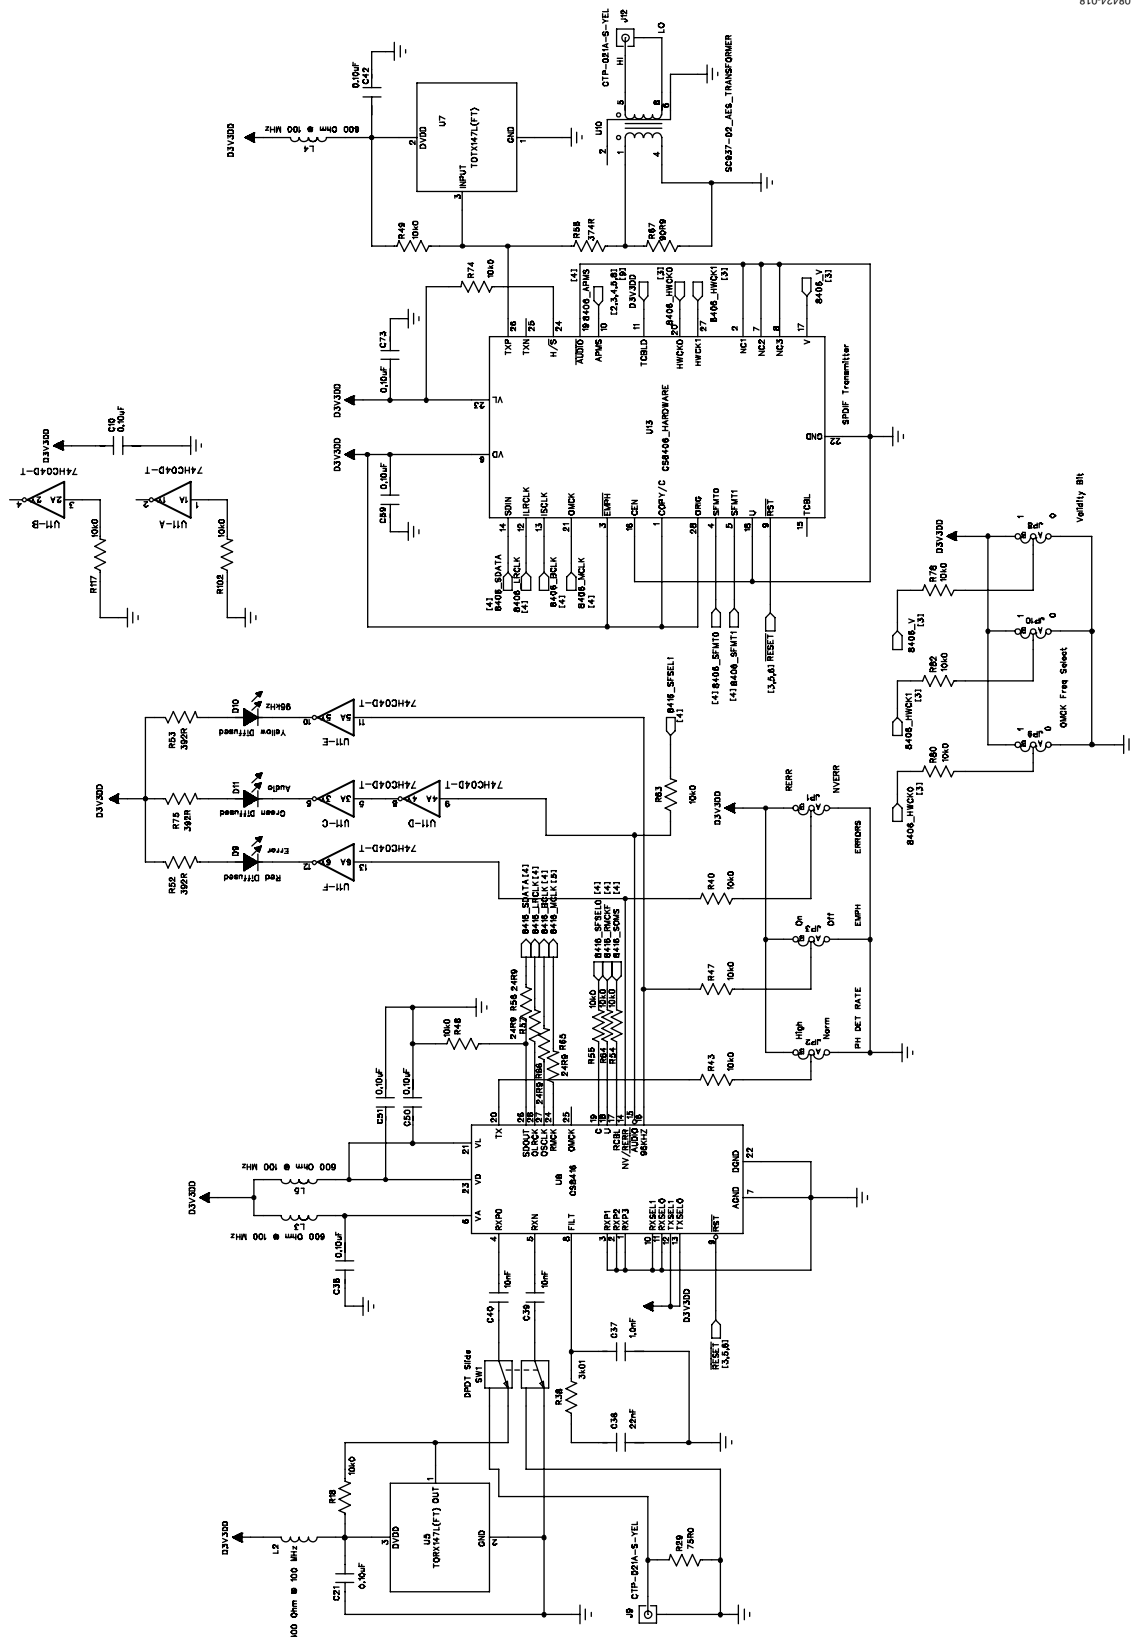


Figure 18. Board Schematics, Page 3—S/PDIF Receive and Transmit Interfaces

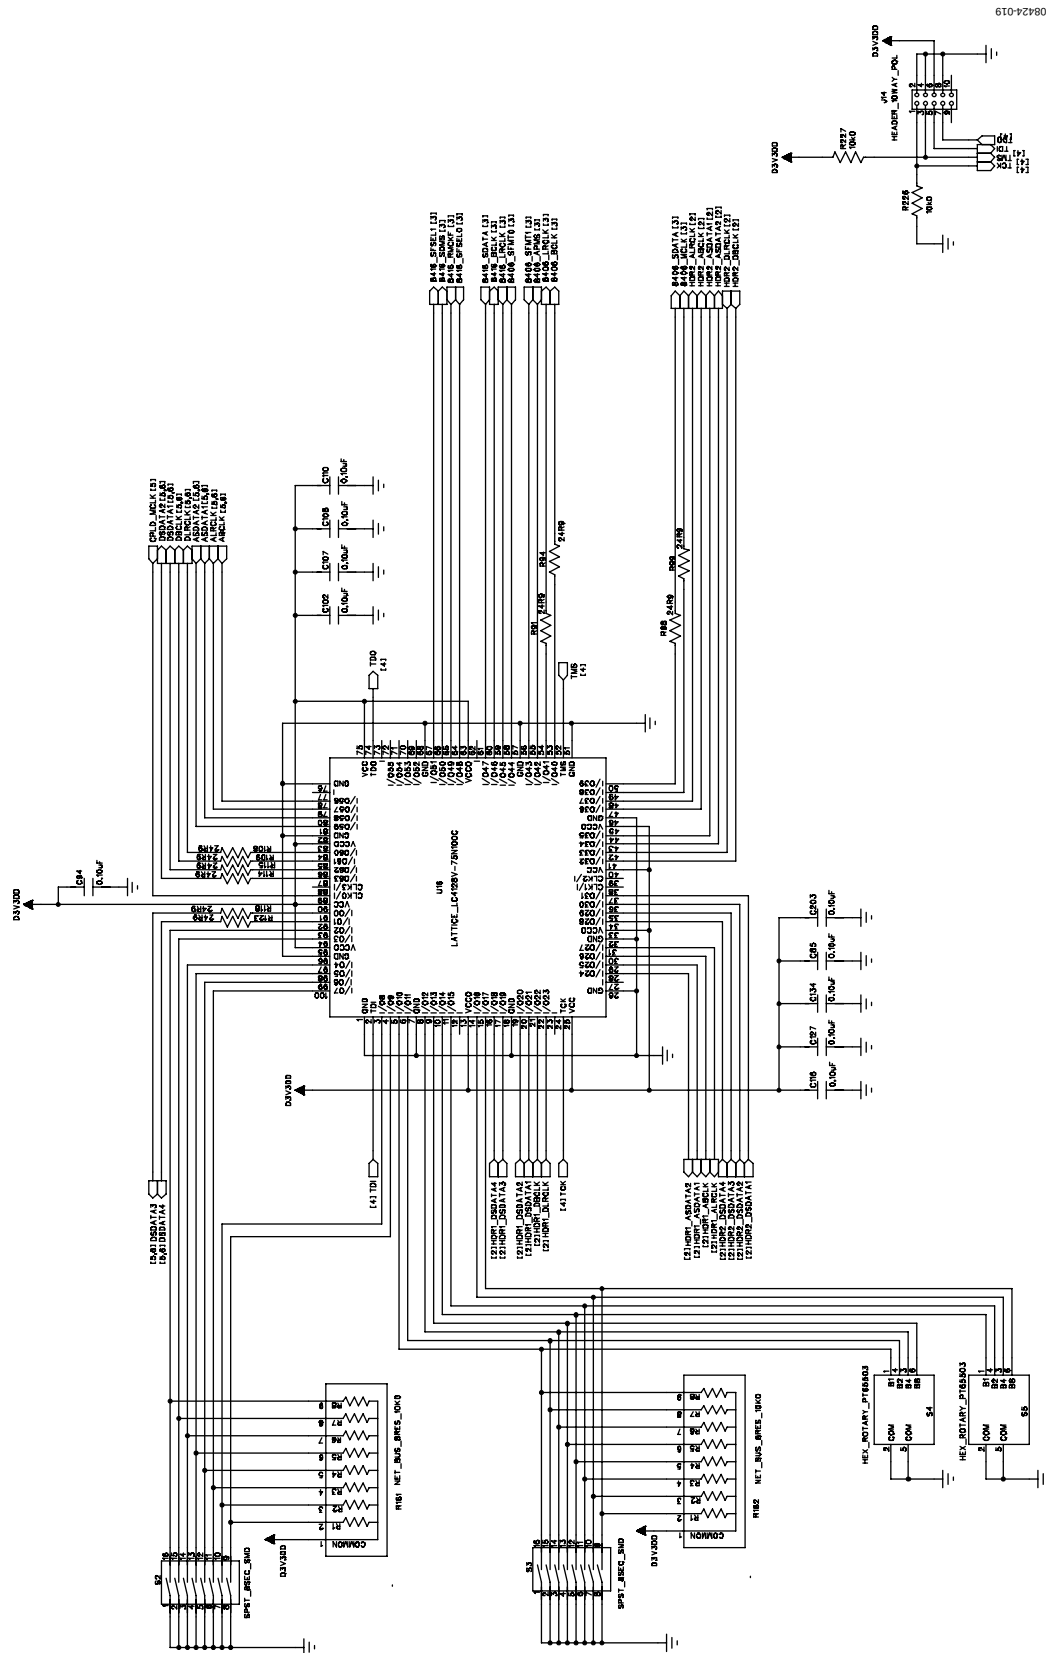


Figure 19. Board Schematics, Page 4—Serial Digital Audio Routing and Control CPLD

Rev. 0 | Page 13 of 32

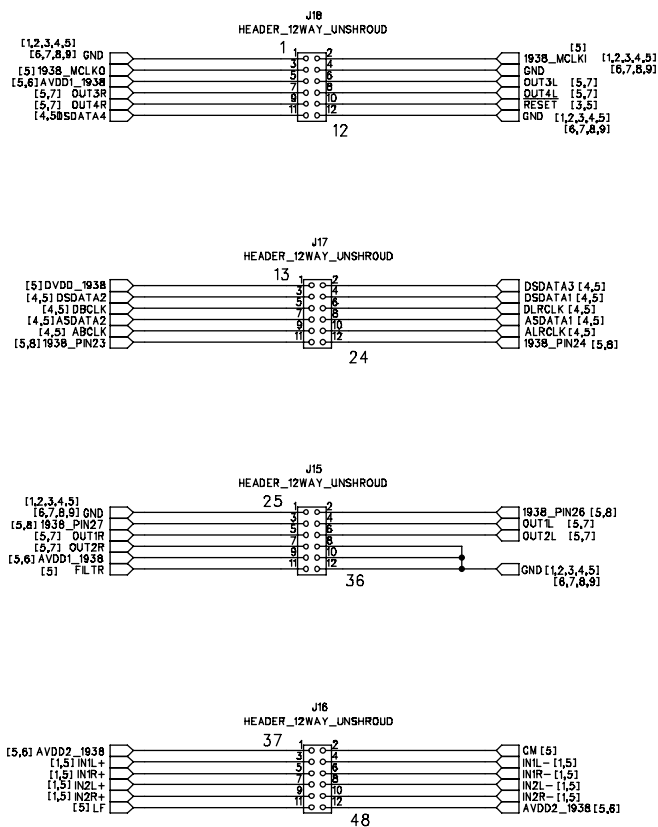


Figure 21. Board Schematics, Page 6—Daughter Card Interface, Useful as Test Points

08A24-022

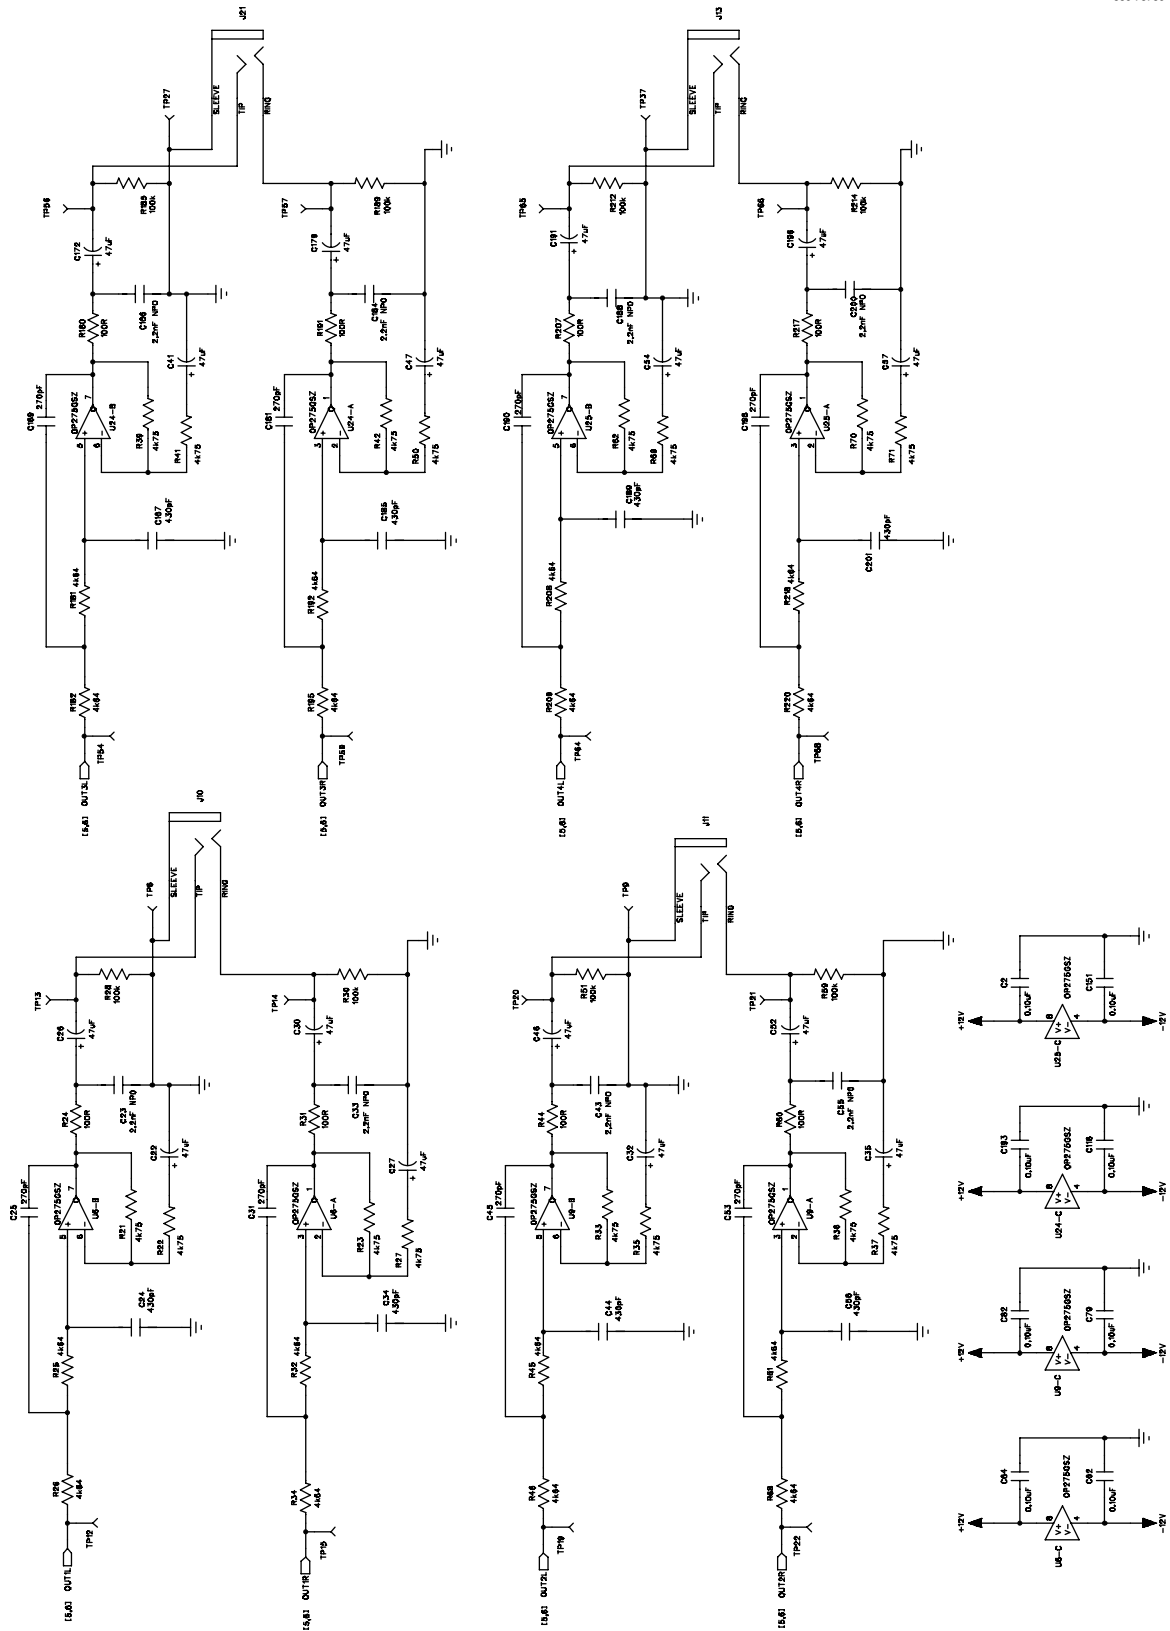


Figure 22. Board Schematics, Page 7—DAC Buffer Circuits

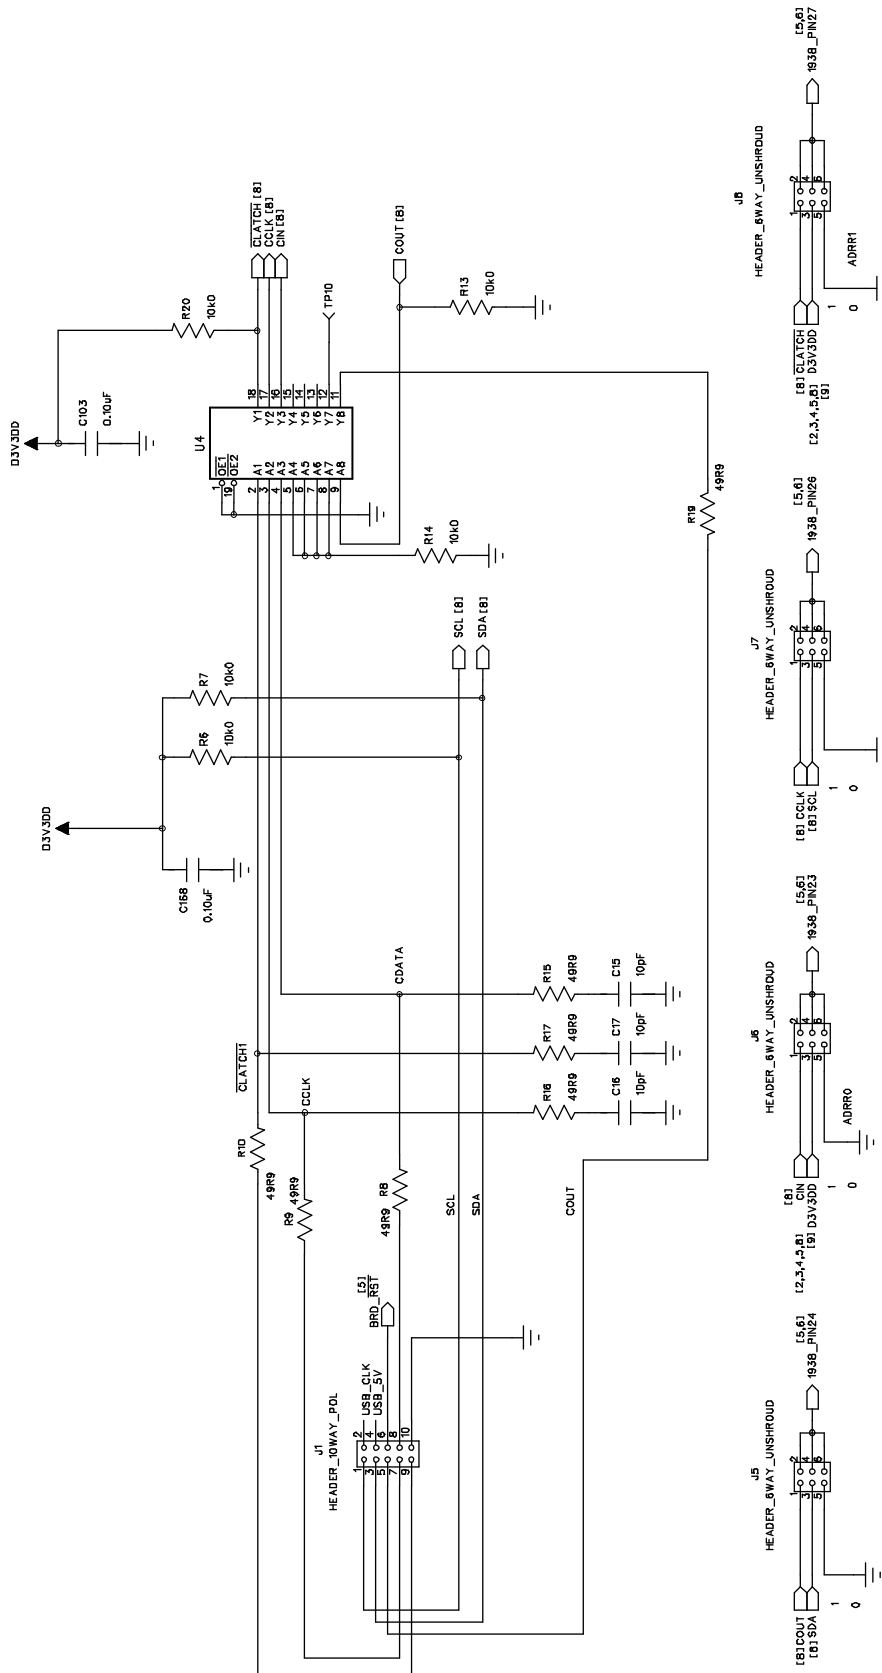


Figure 23. Board Schematics, Page 8—SPI Control Interface

For AD1974 (SPI), JP5–8 to 1–2 position.

For AD1976 (I2C), JP5&7 to 3–4 to select I2C mode.

AD1976 (I2C) ADDR jumpers (J6&8) must match Global Address Bits

For Standalone Master mode: All=0, except 1938_PIN24=SDA (J5).

For Standalone Slave mode: All=0.

Any change to this configuration requires that the part be reset.

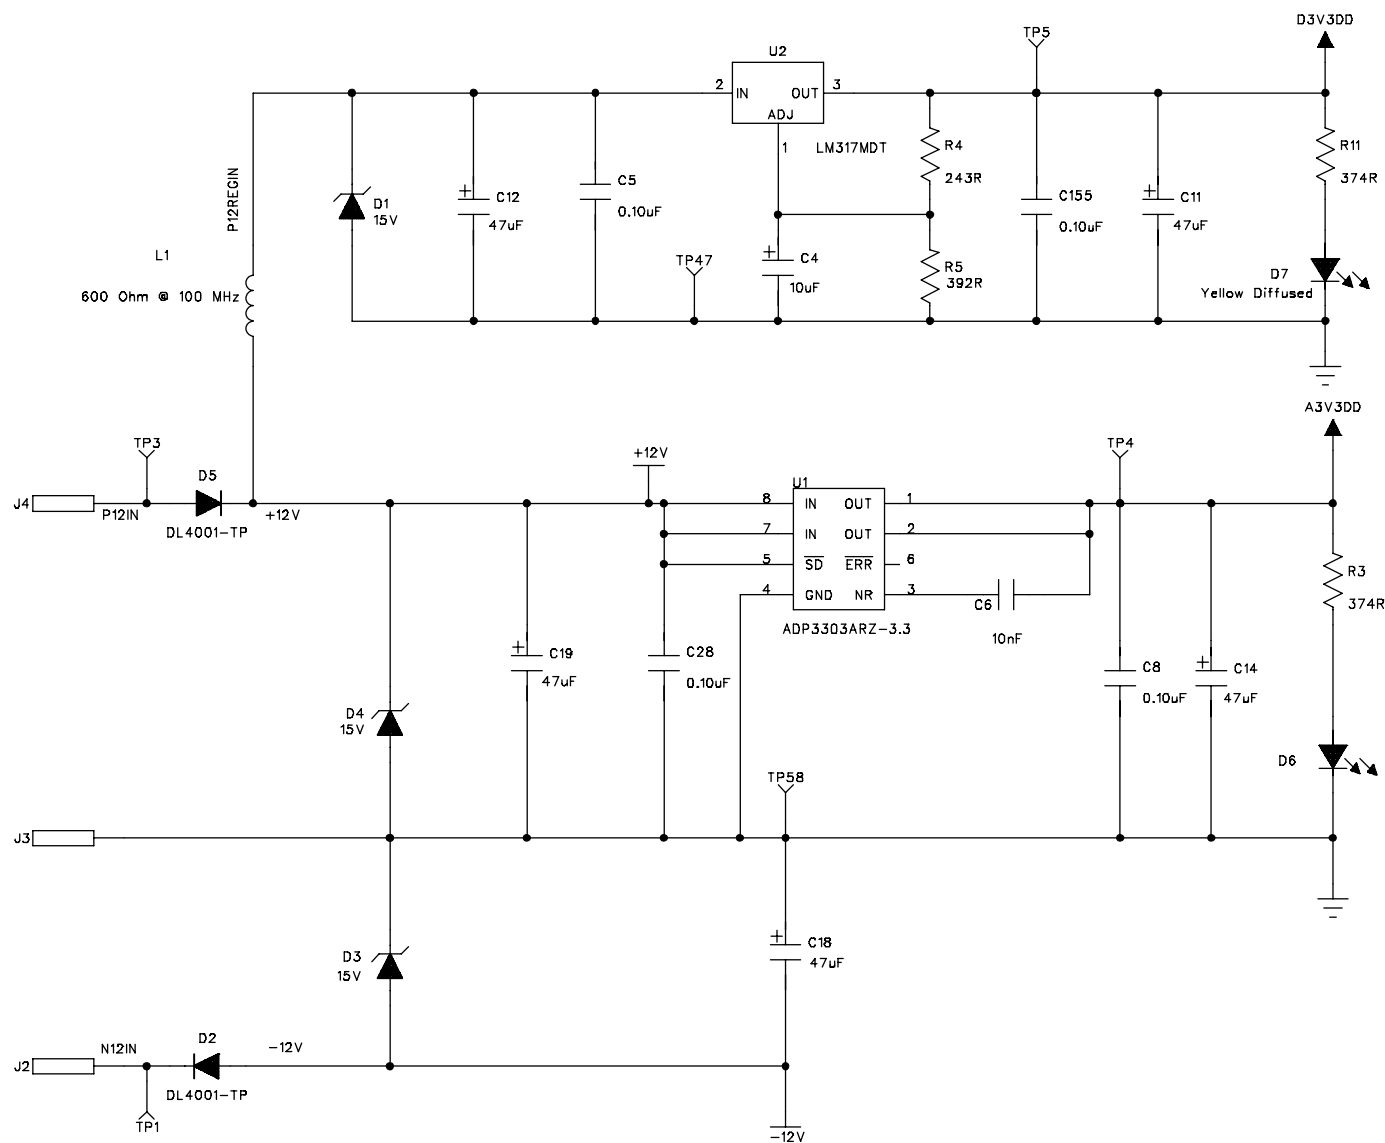


Figure 24. Board Schematics, Page 9—Power Supply

08/24/04

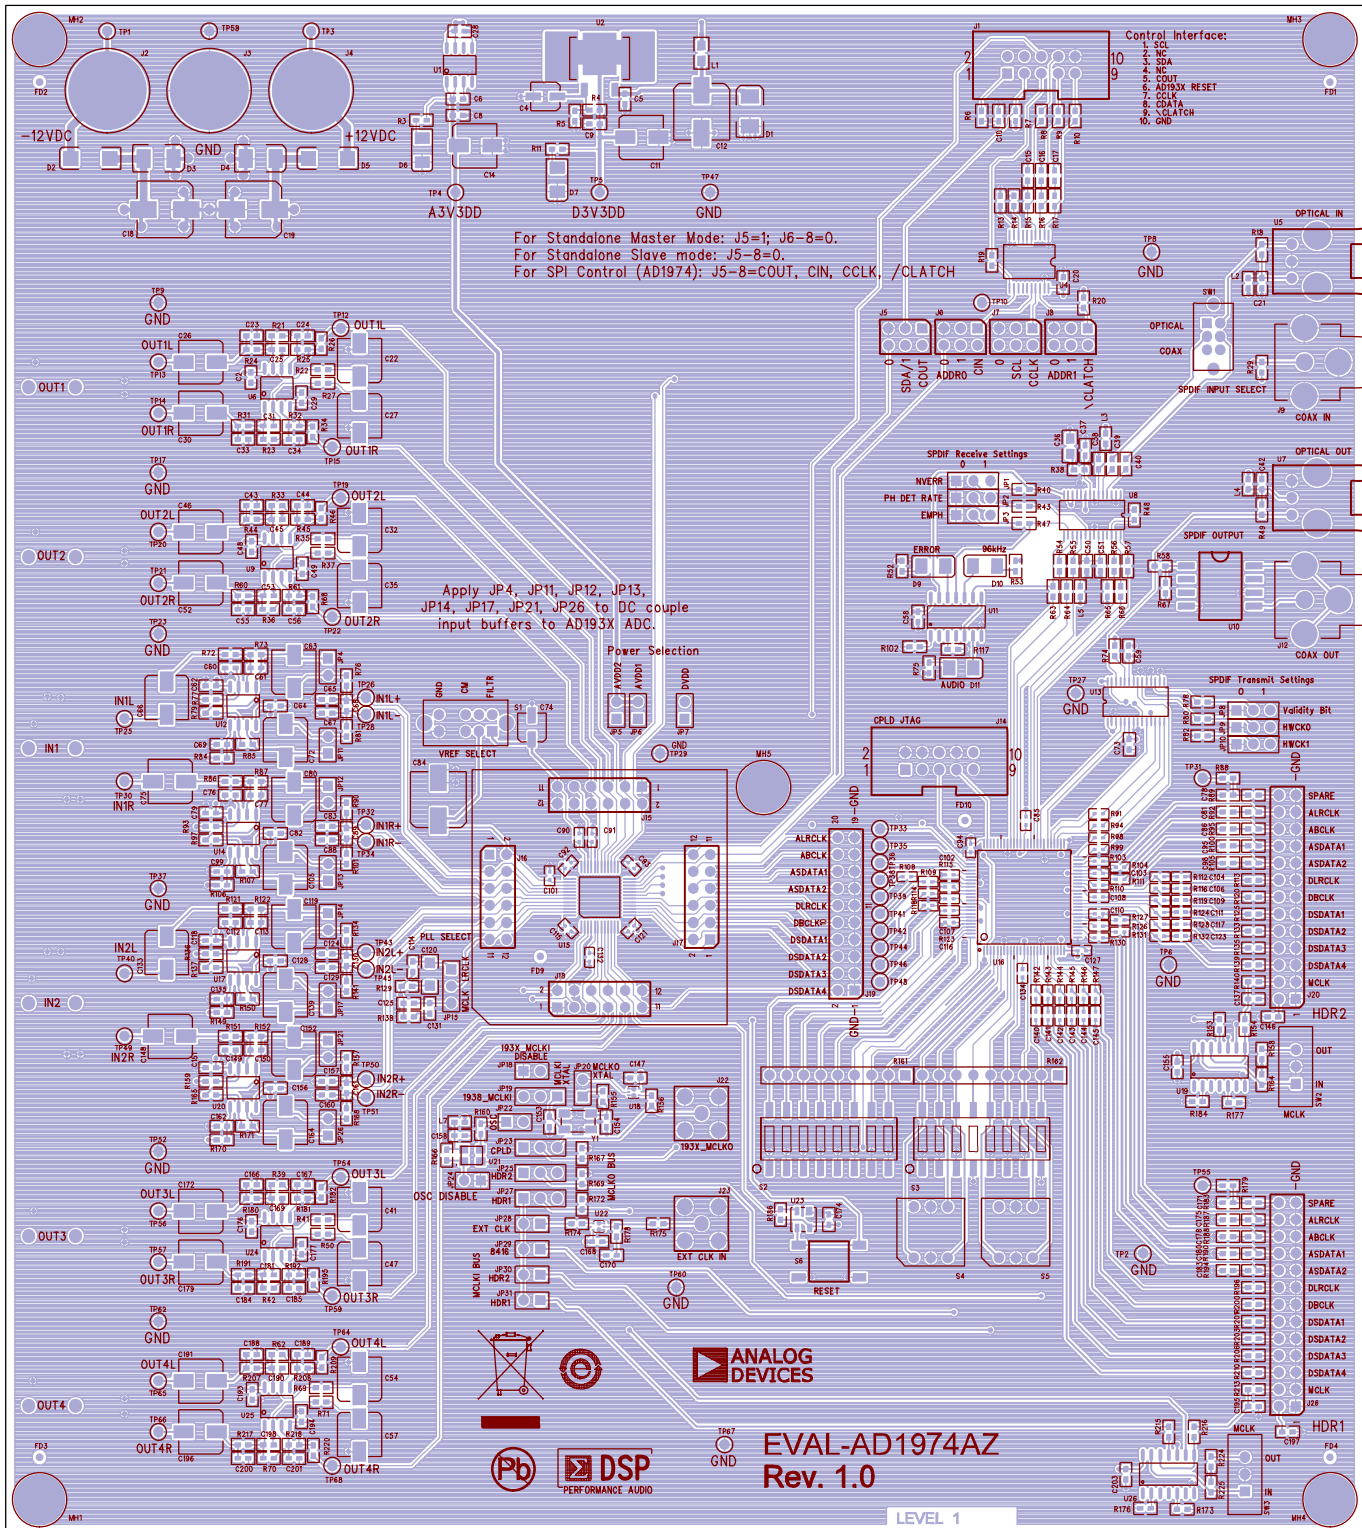


Figure 25. Top Assembly Layer

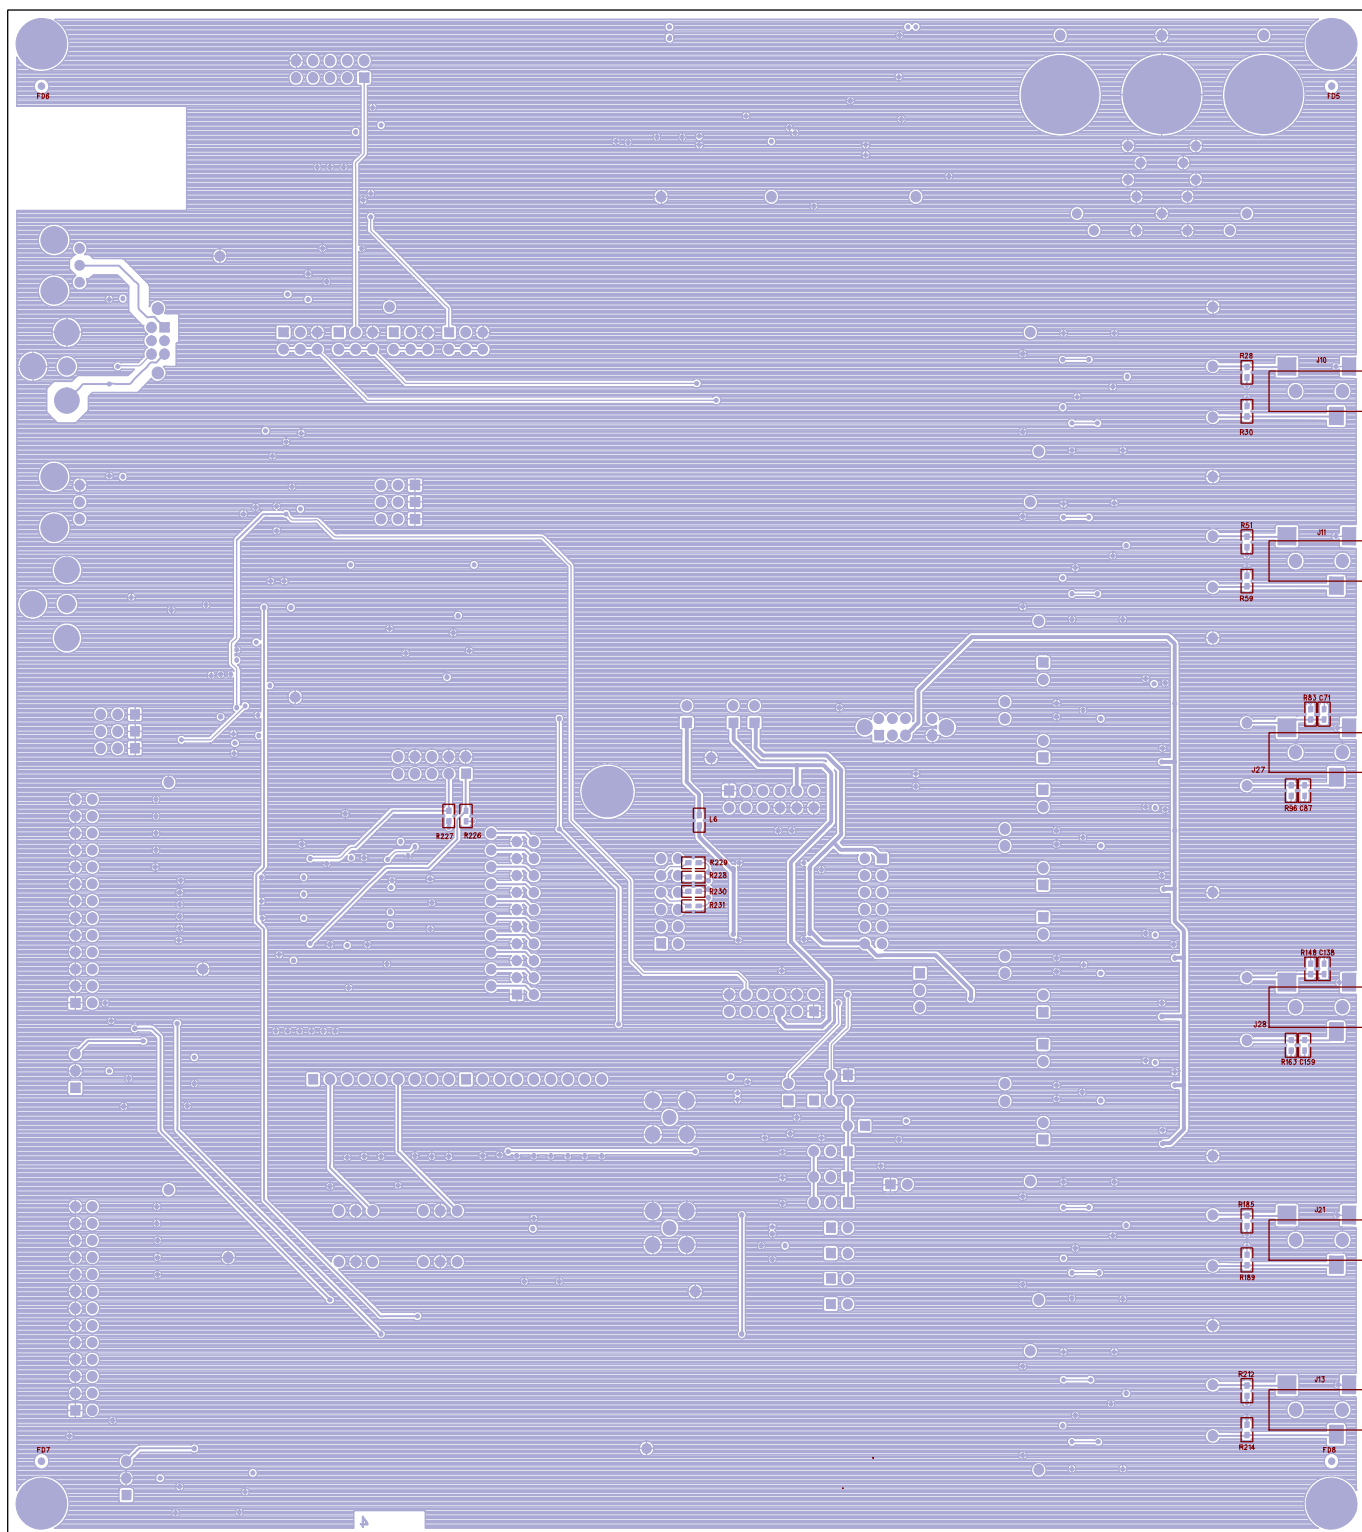


Figure 26. Bottom Assembly Layer

08424-026

CPLD CODE

```

MODULE                                IF_Logic
TITLE    'AD1974 EVB Input Interface Logic'

//=====
//  FILE:                                AD1974_pld_revE.abl
//  REVISION DATE:                04-16-09 (rev-E)
//  REVISION:                      E
//  DESCRIPTION:
//=====

LIBRARY 'MACH';

"INPUTS -----
// AD1974 CODEC pins
DSDATA1,DSDATA2        pin 86, 87 istype 'com';
DSDATA3,DSDATA4        pin 91, 92 istype 'com';
DBCLK,DLRCLK           pin 85, 84 istype 'com';
ASDATA1,ASDATA2        pin 80, 81 istype 'com';
ABCLK,ALRCLK           pin 78, 79 istype 'com';

// 25-pin header connector HDR1 pins
HDR1_DSDATA1           pin 20 istype 'com';
HDR1_DSDATA2           pin 19 istype 'com';
HDR1_DSDATA3           pin 17 istype 'com';
HDR1_DSDATA4           pin 16 istype 'com';
HDR1_DBCLK             pin 21 istype 'com';
HDR1_DLRCLK            pin 22 istype 'com';
HDR1_ASDATA1           pin 29 istype 'com, buffer';
HDR1_ASDATA2           pin 28 istype 'com, buffer';
HDR1_ABCLK             pin 30 istype 'com';
HDR1_ALRCLK            pin 31 istype 'com';

// 25-pin header connector HDR2 pins
HDR2_DSDATA1           pin 37 istype 'com';
HDR2_DSDATA2           pin 36 istype 'com';
HDR2_DSDATA3           pin 35 istype 'com';
HDR2_DSDATA4           pin 34 istype 'com';
HDR2_DBCLK             pin 41 istype 'com';
HDR2_DLRCLK            pin 42 istype 'com';
HDR2_ASDATA1           pin 44 istype 'com';
HDR2_ASDATA2           pin 43 istype 'com, buffer';
HDR2_ABCLK             pin 47 istype 'com';
HDR2_ALRCLK            pin 48 istype 'com';

// S/PDIF Rx CS8414 pins
SDATA_8416             pin 61 istype 'com';

```

```

BCLK_8416                pin 60 istype 'com';
LRCLK_8416                pin 59 istype 'com';
SOMS_RX,SFSEL1_RX,SFSEL0_RX,RMCKF_RX  pin 66,67,64,65 istype 'com';

// S/PDIF Tx CS8404 pins
SDATA_8406                pin 50 istype
'com';
BCLK_8406,LRCLK_8406      pin 53, 54 istype 'com';
MCLK_8406                pin 49 istype
'com';
APMS_TX,SFMT1_TX,SFMT0_TX  pin 55,56,58 istype 'com';
CPLD_MCLK                pin 89 istype
'com';

// AD1974 SPI port pins
//CCLK,CDATA,CLATCH      pin 84, 83, 85 istype 'com';
//COUT
                        pin 82 istype 'com';
//CLATCH2,CLATCH3,CLATCH4      pin 86, 56, 4 istype 'com';
//CONTROL_ENB                pin 81 istype
'com';

S/PDIF_RESET_OUT          pin 69 istype
'com';

// Switch S1, S2, S3 and S4 pins
ADC_CLK_OFF                pin 93 istype
'com';                // S2-1
ADC_CLK_SRC1                pin 94 istype 'com';        // S2-2
ADC_CLK_SRC0                pin 97 istype 'com';        // S2-3
DAC_CLK_OFF                pin 98 istype
'com';                // S2-4
DAC_CLK_SRC1                pin 99 istype 'com';        // S2-5
DAC_CLK_SRC0                pin 100 istype 'com';        // S2-6
S/PDIF_MCLK_RATE            pin 3 istype 'com';        // S2-7
S/PDIF_RESET_IN            pin 4 istype 'com';        // S2-8

MODE11,MODE12,MODE13,MODE14      pin 5,6,8,9 istype 'com'; // S4
STAND_ALONE,MODE22,MODE23,MODE24  pin 10,11,14,15 istype 'com'; // S5

"NODES
I_DSDATA1, I_DSDATA2, I_DSDATA3, I_DSDATA4      node istype 'com';
I_DBCLK, I_DLRCLK                node istype 'com';
I_ASDATA1, I_ASDATA2              node istype 'com, buffer';
I_ABCLK, I_ALRCLK                node istype 'com';
Qdivide                          node istype 'reg, buffer';

```

```
//=====
```

```
"MACROS
```

```
// Switch S3, DIP POSITIONS 6 AND 7
```

```
ADC_HDR_NORMAL      = ( MODE22 &  MODE23);
ADC_HDR_DATA2_DATA1 = ( MODE22 & !MODE23);
ADC_HDR_TDM         = (!MODE22 &  MODE23);
ADC_HDR_AUX         = (!MODE22 & !MODE23);
```

```
S/PDIF_OUT_MUX = MODE24;
```

```
// HEX Switch S4
```

```
                // S4 position 0,
DAC_RX_ALL  =  ( MODE14 & MODE13 &  MODE12 &  MODE11);
```

```
                // S4 position 1,
DAC_RX_1    =  ( MODE14 & MODE13 &  MODE12 & !MODE11);
```

```
                // S4 position 2,
DAC_RX_2    =  ( MODE14 & MODE13 & !MODE12 &  MODE11);
```

```
                // S4 position 3,
DAC_RX_3    =  ( MODE14 & MODE13 & !MODE12 & !MODE11);
```

```
                // S4 position 4,
DAC_RX_4    =  ( MODE14 & !MODE13 &  MODE12 &  MODE11);
```

```
                // S4 position 5,
NA1  =  ( MODE14 & !MODE13 &  MODE12 & !MODE11);
```

```
                // S4 position 6,
NA2  =  ( MODE14 & !MODE13 & !MODE12 &  MODE11);
```

```
                // S4 position 7,
DAC_DATA_ZERO = ( MODE14 & !MODE13 & !MODE12 & !MODE11);
```

```
                // S4 position 8,
DAC_HDR1_ALL  = ( !MODE14 & MODE13 &  MODE12 &  MODE11);
```

```
                // S4 position 9,
DAC_HDR1_IND  = ( !MODE14 & MODE13 &  MODE12 & !MODE11);
```

```
                // S4 position A,
DAC_HDR1_TDM  = ( !MODE14 & MODE13 & !MODE12 &  MODE11);
```

```

        // S4 position B,
DAC_DUAL_TDM = ( !MODE14 & MODE13 & !MODE12 & !MODE11);

        // S4 position C,
DAC_HDR1_AUX = ( !MODE14 & !MODE13 & MODE12 & MODE11);

        // S4 position D,
NA3 = ( !MODE14 & !MODE13 & MODE12 & !MODE11);

        // S4 position E,
NA4 = ( !MODE14 & !MODE13 & !MODE12 & MODE11);

        // S4 position F,
DAC_DATA_HIZ = ( !MODE14 & !MODE13 & !MODE12 & !MODE11);

// Switch S2

DAC_S/PDIF = (DAC_CLK_SRC1 & DAC_CLK_SRC0);
DAC_HDR1 = (DAC_CLK_SRC1 & !DAC_CLK_SRC0);
DAC_ADC = (!DAC_CLK_SRC1 & DAC_CLK_SRC0);
DAC_DAC = (!DAC_CLK_SRC1 & !DAC_CLK_SRC0);

ADC_S/PDIF = (ADC_CLK_SRC1 & ADC_CLK_SRC0);
ADC_HDR1 = (ADC_CLK_SRC1 & !ADC_CLK_SRC0);
ADC_ADC = (!ADC_CLK_SRC1 & ADC_CLK_SRC0);
ADC_DAC = (!ADC_CLK_SRC1 & !ADC_CLK_SRC0);

"=====
EQUATIONS

S/PDIF_RESET_OUT = S/PDIF_RESET_IN;

// Configuration of the CS8416, changes active on reset, BCLK_8416 and LRCLK_8416 are bi-
directional signals.
SOMS_RX = DAC_S/PDIF;

// SOMS = Serial Output Master/Slave Select
SFSEL1_RX = 0; //DIR_RJ # DIR_RJ16;
// SFSEL1 = Serial Format Select 1
SFSEL0_RX = 1; //DIR_I2S # DIR_DSP;
// SFSEL0 = Serial Format Select 0
RMCKF_RX = !S/PDIF_MCLK_RATE;
// RMCKF =
Receive Master Clock Frequency

// M0_8414 = (0 # !DAC_S/PDIF);
// M1_8414 = 1;
// M2_8414 = 0;

```



```

// M3_8414 = 0;

// CS8404 Tx interface mode select
    APMS_TX = 0; // Tx serial port is always slave in this application
    SFMT1_TX = 0; // Tx data format is I2S always
    SFMT0_TX = 1;

// M0_8404 = 0;
// M1_8404 = 0;
// M2_8404 = 1; // I2S format only

// divide 256Fs clock by 2 for 128Fs clock to the the S/PDIF Tx
// Qdivide.clk = CPLD_MCLK;
// Qdivide.d = !Qdivide;

// MCLK_8406 = Qdivide;
    MCLK_8406 = CPLD_MCLK;
BCLK_8406 = I_ABCLK;
LRCLK_8406 = I_ALRCLK;
SDATA_8406 = (ASDATA1 & S/PDIF_OUT_MUX) # (ASDATA2 & !S/PDIF_OUT_MUX);

// For SPI mode, let external port drive the SPI port

DBCLK.oe = (DAC_S/PDIF # DAC_HDR1 # DAC_ADC # !DAC_DAC) & (DAC_CLK_OFF);
DLRCLK.oe = (DAC_S/PDIF # DAC_HDR1 # DAC_ADC # !DAC_DAC) & (DAC_CLK_OFF);
ABCLK.oe = (ADC_S/PDIF # ADC_HDR1 # !ADC_ADC # ADC_DAC) & (ADC_CLK_OFF);
ALRCLK.oe = (ADC_S/PDIF # ADC_HDR1 # !ADC_ADC # ADC_DAC) & (ADC_CLK_OFF);

HDR1_DBCLK.oe = (DAC_S/PDIF # !DAC_HDR1 # DAC_ADC # DAC_DAC);
HDR1_DLRCLK.oe = (DAC_S/PDIF # !DAC_HDR1 # DAC_ADC # DAC_DAC);
HDR1_ABCLK.oe = (ADC_S/PDIF # !ADC_HDR1 # ADC_ADC # ADC_DAC);
HDR1_ALRCLK.oe = (ADC_S/PDIF # !ADC_HDR1 # ADC_ADC # ADC_DAC);

BCLK_8416.oe = (!DAC_S/PDIF);
LRCLK_8416.oe = (!DAC_S/PDIF);
BCLK_8416 = I_DBCLK;
LRCLK_8416 = I_DLRCLK;

DSDATA1.oe = (!DAC_DATA_HIZ);
DSDATA2.oe = (!(DAC_HDR1_TDM # DAC_DUAL_TDM # DAC_DATA_HIZ)); //DSDATA2 is output in DAC
TDM-daisy chain mode
DSDATA3.oe = (!DAC_DATA_HIZ);
DSDATA4.oe = (!(DAC_DUAL_TDM # ADC_HDR_AUX # DAC_HDR1_AUX # DAC_DATA_HIZ)); // SECOND
TDM-OUT IN DUAL LINE DAC TDM MODE
ASDATA2.oe = (ADC_HDR_TDM); //ASDATA2 is input in ADC TDM mode

HDR1_DSDATA2.oe = (DAC_HDR1_TDM # DAC_DUAL_TDM);

```

```
HDR1_DSDATA4.oe = (DAC_DUAL_TDM # ADC_HDR_AUX # DAC_HDR1_AUX);
HDR1_ASDATA2.oe = (!ADC_HDR_TDM);
```

```
DBCLK      = I_DBCLK;
DLRCLK     = I_DLRCLK;
ABCLK      = I_ABCLK;
ALRCLK     = I_ALRCLK;
```

```
DSDATA1 = (HDR1_DSDATA1 & (DAC_HDR1_ALL # DAC_HDR1_IND # DAC_RX_2 # DAC_RX_3 # DAC_RX_4 #
DAC_HDR1_TDM # DAC_DUAL_TDM # ADC_HDR_AUX))
          # (SDATA_8416 & (DAC_RX_ALL # DAC_RX_1)) # (0 & DAC_DATA_ZERO);
DSDATA2 = (HDR1_DSDATA1 & DAC_HDR1_ALL) # (HDR1_DSDATA2 & (DAC_HDR1_IND # ADC_HDR_AUX #
DAC_HDR1_AUX # DAC_RX_1 # DAC_RX_3 # DAC_RX_4))
          # (SDATA_8416 & (DAC_RX_ALL # DAC_RX_2)) # (0 & DAC_DATA_ZERO);
DSDATA3 = (HDR1_DSDATA1 & (DAC_HDR1_ALL)) # (HDR1_DSDATA3 & (DAC_HDR1_IND # DAC_DUAL_TDM #
ADC_HDR_AUX # DAC_HDR1_AUX # DAC_RX_1 # DAC_RX_2 # DAC_RX_4))
          # (SDATA_8416 & (DAC_RX_ALL # DAC_RX_3)) # (0 & DAC_DATA_ZERO);
DSDATA4 = (HDR1_DSDATA1 & (DAC_HDR1_ALL)) # (HDR1_DSDATA4 & (DAC_HDR1_IND # DAC_RX_1 #
DAC_RX_2 # DAC_RX_3))
          # (SDATA_8416 & (DAC_RX_ALL # DAC_RX_4)) # (0 & DAC_DATA_ZERO);
```

```
HDR1_DBCLK = I_DBCLK;
HDR1_DLRCLK = I_DLRCLK;
HDR1_ABCLK = I_ABCLK;
HDR1_ALRCLK = I_ALRCLK;
```

```
HDR1_ASDATA1 = (ASDATA1 & (ADC_HDR_NORMAL # ADC_HDR_TDM # ADC_HDR_AUX # DAC_HDR1_AUX )) #
(ASDATA2 & ADC_HDR_DATA2_DATA1);
HDR1_ASDATA2 = ASDATA2;
ASDATA2 = HDR1_ASDATA2;

HDR1_DSDATA2 = DSDATA2;
HDR1_DSDATA4 = DSDATA4;
```

```
// Internal node signals
```

```
I_DBCLK = (BCLK_8416 & DAC_S/PDIF) # (HDR1_DBCLK & DAC_HDR1) # (DBCLK & DAC_DAC) #
(I_ABCLK & DAC_ADC);
```

```
I_DLRCLK = (LRCLK_8416 & DAC_S/PDIF) # (HDR1_DLRCLK & DAC_HDR1) # (DLRCLK & DAC_DAC) #
(I_ALRCLK & DAC_ADC);
```

```
I_ABCLK = (BCLK_8416 & ADC_S/PDIF) # (HDR1_ABCLK & ADC_HDR1) # (ABCLK & ADC_ADC) #
(I_DBCLK & ADC_DAC);
```

```
I_ALRCLK = (LRCLK_8416 & ADC_S/PDIF) # (HDR1_ALRCLK & ADC_HDR1) # (ALRCLK & ADC_ADC) #
(I_DLRCLK & ADC_DAC);
```

```
"=====
END IF_Logic
```

ORDERING INFORMATION

BILL OF MATERIALS

Table 1.

Qty	Designator	Description	Manufacturer	Part Number
18	C85, C90 to C94, C101 to C103, C107, C108, C110, C115, C116, C121, C127, C132, C134	Multilayer ceramic capacitor, 16 V, X7R (0402)	Panasonic EC	ECJ-0EX1C104K
46	C2, C5, C8 to C10, C20, C21, C28, C29, C38, C42, C48 to C51, C58 to C60, C62, C64, C69, C73, C76, C79, C82, C99, C112, C118, C128, C135, C146, C147, C149, C151, C155, C156, C158, C162, C168, C174, C176, C177, C193, C194, C197, C203	Multilayer ceramic capacitor, 50 V, X7R (0603)	Panasonic EC	ECJ-1VB1H104K
9	C37, C65, C67, C83, C88, C124, C129, C157, C160	Multilayer ceramic capacitor, 50 V, NP0 (0603)	Panasonic EC	ECJ-1VC1H102J
12	R28, R30, R51, R59, R166, R167, R169, R172, R185, R189, R212, R214	Chip resistor, 100 k Ω , 1%, 125 mW, thick film (0603)	Panasonic EC	ERJ-3EKF1003V
8	C68, C71, C87, C89, C130, C138, C159, C161	Multilayer ceramic capacitor, 50 V, NP0 (0603)	Panasonic EC	ECJ-1VC1H101J
16	R24, R31, R44, R60, R77, R84, R93, R106, R136, R149, R159, R170, R180, R191, R207, R217	Chip resistor, 100 k Ω , 1%, 100 mW, thick film (0603)	Panasonic EC	ERJ-3EKF1000V
1	C84	Aluminum electrolytic capacitor, 100 μ F, 16 V, FC, 105 deg, SMD_E	Panasonic EC	EEE-FC1C101P
32	R6, R7, R13, R14, R18, R20, R40, R43, R47 to R49, R54, R55, R63, R64, R74, R78, R80, R82, R102, R117, R158, R164, R173, R176, R177, R184, R186, R224 to R227	Chip resistor, 10 k Ω , 1%, 125 mW, thick film (0603)	Panasonic EC	ERJ-3EKF1002V
3	C6, C39, C40	Multilayer ceramic capacitor, 25 V, NP0 (0603)	TDK Corp	C1608C0G1E103J
12	C15 to C17, C81, C86, C95, C98, C170, C175, C178, C180, C183	Multilayer ceramic capacitor, 100 V, NP0 (0603)	Panasonic EC	ECJ-1VC2A100D
12	C104, C106, C109, C111, C117, C123, C140 to C145	Multilayer ceramic capacitor, 50 V, NP0 (0402)	Kemet	C0402C100J5GACTU
2	C4, C74	Aluminum electrolytic capacitor, 16 V, FC, 105 deg, SMD_B	Panasonic EC	EEE-FC1C100R
4	C61, C77, C113, C150	Multilayer ceramic capacitor, 50 V, NP0 (0603)	Panasonic EC	ECJ-1VC1H121J
3	D1, D3, D4	TVS Zener, 15 V, 600 W, SMB	ON Semiconductor	1SMB15AT3G
9	C23, C33, C43, C55, C114, C166, C184, C188, C200	Multilayer ceramic capacitor, 50 V, NP0 (0603)	Murata Electronics	GRM1885C1H222JA01D
1	C36	Multilayer ceramic capacitor, 25 V, NP0 (0805)	Murata ENA	GRM21B5C1H223JA01L
2	C153, C154	Multilayer ceramic capacitor, 50 V, NP0 (0603)	Panasonic EC	ECJ-1VC1H220J
8	R76, R81, R90, R101, R134, R141, R157, R168	Chip resistor, 237 Ω , 1%, 125 mW, thick film (0603)	Panasonic EC	ERJ-3EKF2370V
2	R4	Chip resistor, 243 Ω , 1%, 100 mW, thick film (0603)	Panasonic EC	ERJ-3EKF2430V
10	R91, R94, R98, R99, R108, R109, R114, R115, R118, R123	Chip resistor, 24.9 Ω , 1%, 63 mW, thick film (0402)	Rohm	MCR01MZPF24R9

Qty	Designator	Description	Manufacturer	Part Number
16	R56, R57, R65, R66, R88, R89, R140, R154, R179, R183, R213, R216, R228 to R231	Chip resistor, 24.9 Ω , 1%, 100 mW, thick film (0603)	Rohm	MCR03EZPFX24R9
8	C25, C31, C45, C53, C169, C181, C190, C198	Multilayer ceramic capacitor, 50 V, NP0 (0603)	Rohm	MCH185A271JK
3	R3, R11, R58	Chip resistor, 374 Ω , 1%, 100 mW, thick film (0603)	Rohm	MCR03EZPFX3740
1	C125	Multilayer ceramic capacitor, 50 V, NP0 (0603)	Panasonic EC	ECJ-1VC1H391J
4	R5, R52, R53, R75	Chip resistor, 392 Ω , 1%, 100 mW, thick film (0603)	Rohm	MCR03EZPFX3920
1	C120	Multilayer ceramic capacitor, 16 V, ECH-U (1206)	Panasonic EC	ECH-U1C393JB5
33	R38	Chip resistor, 3.01 k Ω , 1%, 100 mW, thick film (0603)	Rohm	MCR03EZPFX3011
1	R129	Chip resistor, 3.32 k Ω , 1%, 100 mW, thick film (0603)	Rohm	MCR03EZPFX3321
8	C24, C34, C44, C56, C167, C185, C189, C201	Multilayer ceramic capacitor, 50 V, NP0 (0603)	Murata ENA	GRM1885C1H431JA01D
30	C11, C14, C22, C26, C27, C30, C32, C35, C41, C46, C47, C52, C54, C57, C63, C66, C72, C75, C80, C105, C119, C133, C139, C148, C152, C164, C172, C179, C191, C196	Aluminum electrolytic capacitor, 16 V, FC, 105 deg, SMD_D	Panasonic EC	EEE-FC1C470P
3	C12, C18, C19	Aluminum electrolytic capacitor, FC, 105 deg, SMD_E	Panasonic EC	EEE-FC1E470P
4	R83, R96, R148, R163	Chip resistor, 49.9 k Ω , 1%, 100 mW, thick film (0603)	Panasonic EC	ERJ-3EKF4992V
20	R103, R104, R110 to R112, R116, R119, R124, R126 to R128, R130 to R132, R142 to R147	Chip resistor, 49.9 k Ω , 1%, 63 mW, thick film (0402)	Rohm	MCR01MZPF49R9
35	R8 to R10, R15 to R17, R19, R92, R95, R100, R105, R113, R120, R125, R133, R135, R139, R153, R155, R156, R160, R174, R175, R178, R187, R188, R190, R194, R196, R200, R201, R203, R206, R210, R215	Chip resistor, 49.9 k Ω , 1%, 100 mW, thick film (0603)	Panasonic EC	ERJ-3EKF49R9V
16	R25, R26, R32, R34, R45, R46, R61, R68, R181, R182, R192, R195, R208, R209, R218, R220	Chip resistor, 49.9 k Ω , 1%, 100 mW, thick film (0603)	Panasonic EC	ERJ-3EKF4641V
16	R21 to R23, R27, R33, R35 to R37, R39, R41, R42, R50, R62, R69 to R71	Chip resistor, 49.9 k Ω , 1%, 100 mW, thick film (0603)	Panasonic EC	ERJ-3EKF4751V
1	C131	Multilayer ceramic capacitor, 25 V, NP0 (0603)	TDK Corp	C1608C0G1E562J
1	R138	Chip resistor, 562 Ω , 1%, 125 mW, thick film (0603)	Panasonic EC	ERJ-3EKF5620V
16	R72, R73, R79, R85 to R87, R97, R107, R121, R122, R137, R150 to R152, R165, R171	Chip resistor, 5.76 k Ω , 1%, 125 mW, thick film (0603)	Panasonic EC	ERJ-3EKF5761V
4	C78, C137, C171, C195	Multilayer ceramic capacitor, 100 V, NP0 (0603)	Panasonic EC	ECJ-1VC2A680J
1	U11	IC inverter, hex, TTL/LSTTL, 14 SOIC	NXP Semi	74HC04D-T
2	U19, U26	IC buffer, quad, three state, 14 SOIC	Texas Instruments	SN74LV125AD
1	R29	Chip resistor, 75 Ω , 1%, 100 mW, thick film (0603)	Panasonic EC	ERJ-3EKF75R0V
1	R67	Chip resistor, 90.9 Ω , 1% 100 mW, thick film (0603)	Rohm	MCR03EZPFX90R9

Qty	Designator	Description	Manufacturer	Part Number
1	Y1	Crystal, 12.288 MHz, SMT, 10 pF	Abracon Corp	ABM3B-12.288MHZ-10-1-U-T
1	U15	Four ADC/eight DAC with PLL, 192 kHz, 24-bit CODEC	Analog Devices	AD1974YSTZ
1	U23	Microprocessor voltage supervisor	Analog Devices	ADM811RARTZ-REEL7
1	U1	Voltage regulator, low dropout	Analog Devices	ADP3303ARZ-3.3
1	J2	5-way binding post, black, uninsulated base TH	Deltron Components	552-0100 BLK
1	J3	5-way binding post, mini, green, uninsulated base TH	Deltron Components	552-0400 GRN
1	J4	5-way binding post, mini, red, uninsulated base TH	Deltron Components	552-0500 RED
2	J22, J23	SMA receptacle, straight PCB mount	Amp-RF Division	901-144-8RFX
1	U8	192 kHz digital audio receiver (DGTL RCVR 28-TSSOP)	Cirrus Logic	CS8416-CZZ
1	U13	192 kHz digital audio interface (S/PDIF transmitter)	Cirrus Logic	CS8406-CZZ
2	D2, D5	Passivated rectifier, 1 A, 50 V, MELF	Micro Commercial	DL4001-TP
1	S1	Switch slide, DP3T, PC MNT, L = 4 mm	E-Switch	EG2305
1	SW1	DPDT slide switch, vertical	E-Switch	EG2207
6	L2 to L7	Chip ferrite bead, 600 Ω at 100 MHz	TDK	MPZ1608S601A
1	L1	Chip ferrite bead, 600 Ω at 100 MHz	Steward	HZ0805E601R-10
2	J1, J14	10-way shrouded polarized header	3M	N2510-6002RB
4	J15 to J18	16-way unshrouded, not populated	3M	N/A
1	J19	Connector header, 0.100 dual STR, 72 POS	Sullins	PBC10DAAN; or cut PBC36DAAN
2	J20, J26	Connector header, 0.100 dual STR, 72 POS	Sullins	PBC13DAAN; or cut PBC36DAAN
4	J5 to J8	Connector header, 0.100 dual STR, 72 POS	Sullins	PBC06DAAN; or cut PBC36DAAN
2	S4, S5	16-position rotary switch, hex	APEM	PT65503
19	JP4 to JP7, JP11 to JP14, JP17, JP18, JP20 to JP22, JP24, JP26, JP28 to JP31	2-pin header, unshrouded jumper, 0.10"; use shunt Tyco 881545-2	Sullins	PBC02SAAN; or cut PBC36SAAN
11	JP1 to JP3, JP8 to JP10, JP15, JP19, JP23, JP25, JP27	3-position SIP header	Sullins	PBC03SAAN; or cut PBC36SAAN
1	U16	Complex programmable logic devices (CPLD), HI PERF, E2CMOS, PLD	Lattice Semiconductor	LC4128V-75TN100C
1	D11	Green, diffused, 10 millicandela, 565 nm (1206)	Lumex Opto	SML-LX1206GW-TR
2	D6, D9	Red, diffused, 6.0 millicandela, 635 nm (1206)	Lumex Opto	SML-LX1206IW-TR
2	D7, D10	Yellow, diffused, 4.0 millicandela, 585 nm (1206)	CML Innovative Tech	CMD15-21VYD/TR8
2	U2, U3	3-terminal, adjustable voltage regulator, DPak	STMicroelectronics	LM317MDT-TR
6	J10, J11, J13, J21, J27, J28	Stereo mini jack, SMT	CUI	SJ-3523-SMT
2	R161, R162	Resistor network, bussed 9 res	CTS	773091103
8	U6, U9, U12, U14, U17, U20, U24, U25	Dual bipolar/JFET audio op amp.	Analog Devices	OP275GSZ
1	U21	12.288 MHz fixed SMD oscillator, 1.8 V dc to 3.3 V dc	Abracon Corp	AP3S-12.288MHz-F-J-B
2	J9, J12	RCA jack, PCB, TH mount, R/A, yellow	Connect-Tech Products	CTP-021A-S-YEL

Qty	Designator	Description	Manufacturer	Part Number
1	U10	110 Ω AES/EBU transformer	Scientific Conversion	SC937-02
2	U18, U22	Buffer, three-state, single gate	Texas Instruments	SN74LVC1G125DRLR
1	U4	Octal, three-state buffer/driver	Texas Instruments	SN74LVC541ADBR
2	SW2, SW3	SPDT slide switch PC mount	E-Switch	EG1218
2	S2, S3	8-position SPST SMD switch, flush, actuated	CTS Corp	219-8LPST
1	S6	Tact switch, 6 mm gull wing	Tyco/Alcoswitch	FSM6JSMA
1	U5	15 Mb/sec fiber optic receiving module with shutter	Toshiba	TORX147L(F,T)
1	U7	Fiber optic transmit module, 15 Mb/sec	Toshiba	TOTX147L(F,T)
60	TP1 to TP6, TP8 to TP10, TP12 to TP15, TP17, TP19 to TP23, TP25 to TP52, TP54 to TP60, TP62, TP64 to TP68	Mini test point, white, 0.1 inch, OD	Keystone Electronics	5002

NOTES

NOTES

NOTES

**ESD Caution**

ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

Legal Terms and Conditions

By using the evaluation board discussed herein (together with any tools, components documentation or support materials, the "Evaluation Board"), you are agreeing to be bound by the terms and conditions set forth below ("Agreement") unless you have purchased the Evaluation Board, in which case the Analog Devices Standard Terms and Conditions of Sale shall govern. Do not use the Evaluation Board until you have read and agreed to the Agreement. Your use of the Evaluation Board shall signify your acceptance of the Agreement. This Agreement is made by and between you ("Customer") and Analog Devices, Inc. ("ADI"), with its principal place of business at One Technology Way, Norwood, MA 02062, USA. Subject to the terms and conditions of the Agreement, ADI hereby grants to Customer a free, limited, personal, temporary, non-exclusive, non-sublicensable, non-transferable license to use the Evaluation Board FOR EVALUATION PURPOSES ONLY. Customer understands and agrees that the Evaluation Board is provided for the sole and exclusive purpose referenced above, and agrees not to use the Evaluation Board for any other purpose. Furthermore, the license granted is expressly made subject to the following additional limitations: Customer shall not (i) rent, lease, display, sell, transfer, assign, sublicense, or distribute the Evaluation Board; and (ii) permit any Third Party to access the Evaluation Board. As used herein, the term "Third Party" includes any entity other than ADI, Customer, their employees, affiliates and in-house consultants. The Evaluation Board is NOT sold to Customer; all rights not expressly granted herein, including ownership of the Evaluation Board, are reserved by ADI. CONFIDENTIALITY. This Agreement and the Evaluation Board shall all be considered the confidential and proprietary information of ADI. Customer may not disclose or transfer any portion of the Evaluation Board to any other party for any reason. Upon discontinuation of use of the Evaluation Board or termination of this Agreement, Customer agrees to promptly return the Evaluation Board to ADI. ADDITIONAL RESTRICTIONS. Customer may not disassemble, decompile or reverse engineer chips on the Evaluation Board. Customer shall inform ADI of any occurred damages or any modifications or alterations it makes to the Evaluation Board, including but not limited to soldering or any other activity that affects the material content of the Evaluation Board. Modifications to the Evaluation Board must comply with applicable law, including but not limited to the RoHS Directive. TERMINATION. ADI may terminate this Agreement at any time upon giving written notice to Customer. Customer agrees to return to ADI the Evaluation Board at that time. LIMITATION OF LIABILITY. THE EVALUATION BOARD PROVIDED HEREUNDER IS PROVIDED "AS IS" AND ADI MAKES NO WARRANTIES OR REPRESENTATIONS OF ANY KIND WITH RESPECT TO IT. ADI SPECIFICALLY DISCLAIMS ANY REPRESENTATIONS, ENDORSEMENTS, GUARANTEES, OR WARRANTIES, EXPRESS OR IMPLIED, RELATED TO THE EVALUATION BOARD INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, TITLE, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS. IN NO EVENT WILL ADI AND ITS LICENSORS BE LIABLE FOR ANY INCIDENTAL, SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES RESULTING FROM CUSTOMER'S POSSESSION OR USE OF THE EVALUATION BOARD, INCLUDING BUT NOT LIMITED TO LOST PROFITS, DELAY COSTS, LABOR COSTS OR LOSS OF GOODWILL. ADI'S TOTAL LIABILITY FROM ANY AND ALL CAUSES SHALL BE LIMITED TO THE AMOUNT OF ONE HUNDRED US DOLLARS (\$100.00). EXPORT. Customer agrees that it will not directly or indirectly export the Evaluation Board to another country, and that it will comply with all applicable United States federal laws and regulations relating to exports. GOVERNING LAW. This Agreement shall be governed by and construed in accordance with the substantive laws of the Commonwealth of Massachusetts (excluding conflict of law rules). Any legal action regarding this Agreement will be heard in the state or federal courts having jurisdiction in Suffolk County, Massachusetts, and Customer hereby submits to the personal jurisdiction and venue of such courts. The United Nations Convention on Contracts for the International Sale of Goods shall not apply to this Agreement and is expressly disclaimed.