


# T1/E1/CEPT/ISDN-PRI TRANSFORMERS

Quad Port T1/E1 with 8 Transformers, 1500 Vrms

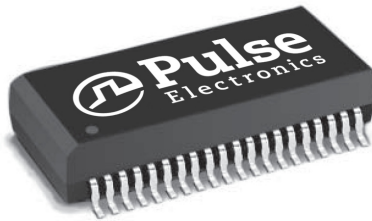

- RoHS peak reflow temperature rating 245°C
- Models matched to leading quad and dual T1/E1/CEPT/ISDN-PRI transceivers
- Crosstalk: -65 dB or better
- UL1950 recognized (some parts pending approval)
- RoHS compliant versions available upon request


## Electrical Specifications @ 25°C

| RoHS Compliant Part Number |          | Turns Ratio (Pri:Sec ±2%) |          | OCL @ 25°C (mH MIN) |     | L <sub>L</sub> (μH MAX) |     | C <sub>ww</sub> (pF MAX) |    | Package/ Schematic | Primary Pins            |                            |
|----------------------------|----------|---------------------------|----------|---------------------|-----|-------------------------|-----|--------------------------|----|--------------------|-------------------------|----------------------------|
| Std Temp.                  | Ex Temp  | TX                        | RX       | TX                  | RX  | TX                      | RX  | TX                       | RX |                    | Transmit                | Receive                    |
| T1064NL                    | -        | 1:1.14                    | 1:1.14CT | 1.2                 | 1.2 | .6                      | .6  | 35                       | 35 | TOU/1              | 1-2, 6-7, 11-12, 16-17  | 38-36, 33-31, 28-26, 23-21 |
| T1065NL                    | T1105NL  | 1:2CT                     | 1:2CT    | 1.2                 | 1.2 | .8                      | .8  | 35                       | 35 | TOU/3              | 4-5, 9-10, 14-15, 19-20 | 24-25, 29-30, 34-35, 39-40 |
| T1068NL                    | T1108NL  | 1:2CT                     | 1:1CT    | 1.2                 | 1.2 | .6                      | .6  | 35                       | 35 | TOU/2              | 1-2, 6-7, 11-12, 16-17  | 21-22, 26-27, 31-32, 36-37 |
| T1071NL                    | -        | 1:1/1.26                  | 1:2CT    | 1.2                 | 1.2 | .6                      | .6  | 35                       | 35 | TOU/2              | 1-2, 6-7, 11-12, 16-17  | 21-22, 26-27, 31-32, 36-37 |
| T1073NL                    | -        | 1:2                       | 1:2      | 1.2                 | 1.2 | .6                      | .6  | 35                       | 35 | TOU/4              | 1-3, 6-8, 11-13, 16-18  | 4-5, 9-10, 14-15, 19-20    |
| T1124NL                    | T1114NL  | 1:2CT                     | 1CT:2    | 1.2                 | 1.2 | .6                      | .6  | 35                       | 35 | TOU/3              | 4-5, 9-10, 14-15, 19-20 | 1-3, 6-8, 11-13, 16-18     |
| T1142NL                    | T1231NL  | 1:2.4                     | 1:1      | 1.0                 | 1.0 | .5                      | .5  | 35                       | 35 | TOU/5              | 1-2, 8-9, 11-12, 18-19  | 24-25, 27-28, 34-35, 37-38 |
| T1145NL                    | -        | 1:2/2.4                   | 1:0.79/1 | 1.0                 | 1.0 | 1.0                     | 1.0 | 35                       | 35 | TOU/6              | 1-2, 9-10, 11-12, 19-20 | 37-36, 35-34, 27-26        |
| -                          | TX1262NL | 1:2                       | 1:2      | 1.2                 | 1.2 | .7                      | .7  | 35                       | 35 | TOU/5              | 1-2, 6-7, 11-12, 16-17  | 3-4, 8-9, 13-14, 18-19     |
| -                          | TX1264NL | 1:2CT                     | 1CT:1    | 1.2                 | 1.2 | .6                      | .6  | 35                       | 35 | TOU/3              | 4-5, 9-10, 14-15, 19-20 | 1-3, 6-8, 11-13, 16-18     |
| -                          | TX1266NL | 1:2                       | 1:1      | 1.2                 | 1.2 | .6                      | .6  | 35                       | 35 | TOU/4              | 1-3, 6-8, 11-13, 16-18  | 4-5, 9-10, 14-15, 19-20    |
| -                          | TX1295NL | 1:1.26CT                  | 1:1.26CT | 1.2                 | 1.2 | .6                      | .6  | 35                       | 35 | TOU/3              | 4-5, 9-10, 14-15, 19-20 | 24-25, 29-30, 34-35, 39-40 |

Notes: Chart Notes and TOU Schematics are on page 2.

## Mechanical

### TOU

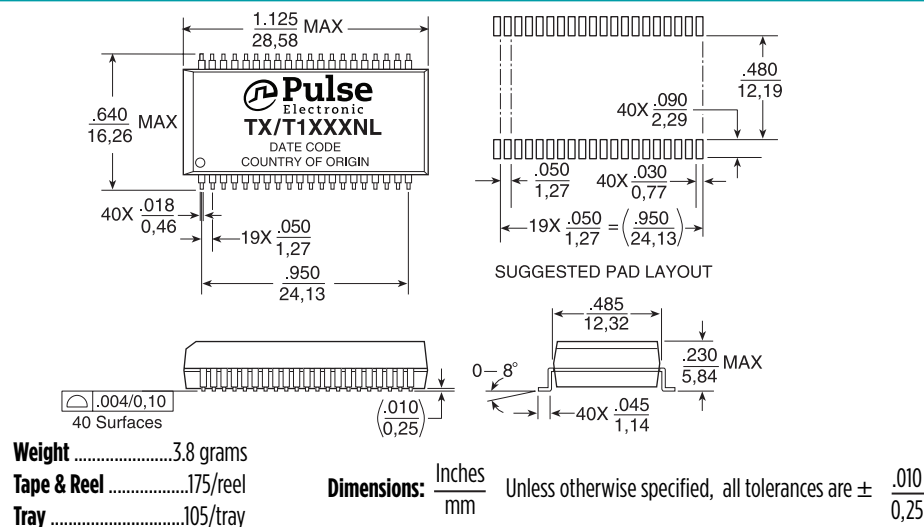

USA 858 674 8100

Germany 49 7032 7806 0

Singapore 65 6287 8998

Shanghai 86 21 62787060

China 86 755 33966678

Taiwan 886 3 4356768

# T1/E1/CEPT/ISDN-PRI TRANSFORMERS

Quad Port T1/E1 with 8 Transformers, 1500 Vrms




## Notes from Electrical Specifications Table

- A. OCL** (primary inductance) is measured at the primary winding. Turns ratio is specified primary: secondary.
- B. To make a 1CT:1** ratio from a 1CT:2CT ratio, use only one-half of the secondary (2CT) winding.
- C. It is possible** to use the same transformer model for the three impedance levels of T1 (100 W) and CEPT (75  $\Omega$  & 120  $\Omega$ ). For specific connection information and resistor values, refer to IC vendor's data book.
- D. Dual Ratio Transformer** (T1071NL and T1145NL) - These transformers have tapped secondary windings to provide two turns ratios (T/R). Use the entire primary winding and connect the secondary pins listed below to obtain desired turns ratio:

| Part Number | Turns Ratio 1 | Secondary Pins | Turns Ratio 2 | Secondary Pins |
|-------------|---------------|----------------|---------------|----------------|
| T1071NL     | 1:1           | 40-39          | 1:1.26        | 40-38          |
|             | 1:1           | 35-34          | 1:1.26        | 35-33          |
|             | 1:1           | 30-29          | 1:1.26        | 30-28          |
|             | 1:1           | 25-24          | 1:1.26        | 25-23          |
| T1145NL     | 1:2           | 40-39          | 1:2.4         | 40-38          |
|             | 1:2           | 33-32          | 1:2.4         | 33-31          |
|             | 1:2           | 30-29          | 1:2.4         | 30-28          |
|             | 1:2           | 23-22          | 1:2.4         | 23-21          |

- E. Dual Ratio Transformer** for the surface mount package is anti-static tubes. Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number, (i.e. T1064NLT).
- F. Extended Temperature Range Models** - For extended temperature range transformers (-40°C to +85°C operating temperature range), OCL (Open Circuit Inductance) for the primary winding) is specified at both -40°C and +25°C. At -40°C, OCL is 600  $\mu$ H minimum. All other parameters are specified at +25°C only. Standard temperature range is 0°C to +70°C.

## Schematics

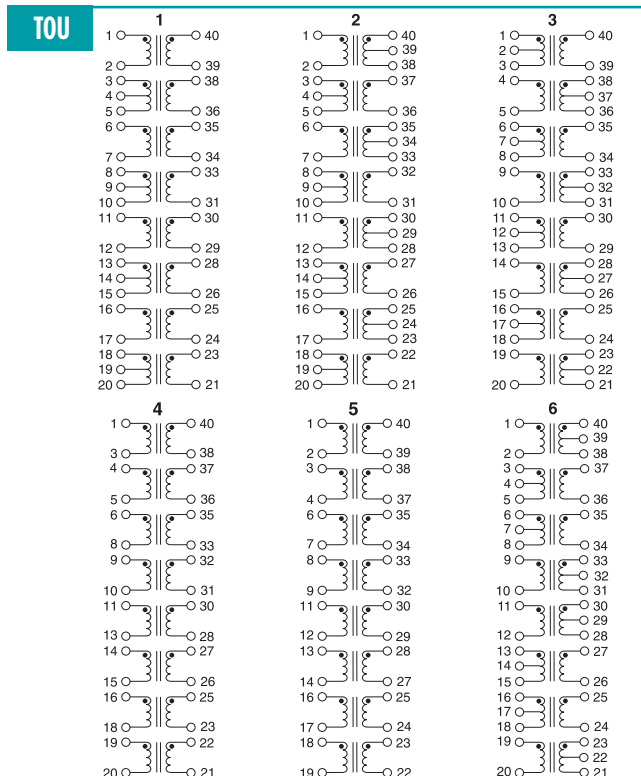

## Transformer Selection Guide

| IC Mfr.                                   | IC Part Number             | Comments     | Octal SMT |          |
|-------------------------------------------|----------------------------|--------------|-----------|----------|
|                                           |                            |              | STD Temp  | EXT Temp |
| <b>Mindspeed</b><br>(Conexant)            | BT8510                     | T1/E1        | T1071NL   | -        |
|                                           | BT8510                     | T1/E1        | T1071NL   | -        |
|                                           | CN8380                     |              | T1124NL   | T1114NL  |
| <b>Cirrus Logic</b><br>(Crystal)          | 61318                      | 120 E1       | T1068NL   | T1108NL  |
|                                           | 61577                      | T1 & E1      | T1065NL   | T1105NL  |
|                                           | 61304A/5A/535A/574A,/75    | 75 E1        | T1068NL   | T1108NL  |
|                                           | 61304A/5A/535A/574A,/75    | 120 E1       | T1071NL   | -        |
|                                           | 61582, 61583               |              | T1064NL   | -        |
|                                           | 61310, 61581               |              | T1068NL   | T1108NL  |
|                                           | 61584/84A                  | IQ3          | T1065NL   | T1105NL  |
| <b>Maxim</b><br>(Dallas)                  | 61584/82/83/A              | IQ5          | T1064NL   | -        |
|                                           | DS2196                     |              | T1068NL   | T1108NL  |
|                                           | DS2148/Q48                 | 3V           | T1068NL   | T1108NL  |
|                                           | DS21352/Q352, DS21354/Q354 |              | T1068NL   | T1108NL  |
| <b>Exar</b>                               | T5683A, 59L91              |              | T1065NL   | T1105NL  |
|                                           | T5894, T5897, T5997        |              | T1065NL   | T1105NL  |
|                                           | T5791/T93/94/95            |              | T1071NL   | -        |
|                                           | 83L30/34/38                |              | T1065NL   | T1105NL  |
|                                           |                            |              |           |          |
| <b>Infineon Technologies</b><br>(Siemens) | PEB22504                   | 3.3V         | T1142NL   | T1231NL  |
|                                           | PEB22554                   | 3.3V         | T1142NL   | T1231NL  |
|                                           | PEB2256 3.3 V              | E1/T1/J1     | T1142NL   | T1231NL  |
| <b>Intel</b><br>(Level One)               | LXT 300/301                |              | T1065NL   | T1105NL  |
|                                           | LXT 304/305/307            | T1, E1       | T1065NL   | T1105NL  |
|                                           | LXT 304/305/307            | 75 E1, 120E1 | T1071NL   | -        |
|                                           | LXT 310/317/318            |              | T1068NL   | T1108NL  |
|                                           | LXT 331                    | T1, E1       | T1068NL   | T1108NL  |
|                                           | LXT 331, LXT 332           |              | T1065NL   | T1105NL  |
|                                           | LXT 334, LXT 335           | T1/E1        | T1065NL   | T1105NL  |
|                                           | LXT 334, LXT 335           | 75 E1        | T1071NL   | -        |
|                                           | LXT 336                    |              | T1065NL   | T1105NL  |
|                                           | LXT 350, LXT 351, LXT 359  | T1, E1       | T1068NL   | T1108NL  |
|                                           | LXT 360/361/362/363        | T1, E1       | T1068NL   | T1108NL  |
|                                           | LXT 380/381/384/386/388    | T1, E1       | T1068NL   | T1108NL  |
| <b>Lucent Technologies</b>                | LXT 380/381/384/386/388    | T1, E1       | T1124NL   | T1114NL  |
|                                           | LXT 3104, LXT 3108         |              | T1068     | T1108NL  |
|                                           | T7689, T769, T7698         | DS1          | T1064NL   | -        |
|                                           | TLIU04C1                   | DS1          | T1064NL   | -        |
| <b>Zarlink</b><br>(Mitel)                 | MT9076, MT9075             |              | T1142NL   | T1231NL  |
|                                           | MT9074, MT9075             |              | T1068NL   | T1108NL  |
| <b>PMC Sierra</b>                         | PM4318                     |              | T1065NL   | T1105NL  |


# T1/E1/CEPT/ISDN-PRI TRANSFORMERS

Quad Port T1/E1 with 8 Transformers, 1500 Vrms




## Application

- 1. ET Product** - All coils have an ET product of 10 V-μsec minimum.
- 2. Flammability** - Materials used in the products are recognized as UL94-VO approved. Products meet the IEC 695-2-2 requirements (Needle Flame Test).
- 3. Balance Characteristics** - The transformers meet the requirements for longitudinal balance of FCC part 68.
- 4. Common Mode Rejection Ratio** - the CMRR for all transformers is better than 50dB at 1MHz. A typical test circuit is shown below.

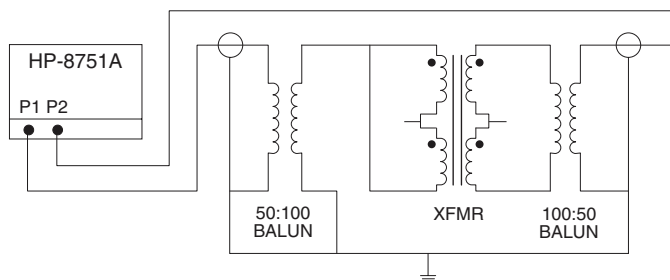

- 5. Crosstalk Attenuation** - In the packages which contain transmit and receive transformers side by side, sufficient crosstalk attenuation is achieved by the inherent characteristics of the toroid cores as well as by their proper positioning. The crosstalk attenuation is typically 65 dB or better. This result was established with the test circuit shown below.

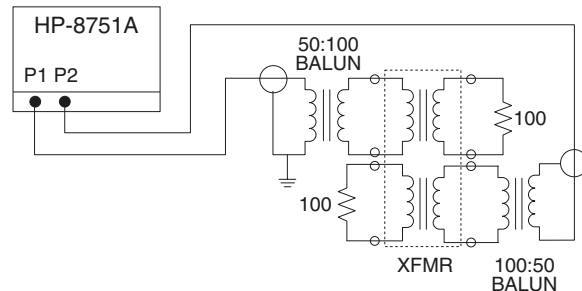

- 6. Return Loss** - ITU-T G.703 and European national regulatory documents specify minimum return loss levels. The transformers will allow these limits to be complied with the situations where they are applicable.


| Frequency   | 50-100 kHz | 10 kHz-2MHz | 2-3 MHz |
|-------------|------------|-------------|---------|
| Return Loss |            |             |         |
| Transmit    | 9 dB       | 15 dB       | 11 dB   |
| Receive     | 12 dB      | 18 dB       | 14 B    |

- 7. Surge Voltage Capability** - All transformers and chokes meet surge voltage tests according to the most stringent regulatory documents, when used with the proper voltage and current suppression devices:

Metallic Voltage: 800 V peak, 10/560μsec  
Longitudinal Voltage: 2,400 V peak, 10/700μsec

- 8. Isolation Voltage** - 100% of transformers are tested during the specified isolation voltage level.
- 9. General Information** - The transformers are specifically designed for use in 1.544 Mbps (T1), 2.048 Mbps (CEPT) and ISDN Primary rate (PRI) interface applications. They are matched to the majority of the line interface transceiver ICs currently available. Use of the proper transformer allows the interface circuit to comply with ITU-T G.703 and other standards regarding pulse waveform, return loss, and balance.
- 10. Common Mode Chokes** - Additional high-frequency 4-line common mode chokes may be used to provide an effective means of complying with national and international regulations on EMI. The common mode chokes are designed to be used in conjunction with Pulse's T1/CEPT transformers as shown in the typical application below. Crosstalk is typically -65 dB or better.

## Typical Application

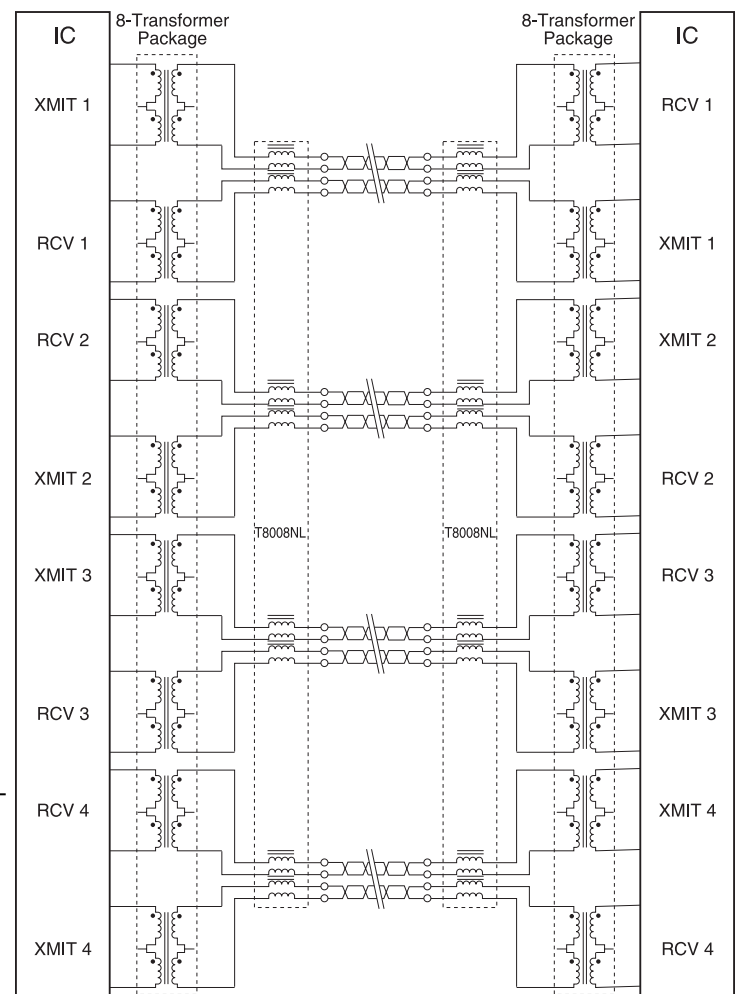

# T1/E1/CEPT/ISDN-PRI TRANSFORMERS

Quad Port T1/E1 with 8 Transformers, 1500 Vrms




## Electrical Specifications @ 25°C

| RoHS Compliant Part Number               | Number of Lines | Turns Ratio (±5%) | OCL (μH MIN) | C <sub>w/w</sub> (pF MAX) | L <sub>L</sub> (μH MAX) | DCR (Ω MAX) | Isolation (Vrms MIN) | Package/Schematic     |
|------------------------------------------|-----------------|-------------------|--------------|---------------------------|-------------------------|-------------|----------------------|-----------------------|
| <b>High Frequency Common Mode Chokes</b> |                 |                   |              |                           |                         |             |                      |                       |
| T8008NL*                                 | 16 (8 x 2 line) | 1:1 (8 places)    | 47.0         | 25                        | .18                     | 0.40        | 500                  | TOU/2 (Surface Mount) |
| PE-65554NL                               | 4               | 1:1:1:1           | 24.0         | 15                        | .20                     | 0.30        | 500                  | IN/1 (Through Hole)   |
| PE-65555NL                               | 4               | 1:1:1:1           | 8.0          | 10                        | .20                     | 0.25        | 500                  | IN/1 (Through Hole)   |
| PE-65854NL                               | 4               | 1:1:1:1           | 47.0         | 16                        | .20                     | 0.30        | 500                  | SH/1 (Surface Mount)  |
| PE-65857NL                               | 4               | 1:1:1:1           | 24.0         | 15                        | .23                     | 0.30        | 500                  | LA/1 (Surface Mount)  |

\*Notes: Please see page 1 for TOU mechanical specifications.


## Schematic

TOU

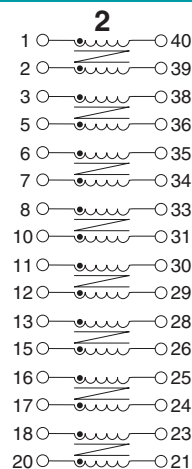


## Mechanicals

IN

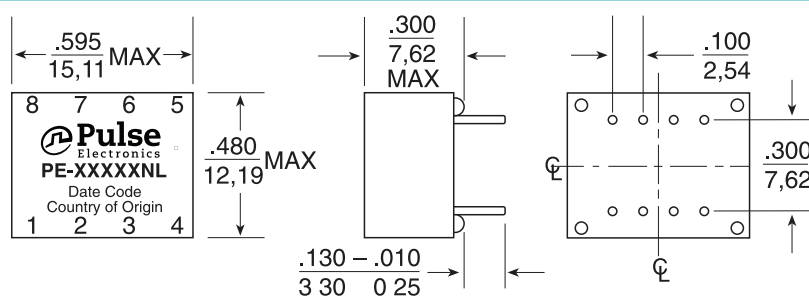


SH

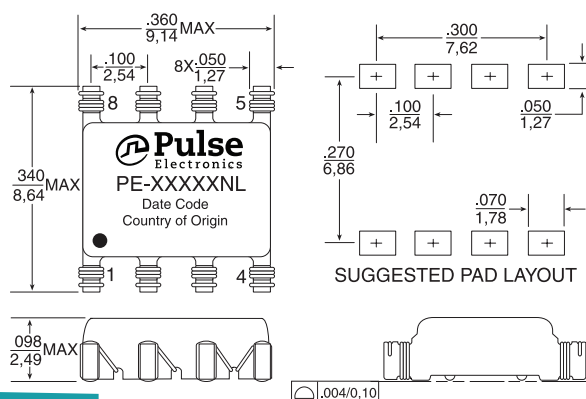

## Schematic

1





# T1/E1/CEPT/ISDN-PRI TRANSFORMERS

Quad Port T1/E1 with 8 Transformers, 1500 Vrms

## Mechanical

## Schematic


LA

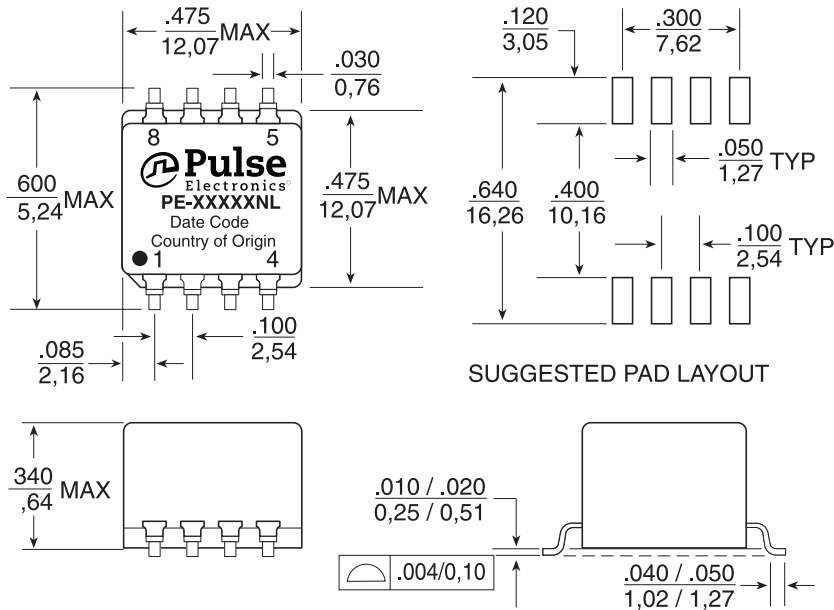

**Weight** .....0.3 grams.....2 grams.....2.5 grams  
**Tape & Reel** .....1500/reel.....250/reel.....(N/A)  
**Tray** .....25/tray.....30/tube.....35/tube

**Dimensions:**  $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified, all tolerances are  $\pm \frac{.010}{0.25}$

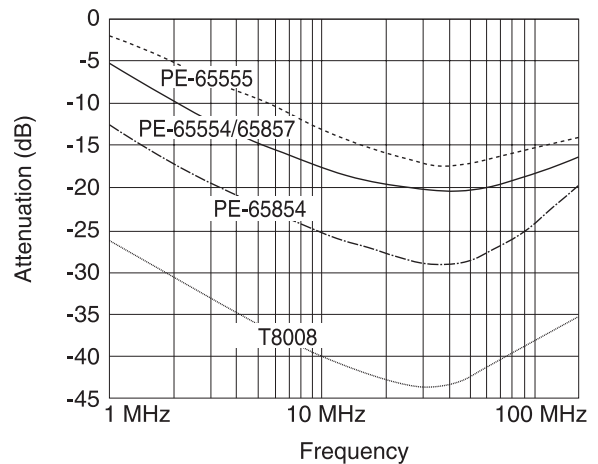

## For More Information

**Pulse Worldwide Headquarters**  
 12220 World Trade Drive  
 San Diego, CA  
 92128  
 U.S.A.

Tel: 858 674 8100  
 Fax: 858 674 8262

**Pulse Europe**  
 Einsteinstrasse 1  
 D-71083 Herrenberg  
 Germany

Tel: 49 7032 78060  
 Fax: 49 7032 7806 135

**Pulse China Headquarters**  
 B402, Shenzhen Academy of  
 Aerospace Technology Bldg.  
 10th Kejinan Road  
 High-Tech Zone  
 Nanshan District  
 Shenzhen, PR China  
 518057  
 Tel: 86 755 33966678  
 Fax: 86 755 33966700

**Pulse North China**  
 Room 2704/2705  
 Super Ocean Finance  
 Ctr.  
 2067 Yan An Road  
 West  
 Shanghai 200336  
 China  
 Tel: 86 21 62787060  
 Fax: 86 2162786973

**Pulse South Asia**  
 135 Joo Seng Road  
 #03-02  
 PM Industrial Bldg.  
 Singapore 368363  
 Tel: 65 6287 8998  
 Fax: 65 6287 8998

**Pulse North Asia**  
 3F, No. 198  
 Zhongyuan Road  
 Zhongli City  
 Taoyuan County 320  
 Taiwan R. O. C.  
 Tel: 886 3 4356768  
 Fax: 886 3 4356823 (Pulse)  
 Fax: 886 3 4356820 (FRE)

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2012. Pulse Electronics, Inc. All rights reserved.