




With over 26,000 combinations Bulgin's mains power entry modules offer a very adaptable and flexible solution to panel design. Power entry modules allow combinations of mains inlets and outlets, filtered inlets, switches, fuseholders, voltage selectors and indicators mounted in either horizontal or vertical format bezels ready for quick snap-fit assembly. The compact design occupies the minimum of panel area and a single rectangular mounting hole, offering easy installation for this mains power entry module.

Our range offers a flange fixing alternative for designers who prefer the security of screw fixing. All types and variations are available through Bulgin's extensive distribution network.

Components used in Power Entry Modules.

Note: Components are Approved Individually (where applicable). Please see individual component pages for full specifications.

Overview of Power Entry Modules

							
Style	C14	Inlets C14 Fused	C16	C20	Outlets Sheet F	Inlet/ C14	Outlet Combinations C14 Fused
Snap to Panel Vertical 	With Single Contact switch Page 420 With other components Pages 421, 422, 423	With Single Contact switch Page 418 With Double Contact Switch Page 419	With Single Contact switch Page 420 With other components Pages 421, 422, 423	With Single Contact switch Page 424	With Single Contact switch Page 426	With other components Page 425	
Snap to Panel Horizontal 	Mini Bezel With Single Contact Switch Page 432 Mini Bezel With Double Contact Switch Page 432	With Single Contact switch Page 427 With Double Contact Switch Page 428				With Single Contact switch Page 429	With Double Contact switch Page 430 No additional components Page 431
Flange Mount - Vertical 		With Single Contact switch Page 433 With Double Contact switch Page 434					




Vertical Module Arrangement



BZV01/Z0000/01

- Fused Inlet with 2.8mm or 6.3mm tabs
- Single Contact Switch Variations
- Filtered Inlet Option
- Options of I/O marked switches

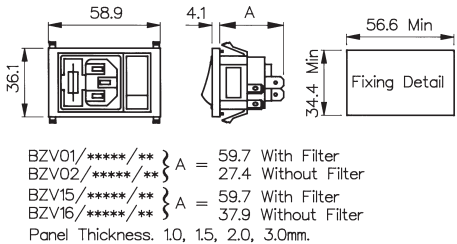

How to order -

BZV XX	/	XXXXX	/	XX
Type of Inlet / Outlet Single Fused C14 Power Inlet (cold condition), 6.3 or 2.8mm tabs: 01 = PF0011/63 02 = PF0011/28 Twin Fused C14 Power Inlet (cold condition), 6.3 or 2.8mm tabs: 15 = PF0033/63 16 = PF0033/28		Filtered or Non Filtered Inlet Z0000 = Non Filtered Axxxx = Standard For Filtered inlet use 6th to 9th characters from filter ordering code see pages 436 - 437 E.g. BZV01/A0620/01		Filtered or Non Filtered Inlet Single Contact Switch: 01 = S.P. Switch Single Contact Neon Switch: 02 = S.P. Red Neon Switch 08 = S.P. Green Neon Switch Neon Indicator: 03 = Red Neon Indicator Single Contact High Inrush Switch: 46 = S.P. High Inrush Switch Single Contact Switch Marked I/O: 69 = S.P. Switch (I/O) Single Contact Neon Switch Marked (I/O): 71 = S.P. Red Neon Switch (I/O) 74 = S.P. Green Neon Switch (I/O) Single Contact High Inrush Switch Marked (I/O): 98 = S.P. High Inrush Switch (I/O)




Vertical Module Arrangement



BZV01/Z0000/10

- Fused Inlet with 2.8mm or 6.3mm tags
- Double Contact Switch or
- Indicator Variations
- Filtered Inlet Option
- Options of I/O marked switches

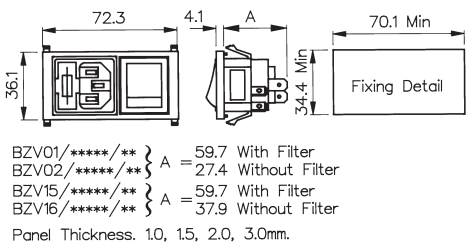

How to order -

BZV XX / XXXXX / XX		
Type of Inlet / Outlet	Filtered or Non Filtered Inlet	Combination of Other Components
Single Fused C14 Power Inlet (cold condition), 6.3 or 2.8mm tabs: 01 = PF0011/63 02 = PF0011/28 Twin Fused C14 Power Inlet (cold condition), 6.3 or 2.8mm tabs: 15 = PF0033/63 16 = PF0033/28	Z0000 = Non Filtered Axxxx = Standard For Filtered inlet use 6th to 9th characters from filter ordering code see pages 436 - 437 E.g. BZV01/A0620/10	Neon Indicator: D3 = Red Neon Indicator Double Contact Switch: 10 = D.P. Switch Double Contact Neon Switch: 11 = D.P. Red Neon Switch 12 = D.P. Green Neon Switch Double Contact High Inrush Switch: 13 = D.P. High Inrush Switch Double Contact Switch Marked I/O: 70 = D.P. Switch (I/O) Double Contact Neon Switch Marked (I/O): 76 = D.P. Red Neon Switch (I/O) 77 = D.P. Green Neon Switch (I/O) Double Contact High Inrush Switch Marked (I/O): 78 = D.P. High Inrush Switch (I/O) B1 = D.P. High Inrush Green Neon Switch (I/O)




Vertical Module Arrangement



BZV03/Z0000/02

- Inlet with 2.8mm or 6.3mm tags
- Single Contact Switch or Neon Indicator Variations
- Filtered Inlet Option
- Options of I/O marked switches
- Non Fused



BZV03, BZV04/****/** A = 62.5 With Filter
28.1 Without Filter
BZV05, BZV06/****/** A = 28.1
Panel Thickness. 1.0, 1.5, 2.0, 3.0mm.

How to order -


BZV XX / XXXXX / XX		
Type of Inlet / Outlet C14 Power Inlet (cold condition), 6.3 or 2.8mm tabs: 03 = PX0575/63 04 = PX0575/28 C16 Power Inlet (hot condition), 6.3 or 2.8mm tabs: 05 = PX0595/63 06 = PX0595/28 Please note type 05 and 06 are not available in filtered version	Filtered or Non Filtered Inlet Z0000 = Non Filtered Axxxx = Standard For Filtered inlet use 6th to 9th characters from filter ordering code see page 435 E.g. BZV03/A0120/02	Combination of Other Components Single Contact Switch: 01 = S.P. Switch Single Contact Neon Switch: 02 = S.P. Red Neon Switch 08 = S.P. Green Neon Switch Neon Indicator: 03 = Red Neon Indicator Single Contact High Inrush Switch: 46 = S.P. High Inrush Switch Single Contact Switch Marked I/O: 69 = S.P. Switch (I/O) Single Contact Neon Switch Marked (I/O): 71 = S.P. Red Neon Switch (I/O) 74 = S.P. Green Neon Switch (I/O) Single Contact High Inrush Switch Marked (I/O): 98 = S.P. High Inrush Switch (I/O)

Vertical Module Arrangement



BZV03/Z0000/07

- Inlet with 2.8mm or 6.3mm tags
- Double Contact Switch/
Fuseholder/Indicator/
Voltage Selectors/
Blanking Plate
- Filtered Inlet Option
- Options of I/O marked switches



Panel Thickness: 1.0, 1.5, 2.0, 3.0mm.

BZV03, BZV04/****/** A = 62.5 With Filter
39.0 Without Filter

BZV05, BZV06/****/** A = 39.0

How to order -

BZV XX

XXXXX

XX

Type of Inlet / Outlet

C14 Power Inlet
(cold condition),
6.3 or 2.8mm tabs:

03 = PX0575/63
04 = PX0575/28

C16 Power Inlet (hot
condition), 6.3 or
2.8mm tabs:

05 = PX0595/63
06 = PX0595/28

Please note type 05
and 06 are not
available in
filtered version

Filtered or Non Filtered Inlet

Z0000 = Non Filtered

Axxxx = Standard

For Filtered inlet use 6th
to 9th characters from filter
ordering code see page 435
E.g. BZV03/A0120/07

Combination of Other Components

Twin Fuseholder and Double Contact
Switch:
05 = 2 x FX0359 + D.P. Switch

Twin Fuseholder and Double Contact Neon
Switch:
06 = 2 x FX0359 + D.P. Red Neon
Switch
09 = 2 x FX0359 + D.P. Green Neon
Switch
19 = 2 x FX0359 + D.P. Red Neon
Switch 125V

Twin Fuseholder and Neon Indicator:
07 = 2 x FX0359 + Red Neon
Indicator

Voltage Selector, Fuseholder and Double
Contact Switch:
15 = 1 x VS0001 + 1 x FX0359 +
Double Contact switch

Voltage Selector, Fuseholder and Double
Contact Neon Switch:
16 = 1 x VS0001 + 1 x FX0359 + D.P.
Red Neon Switch
18 = 1 x VS0001 + 1 x FX0359 + D.P.
Green Neon Switch

Voltage Selector, Fuseholder and Neon
Indicator:
17 = 1 x VS0001 + 1 x FX0359 + Red
Neon Indicator

Twin Fuseholder and Double Contact High
Inrush Switch:
20 = 2 x FX0359 + D.P. High Inrush
Switch

Twin Fuseholder and Double Contact High
Inrush Neon Switch:
21 = 2 x FX0359 + 1 x D.P. High
Inrush Green Neon Switch
22 = 2 x FX0359 + 1 x D.P. High
Inrush Red Neon Switch

Voltage Selector, Neon Indicator and
Double Contact Switch
25 = 1 x VS0001 + 1 x
DX0928/110V/Red + D.P. Switch
26 = 1 x VS0001 + 1 x
DX0928/110V/Green + D.P. Switch
27 = 1 x VS0001 + 1 x
DX0928/250V/Red + D.P. Switch
28 = 1 x VS0001 + 1 x
DX0928/250V/Green + D.P. Switch

Voltage Selector, Neon Indicator and
Double Contact High Inrush Switch:
29 = 1 x VS0001 + 1 x
DX0928/250V/Red + D.P. High Inrush
Switch
30 = 1 x VS0001 + 1 x
DX0928/250V/Green + D.P. High
Inrush Switch

Fuseholder, Neon Indicator and Double
Contact Switch
31 = 1 x FX0359 + 1 x
DX0928/110V/Red + D.P. Switch
32 = 1 x FX0359 + 1 x
DX0928/110V/Green + D.P. Switch
33 = 1 x FX0359 + 1 x
DX0928/250V/Red + D.P. Switch
34 = 1 x Fx0359 + 1 x
DX0928/250V/Green + D.P. Switch

Fuseholder, Neon Indicator and Double
Contact High Inrush Switch:
35 = 1 x FX0359 + 1 x
DX0928/250V/Red + D.P. High Inrush
Switch
36 = 1 x FX0359 + 1 x
DX0928/250V/Green + D.P. High
Inrush Switch

Fuseholder, Blanking Plate and Double
Contact High Inrush Neon Switch:
47 = 1 x FX0359 + 1 x Blanking Plate
(Right) + D.P. High Inrush Green Neon
Switch


Fuseholder, Blanking Plate and Double
Contact Switch:
48 = 1 x FX0359 + 1 x Blanking Plate
(Right) + D.P. Switch

Vertical Module Arrangement



BZV03/Z0000/07

- Inlet with 2.8mm or 6.3mm tags
- Double Contact Switch/
- Fuseholder/Indicator/
- Voltage Selectors/
- Blanking Plate
- Filtered Inlet Option
- Options of I/O marked switches



Panel Thickness: 1.0, 1.5, 2.0, 3.0mm.

BZV03, BZV04/****/** A = 62.5 With Filter
39.0 Without Filter
BZV05, BZV06/****/** A = 39.0

How to order -

BZV XX

XXXXX

XX

Type of Inlet / Outlet

C14 Power Inlet (cold condition), 6.3 or 2.8mm tabs:

03 = PX0575/63
04 = PX0575/28

C16 Power Inlet (hot condition), 6.3 or 2.8mm tabs:

05 = PX0595/63
06 = PX0595/28

Please note type 05 and 06 are not available in filtered version

Filtered or Non Filtered Inlet

Z0000 = Non Filtered

Axxxx = Standard

For Filtered inlet use 6th to 9th characters from filter ordering code see page 435
E.g. BZV03/A0120/07

Combination of Other Components

Twin Fuseholder and Double Contact Switch Marked (I/O):

72 = 2 x FX0359 + D.P. Switch (I/O)

Twin Fuseholder and Double Contact Neon Switch Marked (I/O):

73 = 2 x FX0359 + D.P. Red Neon Switch (I/O)

75 = 2 x FX0359 + D.P. Green Neon Switch (I/O)

82 = 2 x FX0359 + D.P. Red Neon Switch 125V (I/O)

Voltage Selector, Fuseholder and Double Contact Switch Marked (I/O):

79 = 1 x VS0001 + 1 x FX0359 + Double Contact switch (I/O)

Voltage Selector, Fuseholder and Double Contact Neon Switch Marked (I/O):

80 = 1 x VS0001 + 1 x FX0359 + D.P. Red Neon Switch (I/O)

81 = 1 x VS0001 + 1 x FX0359 + D.P. Green Neon Switch (I/O)

Twin Fuseholder and Double Contact High Inrush Switch Marked (I/O):

83 = 2 x FX0359 + D.P. High Inrush Switch (I/O)

Twin Fuseholder and Double Contact High Inrush Neon Switch Marked (I/O):

84 = 2 x FX0359 + 1 x D.P. High Inrush Green Neon Switch (I/O)

85 = 2 x FX0359 + 1 x D.P. High Inrush Red Neon Switch (I/O)

Voltage Selector, Neon Indicator and Double Contact Switch Marked (I/O):

86 = 1 x VS0001 + 1 x DX0928/110V/Red + D.P. Switch (I/O)

87 = 1 x VS0001 + 1 x DX0928/110V/Green + D.P. Switch (I/O)

88 = 1 x VS0001 + 1 x DX0928/250V/Red + D.P. Switch (I/O)

89 = 1 x VS0001 + 1 x DX0928/250V/Green + D.P. Switch (I/O)

Voltage Selector, Neon Indicator and Double Contact High Inrush Switch Marked (I/O):

90 = 1 x VS0001 + 1 x DX0928/250V/Red + D.P. High Inrush Switch (I/O)

91 = 1 x VS0001 + 1 x DX0928/250V/Green + D.P. High Inrush Switch (I/O)

Fuseholder, Neon Indicator and Double Contact Switch Marked (I/O):

92 = 1 x FX0359 + 1 x DX0928/110V/Red + D.P. Switch (I/O)

93 = 1 x FX0359 + 1 x DX0928/110V/Green + D.P. Switch (I/O)

94 = 1 x FX0359 + 1 x DX0928/250V/Red + D.P. Switch (I/O)

95 = 1 x FX0359 + 1 x DX0928/250V/Green + D.P. Switch (I/O)

Fuseholder, Neon Indicator and Double Contact High Inrush Switch Marked (I/O):

96 = 1 x FX0359 + 1 x DX0928/250V/Red + D.P. High Inrush Switch (I/O)

97 = 1 x FX0359 + 1 x DX0928/250V/Green + D.P. High Inrush Switch (I/O)

Fuseholder, Blanking Plate and Double Contact High Inrush Neon Switch Marked (I/O):

99 = 1 x FX0359 + 1 x Blanking Plate (Right) + D.P. High Inrush Green Neon Switch (I/O)

Fuseholder, Blanking Plate and Double Contact Switch Marked (I/O):

A0 = 1 x FX0359 + 1 x Blanking Plate (Right) + D.P. Switch (I/O)

B2 = 1 x VS0002 + 1 x Blanking Plate

B3 = 1 x FX0359 + 1 x Blanking Plate + D.P. High Inrush Switch (I/O)


B5 = 1 x VS0001 + 1 x Blanking Plate + D.P. Switch (I/O)

Vertical Module Arrangement



BZV04/Z0000/04

- Inlet with 2.8mm or 6.3mm tags
- Fuseholder/Voltage Selector/Indicator options/Blanking plate

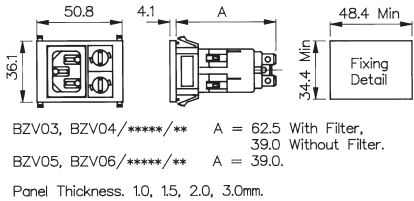

How to order -

BZV XX / XXXXX / XX		
Type of Inlet / Outlet	Filtered or Non Filtered Inlet	Combination of Other Components
C14 Power Inlet (cold condition), 6.3 or 2.8mm tabs: 03 = PX0575/63 04 = PX0575/28 C16 Power Inlet (hot condition), 6.3 or 2.8mm tabs: 05 = PX0595/63 06 = PX0595/28 Please note type 05 and 06 are not available in filtered version	Z0000 = Non Filtered Axxxx = Standard For Filtered inlet use 6th to 9th characters from filter ordering code see page 435 E.g. BZV03/A0120/04	Twin Fuseholder: 04 = 2 x FX0359 Voltage Selector and Fuseholder: 14 = 1 x VS0001 + 1 x FX0359 Voltage selector and Neon: 37 = 1 x VS0001 + DX0928/110V/Red 38 = 1 x VS0001 + DX0928/110V/Green 39 = 1 x VS0001 + DX0928/250V/Red 40 = 1 x VS0001 + DX0928/250V/Green Fuseholder and Neon: 41 = 1 x FX0359 + DX0928/110V/Red 42 = 1 x FX0359 + DX0928/110V/Green 43 = 1 x FX0359 + DX0928/250V/Red 44 = 1 x FX0359 + DX0928/250V/Green Fuseholder and Blanking Plate: 45 = 1 x FX0359 + Blanking Plate Voltage Selector and Blanking Plate: B2 = 1 x VS0001 + Blanking Plate




Vertical Module Arrangement



BZV49/Z0000/69

- ⬡ Inlet with 4.8mm or 6.3mm tags
- ⬡ Single Contact Switch marked I/O
- ⬡ Illuminated, red or green, switches
- ⬡ High inrush non-illuminated switch

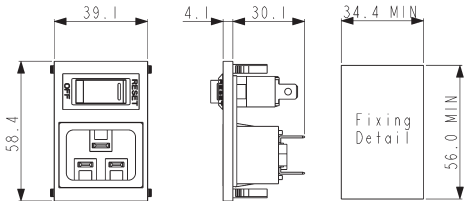

How to order -


BZV XX / XXXXX / XX		
Type of Inlet / Outlet	Filtered or Non Filtered Inlet	Combination of Other Components
C20 Power Inlet (cold condition), 4.8 or 6.3mm tabs: 49 = PX0598/63 50 = PX0598/48	Z0000 = Non Filtered	Single Contact Switch: 01 = S.P. Switch Single Contact Switch Marked (I/O): 69 = S.P. Switch (I/O) Single Contact Illuminated Switch: 02 = S.P. Illuminated Red 08 = S.P. Illuminated Green Single Contact Non-illuminated High Inrush Switch Marked I/O: 98 = S.P. High Inrush Switch (I/O) Single Contact Illuminated (Red or Green 250v Neon) Switch Marked I/O: 71 = S.P. Switch Illuminated Red (I/O) 74 = S.P. Switch Illuminated Green (I/O)

Vertical Module Arrangement



BZV09/Z0000/04

- ⬡ Inlet/Outlet Combination
- ⬡ 2.8mm or 6.3mm tabs
- ⬡ Filtered Inlet and Blanking Plate options
- ⬡ Shuttered or Non-shuttered Outlet
- ⬡ Fused

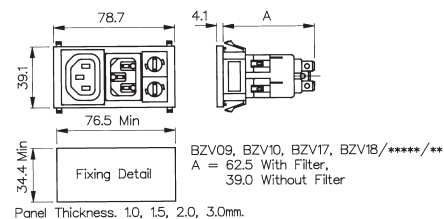

How to order -

BZV XX	XXXXX	XX
Type of Inlet / Outlet C14 Power Inlet (cold condition) and Sheet F Non-shuttered Power Outlet, 2.8 or 6.3mm tabs: 09 = PX0575/63 + PX0695/63 10 = PX0575/28 + PX0695/28 C14 Power Inlet (cold condition) and Sheet F Shuttered Power Outlet, 2.8 or 6.3mm tabs: 17 = PX0575/63 + PX0783/63 18 = PX0575/28 + PX0783/28	Filtered or Non Filtered Inlet Z0000 = Non Filtered Axxxx = Standard For Filtered inlet use 6th to 9th characters from filter ordering code see page 435 E.g. BZV09/A0120/04	Combination of Other Components Twin Fuseholder: 04 = 2 x FX0359 Voltage Selector and Fuseholder: 14 = 1 x VS0001 + 1 x FX0359 Voltage selector and Neon: 37 = 1 x VS0001 + DX0928/110V/Red 38 = 1 x VS0001 + DX0928/110V/Green 39 = 1 x VS0001 + DX0928/250V/Red 40 = 1 x VS0001 + DX0928/250V/Green Fuseholder and Neon: 41 = 1 x FX0359 + DX0928/110V/Red 42 = 1 x FX0359 + DX0928/110V/Green 43 = 1 x FX0359 + DX0928/250V/Red 44 = 1 x FX0359 + DX0928/250V/Green Fuseholder and Blanking Plate: 45 = 1 x FX0359 + Blanking Plate Voltage Selector and Blanking Plate: B2 = 1 x VS0001 + Blanking Plate




Vertical Module Arrangement



BZV45/Z0000/02

- Outlet with 2.8mm or 6.3mm tags
- Shuttered or Non-Shuttered
- Single Contact Switch or Neon Indicator
- I/O Marking Options

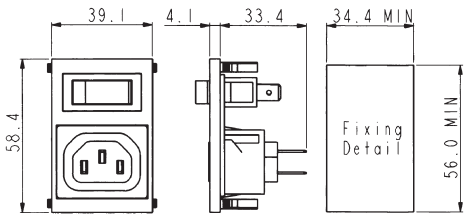

How to order -


BZV XX / XXXXX / XX		
Type of Inlet / Outlet	Filtered or Non Filtered Inlet	Combination of Other Components
Sheet F Power Outlet (non shuttered), 6.3 or 2.8mm tabs: 45 = PX0695/63 46 = PX0695/28 Sheet F Power Outlet (shuttered), 6.3 or 2.8mm tabs: 47 = PX0783/63 48 = PX0783/28	Z0000 = Non Filtered	Single Contact Switch: 01 = S.P. Switch Single Contact Neon Switch: 02 = S.P. Red Neon Switch 08 = S.P. Green Neon Switch Neon Indicator: 03 = Red Neon Indicator Single Contact High Inrush Switch: 46 = S.P. High Inrush Switch Single Contact Switch Marked I/O: 69 = S.P. Switch (I/O) Single Contact Neon Switch Marked (I/O): 71 = S.P. Red Neon Switch (I/O) 74 = S.P. Green Neon Switch (I/O) Single Contact High Inrush Switch Marked (I/O): 98 = S.P. High Inrush Switch (I/O)

Horizontal Module Arrangement



BZH01/Z0000/01

- Fused Inlet with 2.8mm or 6.3mm tabs
- Single Contact Switch Variations
- Filtered Inlet Option
- Options of I/O marked switches

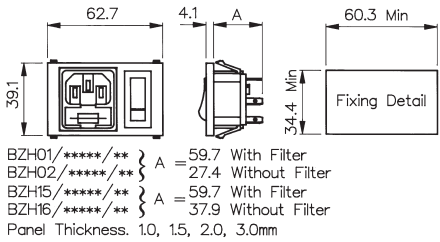

How to order -

BZH XX	/	XXXXX	/	XX
Type of Inlet / Outlet		Filtered or Non Filtered Inlet		Combination of Other Components
Single Fused C14 Power Inlet (cold condition), 2.8 or 6.3mm tabs: 01 = PF0011/63 02 = PF0011/28 Twin Fused C14 Power Inlet (cold condition), 2.8 or 6.3mm tabs: 15 = PF0033/63 16 = PF0033/28		Z0000 = Non Filtered Axxxx = Standard For Filtered inlet use 6th to 9th characters from filter ordering code see pages 436 - 437 E.g. BZH01/A0620/01		Single Contact Switch: 01 = S.P. Switch Single Contact Neon Switch: 02 = S.P. Red Neon Switch 08 = S.P. Green Neon Switch Neon Indicator: 03 = Red Neon Indicator Single Contact High Inrush Switch: 46 = S.P. High Inrush Switch Single Contact Switch Marked I/O: 69 = S.P. Switch (I/O) Single Contact Neon Switch Marked (I/O): 71 = S.P. Red Neon Switch (I/O) 74 = S.P. Green Neon Switch (I/O) Single Contact High Inrush Switch Marked (I/O): 98 = S.P. High Inrush Switch (I/O)




Horizontal Module Arrangement



BZH01/Z0000/10

- Fused Inlet with 2.8mm or 6.3mm tags
- Double Contact Switch Variations
- Filtered Inlet Option
- Options of I/O marked switches

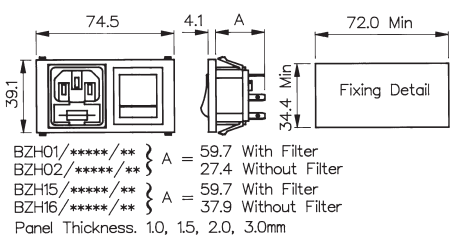

How to order -

BZH XX / XXXXX / XX		
Type of Inlet / Outlet	Filtered or Non Filtered Inlet	Combination of Other Components
Single Fused C14 Power Inlet (cold condition), 2.8 or 6.3mm tabs: 01 = PF0011/63 02 = PF0011/28 Twin Fused C14 Power Inlet (cold condition), 2.8 or 6.3mm tabs: 15 = PF0033/63 16 = PF0033/28	Z0000 = Non Filtered Axxxx = Standard For Filtered inlet use 6th to 9th characters from filter ordering code see pages 436 - 437 E.g. BZH01/A0620/10	Neon Indicator: 03 = Red Neon Indicator Double Contact Switch: 10 = D.P. Switch Double Contact Neon Switch: 11 = D.P. Red Neon Switch 12 = D.P. Green Neon Switch Double Contact High Inrush Switch: 13 = D.P. High Inrush Switch Double Contact Switch marked I/O: 70 = D.P. Switch (I/O) Double Contact Neon Switch Marked (I/O): 76 = D.P. Red Neon Switch (I/O) 77 = D.P. Green Neon Switch (I/O) Double Contact High Inrush Switch Marked (I/O): 78 = D.P. High Inrush Switch (I/O) B1 = D.P. High Inrush Green Neon Switch (I/O)




Horizontal Module Arrangement



BZH09/Z0000/01

- ⬡ Inlet/Outlet Combination with 2.8mm or 6.3mm tags
- ⬡ Shuttered or Non-Shuttered Outlet
- ⬡ Single Contact Switch Variations
- ⬡ Filtered Inlet Option
- ⬡ Options of I/O marked switches

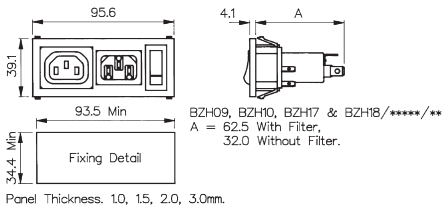

How to order -


BZH XX / XXXXX / XX		
Type of Inlet / Outlet C14 Power Inlet (cold condition) and Sheet F Non-shuttered Power Outlet, 2.8 or 6.3mm tabs: 09 = PX0575/63 + PX0695/63 10 = PX0575/28 + PX0695/28 C14 Power Inlet (cold condition) and Sheet F Shuttered Power Outlet , 2.8 or 6.3mm tabs: 17 = PX0575/63 + PX0783/63 18 = PX0575/28 + PX0783/28	Filtered or Non Filtered Inlet Z0000 = Non Filtered Axxxx = Standard For Filtered inlet use 6th to 9th characters from filter ordering code see page 435 E.g. BZH09/A0120/01	Combination of Other Components Single Contact Switch: 01 = S.P. Switch Single Contact Neon Switch: 02 = S.P. Red Neon Switch 08 = S.P. Green Neon Switch Neon Indicator: 03 = Red Neon Indicator Single Contact High Inrush Switch: 46 = S.P. High Inrush Switch Single Contact Switch Marked I/O: 69 = S.P. Switch (I/O) Single Contact Neon Switch Marked (I/O): 71 = S.P. Red Neon Switch (I/O) 74 = S.P. Green Neon Switch (I/O) Single Contact High Inrush Switch Marked (I/O): 98 = S.P. High Inrush Switch (I/O)

Horizontal Module Arrangement



BZH11/Z0000/10

- Inlet/Outlet Combination with 2.8mm or 6.3mm tags
- Single or Twin Fused Inlet
- Shuttered or Non-Shuttered Outlet
- Double Contact Switch Variations
- Filtered Inlet Option
- Options of I/O marked switches

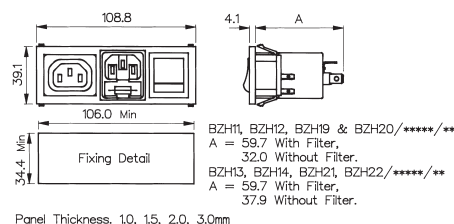

How to order -


BZH XX	XXXXX	XX
Type of Inlet / Outlet Single Fused C14 Power Inlet (cold condition) and Sheet F Power Outlet, 2.8 or 6.3mm tabs: 11 = PF0011/63 + PX0695/63 12 = PF0011/28 + PX0695/28 Twin Fused C14 Power Inlet (cold condition) and Sheet F Power Outlet, 2.8 or 6.3mm tabs: 13 = PF0033/63 + PX0695/63 14 = PF0033/28 + PX0695/28 Single Fused C14 Power Inlet (cold condition) and Sheet F Shuttered Power Outlet, 2.8 or 6.3mm tabs: 19 = PF0011/63 + PX0783/63 20 = PF0011/28 + PX0783/28 Twin Fused C14 Power Inlet (cold condition) and Sheet F Shuttered Power Outlet, 2.8 or 6.3mm tabs: 21 = PF0033/63 + PX0783/63 22 = PF0033/28 + PX0783/28	Filtered or Non Filtered Inlet Z0000 = Non Filtered Axxxx = Standard For Filtered inlet use 6th to 9th characters from filter ordering code see pages 436 - 437 E.g. BZH11/A0620/10	Combination of Other Components Neon Indicator: D3 = Red Neon Indicator Double Contact Switch: 10 = D.P. Switch Double Contact Neon Switch: 11 = D.P. Red Neon Switch 12 = D.P. Green Neon Switch Double Contact High Inrush Switch: 13 = D.P. High Inrush Switch Double Contact Switch Marked I/O: 70 = D.P. Switch (I/O) Double Contact Neon Switch Marked (I/O): 76 = D.P. Red Neon Switch (I/O) 77 = D.P. Green Neon Switch (I/O) Double Contact High Inrush Switch Marked (I/O): 78 = D.P. High Inrush Switch (I/O) B1 = D.P. High Inrush Green Neon Switch (I/O)

Horizontal Module Arrangement



BZH11/Z0000/00

- Fused Inlet/Outlet
- Combination with 2.8mm or 6.3mm tabs
- Filtered Inlet Option
- Single or Twin Fused

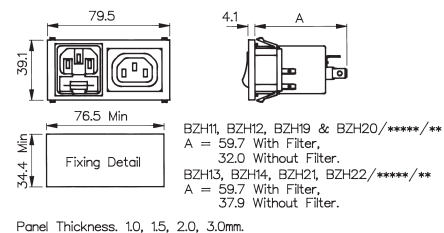

How to order -

BZH XX	/	XXXXX	/	XX
Type of Inlet / Outlet		Filtered or Non Filtered Inlet		Combination of Other Components
Single Fused C14 Power Inlet (cold condition) and Sheet F Non-shuttered Power Outlet, 2.8 or 6.3mm tabs:		Z0000 = Non Filtered		None
11 = PF0011/63 + PX0695/63 12 = PF0011/28 + PX0695/28		Axxxx = Standard		00 = None
Twin Fused C14 Power Inlet (cold condition) and Sheet F Non-shuttered Power Outlet, 2.8 or 6.3mm tabs:		For Filtered inlet use 6th to 9th characters from filter ordering code see pages 436 - 437 E.g. BZH11/A0620/00		
13 = PF0033/63 + PX0695/63 14 = PF0033/28 + PX0695/28				
Single Fused C14 Power Inlet (cold condition) and Sheet F Shuttered Power Outlet, 2.8 or 6.3mm tabs:				
19 = PF0011/63 + PX0783/63 20 = PF0011/28 + PX0783/28				
Twin Fused C14 Power Inlet (cold condition) and Sheet F Shuttered Power Outlet, 2.8 or 6.3mm tabs:				
21 = PF0033/63 + PX0783/63 22 = PF0033/28 + PX0783/28				




Minimum Combined Bezel Size



BZM27/Z0000/57B

- Inlet with 2.8, 4.8 or 6.3mm tags
- Horizontal Module Arrangement
- Single and Double Contact Switch Variations
- Filtered Inlet Option

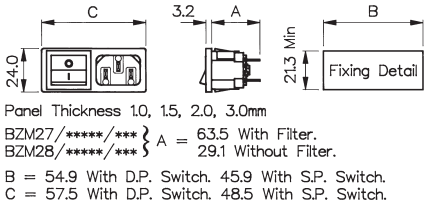

How to order -


BZM XX	/	XXXXX	/	XX	/	X
Type of Inlet / Outlet		Filtered or Non Filtered Inlet		Switch Variation		Panel Thickness
C14 Power Inlet (cold condition), 6.3, 4.8 & 2.8mm tabs: 27 = PX0575/63 42 = PX0575/48 28 = PX0575/28		Z0000 = Non Filtered Axxxx = Standard For Filtered inlet use 6th to 9th characters from filter ordering code see page 435 E.g. BZM27/A0120/57B		Single Contact Switch, 4.8mm or solder tab, marked I/O: 53 = S.P. Switch, 4.8mm tab (I/O) 54 = S.P. Switch, solder tab (I/O) Single Contact Illuminated Switch, 4.8mm or solder tab: 55 = S.P. Switch Illum. Red, 4.8mm tab 61 = S.P. Switch Illum. Green, 4.8mm tab 56 = S.P. Switch Illum. Red, solder tab 62 = S.P. Switch Illum. Green, solder tab Double Contact Switch, 4.8mm or solder tab, marked I/O: 57 = D.P. Switch, 4.8mm tab (I/O) 58 = D.P. Switch, solder tab (I/O) Double Contact Illuminated Switch, 4.8mm or solder tab: 59 = D.P. Switch Illum. Red, 4.8mm tab 63 = D.P. Switch Illum. Green, 4.8mm tab 60 = D.P. Switch Illum. Red, solder tab 64 = D.P. Switch Illum. Green, solder tab Double Contact High Inrush, 4.8mm tabs: 65 = D.P. High Inrush Switch, 4.8mm tabs (S.P. format) Double Contact High Inrush, 4.8mm tabs, marked I/O: 68 = D.P. High Inrush Switch, 4.8mm tabs, I/O (S.P. format) Single Contact Illuminated Switch, 4.8mm or solder tab, Marked I/O: A1 = S.P. Switch Illum. Red, 4.8mm tab (I/O) A5 = S.P. Switch Illum. Green, 4.8mm tab (I/O) A2 = S.P. Switch Illum. Red, solder tab (I/O) A6 = S.P. Switch Illum. Green, solder tab (I/O) Double Contact Illuminated Switch, 4.8mm or solder tab, Marked I/O: A3 = D.P. Switch Illum. Red, 4.8mm tab A7 = D.P. Switch Illum. Green, 4.8mm tab A4 = D.P. Switch Illum. Red, solder tab A8 = D.P. Switch Illum. Green, solder tab		1.0mm = A 1.5mm = B 2.0mm = C 3.0mm = D

Vertical Module Arrangement



BVA01/Z0000/02

- Fused Inlet with 2.8mm or 6.3mm tags
- Screw Fixing to Panel
- Single Contact Switch Variations
- Filtered Inlet Option
- Options of I/O marked switches

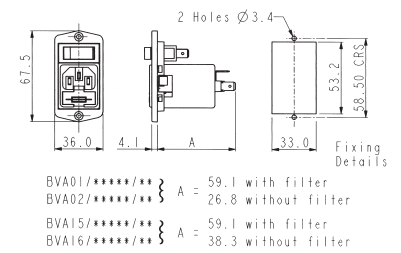


Vertical Module Arrangement



BVB01/Z0000/01

- Fused Inlet with 2.8mm or 6.3mm tags
- Screw Fixing to Panel
- Single Contact Switch Variations
- Filtered Inlet Option
- Options of I/O marked switches

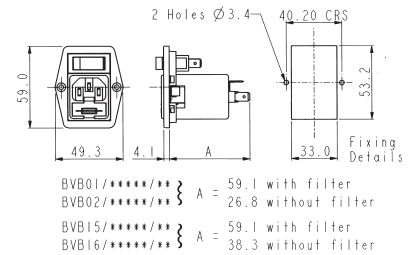

How to order -


BV X		XX	/	XXXXX	/	XX
Flange Type	Type of Inlet / Outlet	Filtered or Non Filtered Inlet		Combination of Other Components		
A = Top fixing	Single Fused C14 Power Inlet (cold condition), 6.3 or 2.8mm tabs:	Z0000 = Non Filtered		Single Contact Switch:		
B = Side fixing		Axxxx = Standard		01 = S.P. Switch		
	01 = PF0011/63 02 = PF0011/28	For Filtered inlet use 6th to 9th characters from filter ordering code see pages 436 - 437 E.g. BVA01/A0620/01		Single Contact Neon Switch:		
	Twin Fused C14 Power Inlet (cold condition), 6.3 or 2.8mm tabs:			02 = S.P. Red Neon Switch 08 = S.P. Green Neon Switch		
	15 = PF0033/63 16 = PF0033/28			Neon Indicator:		
				03 = Red Neon Indicator		
				Single Contact High Inrush Switch:		
				46 = S.P. High Inrush Switch		
				Single Contact Switch Marked I/O:		
				69 = S.P. Switch (I/O)		
				Single Contact Neon Switch Marked (I/O):		
				71 = S.P. Red Neon Switch (I/O) 74 = S.P. Green Neon Switch (I/O)		
				Single Contact High Inrush Switch Marked (I/O):		
				98 = S.P. High Inrush Switch (I/O)		

Vertical Module Arrangement



BVA01/Z0000/10

- Fused Inlet with 2.8mm or 6.3mm tags
- Screw Fixing to Panel
- Double Contact Switch Variations
- Filtered Inlet Option
- Options of I/O marked switches

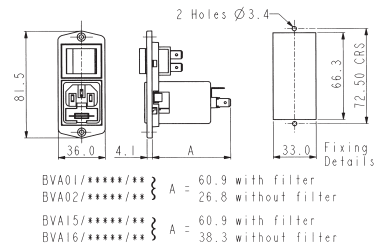


Vertical Module Arrangement



BVB01/Z0000/11

- Fused Inlet with 2.8mm or 6.3mm tags
- Screw Fixing to Panel
- Double Contact Switch Variations
- Filtered Inlet Option
- Options of I/O marked switches

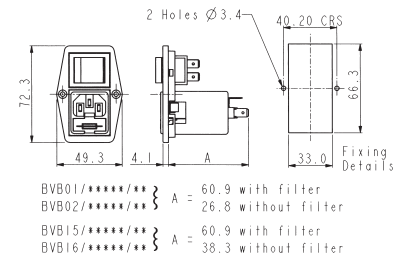

How to order -


BV X XX / XXXXX / XX			
Flange Type	Type of Inlet / Outlet	Filtered or Non Filtered Inlet	Combination of Other Components
A = Top fixing B = Side fixing	Fused C14 Power Inlet (cold condition), 6.3 or 2.8mm tabs: 01 = PF0011/63 02 = PF0011/28 Twin Fused C14 Power Inlet (cold condition), 6.3 or 2.8mm tabs: 15 = PF0033/63 16 = PF0033/28	Z0000 = Non Filtered Axxxx = Standard For Filtered inlet use 6th to 9th characters from filter ordering code see pages 436 - 437 E.g. BVA01/A0620/10	Neon Indicator: D3 = Red Neon Indicator Double Contact Switch: 10 = D.P. Switch Double Contact Neon Switch: 11 = D.P. Red Neon Switch 12 = D.P. Green Neon Switch Double Contact High Inrush Switch: 13 = D.P. High Inrush Switch Double Contact Switch Marked I/O: 70 = D.P. Switch (I/O) Double Contact Neon Switch Marked (I/O): 76 = D.P. Red Neon Switch (I/O) 77 = D.P. Green Neon Switch (I/O) Double Contact High Inrush Switch Marked (I/O): 78 = D.P. High Inrush Switch (I/O) B1 = D.P. High Inrush Green Neon Switch (I/O)

EMI Filter Options



BVA01/Z0000/10

- For Polysnap modules BZV03, BZV04, BZV09, BZV10, BZV17, BZV18, BZH09, BZH10, BZH17, BZH18, BZM27, BZM28
- PX0575 style IEC inlet
- Using PS01/A style filter
- Standard Attenuation Filter

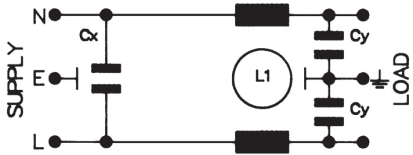

How to order -

B XXXX /		A	XX	X	X	/	XX
Polysnap Part No.		Filter Type	Rating	L/C Circuit	Additional Components		Polysnap Part No.
From Polysnap Selection		A = Standard	01 = 1A	1 = Version 1	0 = None		From Polysnap Selection
			03 = 3A	2 = Version 2			
			06 = 6A	3 = Version 3			
			10 = 10A				

Rating	Version	L1	Cx	Cy
1 AMP	1	2 x 2.8mH	1 x 15nF	2 x 2.2nF
"	2	2 x 10mH	1 x 15nF	2 x 2.2nF
"	3	2 x 10mH	1 x 47nF	2 x 2.2nF
3 AMP	1	2 x 0.75mH	1 x 15nF	2 x 2.2nF
"	2	2 x 1.8mH	1 x 15nF	2 x 2.2nF
"	3	2 x 1.8mH	1 x 47nF	2 x 2.2nF
6 AMP	1	2 x 0.3mH	1 x 15nF	2 x 2.2nF
"	2	2 x 0.7mH	1 x 15nF	2 x 2.2nF
"	3	2 x 0.7mH	1 x 47nF	2 x 2.2nF
10 AMP	1	2 x 0.17mH	1 x 15nF	2 x 2.2nF
"	2	2 x 0.35mH	1 x 15nF	2 x 2.2nF
"	3	2 x 0.17mH	1 x 47nF	2 x 2.2nF

Part No. Example

BZV03/A0120/02

BZV style Polysnap module with PX0575 IEC power inlet, filter rated at 1 amp, L/C circuit version 2 (L1 = 2 x 10mH, Cx = 1 x 15nF, Cy = 2 x 2.2nF) 6.3mm tabs and single Contact red neon switch.

Filter Specification

Max. Working Voltage:	250V a.c. 50-400Hz
Earth Leakage Current:	<0.35mA (250V, 50Hz)
Temperature Range:	-25°C to +85°C
Max. Ambient Temp.: (@ Full Load)	40°C (derate linearly to 0A @ 85°C)
Test Voltage:	2700V d.c. 2 secs. Lines to Earth 1100V d.c. 2 secs. Live to Neutral

Approvals:




Attenuation Curves:

See PS01/A filter, page 440

EMI Filter Options



- For Polysnap modules BZV01, BZV02, BZH01, BZH02, BZH11, BZH12, BZH19, BZH20, BVA01, BVA02, BVB01, BVB02
- PF0011 style single fuse IEC inlet
- Using PS21/A style filter
- Standard Attenuation Filter

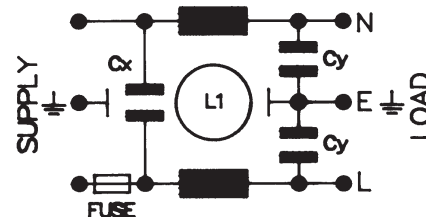

How to order -

B XXXX	/	A	XX	X	X	/	XX
Polysnap Part No.		Filter Type	Rating	L/C Circuit	Additional Components		Polysnap Part No.
From Polysnap Selection		A = Standard	01 = 1A 03 = 3A 06 = 6A	2 = Version 2 3 = Version 3	0 = None		From Polysnap Selection

Rating	Version	L1	Cx	Cy
1 AMP	1			
"	2			
"	3	2 x 12mH	1 x 47nF	2 x 2.2nF
3 AMP	1			
"	2	2 x 1.8mH	1 x 15nF	2 x 2.2nF
"	3	2 x 6.5mH	1 x 47nF	2 x 2.2nF
6 AMP	1			
"	2	2 x 0.7mH	1 x 15nF	2 x 2.2nF
"	3	2 x 2mH	1 x 47nF	2 x 2.2nF
10 AMP	1			
"	2			
"	3			

Part No. Example

BZV01/A0630/01

BZV style Polysnap module with PF0011 single fused (5 x 20mm) IEC power inlet, filter rated at 6 amp, L/C circuit version 3 (L1 = 2 x 2.0mH, Cx = 1 x 47nF, Cy = 2 x 2.2nF), 6.3mm tabs and single Contact switch.

Filter Specification

Max. Working Voltage:	250V a.c. 50-400Hz
Earth Leakage Current:	<0.35mA (250V. 50Hz)
Temperature Range:	-25°C to +85°C
Max. Ambient Temp.:	40°C (derate linearly to 0A @ 85°C)
(@ Full Load)	
Test Voltage:	2700V d.c. 2 secs. Lines to Earth 1100V d.c. 2 secs. Live to Neutral

Approvals:




Attenuation Curves:

See PS21/A filter, page 444

EMI Filter Option



- For Polysnap modules BZV15, BZV16, BZH13, BZH14, BZH15, BZH16, BZH21, BZH22, BVA15, BVA16, BVB15, BVB16
- PF0033 style twin fuse IEC inlet
- Using PS26/A filter
- Standard Attenuation Filter

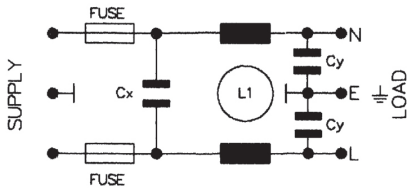

How to order -

B XXXX /	A	XX	X	X	/ XX
Polysnap Part No.	Filter Type	Rating	L/C Circuit	Additional Components	Polysnap Part No.
From Polysnap Selection	A = Standard	02 = 2A 04 = 4A	2 = Version 2	0 = None	From Polysnap Selection

Rating	Version	L1	Cx	Cy	Part No. Example
1 AMP	1				BZH13/A0420/00
"	2				
"	3	2 x 1.8mH	1 x 15nF	2 x 2.2nF	
4 AMP	1				
"	2	2 x 0.7mH	1 x 15nF	2 x 2.2nF	
"	3				

BZH style Polysnap module with PF0033 twin fused (5 x 20mm) IEC power inlet, filter rated at 4 amps, L/C circuit version 2 (L1 = 2 x 0.7mH, Cx = 1 x 15nF, Cy = 2 x 2.2nF) 6.3mm tabs and no additional components.

Filter Specification

Max. Working Voltage:	250V a.c. 50-400Hz
Earth Leakage Current:	<0.35mA (250V, 50Hz)
Temperature Range:	-25°C to +85°C
Max. Ambient Temp.: (@ Full Load)	40°C (derate linearly to 0A @ 85°C)
Test Voltage:	2700V d.c. 2 secs. Lines to Earth 1100V d.c. 2 secs. Live to Neutral

Approvals:

Attenuation Curves: See PS26/A filter, page 446