

# Reference Manual

DOC. REV. 4/9/2013

---

## SPX-2

Sixteen-line Digital I/O Serial  
Peripheral Expansion (SPX™)  
Board



**VERSA**LOGIC  
CORPORATION



[WWW.VERSALOGIC.COM](http://WWW.VERSALOGIC.COM)

12100 SW Tualatin Road  
Tualatin, OR 97062-7341  
(503) 747-2261  
Fax (971) 224-4708

Contents Copyright © 2013  
All Rights Reserved

**Notice:**

Although every effort has been made to ensure this document is error-free, VersaLogic makes no representations or warranties with respect to this product and specifically disclaims any implied warranties of merchantability or fitness for any particular purpose.

VersaLogic reserves the right to revise this product and associated documentation at any time without obligation to notify anyone of such changes.

PC/104 and the PC/104 logo are trademarks of the PC/104 Consortium.



MSPX2

## Product Release Notes

### **Rev. 2**

- Production release.

### **Rev. 1**

- Pre-production only. No customer releases.

## Support Page

The SPX support page, at <http://www.versalogic.com/private/spx2support.asp>, contains additional information and resources for this product including:

- Reference Manual (PDF format)
- Data sheets and manufacturers' links for chips used in this product
- Utility routines and benchmark software

This is a private page for SPX-2 users that can be accessed only by entering this address directly. It cannot be reached from the VersaLogic homepage.

# Table of Contents

---

|                                                |           |
|------------------------------------------------|-----------|
| <b>Introduction .....</b>                      | <b>1</b>  |
| Description.....                               | 1         |
| About SPI.....                                 | 1         |
| Technical Specifications.....                  | 2         |
| RoHS-Compliance .....                          | 3         |
| About RoHS.....                                | 3         |
| Warnings.....                                  | 3         |
| Electrostatic Discharge .....                  | 3         |
| Technical Support.....                         | 4         |
| Repair Service.....                            | 4         |
| <b>Physical Details .....</b>                  | <b>5</b>  |
| SPX-2 Board Layout.....                        | 5         |
| Hardware Assembly.....                         | 6         |
| Connector Functions and Interface Cables ..... | 7         |
| Jumper Summary .....                           | 7         |
| J1 Connector Pinout.....                       | 7         |
| <b>Digital I/O .....</b>                       | <b>8</b>  |
| Description.....                               | 8         |
| External Connections.....                      | 8         |
| Digital I/O Port Configuration.....            | 9         |
| Interrupt Generation .....                     | 9         |
| Writing to a Digital I/O Port.....             | 9         |
| <b>Base Board SPI Registers .....</b>          | <b>11</b> |
| SPI Data Registers .....                       | 13        |

## Description

The VersaLogic SPX-2 is a 16-channel digital I/O expansion module designed to be used with any SPX™ enabled base board. Its features include:

- Microchip MCP23S17 16-bit I/O Expander
- Compatible with any SPX enabled base board

VersaLogic SPX boards are a line of I/O expansion boards using the industry standard Serial Peripheral Interface (SPI) bus. These are small 1.2" x 3.775" that can mount in either "user connector" areas of a PC/104-*Plus* stack using the normal PC/104 stand-offs. They can also mount up to two feet away from the base board using custom cabling.

SPX boards are electrically connected to a base board via a 14-pin 2mm cable. Up to four boards can be daisy-chained together. Four is the maximum number of SPI chips that can be driven by the 14-pin interface. The SPI bus requires each chip to have a discrete chip-select signal, and the 14-pin interface supplies four chip-select signals. The maximum clock rate is 8 MHz.

Power for SPX boards is supplied through the interface cable. I/O connections on SPX boards are provided through screw terminal/wire connections.

All SPX boards are RoHS compliant and industrial temperature rated.

### ABOUT SPI

The SPI bus specifies four logic signals: SCLK – Serial clock (output from master); MOSI – Master output, slave input (output from master); MISO – Master input, slave output (output from slave); and SS – Slave select (output from master).

The SPI implementation on VersaLogic CPU boards adds additional features, such as hardware interrupt input to the master. The master initiates all SPI transactions. A slave device responds when its slave select is asserted and it receives clock pulses from the master.

Slave selects are controlled in one of two modes: manual or automatic. In automatic mode, the slave select is asserted by the SPI controller when the most significant data byte is written. This initiates a transaction to the specified slave device. In manual mode, the slave select is controlled by the user and any number of data frames can be sent. The user must command the slave select high to complete the transaction.

The SPI clock rate can be software configured to operate at speeds between 1 MHz and 8 MHz. All four common SPI modes are supported through the use of clock polarity and clock phase controls.

## Technical Specifications

*Specifications are typical at 25°C with 5.0V supply unless otherwise noted.*

**Board Size:** 1.2" x 3.775", SPX compliant

**Storage Temperature:** -40° C to 85° C

**Free Air Operating Temperature:**

-40° C to +85° C

**Power Requirements:**

+5.0V  $\pm$  5% @ 9.0 mA (45 mW) typ.,

155 mA (773 mW) max.

(Interface cable provides 500 mA total, to be shared by SPX modules)

**Digital I/O:**

16-channel,  $\pm$ 24 mA outputs

3.3V LVCMOS (not 5V tolerant)

**Compatibility:**

SPX – Full compliance

(Any 3.3V signaling SPI interface, 8 MHz maximum clock)

**Weight:**

0.044 lbs (0.020 kg)

**Compliance:**

RoHS – Full compliance

Specifications are subject to change without notice.

## RoHS-Compliance

The SPX-2 is RoHS-compliant.

### ABOUT ROHS

In 2003, the European Union issued Directive 2002/95/EC regarding the Restriction of the use of certain Hazardous Substances (RoHS) in electrical and electronic equipment.

The RoHS directive requires producers of electrical and electronic equipment to reduce to acceptable levels the presence of six environmentally sensitive substances: lead, mercury, cadmium, hexavalent chromium, and the presence of polybrominated biphenyls (PBB) and polybrominated diphenyl ethers (PBDE) flame retardants, in certain electrical and electronic products sold in the European Union (EU) beginning July 1, 2006.

VersaLogic Corporation is committed to supporting customers with high-quality products and services meeting the European Union's RoHS directive.

## Warnings

### ELECTROSTATIC DISCHARGE

Electrostatic discharge (ESD) can damage boards, disk drives and other components. The circuit board must only be handled at an ESD workstation. If an approved station is not available, some measure of protection can be provided by wearing a grounded antistatic wrist strap. Keep all plastic away from the board, and do not slide the board over any surface.

After removing the board from its protective wrapper, place the board on a grounded, static-free surface, component side up. Use an antistatic foam pad if available.

The board should also be protected inside a closed metallic anti-static envelope during shipment or storage.

## Technical Support

If you are unable to solve a problem with this manual please visit the SPX Product Support web page listed below. If you have further questions, contact VersaLogic technical support at (503) 747-2261. VersaLogic technical support engineers are also available via e-mail at [Support@VersaLogic.com](mailto:Support@VersaLogic.com).

### SPX Support Website

<http://www.versalogic.com/private/spx2support.asp>

#### REPAIR SERVICE

If your product requires service, you must obtain a Returned Material Authorization (RMA) number by calling (503) 747-2261. VersaLogic's standard turn-around time for repairs is five working days after the product is received.

Please provide the following information:

- Your name, the name of your company and your phone number
- The name of a technician or engineer that can be contact if any questions arise.
- Quantity of items being returned
- The model and serial number (barcode) of each item
- A detailed description of the problem
- Steps you have taken to resolve or recreate the problem
- The return shipping address

#### Warranty Repair

All parts and labor charges are covered, including return shipping charges for UPS Ground delivery to United States addresses.

#### Non-warranty Repair


All non-warranty repairs are subject to diagnosis and labor charges, parts charges and return shipping fees. Please specify the shipping method you prefer and provide a purchase order number for invoicing the repair.

#### Note

Please mark the RMA number clearly on the outside of the box before returning. Failure to do so can delay the processing of your return.

## SPX-2 Board Layout

The figure below shows the dimensions of the SPX-2 board, as well as the location of connectors, jumpers, and mounting holes.

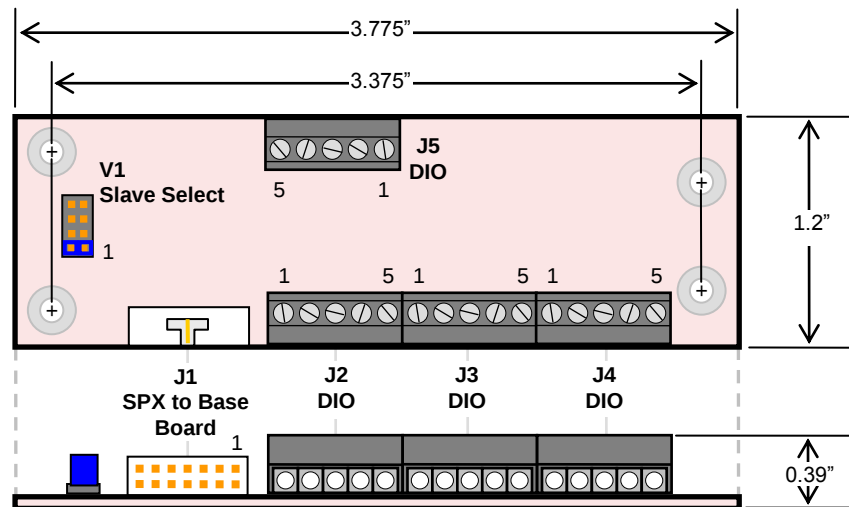

**Figure 1. SPX-2 Board Layout**  
(Not to scale. All dimensions in inches.)

## HARDWARE ASSEMBLY

The SPX-2 mounts on two hardware standoffs using the corner mounting holes. These standoffs are secured to the board, typically across the PC/104 and PC/104-*Plus* stack locations, using pan head screws.

Standoffs and screws are available as part number VL-HDW-101.

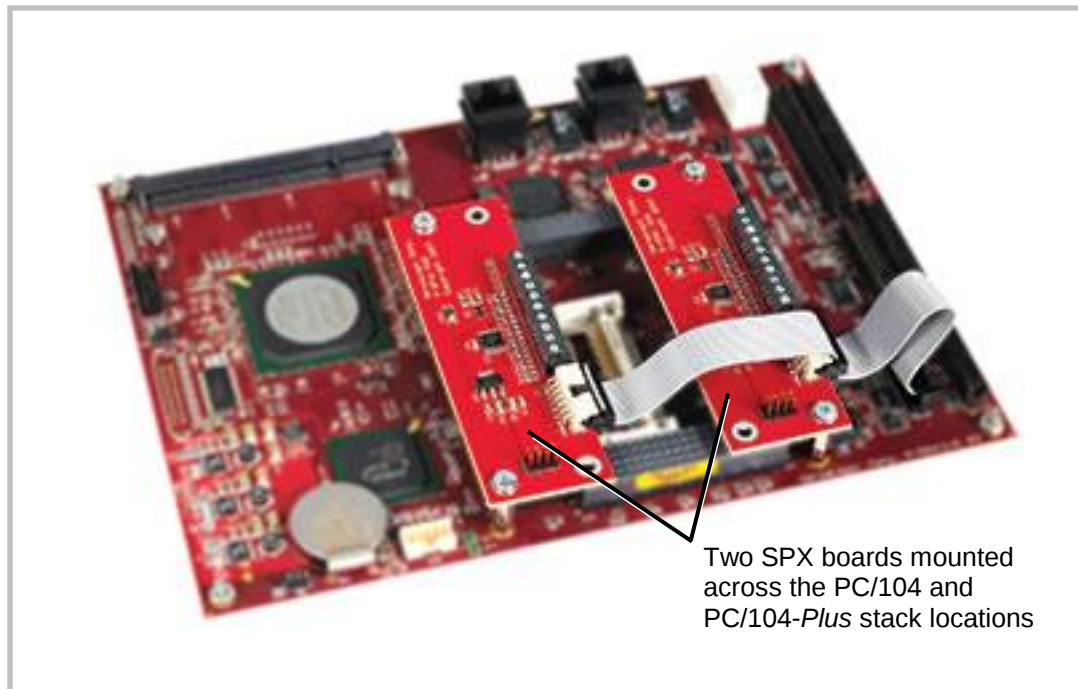


Figure 2. SPX Board Mounting

## Connector Functions and Interface Cables

The following table shows the function of each connector, as well as mating connectors and cables.

**Table 1: Connector Functions and Interface Cables**

| Connector | Function          | Mating Connector                   | Transition Cable     | Cable Description                        |
|-----------|-------------------|------------------------------------|----------------------|------------------------------------------|
| J1        | SPX to Base Board | FCI 89361-714LF or equivalent      | CBR-1401<br>CBR-1402 | 2 SPX Module Cable<br>4 SPX Module Cable |
| J2        | Digital I/O       | Bare wires to 5-pin screw terminal | –                    | –                                        |
| J3        | Digital I/O       | Bare wires to 5-pin screw terminal | –                    | –                                        |
| J4        | Digital I/O       | Bare wires to 5-pin screw terminal | –                    | –                                        |
| J5        | Digital I/O       | Bare wires to 5-pin screw terminal | –                    | –                                        |

## Jumper Summary

**Table 2: Jumper Summary**

| Jumper Block | Description    | As Shipped |
|--------------|----------------|------------|
| V1[1-2]      | Slave Select 0 | In         |
| V1[3-4]      | Slave Select 1 | Out        |
| V1[5-6]      | Slave Select 2 | Out        |
| V1[7-8]      | Slave Select 3 | Out        |

## J1 Connector Pinout

**Table 3: J1 Connector Pinout**

| Pin | Signal Name | Description         |
|-----|-------------|---------------------|
| 1   | V5_0        | +5.0V               |
| 2   | SCLK        | Serial Clock        |
| 3   | GND         | Ground              |
| 4   | MISO        | Master In Slave Out |
| 5   | GND         | Ground              |
| 6   | MOSI        | Master Out Slave In |
| 7   | GND         | Ground              |
| 8   | SS0#        | Slave Select 0      |
| 9   | SS1#        | Slave Select 1      |
| 10  | SS2#        | Slave Select 2      |
| 11  | SS3#        | Slave Select 3      |
| 12  | GND         | Ground              |
| 13  | SINT#       | SPI Interrupt       |
| 14  | V5_0        | +5.0V               |

## Description

The SPX-2 provides a 16-channel digital I/O interface. The digital lines are grouped as two 8-bit bi-directional ports. Data direction and output driver type are configurable by software.

Input data can be inverted through register settings. Any I/O pin(s) can generate an interrupt on change of state. As outputs, the I/O pins drive at 3.3 volt CMOS levels. The SPX-2 I/O inputs are not 5 volt tolerant. Inputs have external 10k pull-ups to 3.3 volts.

The digital I/O expander communicates with the host computer through the SPX interface.

### EXTERNAL CONNECTIONS

Digital I/O channels 0-15 are accessed via connectors J2 through J5 of the SPX-2 as shown in the following table.

**Table 4: Digital I/O Connectors**

| <b>J2<br/>Pin</b> | <b>Signal<br/>Name</b> | <b>Description</b> |
|-------------------|------------------------|--------------------|
| 1                 | GPA0                   | Digital I/O 0      |
| 2                 | GPA1                   | Digital I/O 1      |
| 3                 | GPA2                   | Digital I/O 2      |
| 4                 | GPA3                   | Digital I/O 3      |
| 5                 | Ground                 | Ground             |
| <b>J3</b>         |                        |                    |
| 1                 | GPA4                   | Digital I/O 4      |
| 2                 | GPA5                   | Digital I/O 5      |
| 3                 | GPA6                   | Digital I/O 6      |
| 4                 | GPA7                   | Digital I/O 7      |
| 5                 | Ground                 | Ground             |
| <b>J4</b>         |                        |                    |
| 1                 | GPB0                   | Digital I/O 8      |
| 2                 | GPB1                   | Digital I/O 9      |
| 3                 | GPB2                   | Digital I/O 10     |
| 4                 | GPB3                   | Digital I/O 11     |
| 5                 | Ground                 | Ground             |
| <b>J5</b>         |                        |                    |
| 1                 | GPB4                   | Digital I/O 12     |
| 2                 | GPB5                   | Digital I/O 13     |
| 3                 | GPB6                   | Digital I/O 14     |
| 4                 | GPB7                   | Digital I/O 15     |
| 5                 | Ground                 | Ground             |

For more detailed information on the digital I/O expander, refer to the [Microchip MCP23S17 I/O Expander data sheet](#).

## DIGITAL I/O PORT CONFIGURATION

The 16 I/O pins are grouped into two 8-bit sets (GPIOA and GPIOB) within the MCP23S17. See the Base Board SPI Registers appendix at the end of this document and the [Microchip MCP23S17 data sheet](#) for configuration details. Each pair of I/O ports is configured by a set of paged I/O registers accessible through SPI. These registers control settings such as signal direction, input polarity, and interrupt source. The 16 port pins on the SPX-2 use the slave select configured by the jumper setting at jumper block V1.

## INTERRUPT GENERATION

The SPX-2 digital I/O can be configured to issue hardware interrupts on the transition (high to low or low to high) of any SPX-2 I/O pin. IRQ assignment is made in base board SPI control register SPISTATUS. Note that this IRQ is shared among all SPI devices on-board and externally connected to the base board. The IRQ is also shared with the PC/104 bus and must be enabled in CMOS for ISA IRQx. SPX-2 I/O chip interrupt configuration is achieved through I/O chip register settings. Please refer to the [Microchip MCP23S17 datasheet](#) for more information.

The base board's (EBX-11 and EBX-22) on-board digital I/O chips must be configured for open-drain and mirrored interrupts in order for any SPI device to use hardware interrupts. See the base board's reference manual for instructions. Note that the SPX-2 interrupts should be configured as mirrored, but not open-drain.

## WRITING TO A DIGITAL I/O PORT

The SPX-2 can take advantage of the EBX-11 Rev 6 and above as well as the EBX-22 Rev 3 and above data streaming capability. See the MCP23S17 datasheet for information on Sequential Mode. The following code example initiates a write of 55h to SPX-2 I/O port bits GPA7-GPA0 using the standard 24-bit SPI frame with auto slave select. The SPX-2 is configured for SS0#.

```
;Write 40h to configure MCP23S17 register IOCON

MOV     DX, 1D8h
MOV     AL, 21h           ;SPICONTROL: SPI Mode 00, 24bit, auto SS0#
OUT     DX, AL
MOV     DX, 1D9h
MOV     AL, 30h           ;SPISTATUS: 8MHz, no IRQ, left-shift
OUT     DX, AL
MOV     DX, 1DBh
MOV     AL, 40h           ;SPIDATA1: mirror interrupts
OUT     DX, AL
MOV     DX, 1DCh
MOV     AL, 0Ah           ;SPIDATA2: MCP23S17 IOCON register address 0Ah
OUT     DX, AL
MOV     DX, 1DDh
MOV     AL, 40h           ;SPIDATA3: MCP23S17 write command
OUT     DX, AL
CALL    BUSY              ;Poll busy flag to wait for SPI transaction

;Configure MCP23S17 register IODIRA for outputs

MOV     DX, 1DBh
MOV     AL, 00h           ;SPIDATA1: 00h for outputs
```

```
        OUT    DX, AL
        MOV    DX, 1DCh
        MOV    AL, 00h        ;SPIDATA2: MCP23S17 register address 00h
        OUT    DX, AL
        MOV    DX, 1DDh
        MOV    AL, 40h        ;SPIDATA3: MCP23S17 write command
        OUT    DX, AL
        CALL   BUSY          ;Poll busy flag to wait for SPI transaction

;Write 55h to MCP23S17 register GPIOA

        MOV    DX, 1DBh
        MOV    AL, 55h        ;SPIDATA1: data to write
        OUT    DX, AL
        MOV    DX, 1DCh
        MOV    AL, 14h        ;SPIDATA2: MCP23S17 register address 14h
        OUT    DX, AL
        MOV    DX, 1DDh
        MOV    AL, 40h        ;SPIDATA3: MCP23S17 write command
        OUT    DX, AL
        CALL   BUSY          ;Poll busy flag to wait for SPI transaction

BUSY:   MOV    DX, 1D9h
        IN     AL, DX         ;Get SPISTATUS
        AND    AL, 01h        ;Isolate the BUSY flag
        JNZ    BUSY          ;Loop if SPI transaction not complete
```

# Base Board SPI Registers



The following tables describe the SPI control and data registers of the EBX-11 Rev. 6.00 and later. This is the standard set of SPI registers for VersaLogic CPU boards with an SPX interface. See the reference manual for details and updates.

## SPICONTROL (READ/WRITE) 1D8h

| D7   | D6   | D5      | D4      | D3     | D2  | D1  | D0  |
|------|------|---------|---------|--------|-----|-----|-----|
| CPOL | CPHA | SPILEN1 | SPILEN0 | MAN_SS | SS2 | SS1 | SS0 |

Table 5: SPI Control Register 1 Bit Assignments

| Bit     | Mnemonic | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                               |         |              |              |   |       |   |                     |        |   |   |                               |   |   |        |                               |   |   |   |                                |   |   |   |                                |   |   |   |                                     |   |   |   |                                              |   |   |   |                                               |
|---------|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|---------|--------------|--------------|---|-------|---|---------------------|--------|---|---|-------------------------------|---|---|--------|-------------------------------|---|---|---|--------------------------------|---|---|---|--------------------------------|---|---|---|-------------------------------------|---|---|---|----------------------------------------------|---|---|---|-----------------------------------------------|
| D7      | CPOL     | <b>SPI Clock Polarity</b> – Sets the SCLK idle state.<br>0 = SCLK idles low<br>1 = SCLK idles high                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                               |         |              |              |   |       |   |                     |        |   |   |                               |   |   |        |                               |   |   |   |                                |   |   |   |                                |   |   |   |                                     |   |   |   |                                              |   |   |   |                                               |
| D6      | CPHA     | <b>SPI Clock Phase</b> – Sets the SCLK edge on which valid data will be read.<br>0 = Data read on rising edge<br>1 = Data read on falling edge                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                               |         |              |              |   |       |   |                     |        |   |   |                               |   |   |        |                               |   |   |   |                                |   |   |   |                                |   |   |   |                                     |   |   |   |                                              |   |   |   |                                               |
| D5-D4   | SPILEN   | <b>SPI Frame Length</b> – Sets the SPI frame length. This selection works in manual and auto slave select modes.<br><br><table><tr><th>SPILEN1</th><th>SPILEN0</th><th>Frame Length</th></tr><tr><td>0</td><td>0</td><td>8-bit</td></tr><tr><td>0</td><td>1</td><td>16-bit</td></tr><tr><td>1</td><td>0</td><td>24-bit</td></tr><tr><td>1</td><td>1</td><td>32-bit</td></tr></table>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | SPILEN1                                       | SPILEN0 | Frame Length | 0            | 0 | 8-bit | 0 | 1                   | 16-bit | 1 | 0 | 24-bit                        | 1 | 1 | 32-bit |                               |   |   |   |                                |   |   |   |                                |   |   |   |                                     |   |   |   |                                              |   |   |   |                                               |
| SPILEN1 | SPILEN0  | Frame Length                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                               |         |              |              |   |       |   |                     |        |   |   |                               |   |   |        |                               |   |   |   |                                |   |   |   |                                |   |   |   |                                     |   |   |   |                                              |   |   |   |                                               |
| 0       | 0        | 8-bit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                               |         |              |              |   |       |   |                     |        |   |   |                               |   |   |        |                               |   |   |   |                                |   |   |   |                                |   |   |   |                                     |   |   |   |                                              |   |   |   |                                               |
| 0       | 1        | 16-bit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                               |         |              |              |   |       |   |                     |        |   |   |                               |   |   |        |                               |   |   |   |                                |   |   |   |                                |   |   |   |                                     |   |   |   |                                              |   |   |   |                                               |
| 1       | 0        | 24-bit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                               |         |              |              |   |       |   |                     |        |   |   |                               |   |   |        |                               |   |   |   |                                |   |   |   |                                |   |   |   |                                     |   |   |   |                                              |   |   |   |                                               |
| 1       | 1        | 32-bit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                               |         |              |              |   |       |   |                     |        |   |   |                               |   |   |        |                               |   |   |   |                                |   |   |   |                                |   |   |   |                                     |   |   |   |                                              |   |   |   |                                               |
| D3      | MAN_SS   | <b>SPI Manual Slave Select Mode</b> – This bit determines whether the slave select lines are controlled through the user software or are automatically controlled by a write operation to SPIDATA3 (1DDh). If MAN_SS = 0, then the slave select operates automatically; if MAN_SS = 1, then the slave select line is controlled manually through SPICONTROL bits SS2, SS1, and SS0.<br>0 = Automatic, default<br>1 = Manual                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                               |         |              |              |   |       |   |                     |        |   |   |                               |   |   |        |                               |   |   |   |                                |   |   |   |                                |   |   |   |                                     |   |   |   |                                              |   |   |   |                                               |
| D2-D0   | SS       | <b>SPI Slave Select</b> – These bits select which slave select will be asserted. The SSx# pin on the base board will be directly controlled by these bits when MAN_SS = 1.<br><br><table><tr><th>SS2</th><th>SS1</th><th>SS0</th><th>Slave Select</th></tr><tr><td>0</td><td>0</td><td>0</td><td>None, port disabled</td></tr><tr><td>0</td><td>0</td><td>1</td><td>SPX Slave Select 0, J17 pin-8</td></tr><tr><td>0</td><td>1</td><td>0</td><td>SPX Slave Select 1, J17 pin-9</td></tr><tr><td>0</td><td>1</td><td>1</td><td>SPX Slave Select 2, J17 pin-10</td></tr><tr><td>1</td><td>0</td><td>0</td><td>SPX Slave Select 3, J17 pin-11</td></tr><tr><td>1</td><td>0</td><td>1</td><td>On-Board A/D Converter Slave Select</td></tr><tr><td>1</td><td>1</td><td>0</td><td>On-Board Digital I/O Ch 0-Ch 15 Slave Select</td></tr><tr><td>1</td><td>1</td><td>1</td><td>On-Board Digital I/O Ch 16-Ch 31 Slave Select</td></tr></table> | SS2                                           | SS1     | SS0          | Slave Select | 0 | 0     | 0 | None, port disabled | 0      | 0 | 1 | SPX Slave Select 0, J17 pin-8 | 0 | 1 | 0      | SPX Slave Select 1, J17 pin-9 | 0 | 1 | 1 | SPX Slave Select 2, J17 pin-10 | 1 | 0 | 0 | SPX Slave Select 3, J17 pin-11 | 1 | 0 | 1 | On-Board A/D Converter Slave Select | 1 | 1 | 0 | On-Board Digital I/O Ch 0-Ch 15 Slave Select | 1 | 1 | 1 | On-Board Digital I/O Ch 16-Ch 31 Slave Select |
| SS2     | SS1      | SS0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Slave Select                                  |         |              |              |   |       |   |                     |        |   |   |                               |   |   |        |                               |   |   |   |                                |   |   |   |                                |   |   |   |                                     |   |   |   |                                              |   |   |   |                                               |
| 0       | 0        | 0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | None, port disabled                           |         |              |              |   |       |   |                     |        |   |   |                               |   |   |        |                               |   |   |   |                                |   |   |   |                                |   |   |   |                                     |   |   |   |                                              |   |   |   |                                               |
| 0       | 0        | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | SPX Slave Select 0, J17 pin-8                 |         |              |              |   |       |   |                     |        |   |   |                               |   |   |        |                               |   |   |   |                                |   |   |   |                                |   |   |   |                                     |   |   |   |                                              |   |   |   |                                               |
| 0       | 1        | 0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | SPX Slave Select 1, J17 pin-9                 |         |              |              |   |       |   |                     |        |   |   |                               |   |   |        |                               |   |   |   |                                |   |   |   |                                |   |   |   |                                     |   |   |   |                                              |   |   |   |                                               |
| 0       | 1        | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | SPX Slave Select 2, J17 pin-10                |         |              |              |   |       |   |                     |        |   |   |                               |   |   |        |                               |   |   |   |                                |   |   |   |                                |   |   |   |                                     |   |   |   |                                              |   |   |   |                                               |
| 1       | 0        | 0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | SPX Slave Select 3, J17 pin-11                |         |              |              |   |       |   |                     |        |   |   |                               |   |   |        |                               |   |   |   |                                |   |   |   |                                |   |   |   |                                     |   |   |   |                                              |   |   |   |                                               |
| 1       | 0        | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | On-Board A/D Converter Slave Select           |         |              |              |   |       |   |                     |        |   |   |                               |   |   |        |                               |   |   |   |                                |   |   |   |                                |   |   |   |                                     |   |   |   |                                              |   |   |   |                                               |
| 1       | 1        | 0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | On-Board Digital I/O Ch 0-Ch 15 Slave Select  |         |              |              |   |       |   |                     |        |   |   |                               |   |   |        |                               |   |   |   |                                |   |   |   |                                |   |   |   |                                     |   |   |   |                                              |   |   |   |                                               |
| 1       | 1        | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | On-Board Digital I/O Ch 16-Ch 31 Slave Select |         |              |              |   |       |   |                     |        |   |   |                               |   |   |        |                               |   |   |   |                                |   |   |   |                                |   |   |   |                                     |   |   |   |                                              |   |   |   |                                               |

**SPISTATUS (READ/WRITE) 1D9h**

| D7      | D6      | D5      | D4      | D3        | D2        | D1     | D0   |
|---------|---------|---------|---------|-----------|-----------|--------|------|
| IRQSEL1 | IRQSEL0 | SPICLK1 | SPICLK0 | HW_IRQ_EN | LSBIT_1ST | HW_INT | BUSY |

**Table 6: SPI Control Register 2 Bit assignments**

| Bit     | Mnemonic  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |         |         |           |   |   |           |   |   |           |   |   |           |   |   |           |
|---------|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|---------|-----------|---|---|-----------|---|---|-----------|---|---|-----------|---|---|-----------|
| D7-D6   | IRQSEL    | <p><b>IRQ Select</b> – These bits select which IRQ will be asserted when a hardware interrupt from a connected SPI device occurs. The HW_IRQ_EN bit must be set to enable SPI IRQ functionality.</p> <table> <tr> <th>IRQSEL1</th><th>IRQSEL0</th><th>IRQ</th></tr> <tr> <td>0</td><td>0</td><td>IRQ3</td></tr> <tr> <td>0</td><td>1</td><td>IRQ4</td></tr> <tr> <td>1</td><td>0</td><td>IRQ5</td></tr> <tr> <td>1</td><td>1</td><td>IRQ10</td></tr> </table> <p><b>Note:</b> The on-board digital I/O chips must be configured for open-drain and mirrored interrupts in order for any SPI device to use hardware interrupts (see <b>Error! Reference source not found.</b>).</p> | IRQSEL1 | IRQSEL0 | IRQ       | 0 | 0 | IRQ3      | 0 | 1 | IRQ4      | 1 | 0 | IRQ5      | 1 | 1 | IRQ10     |
| IRQSEL1 | IRQSEL0   | IRQ                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |         |         |           |   |   |           |   |   |           |   |   |           |   |   |           |
| 0       | 0         | IRQ3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |         |         |           |   |   |           |   |   |           |   |   |           |   |   |           |
| 0       | 1         | IRQ4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |         |         |           |   |   |           |   |   |           |   |   |           |   |   |           |
| 1       | 0         | IRQ5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |         |         |           |   |   |           |   |   |           |   |   |           |   |   |           |
| 1       | 1         | IRQ10                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |         |         |           |   |   |           |   |   |           |   |   |           |   |   |           |
| D5-D4   | SPICLK    | <p><b>SPI SCLK Frequency</b> – These bits set the SPI clock frequency.</p> <table> <tr> <th>SPICLK1</th><th>SPICLK0</th><th>Frequency</th></tr> <tr> <td>0</td><td>0</td><td>1.042 MHz</td></tr> <tr> <td>0</td><td>1</td><td>2.083 MHz</td></tr> <tr> <td>1</td><td>0</td><td>4.167 MHz</td></tr> <tr> <td>1</td><td>1</td><td>8.333 MHz</td></tr> </table>                                                                                                                                                                                                                                                                                                                       | SPICLK1 | SPICLK0 | Frequency | 0 | 0 | 1.042 MHz | 0 | 1 | 2.083 MHz | 1 | 0 | 4.167 MHz | 1 | 1 | 8.333 MHz |
| SPICLK1 | SPICLK0   | Frequency                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |         |         |           |   |   |           |   |   |           |   |   |           |   |   |           |
| 0       | 0         | 1.042 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |         |         |           |   |   |           |   |   |           |   |   |           |   |   |           |
| 0       | 1         | 2.083 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |         |         |           |   |   |           |   |   |           |   |   |           |   |   |           |
| 1       | 0         | 4.167 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |         |         |           |   |   |           |   |   |           |   |   |           |   |   |           |
| 1       | 1         | 8.333 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |         |         |           |   |   |           |   |   |           |   |   |           |   |   |           |
| D3      | HW_IRQ_EN | <p><b>Hardware IRQ Enable</b> – Enables or disables the use of the selected IRQ (IRQSEL) by an SPI device.<br/> 0 = SPI IRQ disabled, default<br/> 1 = SPI IRQ enabled</p> <p><b>Note:</b> The selected IRQ is shared with PC/104 ISA bus devices. CMOS settings must be configured for the desired ISA IRQ.</p>                                                                                                                                                                                                                                                                                                                                                                   |         |         |           |   |   |           |   |   |           |   |   |           |   |   |           |
| D2      | LSBIT_1ST | <p><b>SPI Shift Direction</b> – Controls the SPI shift direction of the SPIDATA registers. The direction can be shifted toward the least significant bit or the most significant bit.<br/> 0 = SPIDATA data is left-shifted (MSbit first), default<br/> 1 = SPIDATA data is right-shifted (LSbit first)</p>                                                                                                                                                                                                                                                                                                                                                                        |         |         |           |   |   |           |   |   |           |   |   |           |   |   |           |
| D1      | HW_INT    | <p><b>SPI Device Interrupt State</b> – This bit is a status flag that indicates when the hardware SPX signal SINT# is asserted.<br/> 0 = Hardware interrupt on SINT# is deasserted<br/> 1 = Interrupt is present on SINT#</p> <p>This bit is read-only and is cleared when the SPI device's interrupt is cleared.</p>                                                                                                                                                                                                                                                                                                                                                              |         |         |           |   |   |           |   |   |           |   |   |           |   |   |           |
| D0      | BUSY      | <p><b>SPI Busy Flag</b> – This bit is a status flag that indicates when an SPI transaction is underway.<br/> 0 = SPI bus idle<br/> 1 = SCLK is clocking data in and out of the SPIDATA registers</p> <p>This bit is read-only.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                 |         |         |           |   |   |           |   |   |           |   |   |           |   |   |           |

**SPI DATA REGISTERS****SPIDATA0 (READ/WRITE) 1DAh**

| D7    | D6 | D5 | D4 | D3 | D2 | D1 | D0    |
|-------|----|----|----|----|----|----|-------|
| MSbit |    |    |    |    |    |    | LSbit |

**SPIDATA1 (READ/WRITE) 1DBh**

| D7    | D6 | D5 | D4 | D3 | D2 | D1 | D0    |
|-------|----|----|----|----|----|----|-------|
| MSbit |    |    |    |    |    |    | LSbit |

**SPIDATA2 (READ/WRITE) 1DCh**

| D7    | D6 | D5 | D4 | D3 | D2 | D1 | D0    |
|-------|----|----|----|----|----|----|-------|
| MSbit |    |    |    |    |    |    | LSbit |

**SPIDATA3 (READ/WRITE) 1DDh**

| D7    | D6 | D5 | D4 | D3 | D2 | D1 | D0    |
|-------|----|----|----|----|----|----|-------|
| MSbit |    |    |    |    |    |    | LSbit |

SPIDATA3 contains the most significant byte (MSB) of the SPI data word. A write to this register will initiate the SPI clock and, if the MAN\_SS bit = 0, will also assert a slave select to begin an SPI bus transaction. Increasing frame sizes from 8-bit use the lowest address for the least significant byte of the SPI data word; for example, the LSB of a 24-bit frame would be SPIDATA1. Data is sent according to the LSBIT\_1ST setting. When LSBIT\_1ST = 0, the MSbit of SPIDATA3 is sent first, and received data will be shifted into the LSbit of the selected frame size set in the SPILEN field. When LSBIT\_1ST = 1, the LSbit of the selected frame size is sent first, and the received data will be shifted into the MSbit of SPIDATA3.