

ADSL MAGNETICS

S560-6600-HH

ELECTRICAL CHARACTERISTICS (@25°C)

NOMINAL TURNS RATIO:

(8-5) : (1-4) 1 : 2

CONNECT TERMINALS 2 TO 3 & 6 TO 7

DC RESISTANCE:


(1-3) 0.40 Ω MAX

(2-4) 0.40 Ω MAX

(7-5) 0.40 Ω MAX

(8-6) 0.40 Ω MAX

SCHEMATIC

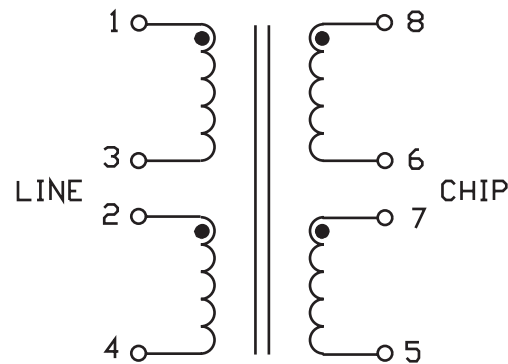

INDUCTANCE @ 100 kHz, 0.1 Vrms:

(1-4) 92.5 μ H $\pm$ 5%

CONNECT TERMINALS 2 TO 3

MAXIMUM LEAKAGE INDUCTANCE:

(1-4) 4 μ H

CONNECT TERMINALS 2 TO 3 & 6 TO 7

SHORT TERMINALS 5, 6, 7 & 8

DIRECT CAPACITANCE:

BETWEEN (1-4) & (8-5) 30 pF MAX

CONNECT TERMINALS 2 TO 3 & 6 TO 7

TOTAL HARMONIC DISTORTION

15 Vpp, 100kHz, 100 Ω LINE -90 dB MAX

MINIMUM DIELECTRIC RATING:

BETWEEN (1-4) & (8-5) 1500 Vrms

CONNECT TERMINALS 2 TO 3 & 6 TO 7







COMPLIES WITH UL1950, EN60950

OPERATING TEMPERATURE RANGE: -40°C TO +85°C



ADSL MAGNETICS

S560-6600-HH

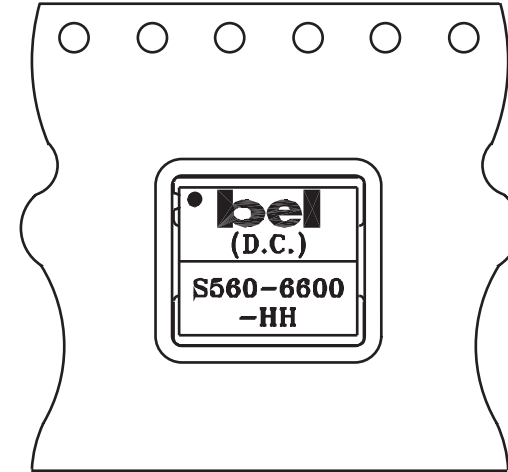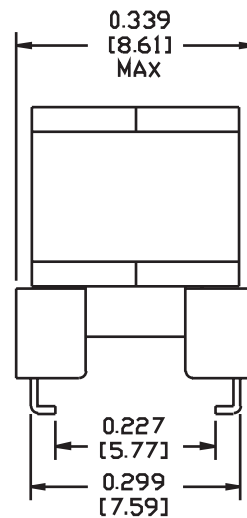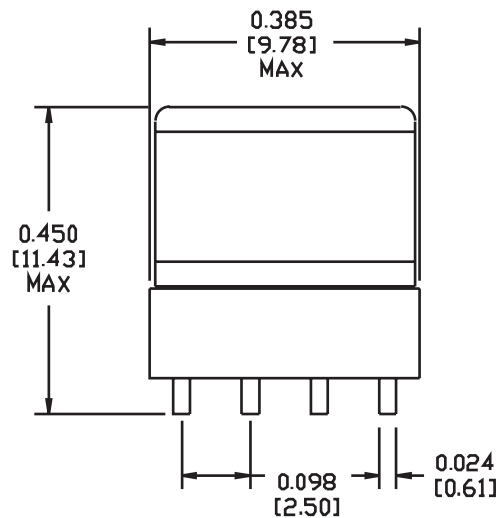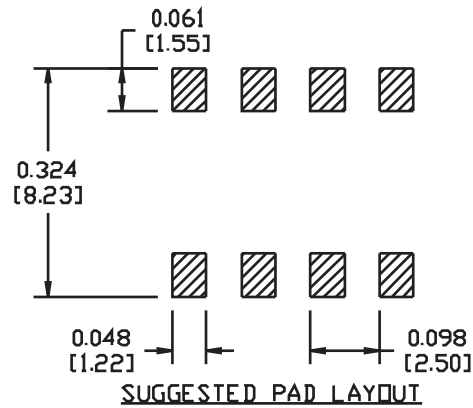

USER FEED DIRECTION

ORIENTATION OF COMPONENT INSIDE POCKET

TAPE WIDTH	24MM
POCKET PITCH	16MM
QUANTITY OF COMPONENTS PER REEL	300
PLASTIC REEL OUTER DIAMETER	13 INCHES
PLASTIC REEL HUB DIAMETER	4 INCHES
COMPLY WITH EIA 481-2-A	