

TOSHIBA BIPOLAR LINEAR INTEGRATED CIRCUIT SILICON MONOLITHIC


# T A R 8 D 0 5 K

## Dual Low-Dropout Regulator


TAR8D05K is a bipolar type 2-output power supply with a control pin. ON and OFF can be switched using the control pin.

### Features

- Include 2-LDO regulators. (2.8V, 2.8V)
- Output power supply can be independent control.
- Overtemperature/overcurrent protection.
- Very small 8-pin package.

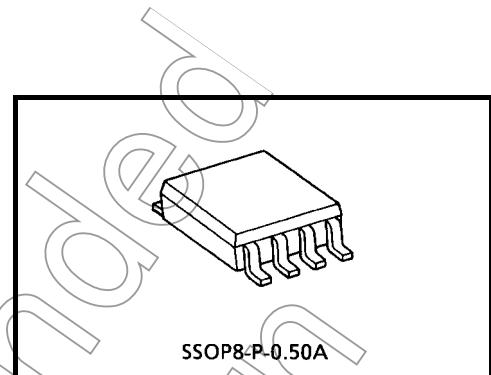

### Pin Assignment (top view)

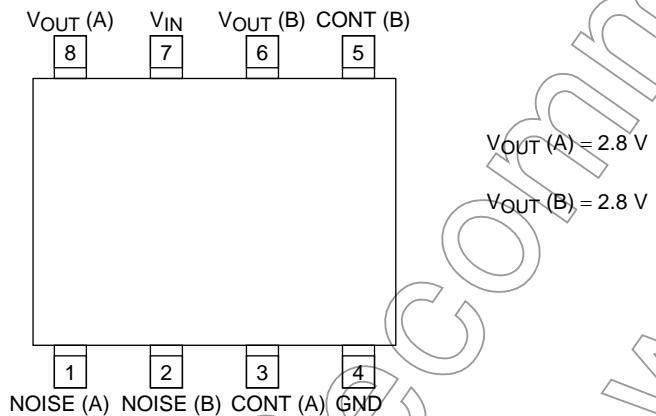

### Marking

8D05

Overtemperature protection and overcurrent protection function are not necessary of operating ratings below the absolute maximum ratings.

Do not use device under conditions in which their absolute maximum ratings will be exceeded.

## Absolute Maximum Ratings (Ta = 25°C)

Characteristics	Symbol	Rating	Unit
Supply Voltage	V <sub>IN</sub>	15	V
Output Current (V <sub>OUT</sub> (A) )	I <sub>OUT</sub> (A)	100	mA
Output Current (V <sub>OUT</sub> (B) )	I <sub>OUT</sub> (B)		
Power Dissipation	P <sub>D</sub>	200 (Note 1)	mW
		400 (Note 2)	
Operation Temp Range	T <sub>opr</sub>	-40~85	°C
Storage Temp Range	T <sub>stg</sub>	-55~150	°C

Note: Using continuously under heavy loads (e.g. the application of high temperature/current/voltage and the significant change in temperature, etc.) may cause this product to decrease in the reliability significantly even if the operating conditions (i.e. operating temperature/current/voltage, etc.) are within the absolute maximum ratings and the operating ranges.

Please design the appropriate reliability upon reviewing the Toshiba Semiconductor Reliability Handbook ("Handling Precautions"/"Derating Concept and Methods") and individual reliability data (i.e. reliability test report and estimated failure rate, etc.).

Note 1: Unit Rating

Note 2: Mounted on a glass epoxy circuit board of 30 mm × 30 mm Pad dimension of 70 mm<sup>2</sup>

**Electrical Characteristics (unless otherwise specified, V<sub>IN</sub> = V<sub>OUT</sub> + 1 V, I<sub>OUT</sub> = 30 mA, C<sub>IN</sub> = 1 μF, C<sub>OUT</sub> = 10 μF, C<sub>NOISE</sub> = 0.01 μF, T<sub>j</sub> = 25°C)**


**2.8 V Output Characteristics (V<sub>OUT</sub> (A), V<sub>OUT</sub> (B) )**

Characteristics	Symbol	Test Condition	Min	Typ	Max	Unit
Output Voltage	V <sub>OUT</sub>	I <sub>OUT</sub> = 30 mA	2.73	2.8	2.87	V
Dropout Voltage	V <sub>IN</sub> -V <sub>OUT</sub>	I <sub>OUT</sub> = 30 mA		120	180	
Input Voltage	V <sub>IN</sub>		V <sub>OUT</sub> + 0.18 V	—	15	V
Load Regulation	Reg·load	I <sub>OUT</sub> = 0 mA~30 mA	—	2	12	mV
Line Regulation	Reg·line	V <sub>IN</sub> = 3.8 V~15.0 V	—	3	15	mV
Temp. Coefficient	T <sub>CV</sub>	T <sub>a</sub> = -40°C~85°C	—	100	—	ppm/°C
Ripple Rejection	R.R	I <sub>OUT</sub> = 10 mA, f = 1 kHz, V <sub>Ripple</sub> = 500 mV <sub>p-p</sub> , T <sub>a</sub> = 25°C	—	70	—	dB
Output Noise Voltage	V <sub>NO</sub>	I <sub>OUT</sub> = 10 mA, 10 Hz ≤ f ≤ 10 kHz, T <sub>a</sub> = 25°C	—	30	—	μV <sub>rms</sub>

**Common Characteristics**

Characteristics	Symbol	Test Condition	Min	Typ	Max	Unit
Stand-by Current	I <sub>B</sub> (OFF)	V <sub>CT</sub> = 0 V	—	—	1	μA
Quiescent Current	I <sub>B1</sub>	I <sub>OUT</sub> (A) = 0 mA, I <sub>OUT</sub> (B) = 0 mA	—	350	700	μA
	I <sub>B2</sub>	I <sub>OUT</sub> (A) = 30 mA, I <sub>OUT</sub> (B) = 30 mA	—	850	1800	μA
Control Voltage (ON)	V <sub>CT</sub> (ON)	—	1.5	—	V <sub>IN</sub>	V
Control Voltage (OFF)	V <sub>CT</sub> (OFF)	—	—	—	0.4	V
Control Input Current	I <sub>CT</sub>	V <sub>CT</sub> = 1.5 V (output ON)	—	—	15	μA

## Application Note • Recommended Application circuit

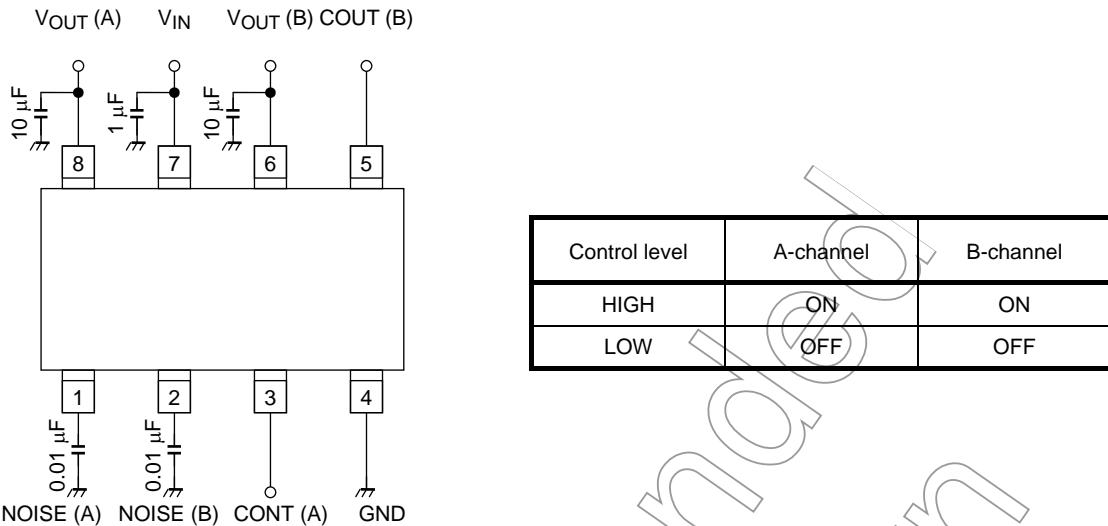

The noise capacitor should be connected to NOISE pin to GND for stable operation.

The recommended value is higher than 0.0047 $\mu$ F.



The figure above shows recommended configuration for using a point regulator. Insert a capacitor for stable input/output operation.

If the control function is not to be used, Toshiba recommended that the control pin be connected to the V<sub>CC</sub> pin.

Not Recommended for New Design


## Ripple Rejection




TAR8D05K feature a circuit with an excellent ripple rejection characteristic. Because the circuit also features an excellent output fluctuation characteristic for sudden supply voltage drops, the circuit is ideal for in the RF blocks incorporated in all mobile telephones.

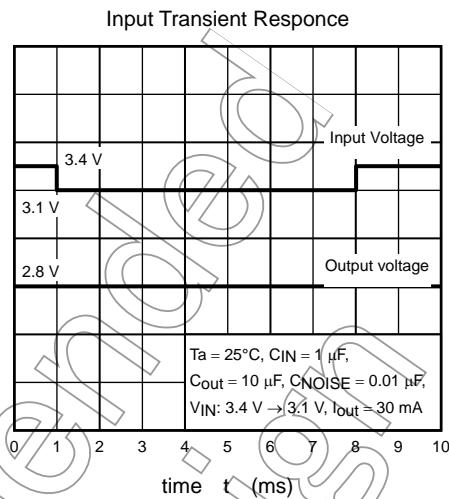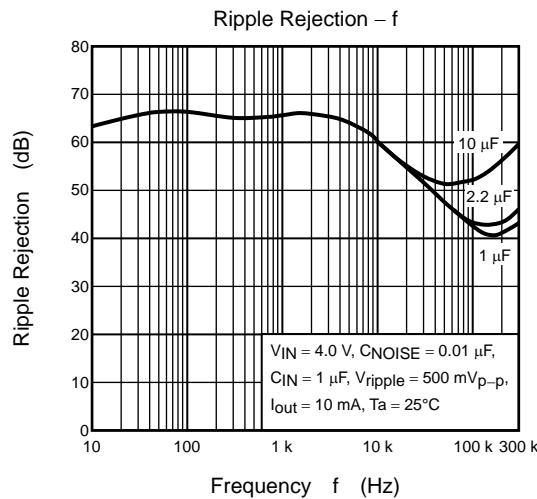

## NOISE Pin

TAR8D05K device incorporate a NOISE pin to reduce output noise voltage. Inserting a capacitor between the NOISE pin and GND reduces output noise. To ensure stable operation, insert a capacitor of 0.0047  $\mu$ F or more between the NOISE pin and GND.


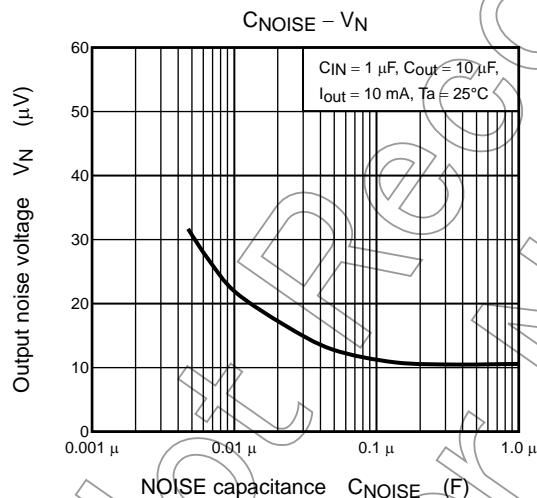


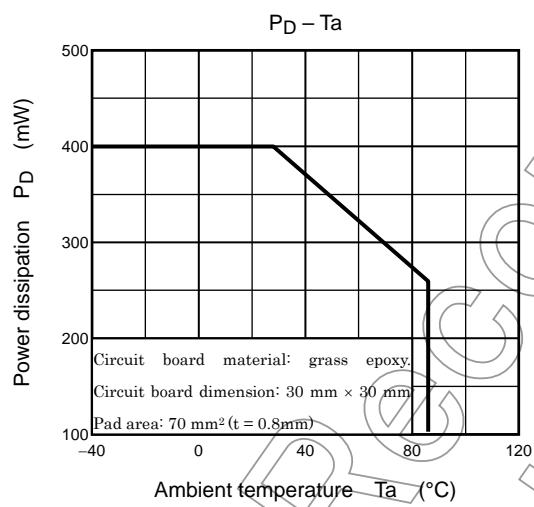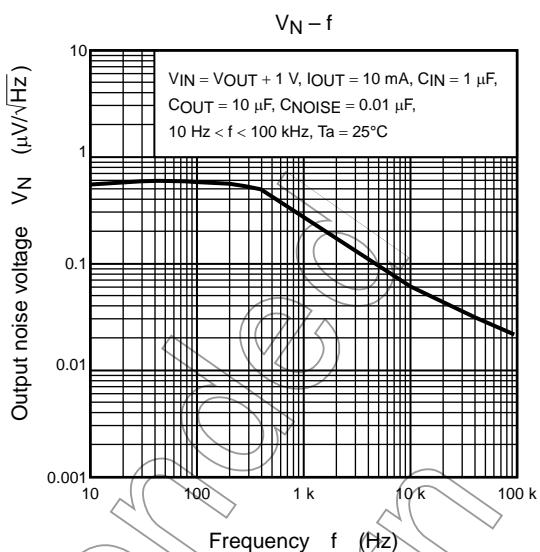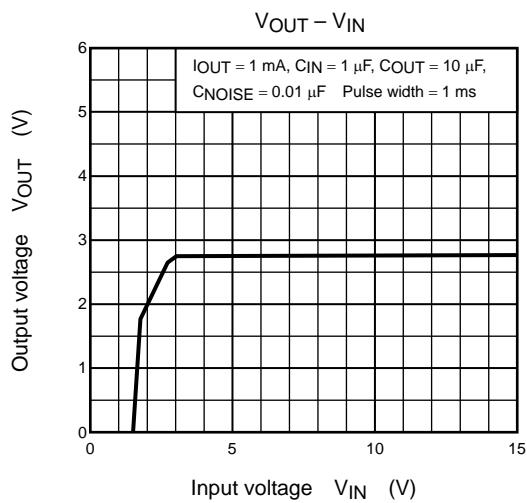

**Package Dimensions**

SSOP8-P-0.50A

Unit : mm

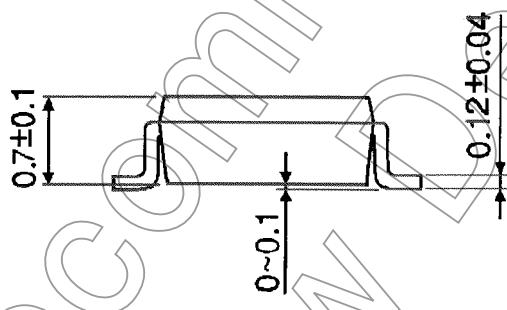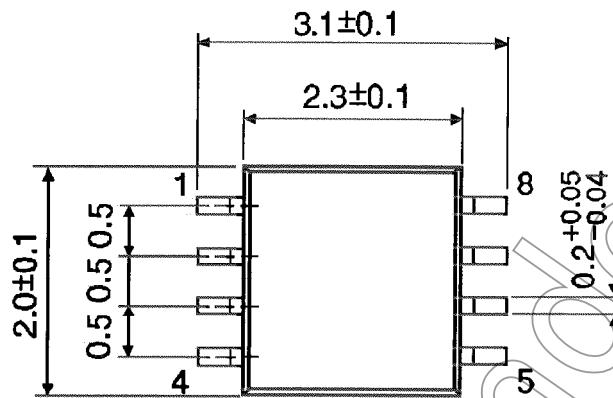

Weight: 0.01 g (Typ.)

## RESTRICTIONS ON PRODUCT USE

- Toshiba Corporation, and its subsidiaries and affiliates (collectively "TOSHIBA"), reserve the right to make changes to the information in this document, and related hardware, software and systems (collectively "Product") without notice.
- This document and any information herein may not be reproduced without prior written permission from TOSHIBA. Even with TOSHIBA's written permission, reproduction is permissible only if reproduction is without alteration/omission.
- Though TOSHIBA works continually to improve Product's quality and reliability, Product can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards for their hardware, software and systems which minimize risk and avoid situations in which a malfunction or failure of Product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. Before creating and producing designs and using, customers must also refer to and comply with (a) the latest versions of all relevant TOSHIBA information, including without limitation, this document, the specifications, the data sheets and application notes for Product and the precautions and conditions set forth in the "TOSHIBA Semiconductor Reliability Handbook" and (b) the instructions for the application that Product will be used with or for. Customers are solely responsible for all aspects of their own product design or applications, including but not limited to (a) determining the appropriateness of the use of this Product in such design or applications; (b) evaluating and determining the applicability of any information contained in this document, or in charts, diagrams, programs, algorithms, sample application circuits, or any other referenced documents; and (c) validating all operating parameters for such designs and applications. **TOSHIBA ASSUMES NO LIABILITY FOR CUSTOMERS' PRODUCT DESIGN OR APPLICATIONS.**
- Product is intended for use in general electronics applications (e.g., computers, personal equipment, office equipment, measuring equipment, industrial robots and home electronics appliances) or for specific applications as expressly stated in this document. Product is neither intended nor warranted for use in equipment or systems that require extraordinarily high levels of quality and/or reliability and/or a malfunction or failure of which may cause loss of human life, bodily injury, serious property damage or serious public impact ("Unintended Use"). Unintended Use includes, without limitation, equipment used in nuclear facilities, equipment used in the aerospace industry, medical equipment, equipment used for automobiles, trains, ships and other transportation, traffic signaling equipment, equipment used to control combustions or explosions, safety devices, elevators and escalators, devices related to electric power, and equipment used in finance-related fields. Do not use Product for Unintended Use unless specifically permitted in this document.
- Do not disassemble, analyze, reverse-engineer, alter, modify, translate or copy Product, whether in whole or in part.
- Product shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable laws or regulations.
- The information contained herein is presented only as guidance for Product use. No responsibility is assumed by TOSHIBA for any infringement of patents or any other intellectual property rights of third parties that may result from the use of Product. No license to any intellectual property right is granted by this document, whether express or implied, by estoppel or otherwise.
- **ABSENT A WRITTEN SIGNED AGREEMENT, EXCEPT AS PROVIDED IN THE RELEVANT TERMS AND CONDITIONS OF SALE FOR PRODUCT, AND TO THE MAXIMUM EXTENT ALLOWABLE BY LAW, TOSHIBA (1) ASSUMES NO LIABILITY WHATSOEVER, INCLUDING WITHOUT LIMITATION, INDIRECT, CONSEQUENTIAL, SPECIAL, OR INCIDENTAL DAMAGES OR LOSS, INCLUDING WITHOUT LIMITATION, LOSS OF PROFITS, LOSS OF OPPORTUNITIES, BUSINESS INTERRUPTION AND LOSS OF DATA, AND (2) DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES AND CONDITIONS RELATED TO SALE, USE OF PRODUCT, OR INFORMATION, INCLUDING WARRANTIES OR CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, ACCURACY OF INFORMATION, OR NONINFRINGEMENT.**
- Do not use or otherwise make available Product or related software or technology for any military purposes, including without limitation, for the design, development, use, stockpiling or manufacturing of nuclear, chemical, or biological weapons or missile technology products (mass destruction weapons). Product and related software and technology may be controlled under the Japanese Foreign Exchange and Foreign Trade Law and the U.S. Export Administration Regulations. Export and re-export of Product or related software or technology are strictly prohibited except in compliance with all applicable export laws and regulations.
- Please contact your TOSHIBA sales representative for details as to environmental matters such as the RoHS compatibility of Product. Please use Product in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. TOSHIBA assumes no liability for damages or losses occurring as a result of noncompliance with applicable laws and regulations.