
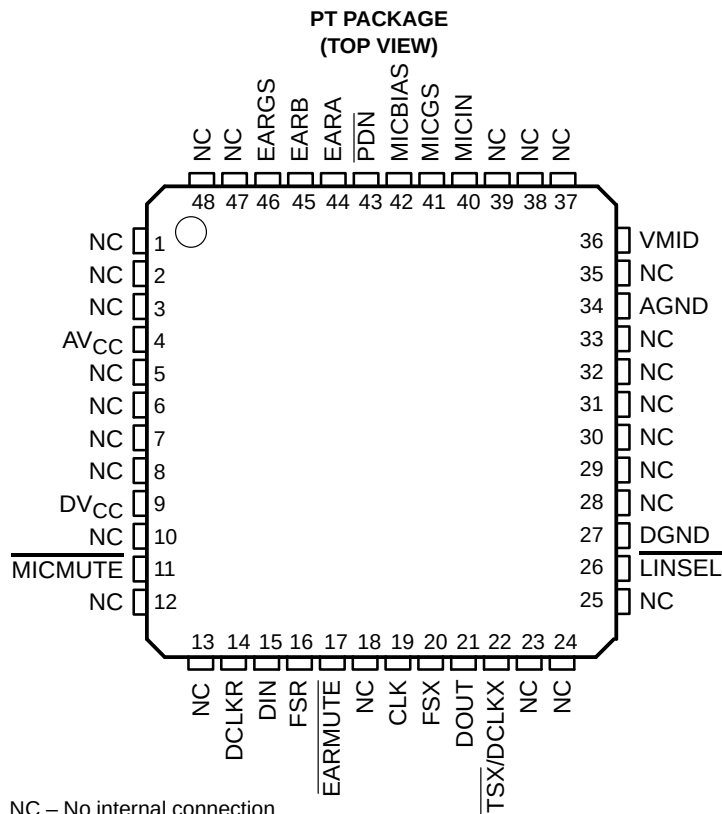


# TLV320AC36, TLV320AC37 3-V VOICE-BAND AUDIO PROCESSORS (VBAP™)

SLWS006B – NOVEMBER 1994 – REVISED OCTOBER 1997

- Single 3-V Operation
- Low Power Consumption:
  - Operating Mode . . . 20 mW Typ
  - Standby Mode . . . 5 mW Typ
  - Power-Down Mode . . . 2 mW Typ
- Combined A/D, D/A, and Filters
- Extended Variable-Frequency Operation
  - Sample Rates up to 16 kHz
  - Pass-Band up to 7.2 kHz
- Electret Microphone Bias Reference Voltage Available
- Drive a Piezo Speaker Directly
- Compatible With All Digital Signal Processors (DSPs)
- Selectable Between 8-Bit Companded and 13-Bit (Dynamic Range) Linear Conversion:
  - TLV320AC36 . . .  $\mu$ -Law and Linear Modes
  - TLV320AC37 . . . A-Law and Linear Modes
- Programmable Volume Control in Linear Mode
- 300 Hz – 3.6 kHz Passband with Specified Master Clock
- Designed for Standard 2.048-MHz Master Clock for U.S. Analog, U.S. Digital, CT2, DECT, GSM, and PCS Standards for Hand-Held Battery-Powered Telephones

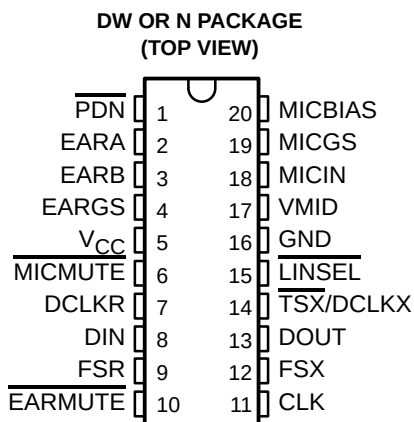

NC – No internal connection



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

VBAP is a trademark of Texas Instruments Incorporated.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

 **TEXAS  
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 1997, Texas Instruments Incorporated

# TLV320AC36, TLV320AC37

## 3-V VOICE-BAND AUDIO PROCESSORS (VBAP™)

SLWS006B – NOVEMBER 1994 – REVISED OCTOBER 1997

---

### description

The TLV320AC36 and TLV320AC37 voice-band audio processor (VBAP) integrated circuits are designed to perform the transmit encoding (A/D conversion) and receive decoding (D/A conversion) together with transmit and receive filtering for voice-band communications systems. Cellular telephone systems are targeted in particular; however, these integrated circuits can function in other systems including digital audio, telecommunications, and data acquisition.

These devices are pin-selectable for either of two modes, companded and linear, providing data in two formats. In the companded mode, data is transmitted and received in 8-bit words. In the linear mode, 13 bits of data, and either three bits of gain-setting control data, or three zero bits of padding to create a 16-bit word, are sent and received.

The transmit section is designed to interface directly with an electret microphone element. The microphone input signal (MICIN) is buffered and amplified with provision for setting the amplifier gain to accommodate a range of signal input levels. The amplified signal is passed through antialiasing and band-pass filters. The filtered signal is then applied to the input of a compressing analog-to-digital converter (COADC) when companded mode is selected. Otherwise, the analog-to-digital converter performs a linear conversion. The resulting data is then clocked out of DOUT as a serial data stream.

The receive section takes a frame of serial data on DIN and converts it to analog through an expanding digital-to-analog converter (EXDAC) when the companded mode is selected; otherwise, a linear conversion is performed. The analog signal then passes through switched capacitor filters, which provide out-of-band rejection,  $(\sin x)/x$  correction functions, and smoothing. The filtered signal is sent to the earphone amplifier. The earphone amplifier has a differential output with adjustable gain and is designed to minimize static power dissipation.

A single on-chip high-precision band-gap circuit generates all voltage references, eliminating the need for external reference voltages. An internal reference voltage equal to  $V_{CC}/2$ , VMID, is used to develop the midlevel virtual ground for all the amplifier circuits and the microphone bias circuit. Another reference voltage, MICBIAS, can supply bias current for the microphone.

The TLV320AC3xC devices are characterized for operation from 0°C to 70°C. The TLV320AC3xI devices are characterized for operation from –40°C to 85°C.




POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

# TLV320AC36, TLV320AC37 3-V VOICE-BAND AUDIO PROCESSORS (VBAP™)

SLWS006B – NOVEMBER 1994 – REVISED OCTOBER 1997

## functional block diagram

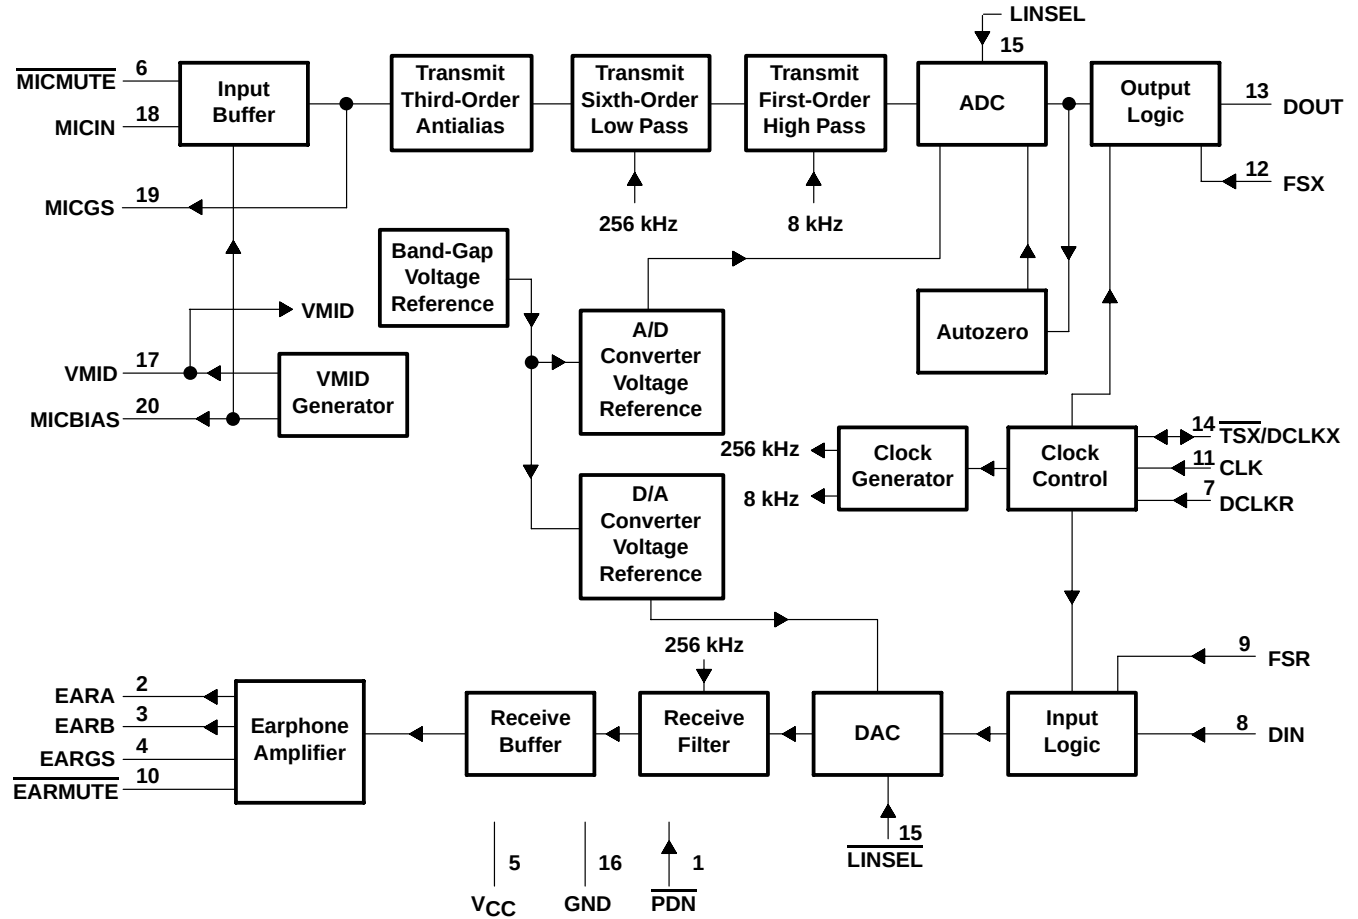

NOTE A: Terminal numbers shown are for the DW and N packages.

# TLV320AC36, TLV320AC37

## 3-V VOICE-BAND AUDIO PROCESSORS (VBAP™)

SLWS006B – NOVEMBER 1994 – REVISED OCTOBER 1997

### Terminal Functions

| TERMINAL                    |       |    | I/O | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                            |
|-----------------------------|-------|----|-----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NAME                        | NO.   |    |     |                                                                                                                                                                                                                                                                                                                                                                                        |
|                             | DW, N | PT |     |                                                                                                                                                                                                                                                                                                                                                                                        |
| AGND                        | —     | 34 |     | Ground return for all internal analog circuits                                                                                                                                                                                                                                                                                                                                         |
| AV <sub>CC</sub>            | —     | 4  |     | 3-V supply voltage for all internal analog circuits                                                                                                                                                                                                                                                                                                                                    |
| CLK                         | 11    | 19 | I   | Clock input. In the fixed-data-rate mode, CLK is the master clock input as well as the transmit and receive data clock input . In the variable-data-rate mode, CLK is the master clock input only (digital).                                                                                                                                                                           |
| DCLKR                       | 7     | 14 | I   | Selection of fixed- or variable-data-rate operation. When DCLKR is connected to V <sub>CC</sub> , the device operates in the fixed-data-rate mode. When DCLKR is not connected to V <sub>CC</sub> , the device operates in the variable-data-rate mode and DCLKR becomes the receive data clock (digital).                                                                             |
| DGND                        | —     | 27 |     | Ground return for all internal digital circuits                                                                                                                                                                                                                                                                                                                                        |
| DIN                         | 8     | 15 | I   | Receive data input. Input data is clocked in on consecutive negative transitions of the receive data clock, which is CLK for a fixed data rate and DCLKR for a variable data rate (digital).                                                                                                                                                                                           |
| DOUT                        | 13    | 21 | O   | Transmit data output. Transmit data is clocked out on consecutive positive transitions of the transmit data clock, which is CLK for a fixed data rate and DCLKX for a variable data rate (digital).                                                                                                                                                                                    |
| DV <sub>CC</sub>            | —     | 9  |     | 3-V supply voltage for all internal digital circuits                                                                                                                                                                                                                                                                                                                                   |
| EARA                        | 2     | 44 | O   | Earphone output. EARA forms a differential drive when used with the EARB signal (analog).                                                                                                                                                                                                                                                                                              |
| EARB                        | 3     | 45 | O   | Earphone output. EARB forms a differential drive when used with the EARA signal (analog).                                                                                                                                                                                                                                                                                              |
| EARGS                       | 4     | 46 | I   | Earphone gain set input of feedback signal for the earphone output. The ratio of an external potential divider network connected across EARA and EARB adjusts the power amplifier gain. Maximum gain occurs when EARGS is connected to EARB. Minimum gain occurs when EARGS is connected to EARA. Earphone frequency response correction is performed using an RC approach (analog).   |
| $\overline{\text{EARMUTE}}$ | 10    | 17 | I   | Earphone output mute control signal. When $\overline{\text{EARMUTE}}$ is low, the output amplifier is disabled and no audio is sent to the earphone (digital).                                                                                                                                                                                                                         |
| FSR                         | 9     | 16 | I   | Frame-synchronization clock input for the receive channel. In the variable-data-rate mode, this signal must remain high for the duration of the time slot. The receive channel enters the standby condition when FSR is TTL-low for five frames or longer. The device enters a production test-mode condition when either FSR or FSX is held high for five frames or longer (digital). |
| FSX                         | 12    | 20 | I   | Frame synchronization clock input for the transmit channel. FSX operates independently of FSR, but also in an analogous manner to FSR. The transmit channel enters the standby condition when FSX is low for five frames or longer. The device enters a production test-mode condition when either FSX or FSR is held high for five frames or longer (digital).                        |
| GND                         | 16    | —  |     | Ground return for all internal circuits                                                                                                                                                                                                                                                                                                                                                |
| $\overline{\text{LINSEL}}$  | 15    | 26 | I   | Linear selection input. When low, $\overline{\text{LINSEL}}$ selects linear coding/decoding. When high, $\overline{\text{LINSEL}}$ selects companded coding/decoding. Companding code on the 'AC36 is $\mu$ -law, and companding code on the 'AC37 is A-law (digital).                                                                                                                 |
| MICBIAS                     | 20    | 42 | O   | Microphone bias. MICBIAS voltage for the electret microphone is equal to VMID.                                                                                                                                                                                                                                                                                                         |
| MICGS                       | 19    | 41 | O   | Output of the internal microphone amplifier. MICGS is used as the feedback to set the microphone amplifier gain. If sidetone is required, it is accomplished by connecting a series network between MICGS and EARGS (analog).                                                                                                                                                          |
| MICIN                       | 18    | 40 | I   | Microphone input. Electret microphone input to the internal microphone amplifier (analog)                                                                                                                                                                                                                                                                                              |
| $\overline{\text{MICMUTE}}$ | 6     | 11 | I   | Microphone input mute control signal. When $\overline{\text{MICMUTE}}$ is active (low), zero code is transmitted (dig.).                                                                                                                                                                                                                                                               |
| $\overline{\text{PDN}}$     | 1     | 43 | I   | Power-down input. When $\overline{\text{PDN}}$ is low, the device powers down to reduce power consumption (digital).                                                                                                                                                                                                                                                                   |
| TSX/DCLKX                   | 14    | 22 | I/O | Transmit time slot strobe (active-low output) or data clock (input) for the transmit channel. In the fixed-data-rate mode, TSX/DCLKX is an open-drain output that pulls to ground and is used as an enable signal for a 3-state buffer. In the variable-data-rate mode, DCLKX becomes the transmit data clock input (digital).                                                         |
| V <sub>CC</sub>             | 5     | —  |     | 3-V supply voltage for all internal circuits                                                                                                                                                                                                                                                                                                                                           |
| VMID                        | 17    | 36 | O   | V <sub>CC</sub> /2 bias voltage reference. A pair of external, low-leakage, high-frequency capacitors (1 $\mu$ F and 470 pF) should be connected between VMID and ground for filtering.                                                                                                                                                                                                |



# TLV320AC36, TLV320AC37

## 3-V VOICE-BAND AUDIO PROCESSORS (VBAP™)

SLWS006B – NOVEMBER 1994 – REVISED OCTOBER 1997

### absolute maximum ratings over operating free-air temperature range (unless otherwise noted)<sup>†</sup>

|                                                              |                              |
|--------------------------------------------------------------|------------------------------|
| Supply voltage range, $V_{CC}$ (see Note 1)                  | –0.3 V to 5.5 V              |
| Output voltage range at DOUT, $V_O$                          | –0.3 V to 5.5 V              |
| Input voltage range at DIN, $V_I$                            | –0.3 V to 5.5 V              |
| Continuous total power dissipation                           | See Dissipation Rating Table |
| Operating free-air temperature range: C suffix               | 0°C to 70°C                  |
| I suffix                                                     | –40°C to 85°C                |
| Storage temperature range, $T_{stg}$                         | –65°C to 150°C               |
| Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds | 260°C                        |

<sup>†</sup> Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: Voltage value is with respect to GND.

DISSIPATION RATING TABLE

| PACKAGE | $T_A \leq 25^\circ\text{C}$<br>POWER RATING | DERATING FACTOR<br>ABOVE $T_A = 25^\circ\text{C}$ | $T_A = 70^\circ\text{C}$<br>POWER RATING | $T_A = 85^\circ\text{C}$<br>POWER RATING |
|---------|---------------------------------------------|---------------------------------------------------|------------------------------------------|------------------------------------------|
| DW      | 1025 mW                                     | 8.2 mW/°C                                         | 656 mW                                   | 533 mW                                   |
| N       | 1150 mW                                     | 9.2 mW/°C                                         | 736 mW                                   | 598 mW                                   |
| PT      | 1075 mW                                     | 7.1 mW/°C                                         | 756 mW                                   | 649 mW                                   |

### recommended operating conditions (see Note 2)

|                                                            | MIN                      | MAX | UNIT     |
|------------------------------------------------------------|--------------------------|-----|----------|
| Supply voltage, $V_{CC}$ (see Note 3)                      | 2.7                      | 3.3 | V        |
| High-level input voltage, $V_{IH}$                         | 2.2                      |     | V        |
| Low-level input voltage, $V_{IL}$                          |                          | 0.8 | V        |
| Load resistance between EARA and EARB, $R_L$ (see Note 4)  | 600                      |     | $\Omega$ |
| Load capacitance between EARA and EARB, $C_L$ (see Note 4) |                          | 50  | nF       |
| Operating free-air temperature, $T_A$                      | TLV320AC36C, TLV320AC37C |     | 0 70     |
|                                                            | TLV320AC36I, TLV320AC37I |     | –40 85   |

- NOTES: 2. To avoid possible damage to these CMOS devices and resulting reliability problems, the power-up sequence detailed in the system reliability features paragraph should be followed.
3. Voltages at analog inputs, outputs, and  $V_{CC}$  are with respect to GND.
4.  $R_L$  and  $C_L$  should not be applied simultaneously.

# TLV320AC36, TLV320AC37

## 3-V VOICE-BAND AUDIO PROCESSORS (VBAP™)

SLWS006B – NOVEMBER 1994 – REVISED OCTOBER 1997

**electrical characteristics over recommended ranges of supply voltage and free-air temperature (unless otherwise noted)**

**supply current,  $f_{DCLKR}$  or  $f_{DCLKX} = 2.048$  MHz, outputs not loaded,  $V_{CC} = 3$  V,  $T_A = 25^\circ\text{C}$**

| PARAMETER |                              | TEST CONDITIONS                                                    | MIN | MAX  | UNIT |
|-----------|------------------------------|--------------------------------------------------------------------|-----|------|------|
| $I_{CC}$  | Supply current from $V_{CC}$ |                                                                    |     |      |      |
|           | Operating                    | PDN is high with CLK signal present                                |     | 7.5  | mA   |
|           | Power down                   | PDN is low for 500 $\mu\text{s}$                                   |     | 0.75 |      |
|           | Standby – both               | PDN is high with FSX and FSR held low                              |     | 2    |      |
|           | Standby – one                | PDN is high with either FSX or FSR pulsing with the other held low |     | 4.5  |      |

### digital interface

| PARAMETER |                                             | TEST CONDITIONS           | MIN                                | TYP <sup>†</sup> | MAX | UNIT          |
|-----------|---------------------------------------------|---------------------------|------------------------------------|------------------|-----|---------------|
| $V_{OH}$  | High-level output voltage                   | DOUT                      | $I_{OH} = -3.2$ mA, $V_{CC} = 3$ V | 2.4              | 2.8 | V             |
| $V_{OL}$  | Low-level output voltage                    |                           |                                    |                  |     |               |
| $I_{IH}$  | High-level input current, any digital input | $V_I = 2.2$ V to $V_{CC}$ |                                    |                  | 10  | $\mu\text{A}$ |
| $I_{IL}$  | Low-level input current, any digital input  | $V_I = 0$ to 0.8 V        |                                    |                  | 10  | $\mu\text{A}$ |
| $C_i$     | Input capacitance                           |                           |                                    | 5                |     | pF            |
| $C_o$     | Output capacitance                          |                           |                                    | 5                |     | pF            |

<sup>†</sup> All typical values are at  $V_{CC} = 3$  V,  $T_A = 25^\circ\text{C}$ .

### microphone interface

| PARAMETER  |                                                       | TEST CONDITIONS       | MIN | TYP <sup>†</sup> | MAX       | UNIT          |
|------------|-------------------------------------------------------|-----------------------|-----|------------------|-----------|---------------|
| $V_{IO}$   | Input offset voltage at MICIN                         | $V_I = 0$ to 3 V      |     |                  | $\pm 5$   | mV            |
| $I_{IB}$   | Input bias current at MICIN                           |                       |     |                  | $\pm 200$ | nA            |
| $B_1$      | Unity-gain bandwidth, open loop at MICIN <sup>‡</sup> |                       |     | 1.5              |           | MHz           |
| $C_i$      | Input capacitance at MICIN                            |                       |     | 5                |           | pF            |
| $A_V$      | Large-signal voltage amplification at MICGS           |                       |     | 10000            |           | V/V           |
| $I_{Omax}$ | Maximum output current                                | VMID                  |     | 3                |           | $\mu\text{A}$ |
|            |                                                       | MICBIAS (source only) |     | 1                |           | mA            |

<sup>†</sup> All typical values are at  $V_{CC} = 3$  V,  $T_A = 25^\circ\text{C}$ .

<sup>‡</sup> The frequency of the first pole is 100 Hz.

### speaker interface

| PARAMETER   |                                                    | TEST CONDITIONS                     | MIN | TYP <sup>†</sup> | MAX            | UNIT             |
|-------------|----------------------------------------------------|-------------------------------------|-----|------------------|----------------|------------------|
| $V_{O(pp)}$ | AC output voltage                                  |                                     |     |                  | 3 <sup>§</sup> | V <sub>pp</sub>  |
| $V_{OO}$    | Output offset voltage at EARA, EARB (single-ended) | Relative to GND                     |     |                  | 80             | mV <sub>pk</sub> |
| $I_{I(kg)}$ | Input leakage current at EARGS                     | $V_I = 0.5$ V to $(V_{CC} - 0.5)$ V |     |                  | $\pm 200$      | nA               |
| $I_{Omax}$  | Maximum output current                             | $R_L = 600$ $\Omega$                |     |                  | $\pm 2.5$      | mA               |
| $r_o$       | Output resistance at EARA, EARB                    |                                     |     | 1                |                | $\Omega$         |
| Gain change |                                                    | EARMUTE low, max level when muted   | -60 |                  |                | dB               |

<sup>†</sup> All typical values are at  $V_{CC} = 3$  V,  $T_A = 25^\circ\text{C}$ .

<sup>§</sup> 2.5 V<sub>pp</sub> when  $V_{CC}$  is 2.7 V.

# TLV320AC36, TLV320AC37

## 3-V VOICE-BAND AUDIO PROCESSORS (VBAP™)

SLWS006B – NOVEMBER 1994 – REVISED OCTOBER 1997

**transmit gain and dynamic range, companded mode ( $\mu$ -law or A-law) or linear mode selected,  $V_{CC} = 3\text{ V}$ ,  $T_A = 25^\circ\text{C}$  (unless otherwise noted) (see Notes 5 and 6)**

| PARAMETER                                                         | TEST CONDITIONS                                                   | MIN   | MAX       | UNIT |
|-------------------------------------------------------------------|-------------------------------------------------------------------|-------|-----------|------|
| Transmit reference-signal level (0 dB) (see Note 7)               | Companded mode selected, $\mu$ -law ('AC36)                       | 0.614 |           | Vrms |
|                                                                   | Companded mode selected, A-law ('AC37)                            | 0.616 |           |      |
|                                                                   | Linear mode selected ('AC36 and 'AC37)                            | 0.626 |           |      |
| Overload-signal level (MICIN at unity gain)                       | Companded mode selected, $\mu$ -law ('AC36)                       | 2.5   |           | Vpp  |
|                                                                   | Companded mode selected, A-law ('AC37)                            | 2.5   |           |      |
|                                                                   | Linear mode selected ('AC36 and 'AC37)                            | 2.5   |           |      |
| Absolute gain error                                               | 0-dB input signal                                                 |       | $\pm 1$   | dB   |
| Gain error with input level relative to gain at $-10\text{ dBm0}$ | MICIN to DOUT at 0 dBm0 to $-40\text{ dBm0}$                      |       | $\pm 0.5$ | dB   |
|                                                                   | MICIN to DOUT at $-41\text{ dBm0}$ to $-50\text{ dBm0}$           |       | $\pm 1.5$ | dB   |
|                                                                   | MICIN to DOUT at $-51\text{ dBm0}$ to $-55\text{ dBm0}$           |       | $\pm 2$   | dB   |
| Gain variation                                                    | $V_{CC} \pm 10\%$ , $T_A = 0^\circ\text{C}$ to $70^\circ\text{C}$ |       | $\pm 0.5$ | dB   |

- NOTES: 5. Unless otherwise noted, the analog input is 0 dB, 1020-Hz sine wave, where 0 dB is defined as the zero-reference point of the channel under test.  
6. The input amplifier is set for inverting unity gain.  
7. The reference-signal level, which is input to the transmit channel, is defined as a value 3 dB below the full-scale value of 2 V.

**transmit filter transfer, companded mode ( $\mu$ -law or A-law) or linear mode selected, over recommended ranges of supply voltage and free-air temperature, CLK = 2.048 MHz, FSX = 8 kHz (see Note 6)**

| PARAMETER                                      | TEST CONDITIONS                                                                              |                          | MIN   | MAX  | UNIT |
|------------------------------------------------|----------------------------------------------------------------------------------------------|--------------------------|-------|------|------|
| Gain relative to input signal gain at 1.02 kHz | Input amplifier set for unity gain, noninverting maximum gain output signal at MICIN is 0 dB | fMICIN = 50 Hz           | −10   | 0    | dB   |
|                                                |                                                                                              | fMICIN = 200 Hz          | −2.8  | 0    |      |
|                                                |                                                                                              | fMICIN = 300 Hz to 3 kHz | ±0.25 |      |      |
|                                                |                                                                                              | fMICIN = 3.3 kHz         | −0.55 | 0.2  |      |
|                                                |                                                                                              | fMICIN = 3.4 kHz         | −1    | −0.1 |      |
|                                                |                                                                                              | fMICIN = 4 kHz           | −14   |      |      |
|                                                |                                                                                              | fMICIN ≥ 4.6 kHz         | −32   |      |      |

NOTE 6. The input amplifier is set for inverting unity gain.

**transmit idle channel noise and distortion, companded mode with  $\mu$ -law or A-law selected, over recommended ranges of supply voltage and operating free-air temperature (see Note 8)**

| PARAMETER                                                                                | TEST CONDITIONS                                           | MIN | MAX | UNIT   |
|------------------------------------------------------------------------------------------|-----------------------------------------------------------|-----|-----|--------|
| Transmit noise, psophometrically weighted                                                | MICIN connected to MICGS through a 10-k $\Omega$ resistor |     | -72 | dB0p   |
| Transmit noise, C-message weighted                                                       | MICIN connected to MICGS through a 10-k $\Omega$ resistor |     | 10  | dBrnC0 |
| Transmit signal-to-distortion ratio with sine-wave input                                 | MICIN to DOUT at 0 dBm0 to $-24\text{ dBm0}$              |     | 36  | dB     |
|                                                                                          | MICIN to DOUT at $-25\text{ dBm0}$ to $-30\text{ dBm0}$   |     | 34  |        |
|                                                                                          | MICIN to DOUT at $-31\text{ dBm0}$ to $-38\text{ dBm0}$   |     | 30  |        |
|                                                                                          | MICIN to DOUT at $-39\text{ dBm0}$ to $-40\text{ dBm0}$   |     | 24  |        |
|                                                                                          | MICIN to DOUT at $-41\text{ dBm0}$ to $-45\text{ dBm0}$   |     | 20  |        |
| Intermodulation distortion, 2-tone CCITT method, composite power level $-13\text{ dBm0}$ | CCITT G.712 (7.1), R2                                     |     | 49  | dB     |
|                                                                                          | CCITT G.712 (7.2), R3                                     |     | 51  |        |

NOTE 8: Transmit noise, linear mode: 200  $\mu\text{Vrms}$  is equivalent to  $-74\text{ dB}$  (referenced to device 0-dB level).

# TLV320AC36, TLV320AC37

## 3-V VOICE-BAND AUDIO PROCESSORS (VBAP™)

SLWS006B – NOVEMBER 1994 – REVISED OCTOBER 1997

**transmit idle channel noise and distortion, linear mode selected, over recommended ranges of supply voltage and operating free-air temperature (see Notes 6 and 8)**

| PARAMETER                                                | TEST CONDITIONS                                           | MIN | MAX | UNIT       |
|----------------------------------------------------------|-----------------------------------------------------------|-----|-----|------------|
| Transmit noise                                           | MICIN connected to MICGS through a 10-k $\Omega$ resistor |     | 200 | $\mu$ Vrms |
| Transmit signal-to-distortion ratio with sine-wave input | MICIN to DOUT at 0 dBm0 to –10 dBm0                       | 46  |     | dB         |
|                                                          | MICIN to DOUT at –11 dBm0 to –12 dBm0                     | 44  |     |            |
|                                                          | MICIN to DOUT at –13 dBm0 to –18 dBm0                     | 40  |     |            |
|                                                          | MICIN to DOUT at –19 dBm0 to –24 dBm0                     | 35  |     |            |
|                                                          | MICIN to DOUT at –25 dBm0 to –40 dBm0                     | 20  |     |            |
|                                                          | MICIN to DOUT at –41 dBm0 to –45 dBm0                     | 18  |     |            |

NOTES: 6. The input amplifier is set for inverting unity gain.

8. Transmit noise, linear mode: 200  $\mu$ Vrms is equivalent to –74 dB (referenced to device 0-dB level).

**receive gain and dynamic range, companded mode ( $\mu$ -law or A-law) or linear mode selected,  $V_{CC} = 3$  V,  $T_A = 25^\circ\text{C}$  (unless otherwise noted) (see Notes 9 and 10)**

| PARAMETER                                                 | TEST CONDITIONS                                                   | MIN   | MAX       | UNIT |
|-----------------------------------------------------------|-------------------------------------------------------------------|-------|-----------|------|
| Receive reference-signal level (0 dB) (see Note 11)       | Companded mode selected, $\mu$ -law ('AC36)                       | 0.736 |           | Vrms |
|                                                           | Companded mode selected, A-law ('AC37)                            | 0.739 |           |      |
|                                                           | Linear mode selected ('AC36 and 'AC37)                            | 0.751 |           |      |
| Overload-signal level                                     | Companded mode selected, $\mu$ -law ('AC36)                       | 3     |           | Vpp  |
|                                                           | Companded mode selected, A-law ('AC37)                            | 3     |           |      |
|                                                           | Linear mode selected ('AC36 and 'AC37)                            | 3     |           |      |
| Absolute gain error                                       | 0-dB input signal                                                 |       | $\pm 1$   | dB   |
| Gain error with output level relative to gain at –10 dBm0 | DIN to EARA and EARB at 0 dBm0 to –38 dBm0                        |       | $\pm 0.5$ | dB   |
|                                                           | DIN to EARA and EARB at –39 dBm0 to –50 dBm0                      |       | $\pm 1.5$ |      |
|                                                           | DIN to EARA and EARB at –51 dBm0 to –55 dBm0                      |       | $\pm 2$   |      |
| Gain variation                                            | $V_{CC} \pm 10\%$ , $T_A = 0^\circ\text{C}$ to $70^\circ\text{C}$ |       | $\pm 0.5$ | dB   |

NOTES: 9. Receive output is measured differentially in the maximum gain configuration. To set the output amplifier for maximum gain, EARGS is connected to EARB and the output is taken between EARA and EARB. All output levels are (sin x)/x corrected.

10. Unless otherwise noted, the digital input is a word stream generated by passing a 0-dB sine wave at 1020 Hz through an ideal encoder, where 0 dB is defined as the zero reference.

11. This reference-signal level is measured at the speaker output of the receive channel with the gain of the output speaker amplifier set to unity.

**receive filter transfer, companded mode ( $\mu$ -law or A-law) or linear mode selected, over recommended ranges of supply voltage and operating free-air temperature, FSR = 8 kHz (see Note 9)**

| PARAMETER                         | TEST CONDITIONS | MIN                         | MAX        | UNIT |
|-----------------------------------|-----------------|-----------------------------|------------|------|
| Gain relative to gain at 1.02 kHz | DIN = 0 dBm0    | $f_{DIN} = < 200$ Hz        | 0.25       | dB   |
|                                   |                 | $f_{DIN} = 200$ Hz          | –0.5 0.25  |      |
|                                   |                 | $f_{DIN} = 300$ Hz to 3 kHz | $\pm 0.25$ |      |
|                                   |                 | $f_{DIN} = 3.3$ kHz         | –0.55 0.2  |      |
|                                   |                 | $f_{DIN} = 3.4$ kHz         | –1 –0.1    |      |
|                                   |                 | $f_{DIN} = 4$ kHz           | –14        |      |
|                                   |                 | $f_{DIN} = > 4.6$ kHz       | –30        |      |

NOTE 9. Receive output is measured differentially in the maximum gain configuration. To set the output amplifier for maximum gain, EARGS is connected to EARB and the output is taken between EARA and EARB. All output levels are (sin x)/x corrected.

# TLV320AC36, TLV320AC37

## 3-V VOICE-BAND AUDIO PROCESSORS (VBAP™)

SLWS006B – NOVEMBER 1994 – REVISED OCTOBER 1997

**receive idle channel noise and distortion, companded mode with  $\mu$ -law or A-law selected, over recommended ranges of supply voltage and operating free-air temperature (see Note 9)**

| PARAMETER                                               | TEST CONDITIONS                              | MIN | MAX  | UNIT  |
|---------------------------------------------------------|----------------------------------------------|-----|------|-------|
| Receive noise, psophometrically weighted                | DIN = 11010101 (A-law)                       |     | – 72 | dB0p  |
| Receive noise, C-message weighted                       | DIN = 11111111 ( $\mu$ -law)                 |     | 8    | dBmC0 |
| Receive signal-to-distortion ratio with sine-wave input | DIN to EARA and EARB at 0 dBm0 to –18 dBm0   | 36  |      | dB    |
|                                                         | DIN to EARA and EARB at –19 dBm0 to –24 dBm0 | 34  |      |       |
|                                                         | DIN to EARA and EARB at –25 dBm0 to –30 dBm0 | 30  |      |       |
|                                                         | DIN to EARA and EARB at –31 dBm0 to –38 dBm0 | 23  |      |       |
|                                                         | DIN to EARA and EARB at –39 dBm0 to –45 dBm0 | 17  |      |       |

NOTE 9. Receive output is measured differentially in the maximum gain configuration. To set the output amplifier for maximum gain, EARGS is connected to EARB and the output is taken between EARA and EARB. All output levels are (sin x)/x corrected.

**receive idle channel noise and distortion, linear mode selected, over recommended ranges of supply voltage and operating free-air temperature (see Notes 9 and 12)**

| PARAMETER                                                                       | TEST CONDITIONS                              | MIN | MAX | UNIT       |
|---------------------------------------------------------------------------------|----------------------------------------------|-----|-----|------------|
| Receive noise                                                                   | DIN = 00000000                               |     | 200 | $\mu$ Vrms |
| Receive signal-to-distortion ratio with sine-wave input                         | DIN to EARA and EARB at 0 dBm0 to –12 dBm0   | 46  |     | dB         |
|                                                                                 | DIN to EARA and EARB at –13 dBm0 to –18 dBm0 | 38  |     |            |
|                                                                                 | DIN to EARA and EARB at –19 dBm0 to –24 dBm0 | 32  |     |            |
|                                                                                 | DIN to EARA and EARB at –25 dBm0 to –40 dBm0 | 18  |     |            |
|                                                                                 | DIN to EARA and EARB at –41 dBm0 to –45 dBm0 | 15  |     |            |
| Intermodulation, 2-tone CCITT distortion method, composite power level –13 dBm0 | CCITT G.712 (7.1), R2                        | 50  |     | dB         |
|                                                                                 | CCITT G.712 (7.2), R3                        | 54  |     |            |

NOTES: 9. Receive output is measured differentially in the maximum gain configuration. To set the output amplifier for maximum gain, EARGS is connected to EARB and the output is taken between EARA and EARB. All output levels are (sin x)/x corrected.

12. Receive noise, linear mode: 200  $\mu$ Vrms is equivalent to –71 dB (referenced to device 0-dB level).

**power supply rejection and crosstalk attenuation over recommended ranges of supply voltage and operating free-air temperature**

| PARAMETER                                                 | TEST CONDITIONS                                                                                                                   | MIN | TYP <sup>†</sup> | MAX | UNIT |
|-----------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|-----|------------------|-----|------|
| Supply voltage rejection, transmit channel                | Idle channel, supply signal = 100 mVrms, f = 0 to 30 kHz (measured at DOUT)                                                       |     | –30              |     | dB   |
| Supply voltage rejection, receive channel                 | Idle channel, supply signal = 100 mVrms, EARGS connected to EARB, f = 0 to 30 kHz (measured differentially between EARA and EARB) |     | –30              |     | dB   |
| Crosstalk attenuation, transmit-to-receive (differential) | MICIN = 0 dB, f = 1.02 kHz, unity transmit gain, EARGS connected to EARB, measured differentially between EARA and EARB           | 50  |                  |     | dB   |
| Crosstalk attenuation, receive-to-transmit                | DIN = 0 dBm0, f = 1.02 kHz, unity transmit gain, measured at DOUT                                                                 | 50  |                  |     | dB   |

<sup>†</sup> All typical values are at V<sub>CC</sub> = 3 V, T<sub>A</sub> = 25°C.



# TLV320AC36, TLV320AC37

## 3-V VOICE-BAND AUDIO PROCESSORS (VBAP™)

SLWS006B – NOVEMBER 1994 – REVISED OCTOBER 1997

### timing requirements

**clock timing requirements over recommended ranges of supply voltage and operating free-air temperature (see Figure 1 through Figure 4)**

|                                            | MIN | NOM† | MAX | UNIT |
|--------------------------------------------|-----|------|-----|------|
| $t_t$ Transition time, CLK and DCLKX/DCLKR |     |      | 10  | ns   |
| Duty cycle, CLK                            | 45% | 50%  | 55% |      |
| Duty cycle, DCLKX/DCLKR                    | 45% | 50%  | 55% |      |

† All typical values are at  $V_{CC} = 3\text{ V}$ ,  $T_A = 25^\circ\text{C}$ .

**transmit timing requirements over recommended ranges of supply voltage and operating free-air temperature, fixed-data-rate mode (see Figure 2)**

|                                                       | MIN | MAX | UNIT |
|-------------------------------------------------------|-----|-----|------|
| $t_{su}(\text{FSX})$ Setup time, FSX high before CLK↓ | 20  | 468 | ns   |
| $t_h(\text{FSX})$ Hold time, FSX high after CLK↓      | 20  | 468 | ns   |

**receive timing requirements over recommended ranges of supply voltage and operating free-air temperature, fixed-data-rate mode (see Figure 1)**

|                                                              | MIN | MAX | UNIT |
|--------------------------------------------------------------|-----|-----|------|
| $t_{su}(\text{FSR})$ Setup time, FSR high before CLK↓        | 20  | 468 | ns   |
| $t_h(\text{FSR})$ Hold time, FSR high after CLK↓             | 20  | 468 | ns   |
| $t_{su}(\text{DIN})$ Setup time, DIN high or low before CLK↓ | 20  |     | ns   |
| $t_h(\text{DIN})$ Hold time, DIN high or low after CLK↓      | 20  |     | ns   |

**transmit timing requirements over recommended ranges of supply voltage and operating free-air temperature, variable-data-rate mode (see Figure 4)**

|                                                         | MIN | MAX                      | UNIT |
|---------------------------------------------------------|-----|--------------------------|------|
| $t_{su}(\text{FSX})$ Setup time, FSX high before DCLKX↓ | 40  | $t_c(\text{DCLKX}) - 40$ | ns   |
| $t_h(\text{FSX})$ Hold time, FSX high after DCLKX↓      | 35  | $t_c(\text{DCLKX}) - 35$ | ns   |

**receive timing requirements over recommended ranges of supply voltage and operating free-air temperature, variable-data-rate mode (see Figure 3)**

|                                                                | MIN | MAX                      | UNIT |
|----------------------------------------------------------------|-----|--------------------------|------|
| $t_{su}(\text{FSR})$ Setup time, FSR high before DCLKR↓        | 40  |                          | ns   |
| $t_h(\text{FSR})$ Hold time, FSR high after DCLKR↓             | 35  | $t_c(\text{DCLKR}) - 35$ | ns   |
| $t_{su}(\text{DIN})$ Setup time, DIN high or low before DCLKR↓ | 30  |                          | ns   |
| $t_h(\text{DIN})$ Hold time, DIN high or low after DCLKR↓      | 30  |                          | ns   |

### switching characteristics

**propagation delay times over recommended ranges of operating conditions, fixed-data-rate mode,  $C_L = 0$  to 10 pF (see Figure 2)**

| PARAMETER                                                               | TEST CONDITIONS                    | MIN | MAX | UNIT |
|-------------------------------------------------------------------------|------------------------------------|-----|-----|------|
| $t_{pd1}$ From CLK bit 1 high to DOUT bit 1 valid                       |                                    |     | 35  | ns   |
| $t_{pd2}$ From CLK high to DOUT valid, bits 2 to n                      |                                    |     | 35  | ns   |
| $t_{pd3}$ From CLK bit n low to DOUT bit n Hi-Z                         |                                    | 30  |     | ns   |
| $t_{pd4}$ From CLK bit 1 high to $\overline{\text{TSX}}$ active (low)   | $R_{pullup} = 1.24\text{ k}\Omega$ |     | 40  | ns   |
| $t_{pd5}$ From CLK bit n low to $\overline{\text{TSX}}$ inactive (high) | $R_{pullup} = 1.24\text{ k}\Omega$ | 30  |     | ns   |



propagation delay times over recommended ranges of operating conditions, variable-data-rate mode (see Figure 4)

| PARAMETER                                       | TEST CONDITIONS    | MIN | MAX | UNIT |
|-------------------------------------------------|--------------------|-----|-----|------|
| $t_{pd6}$ FSX high to DOUT bit 1 valid          | $C_L = 0$ to 10 pF |     | 30  | ns   |
| $t_{pd7}$ DCLKX high to DOUT valid, bits 2 to n | $C_L = 0$ to 10 pF |     | 40  | ns   |
| $t_{pd8}$ FSX low to DOUT bit n Hi-Z            |                    | 20  |     | ns   |

## PARAMETER MEASUREMENT INFORMATION

All timing parameters are referenced to  $V_{IH}$  and  $V_{IL}$ . Bit 1 = MSB (most significant bit) and is clocked in first on DIN or clocked out first on DOUT. Bit n = LSB (least significant bit) and is clocked in last on DIN or is clocked out last on DOUT. N = 8 for the companded mode, and N = 16 for the linear mode.

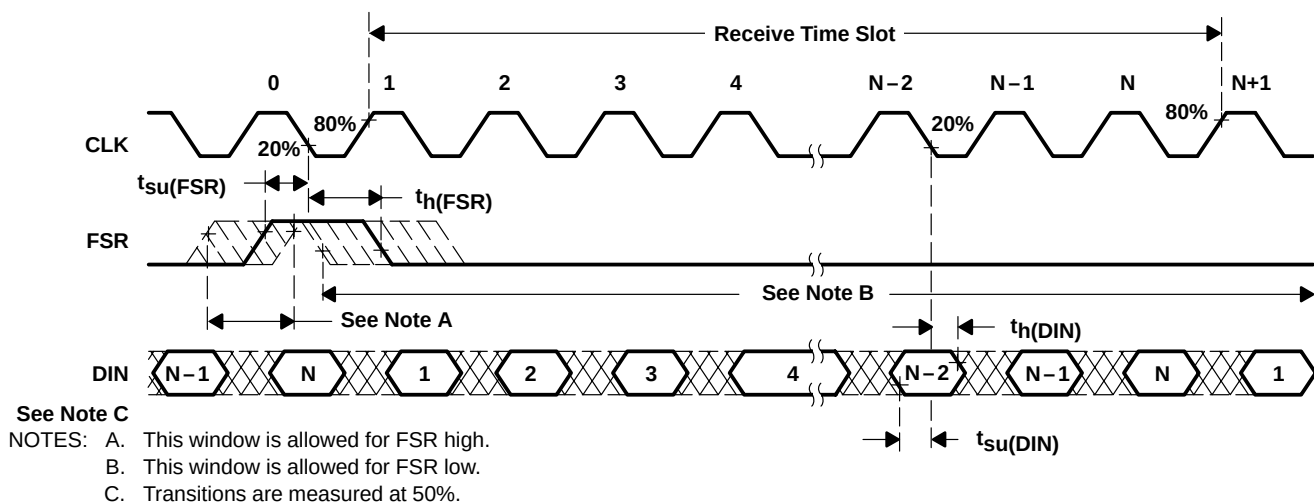


Figure 1. Fixed-Data Rate Mode, Receive Side Timing Diagram

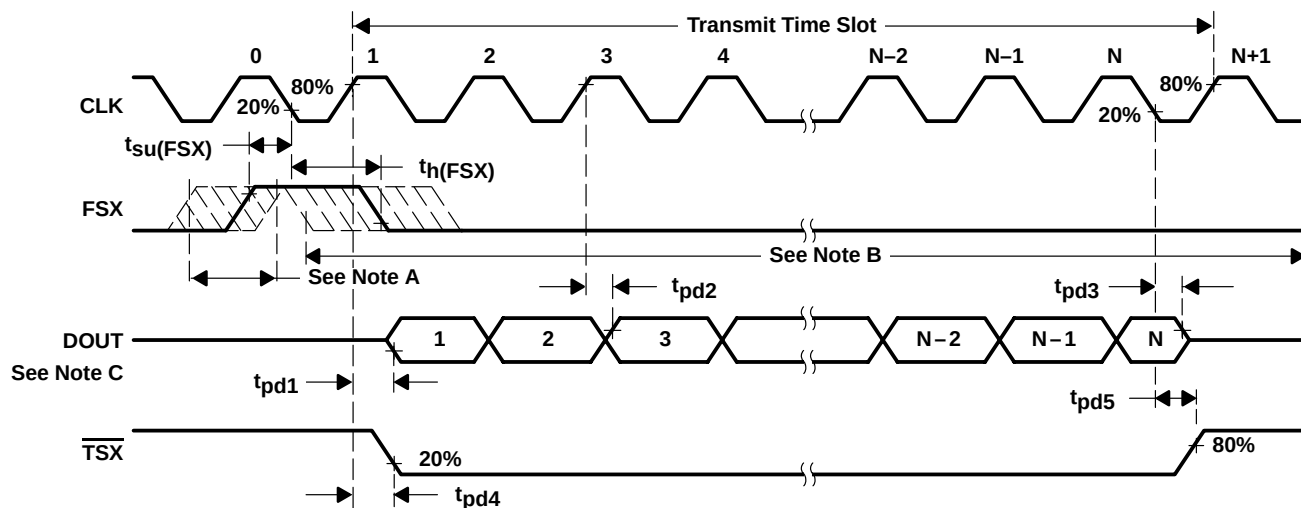


Figure 2. Fixed-Data Rate Mode, Transmit Side Timing Diagram

# TLV320AC36, TLV320AC37 3-V VOICE-BAND AUDIO PROCESSORS (VBAP™)

SLWS006B – NOVEMBER 1994 – REVISED OCTOBER 1997

## PARAMETER MEASUREMENT INFORMATION

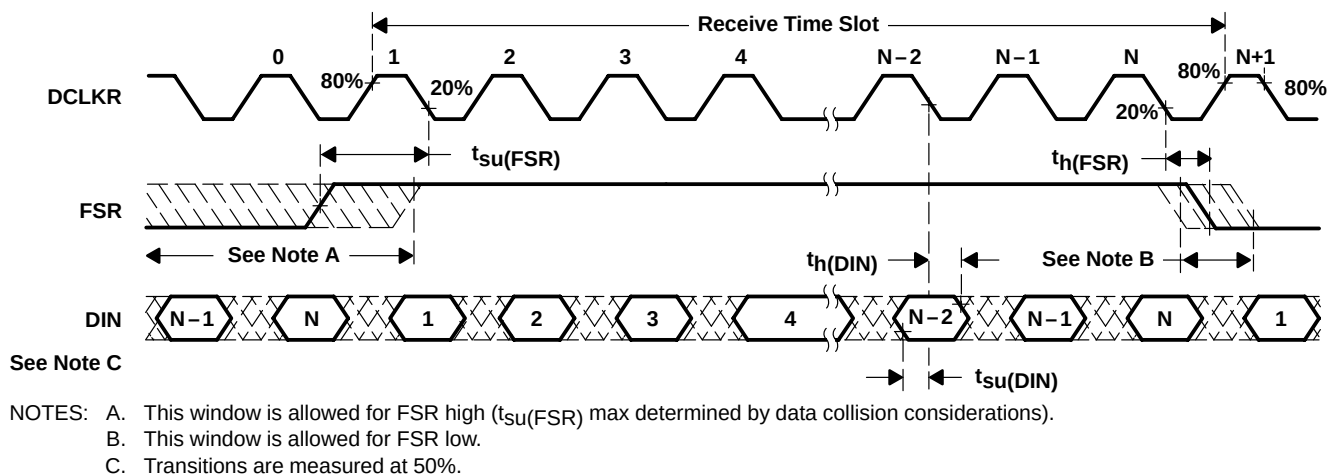


Figure 3. Variable-Data Rate Mode, Receive Side Timing Diagram

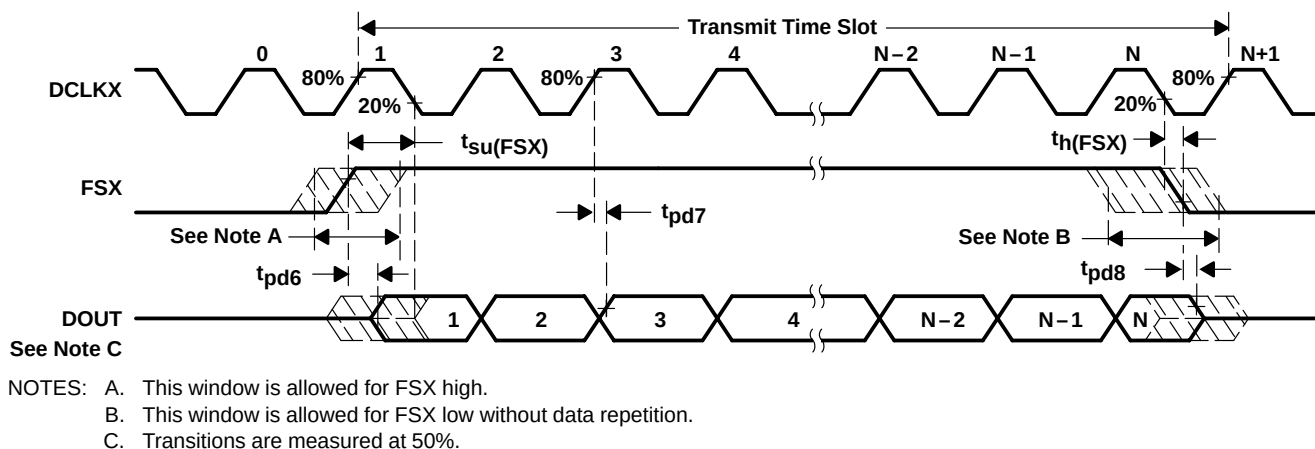


Figure 4. Variable-Data Rate Mode, Transmit Side Timing Diagram

---

## PRINCIPLES OF OPERATION

### general

#### system reliability features

The device should be powered up and initialized as follows:

1. Apply GND.
2. Apply  $V_{CC}$ .
3. Connect all clocks.
4. Apply TTL high to  $\overline{PDN}$ .
5. Apply synchronizing pulses to FSX and/or FSR.

Even though the VBAP is heavily protected against latch-up, it is still possible to cause it to latch up under certain improper power conditions. To help ensure that latch-up does not occur, a reverse-biased Schottky diode (with a forward voltage drop of less than or equal to 0.4 V — 1N5711 or equivalent) should be connected between  $V_{CC}$  (power supply) and GND.

On the transmit channel, digital outputs DOUT and  $\overline{TSX}$  are held in the high-impedance state for approximately four frames (500  $\mu$ s) after power up or application of  $V_{CC}$ . After this delay, DOUT,  $\overline{TSX}$ , and signaling are functional and occur in the correct time slot. The analog circuits on the transmit side require approximately 60 ms to reach their equilibrium value due to the autozero circuit settling time. To further enhance system integrity, DOUT and  $\overline{TSX}$  are placed in the high-impedance state after an interruption of CLK.

#### power-down and standby operations

To minimize power consumption, a power-down mode and three standby modes are provided.

For power down, an external low signal is applied to  $\overline{PDN}$ . In the absence of a signal,  $\overline{PDN}$  is internally pulled up to a high logic level and the device remains active. In the power-down mode, the average power consumption is reduced to 2 mW.

Three standby modes give the user the option of placing the entire device on standby, placing only the transmit channel on standby, or placing only the receive channel on standby. To place the entire device on standby, both FSX and FSR are held low. For transmit-only operation (receive channel on standby), FSX is pulsing and FSR is held low. For receive-only operation (transmit section on standby), FSR is pulsing and FSX is held low. When the entire device is in standby mode, power consumption is reduced to 5 mW. See Table 1 for power-down and standby procedures.

# TLV320AC36, TLV320AC37

## 3-V VOICE-BAND AUDIO PROCESSORS (VBAP™)

SLWS006B – NOVEMBER 1994 – REVISED OCTOBER 1997

### PRINCIPLES OF OPERATION

**Table 1. Power-Down and Standby Procedures**

| DEVICE STATUS                         | PROCEDURE                                                                                                 | TYPICAL POWER CONSUMPTION | DIGITAL OUTPUT STATUS                                                           |
|---------------------------------------|-----------------------------------------------------------------------------------------------------------|---------------------------|---------------------------------------------------------------------------------|
| Power on                              | $\overline{\text{PDN}} = \text{high}$ ,<br>$\text{FSX} = \text{pulses}$ ,<br>$\text{FSR} = \text{pulses}$ | 20 mW                     | Digital outputs active but not loaded                                           |
| Power down                            | $\overline{\text{PDN}} = \text{low}$ ,<br>$\text{FSX}, \text{FSR} = \text{X}^\dagger$                     | 2 mW                      | $\overline{\text{TSX}}$ and DOUT in the high-impedance state                    |
| Entire device on standby mode         | $\text{FSX} = \text{low}$ ,<br>$\text{FSR} = \text{low}$ ,<br>$\overline{\text{PDN}} = \text{high}$       | 5 mW                      | $\overline{\text{TSX}}$ and DOUT in the high-impedance state                    |
| Only transmit channel in standby mode | $\text{FSX} = \text{low}$ ,<br>$\text{FSR} = \text{pulses}$ ,<br>$\overline{\text{PDN}} = \text{high}$    | 10 mW                     | $\overline{\text{TSX}}$ and DOUT in the high-impedance state within five frames |
| Only receive channel in standby mode  | $\text{FSR} = \text{low}$ ,<br>$\text{FSX} = \text{pulses}$ ,<br>$\overline{\text{PDN}} = \text{high}$    | 10 mW                     | Digital outputs active but not loaded                                           |

$^\dagger \text{X} = \text{don't care}$

#### fixed-data-rate timing

Fixed-data-rate timing is selected by connecting DCLKR to  $V_{CC}$  and uses the master clock (CLK), frame synchronization clocks (FSX and FSR), and the  $\overline{\text{TSX}}$  output. FSX and FSR are inputs that set the sampling frequency. Data is transmitted on DOUT on the positive transitions of CLK following the rising edge of FSX. Data is received on DIN on the falling edges of CLK following FSR. A D/A conversion is performed on the received digital word, and the resulting analog sample is held on an internal sample-and-hold capacitor until transferred to the receive filter. The data word is eight bits long in the companded mode and 16 bits long in the linear mode.

#### variable-data-rate timing

Variable-data-rate timing is selected by connecting DCLKR to the receive data clock. In this mode, the master clock (CLK) controls the switched-capacitor filters, while data transfer into DIN and out of DOUT is controlled by DCLKR and DCLKX respectively. This allows the data to be transferred in and out of the device at any rate up to the frequency of the master clock. DCLKR and DCLKX must be synchronous with CLK.

While the FSX input is high, data is transmitted from DOUT on consecutive positive transitions of DCLKX. Similarly, while the FSR input is high, the data word is received at DIN on consecutive negative transitions of DCLKR. The transmitted data word at DOUT is repeated in all remaining time slots in the frame as long as DCLKX is pulsed and FSX is held high. This feature, which allows the data word to be transmitted more than once per frame, is available only with variable-data-rate timing.

#### asynchronous operations

To avoid crosstalk problems associated with special interrupt circuits, the design includes separate converters, filters, and voltage references on the transmit and receive sides to allow completely independent operation of the two channels. In either timing mode, the master clock, data clock, and time-slot strobe must be synchronized at the beginning of each frame.

#### precision voltage references

A precision band-gap reference voltage is generated internally and is used to supply all the references required for operation of both the transmit and receive channels. The gain in each channel is trimmed during the manufacturing process. This ensures very accurate, stable gain performance over variations in supply voltage and device temperature.




POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

## conversion laws

## transmit operation

The microphone input amplifier is designed specifically to interface to electret-type microphone elements, as shown in Figure 5. The VMID buffer circuit provides a voltage (MICBIAS) equal to  $1/2 V_{CC}$  as a reference for the microphone amplifier and a bias voltage to the electret microphone. The microphone amplifier output (MICGS) is used in conjunction with a feedback network and applied to the amplifier inverting input (MICIN) to set the amplifier gain. In the companded mode, when the MICIN signal level decreases to a level near the noise floor, the VBAP mutes the signal and outputs zero bits while continuing to monitor the signal level. When the input level once again exceeds the noise threshold, the mute is released and normal operation resumes. Input hysteresis is provided to ensure noiseless transitions in to and out of the muted condition. VMID appears at a terminal to provide a place to filter the VMID voltage.

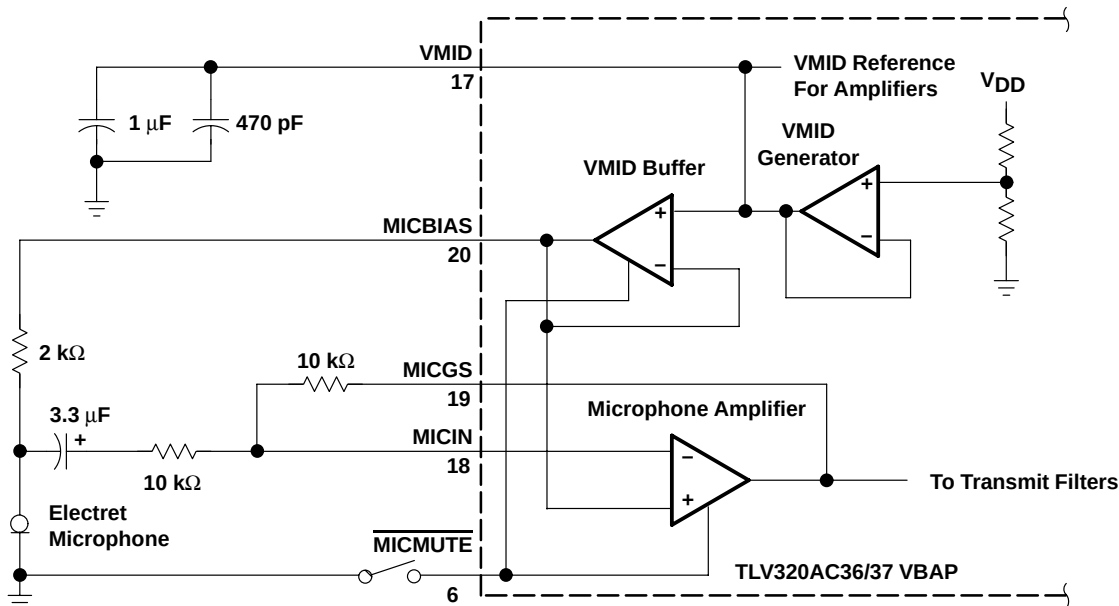

### Figure 5. Typical Microphone Interface

**transmit filter**

A low-pass antialiasing section is included on the device and achieves a 35-dB attenuation at the sampling frequency. No external components are required to provide the necessary antialiasing function for the switched-capacitor section of the transmit filter.

# TLV320AC36, TLV320AC37

## 3-V VOICE-BAND AUDIO PROCESSORS (VBAP™)

SLWS006B – NOVEMBER 1994 – REVISED OCTOBER 1997

---

### PRINCIPLES OF OPERATION

#### encoding

The encoder internally samples the output of the transmit filter and holds each sample on an internal sample-and-hold capacitor. The encoder performs an A/D conversion on a switched-capacitor array. Digital data representing the sample is transmitted on the first 8 or 16 data clock cycles of the next frame.

The autozero circuit corrects for dc offset on the input signal to the encoder using the sign-bit averaging technique. The sign bit from the encoder output is long-term averaged and subtracted from the input to the encoder.

#### data word structure

The data word is eight bits long in the companded mode and all eight bits represent one audio data sample. The sign bit is the first bit transmitted.

The data word is 16 bits long in the linear mode. The first 13 bits comprise the audio data sample, and the last three bits form the volume control word in the receive direction (DIN) and are zero pad bits in the transmit direction (DOOUT). The sign bit is transmitted first.

#### receive operation

##### decoding

In the companded mode, the serial data word is received at DIN on the first eight clock cycles in fixed-data rate and on the last eight clock cycles in variable-data rate. In the linear mode, the serial data word is received at DIN on the first 13 clock cycles. D/A conversion is performed, and the corresponding analog sample is held on an internal sample-and-hold capacitor. This sample is transferred to the receive filter.

##### receive filter

The receive section of the filter provides pass-band flatness and stop-band rejection that approximates both the AT&T D3/D4 specification and CCITT recommendation G.712 when operated at the recommended frequencies. The filter contains the required compensation for the  $(\sin x)/x$  response of such decoders.

##### receive buffer


The receive buffer contains the volume control.

##### earphone amplifier

The earphone audio-output amplifier has a balanced output, as shown in Figure 6, to allow maximum flexibility in output configuration. The output amplifier is designed to directly drive a piezo earphone in the differential configuration without any additional external components. The output can also be used to drive a single-ended load with the output signal voltage centered around  $V_{CC}/2$ .

The receive-channel output level can be adjusted between specified limits by connecting an external resistor network to EARGS.

## PRINCIPLES OF OPERATION

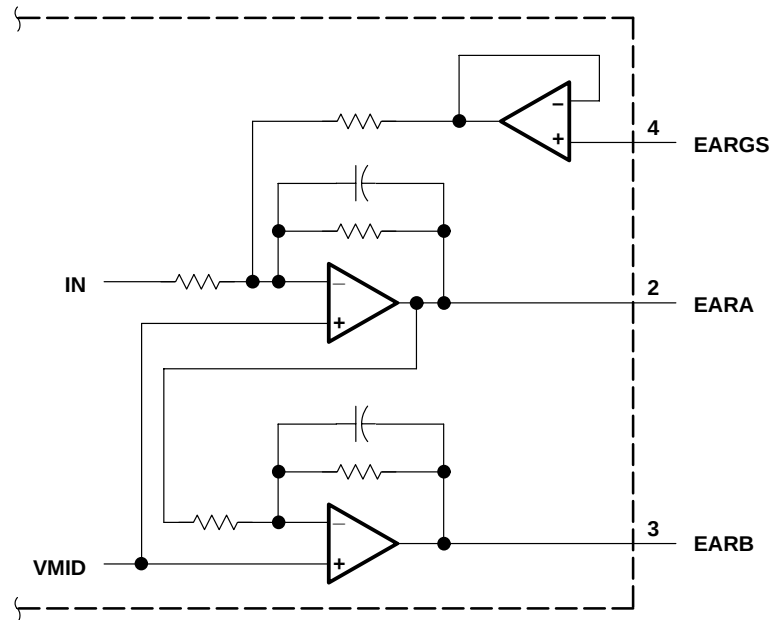

NOTE A: Terminal numbers shown are for the DW and N packages.

**Figure 6. Earphone Audio-Output Amplifier Configuration and Internal Gain-Setting Network**

### receive data format

In the companded mode, eight bits of data are received. The sign bit is the first bit received (see Table 2).

In the linear mode, 16 bits of data are received. The first 13 bits are the D/A code, and the remaining three bits form the volume control word (see Table 2). The volume control function is actually an attenuation control in which the first bit received is the most significant. The maximum volume occurs when all three volume control bits are zero. Eight levels of attenuation are selectable in 3-dB steps, giving a maximum attenuation of 21 dB when all bits are 1s. The volume control bits are not latched into the VBAP and must be present in each received data word.

### Table 2. Receive-Data Bit Definitions

| BIT NO. | COMPANDED MODE | LINEAR MODE |
|---------|----------------|-------------|
| 0       | CD7            | LD12        |
| 1       | CD6            | LD11        |
| 2       | CD5            | LD10        |
| 3       | CD4            | LD9         |
| 4       | CD3            | LD8         |
| 5       | CD2            | LD7         |
| 6       | CD1            | LD6         |
| 7       | CD0            | LD5         |
| 8       | –              | LD4         |
| 9       | –              | LD3         |
| A       | –              | LD2         |
| B       | –              | LD1         |
| C       | –              | LD0         |
| D       | –              | V2          |
| E       | –              | V1          |
| F       | –              | V0          |

**Companded Mode:**

MSB (sign bit)

CD7 CD6 CD5 CD4 CD3 CD2 CD1 CD0

LSB

Companded Data

**Linear Mode:**

The diagram shows a sequence of bits over time. The first 13 bits are LD12 (MSB) through LD0 (LSB), collectively labeled as 'Linear Data'. These are followed by three bits labeled V2, V1, and V0, collectively labeled as 'Volume Control'. A 'Time' axis with an arrow pointing right is at the bottom.

V2, V1, V0 = Volume (attenuation control) 000 = maximum volume, 3 dBm0  
111 = minimum volume, -18 dBm0

## APPLICATION INFORMATION

### output gain set design considerations (see Figure 7)

EARA and EARB are low-impedance complementary outputs. The voltages at the nodes are:

$V_{O+}$  at EARA

$V_{O-}$  at EARB

$V_{OD} = V_{O+} - V_{O-}$  (total differential response)

R1 and R2 are a gain-setting resistor network with the center tap connected to EARGS.


A value greater than 10 kΩ and less than 100 kΩ for R1 + R2 is recommended because of the following:

The parallel combination R1 + R2 and  $R_L$  sets the total loading. The total capacitance at EARGS and the parallel combination of R1 and R2 define a time constant that has to be minimized to avoid inaccuracies.

$V_A$  represents the maximum available digital mW output response ( $V_A = 1.001$  Vrms).

$$V_{OD} = A \times V_A$$

$$\text{where } A = \frac{1 + (R1/R2)}{4 + (R1/R2)}$$

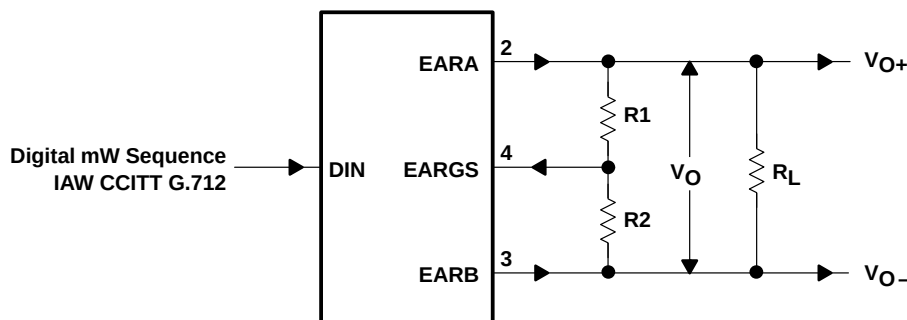

NOTE A: Terminal numbers shown are for the DW and N packages.

Figure 7. Gain-Setting Configuration

### higher clock frequencies and sample rates

The VBAP is designed to work with sample rates up to 16 kHz where the frequency of the frame sync determines the sampling frequency. However, there is a fundamental requirement to maintain the ratio of the master clock frequency,  $f_{CLK}$ , to the frame sync frequency,  $f_{FSR}/f_{FSX}$ . This ratio for the VBAP is 2.048 MHz/8 kHz, or 256 master clocks per frame sync. For example, to operate the VBAP at a sampling rate of  $f_{FSR}$  and  $f_{FSX}$  equal to 16 kHz,  $f_{CLK}$  must be 256 times 16 kHz, or 4.096 MHz. If the VBAP is operated above an 8-kHz sample rate, however, it is expected that the performance becomes somewhat degraded. Exact parametric specifications for rates up to 16-kHz sample rate are not specified at this time.

# TLV320AC36, TLV320AC37 3-V VOICE-BAND AUDIO PROCESSORS (VBAP™)


SLWS006B – NOVEMBER 1994 – REVISED OCTOBER 1997

## MECHANICAL DATA

DW (R-PDSO-G\*\*)

PLASTIC SMALL-OUTLINE PACKAGE

16 PIN SHOWN

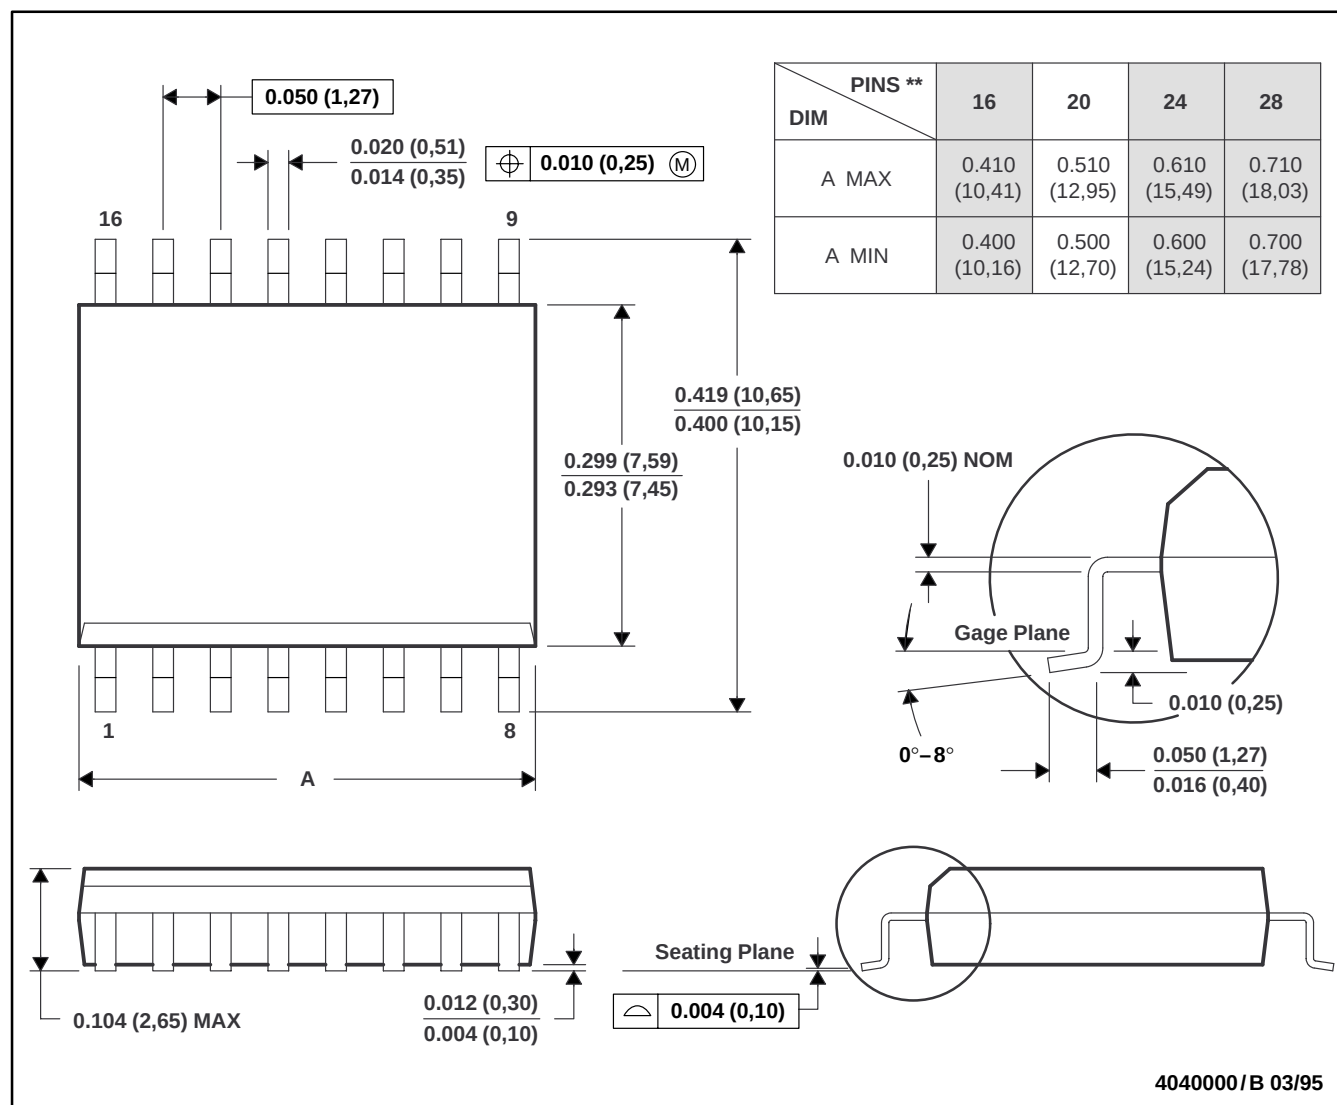

- NOTES: A. All linear dimensions are in inches (millimeters).  
 B. This drawing is subject to change without notice.  
 C. Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15).  
 D. Falls within JEDEC MS-013

# TLV320AC36, TLV320AC37 3-V VOICE-BAND AUDIO PROCESSORS (VBAP™)


SLWS006B – NOVEMBER 1994 – REVISED OCTOBER 1997

## MECHANICAL DATA

N (R-PDIP-T\*\*)

PLASTIC DUAL-IN-LINE PACKAGE

16 PIN SHOWN

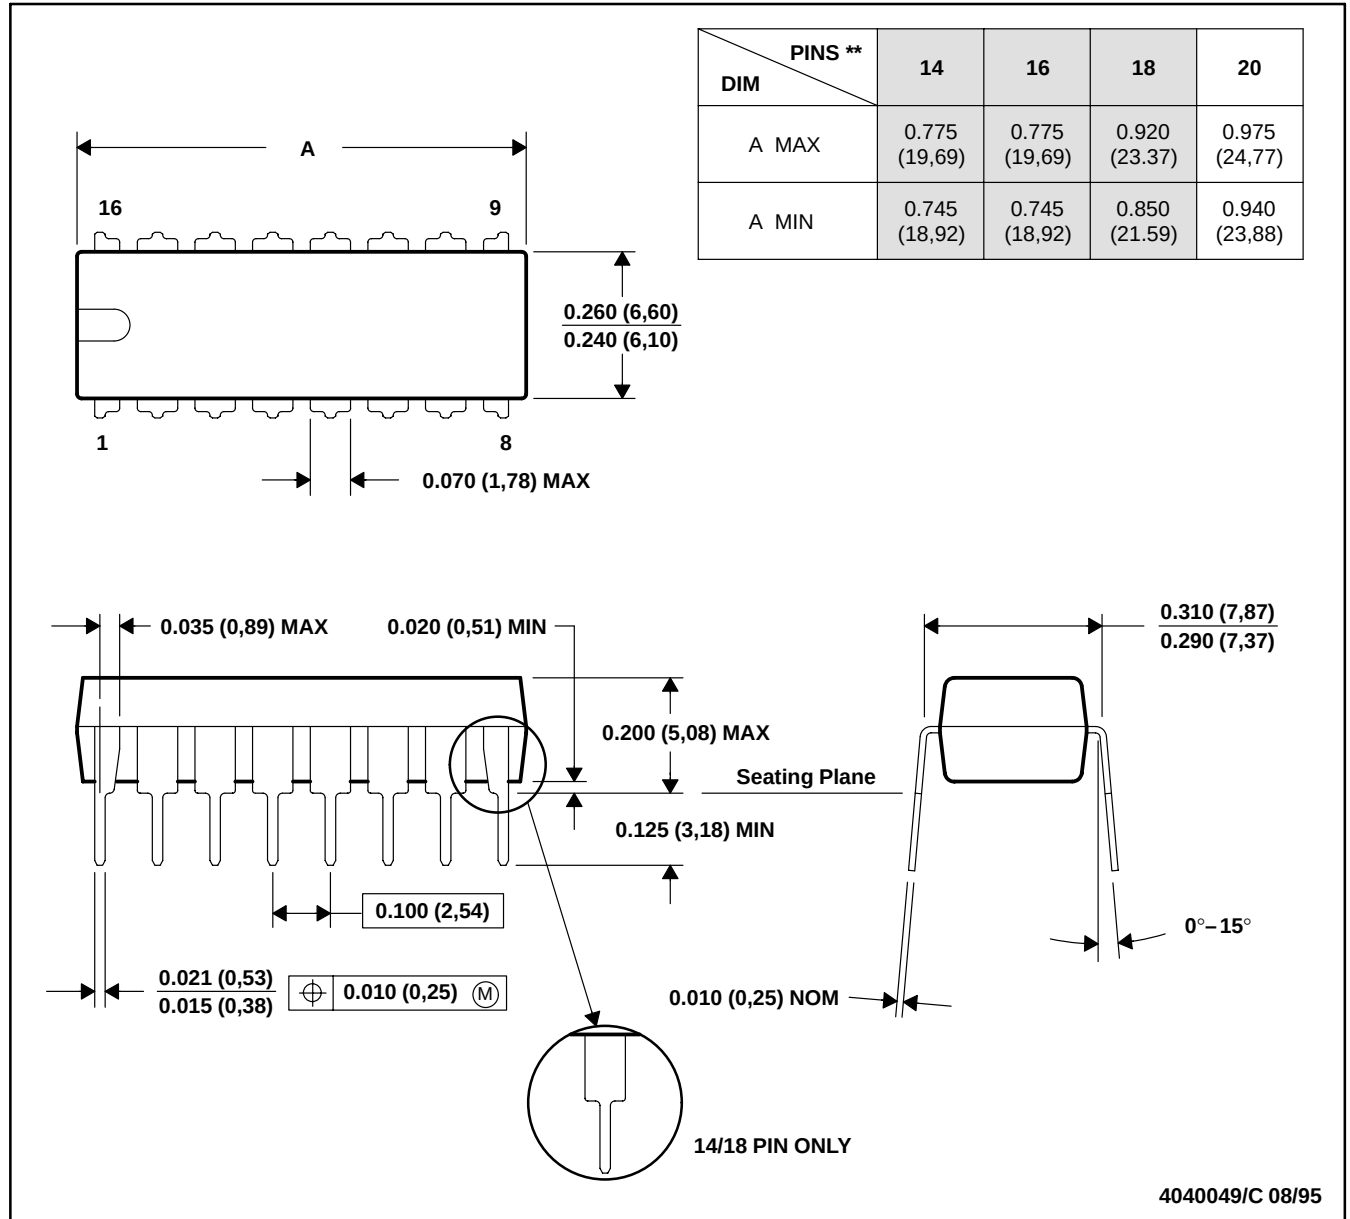

- NOTES: A. All linear dimensions are in inches (millimeters).  
 B. This drawing is subject to change without notice.  
 C. Falls within JEDEC MS-001 (20 pin package is shorter than MS-001.)


# TLV320AC36, TLV320AC37 3-V VOICE-BAND AUDIO PROCESSORS (VBAP™)

SLWS006B – NOVEMBER 1994 – REVISED OCTOBER 1997

## MECHANICAL DATA

PT (S-PQFP-G48)

PLASTIC QUAD FLATPACK

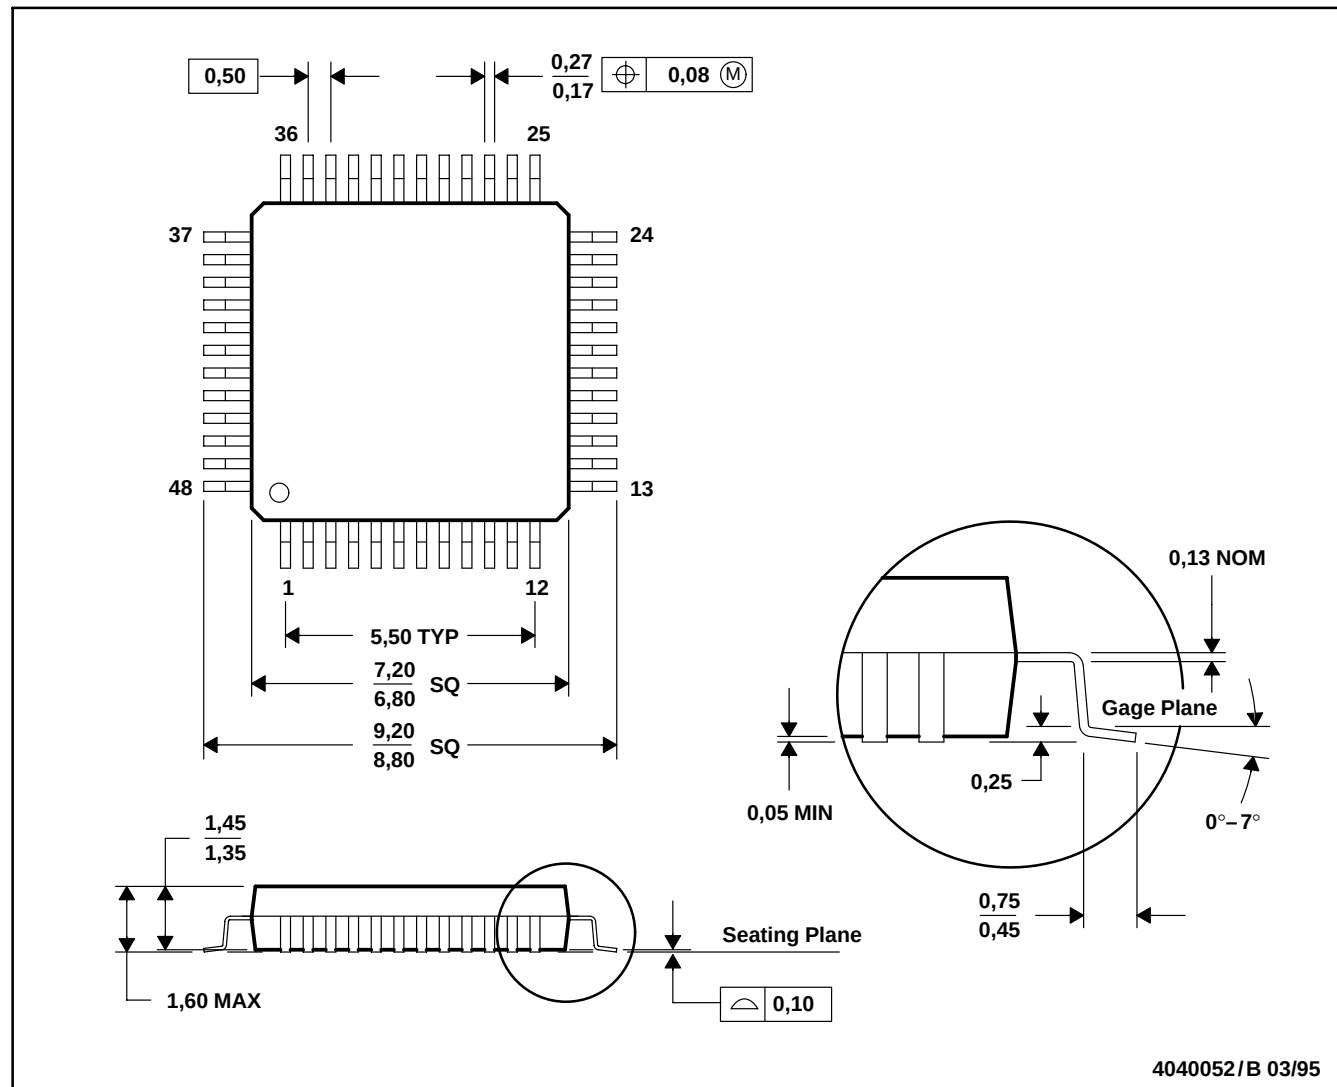

- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Falls within JEDEC MO-136
  - D. This may also be a thermally-enhanced plastic package with leads connected to the die pads.

## **IMPORTANT NOTICE**

Texas Instruments (TI) reserves the right to make changes to its products or to discontinue any semiconductor product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

TI warrants performance of its semiconductor products and related software to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Certain applications using semiconductor products may involve potential risks of death, personal injury, or severe property or environmental damage ("Critical Applications").

TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, INTENDED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT APPLICATIONS, DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS.

Inclusion of TI products in such applications is understood to be fully at the risk of the customer. Use of TI products in such applications requires the written approval of an appropriate TI officer. Questions concerning potential risk applications should be directed to TI through a local SC sales office.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards should be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or services described herein. Nor does TI warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used.