



SAW Components

Data Sheet B9300

Data Sheet

A large, stylized, 3D-rendered graphic of the word "EPCOS" in a light gray, sans-serif font. The letters are tilted and appear to be floating or emerging from a dark, textured background that resembles a globe or a complex circuit board. The overall effect is a sense of depth and modernity.



SAW Components

B9300

Low-Loss Dual Band Filter for Mobile Communication

1842,5 & 1960,0 MHz

Data Sheet



Chip Sized Saw Package QCS10H

Features



- Low-loss 2-in-1 RF filter for mobile telephone GSM1800 and GSM1900 systems, receive path
- Usable passband:
Filter 1 (GSM 1900): 60 MHz
Filter 2 (GSM 1800): 75 MHz
- Unbalanced to balanced operation for both filters
- Impedance transformation from 50 Ω to 150 Ω for both filters
- Suitable for GPRS class 1 to 12
- Package for **Surface Mounted Technology (SMT)**
- Pb-free

Terminals


- Ni, gold-plated

Pin configuration

1	Input [Filter 1]
4	Input [Filter 2]
6,7	Output, balanced [Filter 2]
8,9	Output, balanced [Filter 1]
2,3,5,10	Case-ground



Dimensions in mm, approx. weight t.b.d.



Type	Ordering code	Marking and Package according to	Packing according to
B9300	B39202-B9300-G110	C61157-A7-A141	F61074-V8152-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 40 /+ 85	$^{\circ}\text{C}$	machine model, 10 pulses ¹⁾
Storage temperature range	T_{stg}	- 40 /+ 85	$^{\circ}\text{C}$	
DC voltage	V_{DC}	5	V	
ESD voltage	V_{ESD}	50	V	
Input power at GSM850, GSM900, GSM1800, GSM1900 TX bands	P_{IN}	15	dBm	effective power in the on-state, duty cycle 4:8

1) acc. to JESD22-A115A (Machine Model), 10 negative & 10 positive pulses



SAW Components	B9300
Low-Loss Dual Band Filter for Mobile Communication	1842,5 & 1960,0 MHz

Data Sheet



Characteristics of Filter 1 (GSM 1900)

Operating temperature range:	$T = 25\text{ }^{\circ}\text{C}$
Terminating source impedance:	$Z_S = 50\text{ }\Omega$
Terminating load impedance:	$Z_L = 150\text{ }\Omega \parallel 18\text{nH (balanced)}$

		min.	typ.	max.	
Center frequency	f_c	—	1960,0	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$				
1930,0 ...1990,0MHz		—	1,6	2,1	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
1930,0 ...1990,0MHz		—	0,5	1,0	dB
Input VSWR					
1930,0 ...1990,0MHz		—	1,7	2,0	
Output VSWR					
1930,0 ...1990,0MHz		—	1,7	2,0	
Output phase balance ($\Phi(S_{31}) - \Phi(S_{21}) + 180^{\circ}$)					
1930,0 ...1990,0MHz		-10	-2/+4	+10	degree
Output amplitude balance (S_{31}/S_{21})					
1930,0 ...1990,0MHz		-1,2	-0,6/+0,6	+1,2	dB
Attenuation	$\alpha_{\min}$				
10,0 ...1510,0MHz		40,0	43	—	dB
1510,0 ...1830,0MHz		30,0	36	—	dB
1830,0 ...1850,0MHz		26,0	32	—	dB
1850,0 ...1890,0MHz		23,0	28	—	dB
1890,0 ...1910,0MHz		13,0	18	—	dB
2010,0 ...2070,0MHz		13,0	15	—	dB
2070,0 ...2400,0MHz		22,0	26	—	dB
2400,0 ...6000,0MHz		30,0	34	—	dB



SAW Components

B9300

Low-Loss Dual Band Filter for Mobile Communication

1842,5 & 1960,0 MHz

Data Sheet



Characteristics of Filter 1 (GSM 1900)

Operating temperature range: $T = -20$ to $+75\text{ }^{\circ}\text{C}$
Terminating source impedance: $Z_S = 50\text{ }\Omega$
Terminating load impedance: $Z_L = 150\text{ }\Omega \parallel 18\text{nH}$ (balanced)

		min.	typ.	max.	
Center frequency	f_c	—	1960,0	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$	—	1,7	2,3	dB
1930,0 ...1990,0MHz					
Amplitude ripple (p-p)	$\Delta\alpha$	—	0,6	1,3	dB
1930,0 ...1990,0MHz					
Input VSWR		—	1,7	2,0	
1930,0 ...1990,0MHz					
Output VSWR		—	1,7	2,0	
1930,0 ...1990,0MHz					
Output phase balance ($\Phi(S_{31}) - \Phi(S_{21}) + 180^{\circ}$)		-10	-3/+5	+10	degree
1930,0 ...1990,0MHz					
Output amplitude balance (S_{31}/S_{21})		-1,2	-0,7/+0,7	+1,2	dB
1930,0 ...1990,0MHz					
Attenuation	$\alpha_{\min}$				
10,0 ...1510,0MHz		40,0	43	—	dB
1510,0 ...1830,0MHz		30,0	35	—	dB
1830,0 ...1850,0MHz		26,0	32	—	dB
1850,0 ...1890,0MHz		23,0	27	—	dB
1890,0 ...1910,0MHz		12,0	16	—	dB
2010,0 ...2070,0MHz		12,0	15	—	dB
2070,0 ...2400,0MHz		21,0	24	—	dB
2400,0 ...6000,0MHz		30,0	34	—	dB



SAW Components

B9300



Low-Loss Dual Band Filter for Mobile Communication

1842,5 & 1960,0 MHz

Data Sheet



Transfer Function of Filter 1 (GSM 1900)

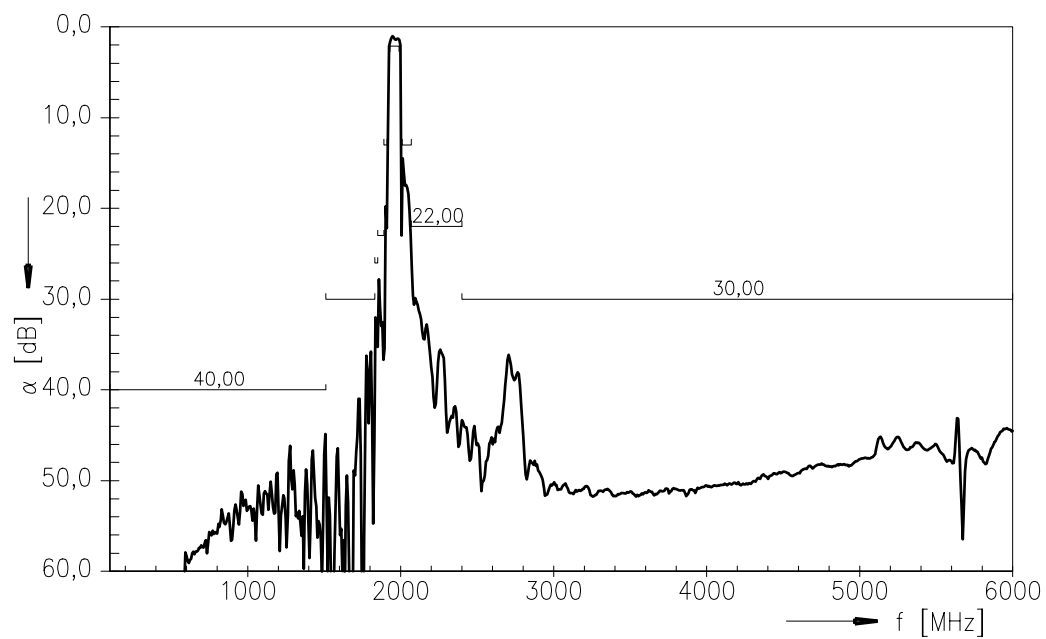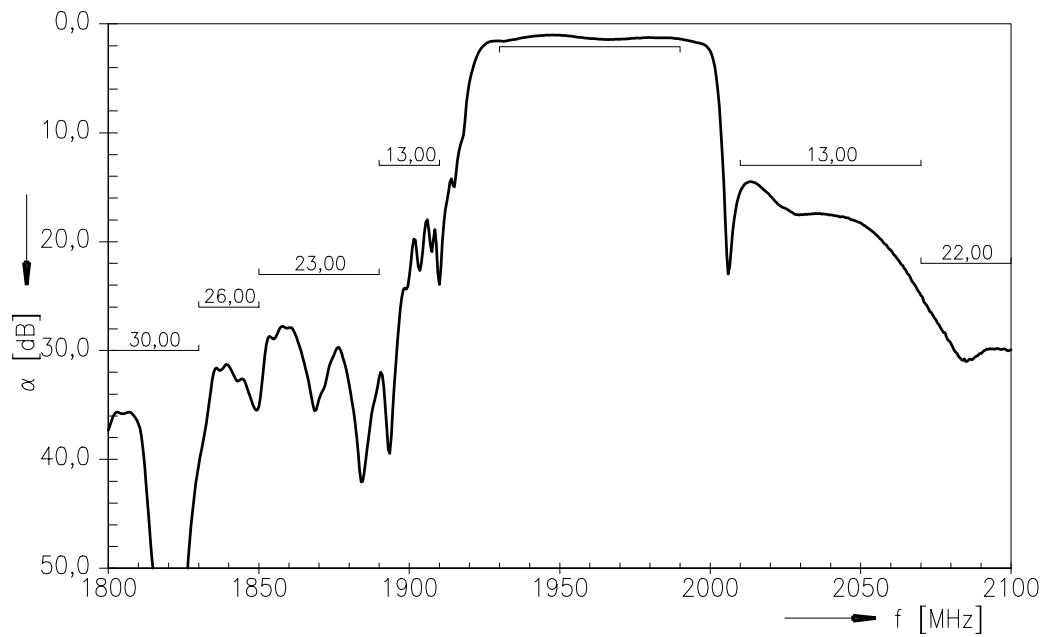



SAW Components	B9300
Low-Loss Dual Band Filter for Mobile Communication	1842,5 & 1960,0 MHz
Data Sheet	

Characteristics of Filter 2 (GSM1800)

Operating temperature range: $T = 25\text{ }^{\circ}\text{C}$
 Terminating source impedance: $Z_S = 50\text{ }\Omega$
 Terminating load impedance: $Z_L = 150\text{ }\Omega \parallel 15\text{ nH}$ (balanced)

		min.	typ.	max.	
Center frequency	f_c	—	1842,5	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$				
1805,0 ... 1880,0MHz		—	1,6	2,1	dB
Amplitude ripple	$\Delta\alpha$				
1805,0 ... 1880,0MHz		—	0,5	1,0	dB
Input VSWR					
1805,0 ... 1880,0MHz		—	1,8	2,2	
Output VSWR					
1805,0 ... 1880,0MHz		—	1,7	2,2	
Output phase balance ($\Phi(S_{31}) - \Phi(S_{21}) + 180^{\circ}$)					
1805,0 ... 1880,0MHz		- 10	-3/+3	+10	degree
Output amplitude balance (S_{31}/S_{21})					
1805,0 ... 1880,0MHz		-1,0	-0,6/+0,4	+1,0	dB
Attenuation	$\alpha_{\min}$				
10,0 ... 902,0MHz		30,0	52	—	dB
902,0 ... 940,0MHz		45,0	52	—	dB
940,0 ... 1705,0MHz		28,0	42	—	dB
1705,0 ... 1785,0MHz		13,0	18	—	dB
1920,0 ... 1980,0MHz		17,0	23	—	dB
1980,0 ... 2030,0MHz		24,0	28	—	dB
2030,0 ... 2400,0MHz		28,0	34	—	dB
2400,0 ... 6000,0MHz		28,0	32	—	dB



SAW Components

B9300

Low-Loss Dual Band Filter for Mobile Communication

1842,5 & 1960,0 MHz

Data Sheet



Characteristics of Filter 2 (GSM1800)

Operating temperature range: $T = -20$ to $+75$ °C
Terminating source impedance: $Z_S = 50 \Omega$
Terminating load impedance: $Z_L = 150 \Omega \parallel 15nH$ (balanced)

		min.	typ.	max.	
Center frequency	f_c	—	1842,5	—	MHz
Maximum insertion attenuation	α_{max}				
1805,0 ... 1880,0MHz		—	1,8	2,3	dB
Amplitude ripple	$\Delta\alpha$				
1805,0 ... 1880,0MHz		—	0,7	1,3	dB
Input VSWR					
1805,0 ... 1880,0MHz		—	1,8	2,2	
Output VSWR					
1805,0 ... 1880,0MHz		—	1,7	2,2	
Output phase balance ($\Phi(S_{31}) - \Phi(S_{21}) + 180^\circ$)					
1805,0 ... 1880,0MHz		- 10	-3/+3	+10	degree
Output amplitude balance (S_{31}/S_{21})					
1805,0 ... 1880,0MHz		-1,0	-0,7/+0,5	+1,0	dB
Attenuation	α_{min}				
10,0 ... 902,0MHz		30,0	52	—	dB
902,0 ... 940,0MHz		45,0	52	—	dB
940,0 ... 1705,0MHz		28,0	42	—	dB
1705,0 ... 1785,0MHz		12,0	15	—	dB
1920,0 ... 1980,0MHz		17,0	23	—	dB
1980,0 ... 2030,0MHz		24,0	28	—	dB
2030,0 ... 2400,0MHz		28,0	34	—	dB
2400,0 ... 6000,0MHz		28,0	32	—	dB



SAW Components

B9300



Low-Loss Dual Band Filter for Mobile Communication

1842,5 & 1960,0 MHz

Data Sheet



Transfer Function of Filter 2 (GSM 1800)

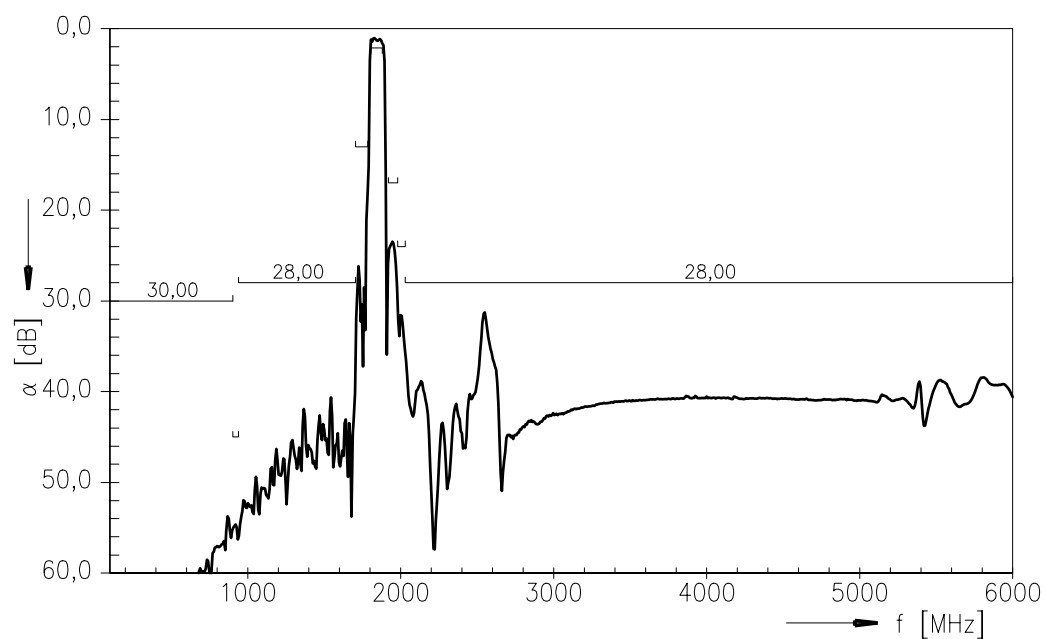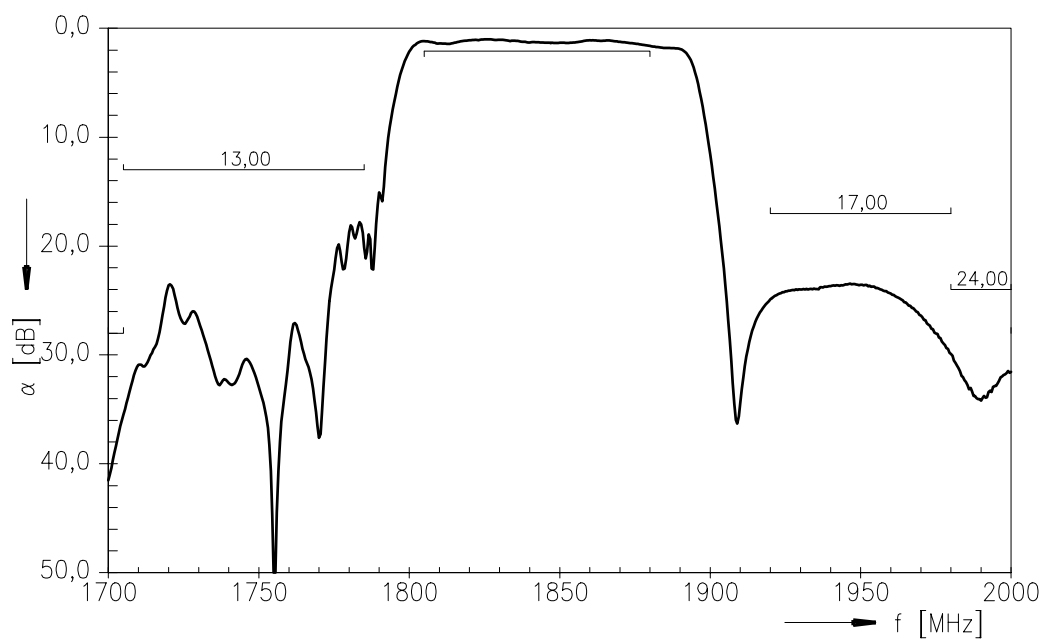



SAW Components

B9300

Low-Loss Dual Band Filter for Mobile Communication

1842,5 & 1960,0 MHz

Data Sheet



Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW MC WT

P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2005. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.