CMOS 8-Bit Microcontroller TMP88PS34NG/FG

The TMP88PS34 is the high-speed and high performance 8-bit signal chip microcomputers which built in a program storage area (64 Kbytes), an OSD font storage area (42 Kbytes) and the One-Time PROM of vector table storage area (256 bytes). The TMP88PS34 is pin compatible with the TMP88CS34. The operation possible with the TMP88PS34 can be performed by writing programs to PROM. The TMP88PS34 can write and verify in the same way as the TC571000D an EPROM programmer.


Product No.	OTP	RAM	Package	Adaptor Socket
TMP88PS34NG	64 Kbytes (256 bytes)	1.5 Kbytes	P-SDIP42-600-1.78	BM11174A
TMP88PS34FG	42 Kbytes	1.5 Kbytes	P-QFP44-1414-0.80D	BM11175A


RESTRICTIONS ON PRODUCT USE

060116EBP

- The information contained herein is subject to change without notice. 021023_D
- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor
 devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical
 stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety
 in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such
 TOSHIBA products could cause loss of human life, bodily injury or damage to property.
 - In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc. 021023_A
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunctionor failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk. 021023_B
- The products described in this document shall not be used or embedded to any downstream products of which
 manufacture, use and/or sale are prohibited under any applicable laws and regulations. 060106_Q
- The information contained herein is presented only as a guide for the applications of our products. No responsibility
 is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may result from
 its use. No license is granted by implication or otherwise under any patent or patent rights of TOSHIBA or others.
- The products described in this document are subject to the foreign exchange and foreign trade laws. 021023_E
- For a discussion of how the reliability of microcontrollers can be predicted, please refer to Section 1.3 of the chapter entitled Quality and Reliability Assurance/Handling Precautions. 030619_s

Pin Assignments

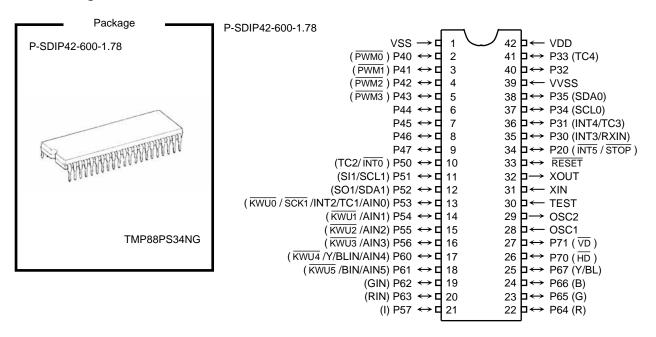

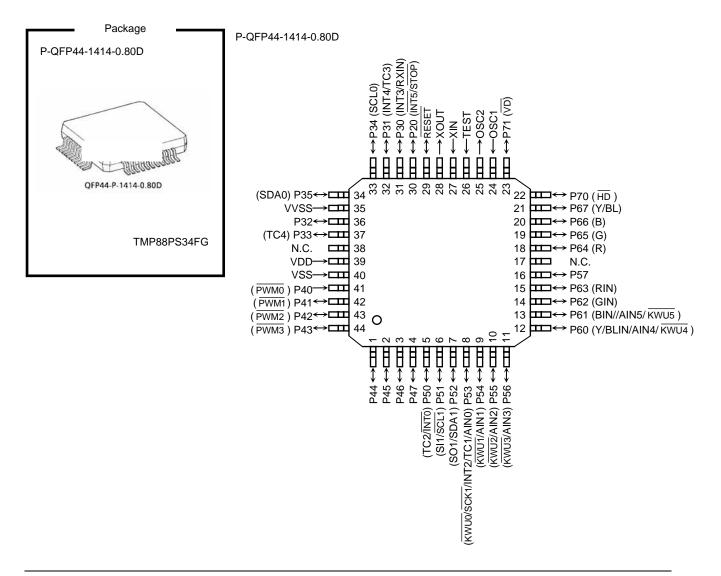

88PS34-2 2006-07-06

Operational Description

The configuration and function of the TMP88PS34 are the same as those of the TMP88CS34, except in that a one-time PROM is used instead of an on-chip mask ROM.

1. Operation Mode

The TMP88PS34 has two mode: MCU and PROM.

1.1 MCU Mode

The MCU mode is activated by fixing the TEST/VPP pin at low level. In the MCU mode, operation is the same as with the TMP88CS34.

1.1.1 Program Memory

The TMP88PS34 has a 64 Kbytes (addresses 04000H to 13EFFH in the MCU mode, addresses 10000H to 1FEFFH in the PROM mode) of program storage area, 42 Kbyte (addresses 20000H to 2A7FFH in the MCU mode, addresses 05800H to 0FFFFH in the PROM mode) and 256 byte (addresses FFF00H to FFFFFH in the MCU mode, addresses 1FF00H to 1FFFFH in the PROM mode) one-time PROM of vector table storage area.

88PS34-3 2006-07-06

1.1.2 Data Memory

The TMP88PS34 has an on-chip 1.5-Kbyte data memory (static RAM).

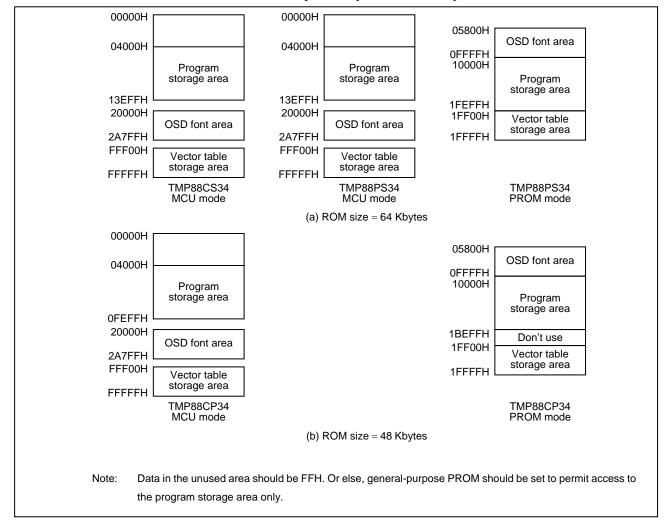


Figure 1.1.1 Program Storage Area

88PS34-4 2006-07-06

1.1.3 Input/Output Circuit for Pins

(1) Control pins

The TMP88PS34 is identical to the TMP88CS34 and TMP88CP34 except that it has a TEST pin without a pull-down resistor.




Figure 1.1.2 TEST pin

(2) I/O ports

The input/output circuit for the TMP88PS34 I/O port is the same as that for the TMP88CS34 and TMP88CP34.

1.2 PROM Mode

The PROM mode is used to write and verify programs with a general-purpose PROM programmer. The high-speed programming mode can be used for program operation.

The TMP88PS34 is not supported an electric signature mode, so the ROM type must be set to TC571000D.

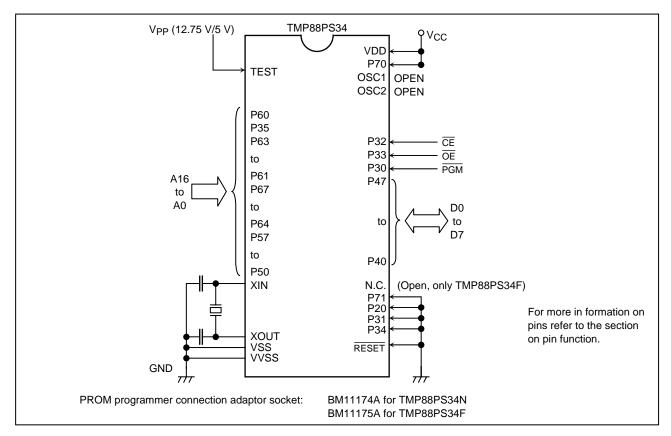


Figure 1.2.1 Setting for PROM Mode

Pin Name (EPROM mode)	Input/Output	Function	Pin name (MCU mode)		
A16			P60		
A15 to A8	Input	PROM address inputs	P35, P63 to P61, P67 to P64		
A7 to A0			P57 to P50		
D7 to D0	I/O	PROM data inputs/outputs	P47 to p40		
CE		Chip enable signal input (active low)	P32		
ŌĒ	Input	Output enable signal input (active low)	P33		
PGM		Program mode signal input	P30		
VPP		+12.75 V/5 V (Program supply voltage)	TEST		
VCC	Power supply	+6.25 V/5 V	VDD, OVDD		
GND		0 V	VSS, VVSS, OVSS		
P70		PROM mode setting pin. Be fixed at high level.			
P71, P20, P31, P34	Input	PROM mode setting pin. Be fixed at low level.			
RESET		PROM mode setting pin. Be fixed at low level.			
XIN	Input	Connect an 8 MHz oscillator to stabilize the state.			
XOUT	Output	- Connect an o winz oscillator to stabilize the state.			
N.C.	Open	Open			
OSC1, OSC2	I/O	Open			

PROM programmer connection adaptor socket:

BM11174A for TMP88PS34NG BM11175A for TMP88PS34FG

1.3 Programming Flowchart (High-speed Programming Mode)

The high-speed programming mode is achieved by applying the program voltage (+12.75 V) to the VPP pin when Vcc=6.25 V. After the address and input data are stable, the data is programmed by applying a single 0.1ms program pulse to the \overline{PGM} input. The programmed data is verified. If incorrect, another 0.1ms program pulse is applied. This process should be repeated (up to 25 times) until the program operates correctly. After that, change the address and input data, and program as before. When programming has been completed, the data in all addresses should be verified with Vcc=Vpp=5 V.

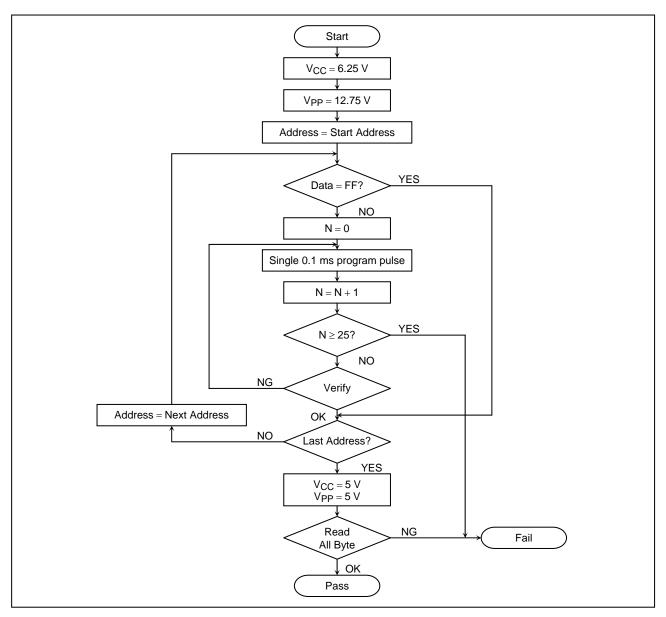


Figure 1.3.1 Flow Chart of High-speed Programming

1.4 Writing Method for General-purpose PROM Program

(1) Adapters

BM11174A: TMP88PS34NG BM11175A: TMP88PS34FG

(2) PROM programmer specifying

1. PROM type is specified to TC571000D. (Note 1)

Writing voltage: 12.75 V (high-speed program mode)

2. Data transfer (copy) (Note 1)

In the TMP88PS34, EPROM is within the addresses 10000H to 1FEFFH (Program storage area) and 0A000H to 0FFFFH (OSD font area) and 1FF00H to 1FFFFH (Vector table storage area). Data is required to be transferred (copied) to the addresses where it is possible to write. The program area in MCU mode and PROM mode is referred to "Program memory area" in Figure 1.1.1.

3. Writing address is specified. (Note 1)

Start address: 05800H End address: 1FFFFH

(3) Writing

Writing/Verifying is required to be executed in accordance with PROM programmer operating procedure.

- Note 1: The specifying method is referred to the PROM programmer description. Either write the data FF_H to the unused area or set the PROM programmer to access only the program storage area.
- Note 2: When MCU is set to an adapter or the adapter is set to PROM programmer, a position of pin 1 must be adjusted. If the setting is reversed, MCU, the adapter and PROM program is damaged.

88PS34-8 2006-07-06

Input/Output Circuit

(1) Control pins

The input/output circuitries of the TMP88PS34 control pins are shown below.

Control Pin	I/O	Input/Output Circuitry	Remarks
XIN XOUT	I/O	Osc.enable fc VDD VDD Rf RO XOUT 7777	Resonator connection pins (high-frequency) $R_f = 1.2 \ \text{M}\Omega \ (\text{typ.})$ $R_O = 0.5 \ \text{k}\Omega \ (\text{typ.})$
RESET	I/O	Address-trap-reset Watchdog-timer-reset System-clock-reset	Sink open drain output Hysteresis input Pull-up resistor $R_{IN} = 220 \ M\Omega \ (typ.)$ $R = 1 \ k\Omega \ (typ.)$
STOP / INT5 (P20)	Input	P20/STOP / INT5	Hysteresis input $R=1\ k\Omega\ (typ.)$
TEST	Input		R = 1 kΩ (typ.)
OSC1 OSC2	I/O	Osc.enable fc VDD VDD Rf Ro VDD OSC1 OSC2 TTT	$R_f = 1.2 \text{ M}\Omega \text{ (typ.)}$ $R_O = 0.5 \text{ k}\Omega \text{ (typ.)}$

(2) Input/Output ports

Port	I/O	Input/Output Circuitry	Remarks
P20	I/O	Initial "High-Z"	Sink open drain output Hysteresis input $R=1\ k\Omega\ (typ.)$
P30 to P33 P50, P57 P70, P71	I/O	Initial "High-Z" Disable	Tri-state I/O Hysteresis input $R=1\ k\Omega\ (typ.)$
P34, P35, P51, P52	I/O	Open drain output enable Disable	Tri-state I/O or Open drain output programmable Hysteresis input $R=1\ k\Omega\ (typ.)$
P40 to P47	1/0	Initial "High-Z" Disable	Tri-state I/O $R=1~k\Omega~(typ.)$
P53 to P56	I/O	Disable Note that the second s	Tri-state I/O Hysteresis input Key-on wake-up input $(V_{IL4}=0.65\times V_{DD})$ $R=1~k\Omega~(typ.)$ $R_A=5~k\Omega~(typ.)$ $C_A=22~pF~(typ.)$

Port	I/O	Input/Output Circuitry	Remarks
P60	I/O	Initial "High-Z" Disable CA RA Key-on Wake-up	Sink open drain I/O High-current output $I_{OL}=20$ mA (typ.) $R=1 \text{ k}\Omega \text{ (typ.)}$ $R_A=5 \text{ k}\Omega \text{ (typ.)}$ $C_A=22 \text{ pF (typ.)}$ Key-on wake-up input $(V_{IL4}=0.65 \times V_{DD})$
P61	I/O	Disable Disable RA Key-on Wake-up	Tri-state I/O $R=1~k\Omega~(typ.)$ $R_A=5~k\Omega~(typ.)$ $C_A=22~pF~(typ.)$ Key-on wake-up input $(V_{IL4}=0.65\times V_{DD})$
P62 to P67	I/O	Initial "High-Z" Disable	Tri-state I/O $R=1~k\Omega~(typ.)$

Electrical Characteristics

Output current (Total)

Storage temperature

Operating temperature

Power dissipation [Topr = 70°C]

Soldering temperature (time)

Absolute maximum rati	ngs	$(V_{SS} = 0 V)$		
Parameter	Symbol	Pins	Ratings	Unit
Supply voltage	V_{DD}	-	-0.3 to 6.5	
Programmable voltage	V _{PP}	TEST/V _{PP} pin	-0.3 to 13.0	
Input voltage	V_{IN}	_	-0.3 to V _{DD} + 0.3	
Output voltage	V _{OUT1}	_	-0.3 to V _{DD} + 0.3	
Output current (Per 1 pin)	I _{OUT1}	Ports P2, P3, P4, P5, P61 to P67, P7	3.2	
Output current (ret i pili)	I _{OUT2}	Ports P60	30	mA
				1117

Ports P60

Ports P2, P3, P4, P5, P61 to P67, P7

_

30

30

400

-55 to 125

-30 to 70

260 (10 s)

mW

°C

The absolute maximum ratings are rated values which must not be exceeded during operation, even for an instant. Any one of the ratings must not be exceeded. If any absolute maximum rating is exceeded, a device may break down or its performance may be degraded, causing it to catch fire or explode resulting in injury to the user. Thus, when designing products which include this device, ensure that no absolute maximum rating value will ever be exceeded.

$(V_{SS} = 0 \text{ V}, \text{ Topr} = -30 \text{ to } 70 ^{\circ}\text{C})$
(۱

 Σ Iout1

 Σ I_{OUT2}

PD

Tsld

Tstg

Topr

Parameter	Symbol	Pins	Conditions		Min	Max	Unit	
			fc = 16 MHz	fc = 16 MHz NORMAL mode				
Supply voltage	V_{DD}	=	fc = 16 MHz	IDLE	mode	4.5	5.5	
			-	STOF	o mode			
	V _{IH1}	Except hysteresis input	·			$V_{DD} \times 0.70$		
Input high voltage	V _{IH2}	Hysteresis input	V _{DD} = 4.5 to 5.5V		$V_{DD}\times 0.75$	V_{DD}	V	
	V _{IH3}	Key-on Wake-up input			$V_{DD}\times 0.90$			
	V_{IL1}	Except hysteresis input	V _{DD} = 4.5 to 5.5V			$V_{DD} \times 0.30$		
Input low voltage	V_{IL2}	Hysteresis input	VDD = 4.5 to 5.5 v			0	$V_{DD} \times 0.25$	
	V_{IL3}	Key-on Wake-up input	V _{DD} = 4.5 to 5.5V				$V_{DD} \times 0.65$	
	fc	XIN, XOUT	$V_{DD} = 4.5 \text{ to } 5$	5.5V		8.0	16.0	
Clock frequency	food	f laternal alask	\/	fc = 8 MHz	8.0	12.0	MHz	
	IOSC	fosc Internal clock		$V_{DD} = 4.5 \text{ to } 5.5V$ fc = 1		16.0	24.0	

- Note 1: The recommended operating conditions for a device are operating conditions under which it can be guaranteed that the device will operate as specified. If the device is used under operating conditions other than the recommended operating conditions (supply voltage, operating temperature range, specified AC/DC values etc.), malfunction may occur. Thus, when designing products which include this device, ensure that the recommended operating conditions for the device are always adhered to.
- Note 2: Clock frequency fc: Supply voltage range is specified in NORMAL mode and IDLE mode.
- Note 3: Smaller value is alternatively specified as the maximum value.

DC Char	acteristics	(V _{SS} =	= 0 V, Topr = -30 to 70 °C)					
Parameter	Symbol	Pins	Conditions	Min	Тур.	Max	Unit	
Hysteresis voltage	V_{HS}	Hysteresis input		=	0.9	-	V	
	I _{IN1}	TEST	V _{DD} = 5.5 V, V _{IN} = 5.5 V/0 V	-	_	±2		
lanut aurrant	I _{IN2}	Open drain ports	V _{DD} = 5.5 V, V _{IN} = 5.5 V/0 V	_	-	±2		
Input current	I _{IN3}	Tri-state ports	V _{DD} = 5.5 V, V _{IN} = 5.5 V/0 V	_	-	±2	μΑ	
	I _{IN4}	RESET, STOP	V _{DD} = 5.5 V, V _{IN} = 5.5 V/0 V	-	-	±2		
Input resistance	R _{IN2}	RESET	V _{DD} = 5.5 V, V _{IN} = 0 V	100	220	450	kΩ	
Output leakage	I _{LO1}	Sink open drain ports	V _{DD} = 5.5 V, V _{OUT} = 5.5 V	_	-	2		
current	I _{LO2}	Tri-state ports	V _{DD} = 5.5 V, V _{OUT} = 5.5 V/0 V	-	-	±2	μА	
Output high voltage	V _{OH2}	Tri-state ports	$V_{DD} = 4.5 \text{ V}, I_{OH} = -0.7 \text{ mA}$	4.1	-	_		
Output low voltage	V _{OL}	Except XOUT and ports P60	$V_{DD} = 4.5 \text{ V}, I_{OL} = 1.6 \text{ mA}$	-	_	0.4	V	
Output low current	I _{OL3}	Port P60	V _{DD} = 4.5 V, V _{OL} = 1.0 V	-	20	_		
Supply current in NORMAL mode			V _{DD} = 5.5 V fc = 16 MHz (Note3)	-	25	30	mA	
Supply current in IDLE mode	I _{DD}	_	fc = 16 MHz (Note3) $V_{IN} = 5.3 \text{ V}/0.2 \text{ V}$	-	20	25		
Supply current in STOP mode			V _{DD} = 5.5 V V _{IN} = 5.3 V/0.2 V	-	0.5	10	μА	

Note 1: Typical values show those at Topr = $25 \, ^{\circ}$ C, VDD = $5 \, \text{V}$.

Note 2: Input Current I_{IN3} ; The current through resistor is not included.

Note 3: Supply Current I_{DD} ; The current (Typ. 0.5 mA) through ladder resistors of ADC is included in NORMAL mode and IDLE mode.


AD Conversion Characteristics		$(V_{SS} = 0 \text{ V}, V_{DD} = 4.5 \text{ V} \text{ to } 5.5 \text{ V}, \text{Topr} = -30 \text{ to } 70 ^{\circ}\text{C})$				
Parameter	Symbol	Conditions	Min	Тур.	Max	Unit
Analog reference voltage	V _{AREF}	supplied from V _{DD} pin.	-	V_{DD}	-	
Analog reference voltage	V _{ASS}	supplied from V _{SS} pin.	=	0	=	V
Analog reference voltage range	ΔV_{AREF}	= V _{DD} - V _{SS}	=	V_{DD}	=	v
Analog input voltage	V_{AIN}		V _{SS}	-	V_{DD}	
Nonlinearity error			=	=	±1	
Zero point error		V _{DD} = 5.0 V	=	=	±2	LSB
Full scale error		VDD = 2.0 V	_	_	±2	LOB
Total error			_	_	±3	

Note: The total error means all error except quanting error.

AC characteristic	s	$(V_{SS} = 0 \text{ V}, V_{DD} = 4.5 \text{ V} \text{ to } 5.5 \text{ V}, \text{Topr} = -30 \text{ to } 70 ^{\circ}\text{C})$				
Parameter	Symbol	Conditions	Min	Тур.	Max	Unit
Machine cycle time	t _{cy}	in NORMAL mode	0.5	-	1.0	иS
Machine Cycle time		in IDLE mode	0.5			μο
High level clock pulse width	tWCH	For external clock operation	31.25			nc
Low level clock pulse width	twcL	(XIN input), fc = 16 MHz	31.25	_	_	ns

Recommended oscillating conditions

Parameter	Oscillator	Oscillation	Recommended Oscillator		Recommended Constant		
Farameter	Parameter Oscillator		Neconinended Oscillator		C ₁	C ₂	
High-frequency oscillation	Ceramic resonator	8 MHz	Murata	CSA 8.00MTZ	30 pF	30 pF	
		16 MHz	Murata	CSA 16.00MXZ040	5 pF	5 pF	



High-frequency Oscillation

- Note 1: To keep reliable operation, shield the device electrically with the metal plate on its package mold surface against the high electric field, for example, by CRT (Cathode Ray Tube).
- Note 2: The product numbers and specifications of the resonators by Murata Manufacturing Co., Ltd. are subject to change. For up-to-date information, please refer to the following URL;


88PS34-14

http://www.murata.co.jp/search/index.html

Recommended oscillating conditions

$$(V_{SS} = 0 \text{ V}, V_{DD} = 4.5 \text{ V} \text{ to } 5.5 \text{ V}, \text{Topr} = -30 \text{ to } 70 \text{ }^{\circ}\text{C})$$

Item	Resonator	Oscillation	Recommended parameter value			
		Frequency	L (μH)	C ₁ (pF)	C ₂ (pF)	
Oscillation for OSD	LC resonator	8 MHz	33	5 to 30	10	
		12 MHz	15	5 to 30	10	
		16 MHz	10	5 to 30	10	
		20 MHz	6.8	5 to 25	10	
		24 MHz	4.7	5 to 25	10	



Oscillation for OSD

The frequency generated in LC oscillation can be obtained using the following equations.

$$f = \frac{1}{2\pi\sqrt{LC}}, C = \frac{C_1 ^{\raisebox{0.1ex}{$\scriptscriptstyle\bullet$}} C_2}{C_1 + C_2}$$

C₁ is not fixed at a constant value. It can be changed to tune into the desired frequency.

Note 1: Toshiba's OSD circuit determines a horizontal display start position by counting clock pulses generated in LC oscillation. For this reason, the OSD circuit may fail to detect clock pulses normally, resulting in the horizontal start position becoming unstable, at the beginning of oscillation, if the oscillation amplitude is low.

Changing L and C_2 from the values recommended for a specific frequency may hamper a stable OSD display.

If the LC oscillation frequency is the same as a high-frequency clock value, the oscillation of the high-frequency oscillator may cause the LC oscillation frequency to fluctuate, thus making OSD displays flicker.

When determining these parameters, please check the oscillation frequency and the stability of oscillation on your TV sets.

Also check the determined parameters on your final products, because the optimum parameter values may vary from one product to another.

Note 2: When using the LSI package in a strong electric field, such as near a CRT, electrically shield the package so that its normal operation can be maintained.


DC/AC Characteristics (PROM mode)

 $(V_{SS} = 0 V)$

(1) Read operation (V_{DD} = 5.0 ± 0.25 V, Topr = 25 ± 5 °C)

Parameter	Symbol	Conditions	Min	Тур.	Max	Unit
Input high voltage (A0 to A16, $\overline{\text{CE}}$, $\overline{\text{OE}}$, $\overline{\text{PGM}}$)	V _{IH4}		$V_{DD} \times 0.7$	-	VDD	
Input low voltage (A0 to A16, $\overline{\text{CE}}$, $\overline{\text{OE}}$, $\overline{\text{PGM}}$)	V_{IL4}		0	-	0.8	V
Program power supply voltage	V _{PP}		4.75	5.0	5.25	
Address access time	tACC		=	1.5tcyc + 300	-	ns


Note: tcyc = 400 ns at 10 MHz

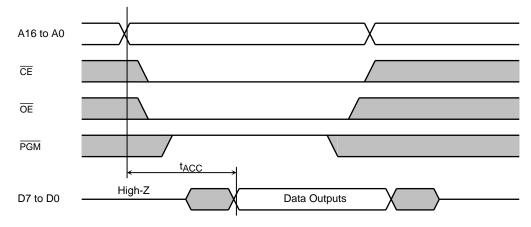

(2) High-speed programming operation (Topr = 25 ± 5 °C, V_{DD} = 6.25 ± 0.25 V)

Parameter	Symbol	Conditions	Min	Тур.	Max	Unit
Input high voltage (D0 to D7, A0 to A16, $\overline{\text{CE}}$, $\overline{\text{OE}}$, $\overline{\text{PGM}}$)	V _{IH4}		V _{DD} × 0.7	ı	V _{DD}	
Input low voltage (D0 to D7, A0 to A16, $\overline{\text{CE}}$, $\overline{\text{OE}}$, $\overline{\text{PGM}}$)	V _{IL4}		0	-	0.8	V
Program power supply voltage	V _{PP}		12.5	12.75	13.0	
Initial program pulse width	t _{PW}	V _{DD} = 6.0 V	0.095	0.1	0.105	ms

High-speed Programming Timing

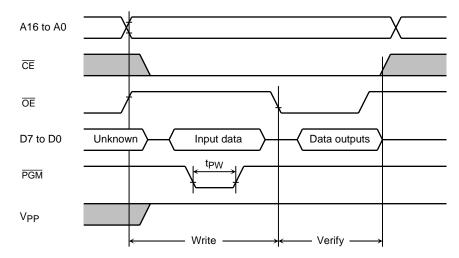

Note 1: When Vcc power supply is turned on or after, Vpp must be increased.

When Vcc power supply is turned off or before, Vpp must be increased.


Note 2: The device must not be set to the EPROM programmer or picked up from it under applying the program voltage (12.75 V \pm 0.25 V) to the Vpp pin as the device is damaged.

Note 3: Be sure to execute the Recommended programing mode with the Recommended programing adaptor. If a mode or an adaptor except the above, the misoperation sometimes occurs.

Package

P-SDIP42-600-1.78

Unit: mm

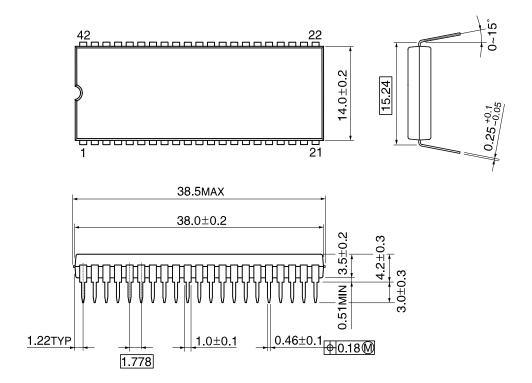

P-QFP44-1414-0.80D

Unit: mm

