


ADSL LINE TRANSFORMERS

For Centillium ADSL CPE Chipsets



- Matched to Centillium's CopperFlite™ CT-L51ST81, Flite Optimizer™ CT-L52SU81, and Universal CopperFlite™ CT-L61ST81 chipsets
- Excellent THD performance in a small footprint
- Designed to meet UL1950 and EN60950 supplementary insulation requirements for working voltages up to 250 Vrms

Electrical Specifications @ 25°C — Operating Temperature -40°C to +85°C

Part Number	Mounting	Turns Ratio ($\pm 2\%$)	Inductance @ 10 kHz, 100 mV	Leakage Inductance @ 100 kHz, 0.1 Vrms
BX2353	SMT	1CS:2.125CS (1-4) : (7-10) with (2-3) & (8-9) Shorted	5.0 mH $\pm 10\%$ (7-10) with (8-9) Shorted	13 μ H Max. (7-10) with (1-4), (2-3), & (8-9) Shorted
BX2358	SMT	1CS:1CS (1-4) : (7-10) with (2-3) & (8-9) Shorted	5.0 mH $\pm 10\%$ (7-10) with (8-9) Shorted	15 μ H Max. (7-10) with (1-4), (2-3), & (8-9) Shorted

Additional Electrical Specifications



Part Number	Longitudinal Balance (from 30 kHz to 1.1 MHz)	THD at 100 Ω (@ 30 kHz, 2.5 Vrms)	DC Resistance		Isolation Voltage (1 sec)
BX2353	≤ -40 dB	≤ -85 dB	0.35 Ω MAX (1-3) 0.40 Ω MAX (2-4)	1.75 Ω MAX (7-9) = (8-10)	1,875 Vrms
BX2358	≤ -40 dB	≤ -85 dB	1.0 Ω MAX (1-3) 1.3 Ω MAX (2-4)	1.1 Ω MAX (7-9) = (8-10)	1,875 Vrms

NOTE: Transformers are shipped in trays unless Tape & Reel packaging is specified by adding the suffix "T" to the part number (i.e. BX2353T).

Mechanical

Schematic

BX2353/BX2358

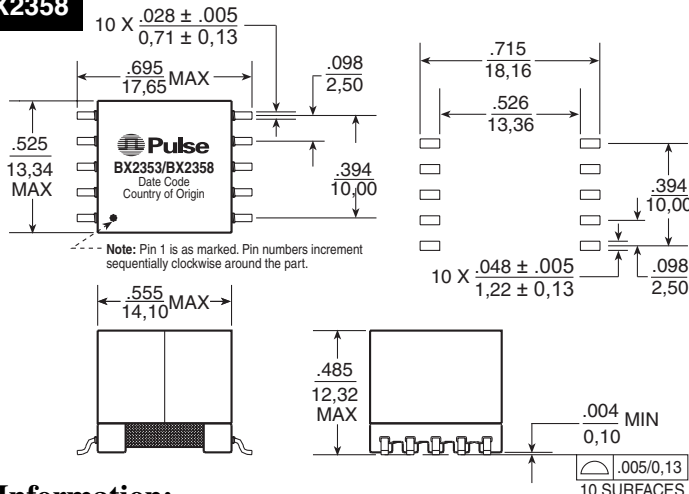

Weight6.2 grams
Tape & Reel150/reel
Tray60/tray
Dimensions: Inches
mm
Unless otherwise specified, all tolerances are $\pm .010$
0,25

For More Information:

Pulse Worldwide Headquarters

12220 World Trade Drive
San Diego, CA 92128
U.S.A.
www.pulseeng.com
TEL: 858 674 8100
FAX: 858 674 8262

Pulse Northern Europe

3 Huxley Road
Surrey Research Park
Guildford, Surrey GU2 5RE
United Kingdom
TEL: 44 1483 401700
FAX: 44 1483 401701

Pulse Southern Europe

Zone Industrielle
F-39270
Orgelet
France
TEL: 33 3 84 35 04 04
FAX: 33 3 84 25 46 41

Pulse China Headquarters

No. 1
Industrial District
Changan, Dongguan
China
TEL: 86 769 5538070
FAX: 86 769 5538870

Pulse North China

Room 1002
No. 819
Nanjing West Rd
Shanghai
China
TEL: 86 21 32181071
FAX: 86 21 32181396

Pulse South Asia

150 Kampong Ampat
#07-01/02
KA Centre
Singapore 368324
TEL: 65 6287 8998
FAX: 65 6280 0080

Pulse North Asia

3F-4, No. 81, Sec. 1
Hsin Tai Wu Road
Hsi-Chih
Taipei Hsien
Taiwan
TEL: 886 2 26980228
FAX: 886 2 26980948

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.

© Copyright, 2005. Pulse Engineering, Inc. All rights reserved.

www.pulseeng.com

B999.B (12/05)