

DS9034PCX PowerCap with Crystal

FEATURES

- Provides 10 years of battery backup power for Nonvolatile Timekeeping RAMs in the PowerCap Module package (PCM)
- Snaps directly onto surface—mounted PowerCap Module Boards
- Detachment feature allows easy removal
- Compatible with these 34-pin PowerCap Module boards:
 - DS1386P
 - DS1486P
 - DS1643P
 - DS1644P
 - DS1646P
 - DS1647P
 - DS1743P/WP

V_{BAT} GND TOP VIEW



SIDE VIEW

DESCRIPTION

The DS9034PCX PowerCap is designed to be a snap-on lithium power source for Nonvolatile Timekeeping RAMs in Dallas Semiconductor's directly surface-mountable PowerCap Module (PCM) package. After a PowerCap Module Board has been soldered in place and cleaned, the DS9034PCX PowerCap is snapped on top of the PCM Board to form a complete PowerCap Module package. The PowerCap is keyed to prevent incorrect attachment. The DS9034PCX can be easily removed by inserting a regular screwdriver into a detachment feature and prying gently outward and upward to release the PowerCap from the PowerCap Module Board.

PIN DESCRIPTION

- +3 Volt Battery Output V_{BAT}

GND

X1. X2 32.768 kHz Crystal Connections

ABSOLUTE MAXIMUM RATINGS*

Operating Temperature 0°C to 70°C -20°C to +70°C Storage Temperature

CRYSTAL CHARACTERISTICS


Nominal Frequency 32.768 kHz Load Capcitance 6 pF

BATTERY CHARACTERISTICS

Nominal Voltage 31/ **Nominal Capacity** 130 mAhr Chemistry Li (CF)x Data Retention Life 10 Years (25°C)


* This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operation sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods of time may affect reliability.

POWERCAP ATTACHMENT

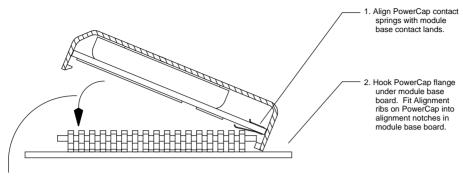


3. Push down slot side of PowerCap until it snaps onto module base.

POWERCAP REMOVAL

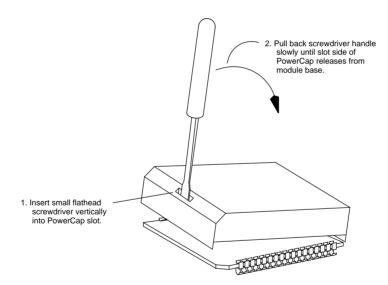

DS9034PCX

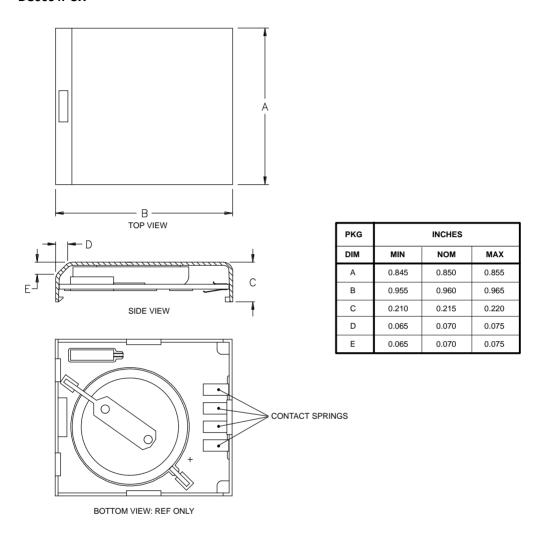

POWER CAP: BATTERY AND CRYSTAL

ATTENTION: BATTERY COMPONENT

The DS9034PCX contains a lithium battery. Do not short, ground or apply external voltages to the electrical portions of this device. Do not expose to temperatures over 85°C. Do not subject this device to any type of cleaning process. Store only in non–conductive containers. Failure to observe these precautions may result in battery discharge or decreased battery life.