

STRUCTURE
PRODUCT SERIES

Silicon Monolithic Integrated Circuit
7-Channel Switching Regulator Controller for Digital Camera

TYPE

BD9739KN

FEATURES

- Wide input voltage range (1.5 to 10V)
- Controls up to 7 switching regulators: Step-up converter(2 channels), Step-down converter(2 channels), Configurable for step-up or step-down conversion(1 channel)
Configurable for step-up or step-down/inverting conversion(1 channel), step-up converter For LED(1 channel)
- Transformer-less application available.
- Synchronous rectifying action mode(3 channels) Built-in FET Transistor(2 channels)

○Absolute maximum ratings (Ta=25°C)

Parameter	Symbol	Limits	Units
Power Supply Voltage	VBAT, VCC, PVCC	-0.3~12	V
	PVCCH, PVCC	-0.3~15	V
Power Input Voltage	DRAIN2,3	-0.3~12	V
	OUT1B	-0.3~20	V
	OUT7B	-0.3~17	V
	SWOUT1	-0.3~12	V
	SWIN4,6,7	-0.3~20	V
Power Dissipation	Pd	550(*1)	mW
		1000(*2)	mW
Operating Temperature	Topr	-25~+85	°C
Storage Temperature	Tstg	-55~+125	°C

(*1) Without external heat sink, the power dissipation reduces by 5.0mW/°C over 25°C.

(*2) Reduced by 7.6mW/°C over 25°C, when mounted on a PCB (70.0mm×70.0mm×1.6mm).

○Operating conditions (Ta = -25°C~+85°C)

parameter	Symbol	Spec.			Units
		Min.	Typ.	Max.	
Power Supply Voltage	VBAT	1.5	—	10	V
	VCC, PVCC	2.5	—	10	V
	PVCC2	4.0	—	14	V
VREF Pin Connected Capacitor	CVREF	1.0	—	4.7	μF
VREGA Pin Connected Capacitor	CVREGA	1.0	—	10	μF
SCP Pin Connected Capacitor	CSCP	0.001	—	2.2	μF
SS1 Pin Connected Capacitor	CSS1	0.001	—	2.2	μF
SS23 Pin Connected Capacitor	CSS23	0.005	—	1.0	μF
[Oscillator]					
Oscillator Frequency	fosc	0.1	—	1.2	MHz
OSC Timing Resistor	RT	4.7	—	30	kΩ
OSC Timing Capacitor	CT	100	—	10000	pF

	Symbol	Spec.			units
		Min.	Typ.	Max.	
[Driver]					
DRAIN Pin Input Voltage	VDRAIN	—	—	10	V
Nch FET Output Current(CH2,CH3)	IoFET4	—	—	700	mA
Driver Output Current(CH1,4,5,6)	Iout	—	—	30	mA
Driver Peak Current(CH1,4,5,6)	Ipeak	—	—	200	mA
Built-in NPN TR Sink Current (CH1)	INPN sink	—	—	500	mA
[SW Circuit]					
SWOUT1 Sink Current	ISWOUT1	—	—	10	mA
SWOUT4 Source Current	ISWOUT4	—	—	50	mA
SWOUT6 Source Current	ISWOUT6	—	—	50	mA
SWOUT7 Source Current	ISWOUT7	—	—	30	mA


- ◎ It is strongly recommended that a capacitor be connected to VREF, VREGA pin to prevent oscillation.
※The IC may not operate properly due to undetermined state of the internal logic when Vcc voltage is applied suddenly while STB pins are already ON.
In this case, make sure STB pins are initially OFF.

○Electrical characteristics (Ta=25°C, VBAT=3V, VCC=5V, RT=11kohm, CT=180pF, STB1~7=3V ,unless otherwise specified)

parameter	Symbol	Spec.			Units	Conditions
		Min.	Typ.	Max.		
[Reference Voltage]						
Reference Voltage	Vref2	0.99	1.0	1.01	V	
Line Regulation	DVL	—	4.0	12.5	mV	Vcc=3.0V~10.0V
Load Regulation	DVL0	—	1.0	7.5	mV	Iref=10 μA ~100 μA
Short-Circuit Output Current	Ios	0.2	1	—	mA	Vref=0V
[Internal Regulator]						
REGA Output Voltage	VREGA	2.4	2.5	2.6	V	Ireg=1mA
[Low Voltage Input Prevented Operation Faults Circuit]						
Threshold Voltage 1	Vst1	3.45	3.6	3.75	V	PVCC monitor
Hysteresis width1	ΔVst1	—	300	—	mV	
Threshold Voltage 2	Vst2	2.3	2.4	2.5	V	VCC monitor
Hysteresis width2	ΔVst2	—	200	—	mV	
Threshold Voltage 3	Vst3	—	2.0	—	V	VREGA monitor
Hysteresis width3	ΔVst3	—	50	—	mV	
[Start up Circuit]						
Oscillator Frequency	Fstart	50	120	220	kHz	
Minimum VBAT Voltage	Vst1	1.5	-	-	V	VBAT monitor
Soft Start Charge Current	Iss1	1.1	2.2	3.3	μA	Vss1=0V
[Soft start 23]						
Soft start Charge Current	Iss23	5	10	15	μA	Vss23=0V
[Protection Circuit]						
Timer Start Threshold Voltage	Vtc	2.1	2.2	2.3	V	FB monitor
SCP Output Current	Iscp	0.5	1.0	1.5	μA	VSCP=0.1V
SCP Threshold Voltage	Vsc	0.45	0.50	0.55	V	
SCP Standby Voltage	Vssc	—	22	170	mV	
[Triangular wave oscillator]						
Oscillator Frequency	fosc1	450	500	550	kHz	RT=11kohm, CT=180pF
Frequency Stability (Voc)	Di	—	0.3	2	%	VCC=3.0V ~9.5V
RT Output Voltage	VRT	0.78	1.00	1.22	V	
[Error Amp 1~4,6]						
Low-level Output Voltage	VOL	—	1.3	—	V	INV=2V
High-level Output Voltage	VOH	VREGA-0.3	—	—	V	INV=0V
Maximum Sink Current	IOI	36	72	-	μA	FB=1.7V, VINV=1.1V
Maximum Source Current	IOO	36	72	-	μA	FB=1.7V, VINV=0.9V
[Error Amp 7]						
Low-level Output Voltage	VOL	—	1.3	—	V	INV=2V
High-level Output Voltage	VOH	VREGA-0.3	—	—	V	INV=0V
Maximum Sink Current	IOI	36	72	—	μA	FB=1.7V, VINV=1.1V
Maximum Source Current	IOO	36	72	—	μA	FB=1.7V, VINV=0.9V
Non-inverting voltage reference	VNON7	—	0.2	—		
[Error Amp 5]						
NON5 input voltage range	VRES	-0.3	—	1.5	V	
Low-level Output Voltage	VOL	—	1.3	—	V	INV=2V
High-level Output Voltage	VOH	VREGA-0.3	—	—	V	INV=0V
Maximum Sink Current	IOI	36	72	—	μA	FB7=1.7V, VINV=1.1V
Maximum Source Current	IOO	36	72	—	μA	FB7=1.7V, VINV=0.9V
[PWM Comparator]						
Input Threshold Voltage 1,2,3	Vt0	—	1.49	—	V	V1:DUTY0%
	Vt100	—	1.95	—	V	V1:DUTY100%
Input Threshold Voltage 4,5,6,7	Vt0	—	1.49	—	V	V1:DUTY0%
	Vt100	—	1.95	—	V	V1:DUTY100%
MAX DUTY4,5,6,7	Dmax1	77	85	93	%	VINV=0.9V, VSCP=0V
MAX DUTY1 (step-up)	Dmax2	77	85	93	%	VINV=0.9V VSCP, UDSEL=0V


parameter	Symbol	Spec.			Units	Conditions	
		Min.	Typ.	Max.			
[Output circuit]							
High-level Output Voltage on Driving	VSATH	VCC −1.6	VCC −0.8	−	V	Io=30mA	
Low-level Output Voltage on Driving	VSATL	−	0.8	1.6	V	Io=30mA	
Hi-side Nch FET ON Resistor	RonH	−	270	500	mΩ	PVCCH=5V (Io=200mA)	
Low-side Nch FET ON Resistor	RonL	−	270	500	mΩ	PVCTL=5V (Io=200mA)	
CH7 Nch FET ON Resistor	RonL7	−	0.7	1.4	Ω	PVCTL=5V (Io=50mA)	
[Step-up/down Selector]							
UDSEL1,5 Control Voltage	Step down	VUDDO	VCC ×0.7	−	VCC	V	
	Step up	VUDUP	0	−	VCC ×0.3	V	
[Power on Switch]							
SWOUT1	Output Voltage on Driving	VSAT	-	0.1	0.3	V	Io=1mA
	OFF Time Leak Current	ILEAK	-	0	5	μA	STB1=0V
SWOUT 4	Output Voltage on Driving	VSAT	VSW IN4 −0.3	VSW IN4 −0.1	-	V	Io=20mA VSWIN4=5V
	OFF Time Leak Current	ILEAK	-	0	5	μA	STB4=0V
SWOUT6	Output Voltage on Driving	VSAT	VSW IN6 −0.3	VSW IN6 −0.1	-	V	Io=20mA VSWIN6=5V
	OFF Time Leak Current	ILEAK	-	0	5	μA	STB6=0V
SWOUT7	Output Voltage on Driving	VSAT	VSW IN7 −0.3	VSW IN7 −0.1	-	V	Io=10mA VSWIN7=10V
	OFF Time Leak Current	ILEAK	-	0	5	μA	STB7=0V
[STB1~7]							
STB Control Voltage 1	ON	VSTB H1	2.0	-	11	V	STB1
	OFF	VSTB L1	−0.3	-	0.3	V	
STB Pull-down Resistor 1		RSTB1	250	400	700	kΩ	STB1
STB Control Voltage 2	ON	VSTB H2	2.0	-	11	V	STB2,3,4,5,6,7
	OFF	VSTB L2	−0.3	-	0.3	V	
STB Pull-down Resistor 2		RSTB2	250	400	700	kΩ	STB2,3,4,5,6,7
[Circuit Current]							
Stand by Current 1 (VBAT sink current)		ISTB1	-	-	5	μA	STB1~7=0V
Stand by Current 2 (VCC,PVCC sink current)		ISTB2	-	-	5	μA	STB1~7=0V
Start up Current (VBAT sink current)		IST	-	30	100	mA	CT=1.7V VCC=0V
Circuit Current on Driving 1 (VBAT sink current)		Ioc1	-	100	300	μA	CT=1.7V
Circuit Current on Driving 2 (VCC,PVCC sink current)		Ioc2	-	5	15	mA	CT=1.7V INV=2.5V

○ This product is not designed for normal operation within a radioactive environment.

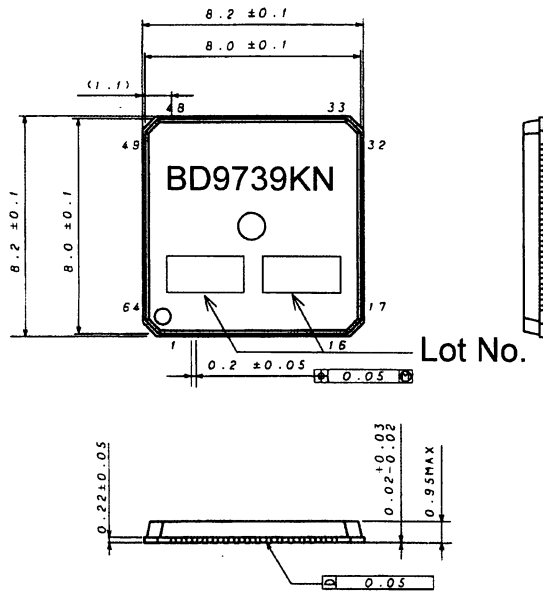

Plastic mold
(UNIT : mm)

BLOCK Diagram

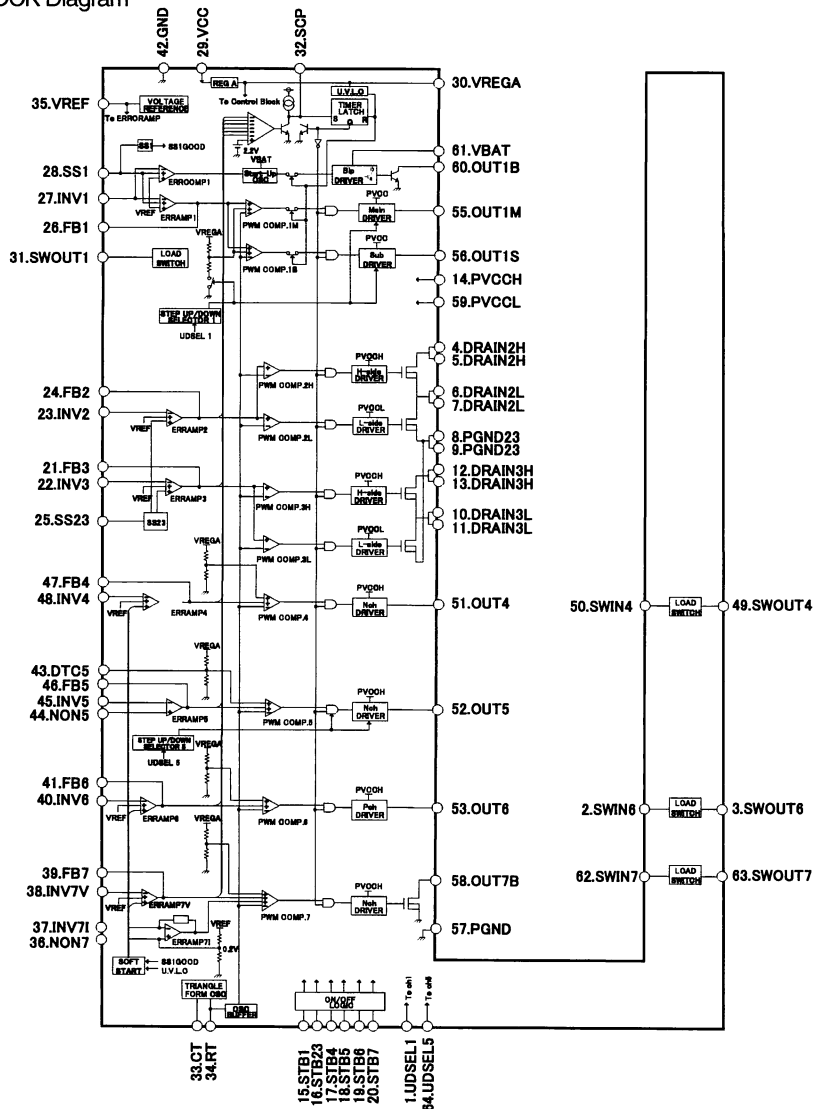

Pin No.	Pin Name
61	VBAT
29	VCC
54	PVCC
14	PVCCH
59	PVCCL
8,9,57	PGND23,PGND
42	GND
30	VREGA
51,52,53	OUT4,5,6
58	OUT7B
60	OUT1B
4,5,12,13	DRAIN2,3H
6,7,10,11	DRAIN2,3L
55	OUT1M
56	OUT1S
35	VREF
43	DTC 5
26,24,21,47,46,41,39	FB 1~7
27,23,22,48,45,40	INV 1~6
37,38	INV7I,INV7V
44,36	NON5,7
28	SS1
25	SS23
34	RT
33	CT
32	SCP
1,64	UDSEL1,5
15,16,17,18,19,20	STB 1,23 4,5,6,7
50,2,62	SWIN4,6,7
31,49,3,63	SWOUT1,4,6,7

○NOTE FOR USE

- (1) Absolute maximum rating
The device may be destroyed when applied voltage or operating temperature exceeds its absolute maximum rating. Because the source, such as short mode or open mode, cannot be identified if the device is destroyed, it is important to take physical safety measures (such as fusing) if a special mode in excess of absolute rating limits is to be implemented.
- (2) Supply line
Since the motor's reverse electromotive force gives rise to the return of regenerative current, measures should be taken to establish a channel for the current, such as adding a capacitor between the power supply and GND. In determining the approach to take, make sure that no problems will be posed by the various characteristics involved, such as capacitance loss at low temperatures with an electrolytic capacitor.
- (3) GND potential
Make sure the potential for the GND pin is always kept lower than the potentials of all other pins, regardless of the operating mode.
- (4) Thermal design
Be sure to factor in allowable power dissipation (Pd) in actual operation, and to build sufficient margin into the thermal design to accommodate this power loss.
- (5) Operation in strong magnetic fields
Use in strong electromagnetic fields may cause malfunctions. Exercise caution with respect to electromagnetic fields.
- (6) ASO
Set the parameters so that output Tr will not exceed the absolute maximum rating or ASO value when the IC is used.
- (7) Thermal shutdown circuit
This IC is provided with a built-in thermal shutdown (TSD) circuit, which is activated when the chip temperature reaches the threshold value listed below. When TSD is on, the device goes to high impedance mode. Note that the TSD circuit is provided for the exclusive purpose shutting down the IC in the presence of extreme heat, and is not designed to protect the IC per se or guarantee performance when or after extreme heat conditions occur. Therefore, do not operate the IC with the expectation of continued use or subsequent operation once the TSD is activated.
- (8) Mutual impedance
Use short and wide wiring tracks for the main supply and ground to keep the mutual impedance as small as possible. Use inductor and capacitor network to keep the ripple voltage minimum.
- (9) Voltage of STB pin
The threshold voltages of STB pin are 0.3V and 2.0V. STB state is set below 0.3V while action state is set beyond 2.0V. The region between 0.3V and 2.0V is not recommended and may cause improper operation.
- (10) Setting Max Duty
Max duty limit might not work normally at high frequency. Consider adequate margin when operating circuit above the maximum allowable switching frequency.
- (11) Please use the same power supply of driver block as that of main block.
This IC can't be used on the application that arbitrary voltage is applied to driver block.

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.

In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.

Thank you for your accessing to ROHM product informations.
More detail product informations and catalogs are available,
please contact your nearest sales office.

Please contact our sales offices for details ;

U.S.A / San Diego	TEL : +1(858)625-3630	FAX : +1(858)625-3670
Atlanta	TEL : +1(770)754-5972	FAX : +1(770)754-0691
Dallas	TEL : +1(972)312-8818	FAX : +1(972)312-0330
Germany / Dusseldorf	TEL : +49(2154)9210	FAX : +49(2154)921400
United Kingdom / London	TEL : +44(1)908-282-666	FAX : +44(1)908-282-528
France / Paris	TEL : +33(0)1 56 97 30 60	FAX : +33(0) 1 56 97 30 80
China / Hong Kong	TEL : +852(2)740-6262	FAX : +852(2)375-8971
Shanghai	TEL : +86(21)6279-2727	FAX : +86(21)6247-2066
Dilian	TEL : +86(411)8230-8549	FAX : +86(411)8230-8537
Beijing	TEL : +86(10)8525-2483	FAX : +86(10)8525-2489
Taiwan / Taipei	TEL : +866(2)2500-6956	FAX : +866(2)2503-2869
Korea / Seoul	TEL : +82(2)8182-700	FAX : +82(2)8182-715
Singapore	TEL : +65-6332-2322	FAX : +65-6332-5662
Malaysia / Kuala Lumpur	TEL : +60(3)7958-8355	FAX : +60(3)7958-8377
Philippines / Manila	TEL : +63(2)807-6872	FAX : +63(2)809-1422
Thailand / Bangkok	TEL : +66(2)254-4890	FAX : +66(2)256-6334

Japan /
(Internal Sales)

Tokyo	2-1-1, Yaesu, Chuo-ku, Tokyo 104-0082	
	TEL : +81(3)5203-0321	FAX : +81(3)5203-0300
Yokohama	2-4-8, Shin Yokohama, Kohoku-ku, Yokohama, Kanagawa 222-8575	
	TEL : +81(45)476-2131	FAX : +81(45)476-2128
Nagoya	Dainagayo Building 9F 3-28-12, Meieki, Nakamura-ku, Nagoya, Aichi 450-0002	
	TEL : +81(52)581-8521	FAX : +81(52)561-2173
Kyoto	579-32 Higashi Shiokouji-cho, Karasuma Nishi-iru, Shiokoujidori, Shimogyo-ku, Kyoto 600-8216	
	TEL : +81(75)311-2121	FAX : +81(75)314-6559

(Contact address for overseas customers in Japan)

Yokohama	TEL : +81(45)476-9270	FAX : +81(045)476-9271
----------	-----------------------	------------------------