

M62383FP

5 V Composite Type D-A Converter

REJ03F0076-0100Z

Rev.1.0

Sep.19.2003

Description

The M62383FP is a 5 V composite D-A converter incorporating two modules, with two 8-bit buffer amp output D-A converters and an 8-bit D-A converter for reference voltage adjustment as one module.

The D-A outputs can be set simultaneously for each module without address setting. The data configurations comprise 16-bit serial data for the two main D-A circuits and 8-bit serial data for the reference voltage setting D-A. The D-A output buffer amps have full-swing output capability, from power supply voltage to GND.

Features

- Simultaneous dual-output data setting by means of 16-bit serial data (TTL level)
- Data transfer clock frequency: 10 MHz (max.)
- D-A converter output settling time: 5 μ s (typ.)
- Power-on reset and external reset (L reset) functions
(D-A output = 0 V, MON output = $V_{REF} \times 255/256$)


Application

Automatic adjustment of electronic devices


Recommended Operating Conditions

Power supply voltage: 5 V $\pm$ 10%

Pin Connection Diagram (Top View)

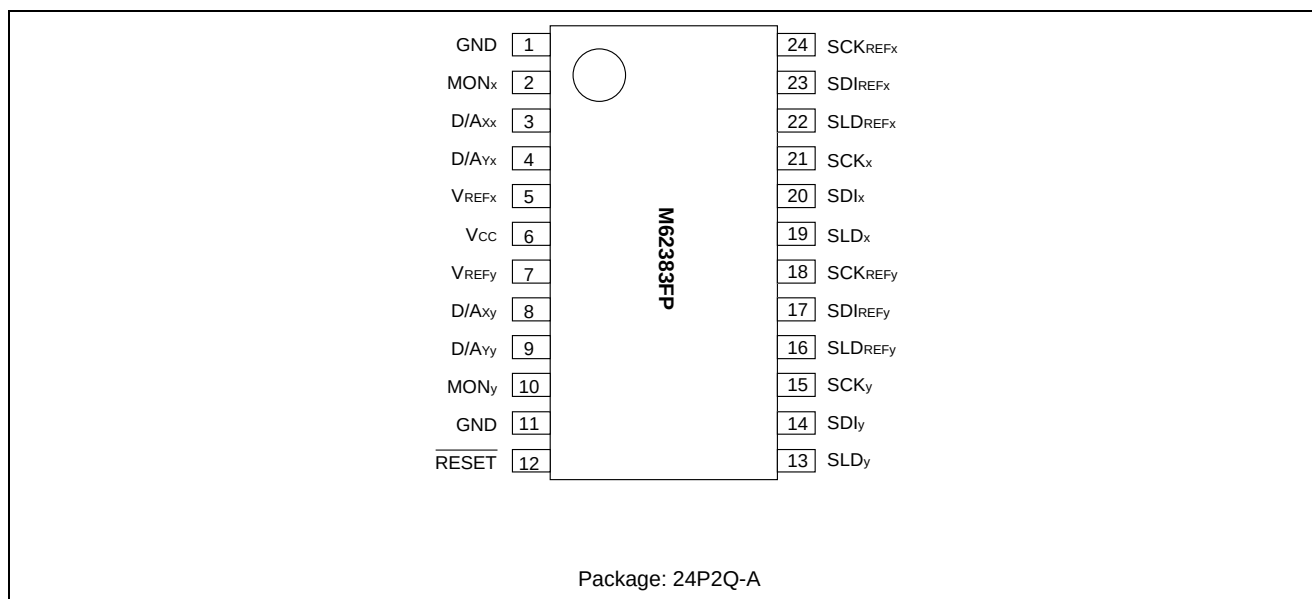

Block Diagram

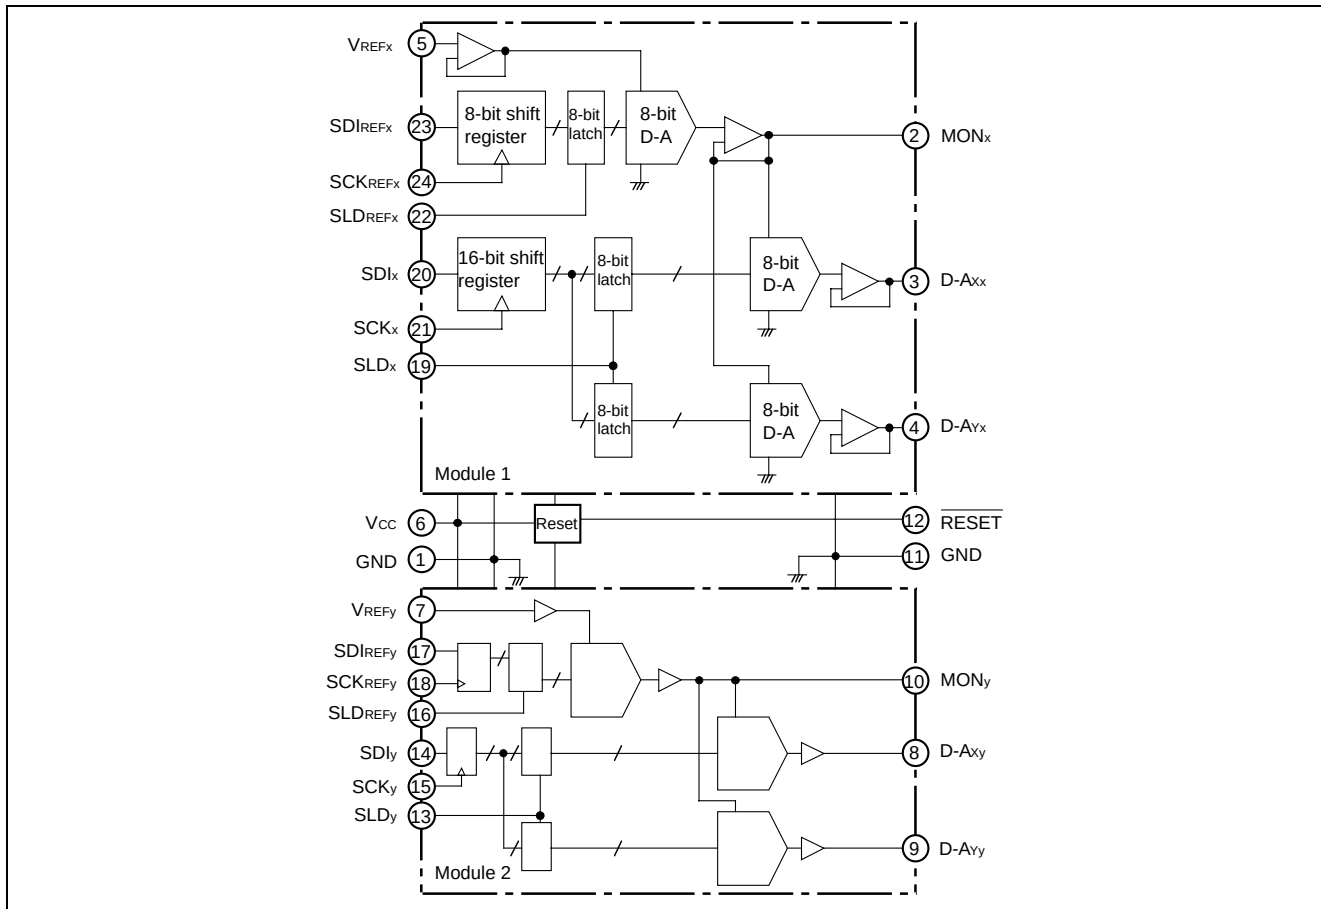

Pin Description

Pin No.	Symbol	Function	
1, 11	GND	Ground (GND) pin	
2	MONx	Module 1: Reference voltage D-A output pin	
10	MONy	Module 2: Reference voltage D-A output pin	
3	D/Axx	Module 1: 8-bit D-A output pin (x side)	
4	D/Axy	Module 1: 8-bit D-A output pin (y side)	
8	D/Ayx	Module 2: 8-bit D-A output pin (x side)	
9	D/Ayy	Module 2: 8-bit D-A output pin (y side)	
5	VREFx	Module 1: Reference voltage input pin	
7	VREFy	Module 2: Reference voltage input pin	
6	Vcc	Power supply (VCC) pin	
12	RESET	Reset pin	When input level is changed from "H" to "L", D-A output becomes 0 V (D-A data: 00h), and MON output becomes VREF × 255/256 (MON data: FFh). Even if input level is restored from "L" to "H", output is maintained until next data setting. TTL-based.
19	SLDx	Module 1: Load signal input pin	At rising edge of input signal from "L" to "H", data in 16-bit shift register is loaded into D/A data register. TTL-based.
13	SLDy	Module 2: Load signal input pin	
22	SLDREFx	Module 1: Reference voltage load signal input pin	At rising edge of input signal from "L" to "H", data in 8-bit shift register is loaded into D/A data register. TTL-based.
16	SLDREFy	Module 2: Reference voltage load signal input pin	
20	SDIx	Module 1: Serial data input pin	TTL-based 16-bit-length serial data
14	SDIy	Module 2: Serial data input pin	
23	SDIREF _x	Module 1: Reference voltage serial data input pin	TTL-based 8-bit-length serial data
17	SDIREF _y	Module 2: Reference voltage serial data input pin	
21	SCKx	Module 1: Shift clock signal input pin	TTL Schmitt trigger based serial clock input SDI serial data is sent to 16-bit shift register one bit at a time at each rise.
15	SCKy	Module 2: Shift clock signal input pin	
18	SCKREF _x	Module 1: Reference voltage shift clock signal input pin	TTL Schmitt trigger based serial clock input SDIREF serial data is sent to 8-bit shift register one bit at a time at each rise.
24	SCKREF _y	Module 2: Reference voltage shift clock signal input pin	

Absolute Maximum Ratings

(Unless specified otherwise, Ta = 25°C)


Item	Symbol	Rated Value	Unit	Conditions
Power supply voltage	VCC	-0.3 to 7.0	V	
Digital input voltage	VDIN	-0.3 to Vcc+0.3 (≤ 7.0)	V	DC voltage ("H" level voltage)
Reference voltage input voltage	VREF	-0.3 to Vcc+0.3 (≤ 7.0)	V	
Output voltage	VDAout	-0.3 to Vcc+0.3 (≤ 7.0)	V	
Internal permissible loss	Pd	500	mW	
Operating ambient temperature	Topr	-20 to +85	°C	
Storage temperature	Tstg	-55 to +150	°C	

Recommended Operating Conditions

(Unless specified otherwise, VCC = 5 V $\pm$ 10%, VREF = VCC, fSCK = 5 MHz, VIH = VCC, VIL = GND, Ta = 25°C)

Item	Symbol	Specification Values			Unit	Test Conditions
		Min.	Typ.	Max.		
Power supply voltage	Vcc	4.5	5.0	5.5	V	
Reference power supply voltage	VREF	GND		Vcc	V	VCC voltage or below
Clock frequency	fSCK			10	MHz	
"H" level input voltage	VIH	2		Vcc	V	TTL "H" input level
"L" level input voltage	VIL	GND		0.8	V	TTL "L" input level
Clock input hysteresis voltage	V Δ	0.4	0.6	1.0	V	TTL Schmitt trigger
Clock "L" pulse width	tSCKL	30		450	ns	See timing chart
Clock "H" pulse width	tSCKH	30		450	ns	See timing chart
Clock rise time	tSCKR	10		100	ns	See timing chart
Clock fall time	tSCKF	10		100	ns	See timing chart
Data setup time	tDCH	10		100	ns	See timing chart
Data hold time	tCHD	20		200	ns	See timing chart
Load setup time	tCHL	40		800	ns	See timing chart
Load hold time	tLDC	20		400	ns	See timing chart
Load "H" pulse time	tLDH	20		400	ns	See timing chart
Reset "H" pulse time	tRSTL	50			ns	See timing chart

Timing Chart

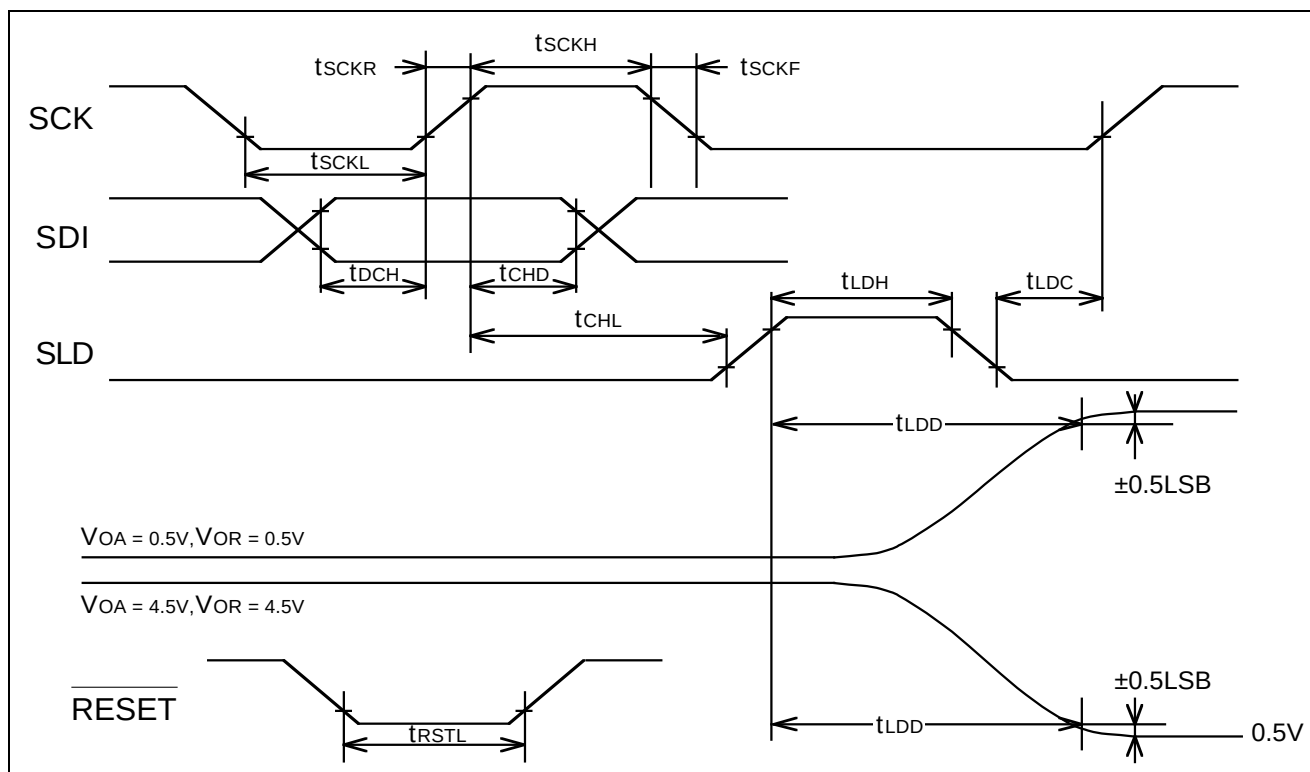

Electrical Characteristics

(Unless specified otherwise, VCC = 5 V $\pm$ 10%, VREF = VCC, fSCK = 5 MHz, VIH = VCC, VIL = GND, Ta = -20°C to 85°C)

(a) Common to analog and digital blocks

Item	Symbol	Specification Values			Unit	Test Conditions
		Min.	Typ.	Max.		
Circuit current	Icc		6.0	10	mA	

(b) Digital block

Item	Symbol	Specification Values			Unit	Test Conditions
		Min.	Typ.	Max.		
Input leakage current	IILK	-10		10	μ A	VIN = 0V to 5V

(c) Analog block


Item	Symbol	Specification Values			Unit	Test Conditions
		Min.	Typ.	Max.		
Reference voltage input voltage	VREF	GND		V _{cc}	V	When SDIREF is set to (FF)h, VREF = MON
Reference voltage input current	IREF	-1		+1	μA	GND ≤ VREF ≤ V _{cc}
Upper reference voltage output voltage (*1)	VORU	4.88	4.98	V _{cc}	V	SDIREF = (FF)h, SDI = (FFFF)h, MON output value
Lower reference voltage output voltage (*1)	VORL	GND		0.10	V	SDIREF = (00)h, SDI = (FFFF)h, MON output value
Reference voltage output offset voltage (*1)	ΔVOR	-100		100	mV	VREF = 2 to 5V, SDI = (FFFF)h, 255/256VREF-VOR (MON output value)
Upper buffer amp D-A output voltage	VOAU	4.5			V	IOA = ±0.5mA, SDIREF = (FF)h, SDI = (FFFF)h
Lower buffer amp D-A output voltage	VOAL			0.05	V	IOA = ±0.5mA, SDIREF = (FF)h, SDI = (0000)h
Accuracy: Differential nonlinearity error	SDL	-1.0		+1.0	LSB	(Monotone increasing capability)
Accuracy: Nonlinearity error	SNL	-1.0		+1.0	LSB	
Accuracy: Zero scale error	SZERO	-2.0		+2.0	LSB	VREF = 2 to 5 V: Buffer output offset (*2)
Accuracy: Full-scale error	SFULL	-2.0		+2.0	LSB	VREF = 2 to 5 V: Buffer output offset (*2)
Reference voltage input pin capacitance	CREF			10	pF	
D-A converter output settling time	tLDDA		5	10	μS	VOA = 0.5↔4.5V, IOA = 0.1mA, Co = 50pF, SDIREF = (FF)h, Time for output to be absorbed within ±0.5 LSB
Reference voltage output settling time	tLDDR		10	20	μS	VOA = 0.5↔4.5V, no external load Time for output to be absorbed within ±0.5 LSB
Power-on reset voltage (*3)	$\overline{\text{VRESET}}$	0.8	1.5	3	V	V _{cc} = 0→5V, VOA = 0V, VOR = VREF×255/256 set

Notes: 1. MON output specification. Equivalent to ±5 LSB.


2. D-A output (D-Axx, D-Axy, D-Ayx, D-Ayy) specification. MON output is stipulated by 3 items in *1 above (VORU, VORL, ΔVOR).

3. Reference values

Digital Data Format

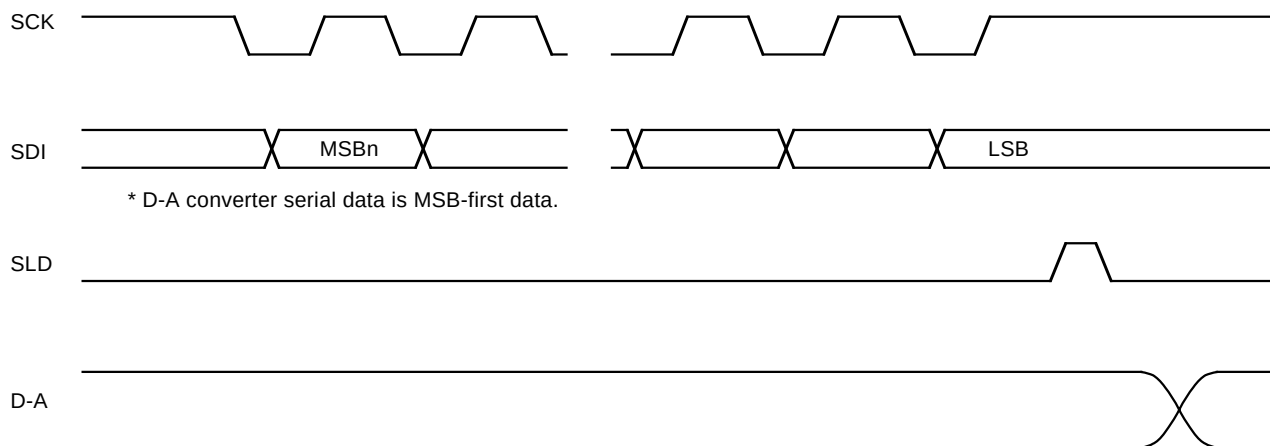

SDIx, SDIy




$$V_{OA} = V_{OR} \times \frac{2^7 \times D_7 + 2^6 \times D_6 + 2^5 \times D_5 + 2^4 \times D_4 + 2^3 \times D_3 + 2^2 \times D_2 + 2^1 \times D_1 + 2^0 \times D_0}{256}$$

V_{OA} : D-A output voltage
 V_{OR} : MON output voltage

D_n^* : D-A data
 $n = 0$ to 7 , $*$ = x, y

SDIREFx, SDIREF




$$V_{OA} = V_{REF} \times \frac{2^7 \times D_7 + 2^6 \times D_6 + 2^5 \times D_5 + 2^4 \times D_4 + 2^3 \times D_3 + 2^2 \times D_2 + 2^1 \times D_1 + 2^0 \times D_0}{256}$$

V_{OR} : MON output voltage
 V_{REF} : Reference voltage

Usage Notes

1. This IC has three pins to which a constant voltage is applied during use (constant-voltage input pins: VCC, VREFx, VREFy). If ripples or spikes are imposed on these pins, D-A conversion accuracy may fall. When using this IC, a capacitor (1 μ F or higher recommended) must be inserted between the constant-voltage input pins and ground (GND) in order to ensure stable D-A conversion.
2. With regard to the reset function (power-on reset), when the power supply voltage passes the vicinity of 1.5 V at power-on, the D-A output voltage (V_{OA}) becomes 0 V (D-A data: 00h), and the MON output voltage (V_{OR}) becomes $V_{REF} \times 255/256$ (MON data: FFh), and output is maintained until the next data is set. In the event of repeated power supply on/off operations at short intervals, a reset may not be effected because of the simplicity of the circuit.

Sample Standard Application Circuit

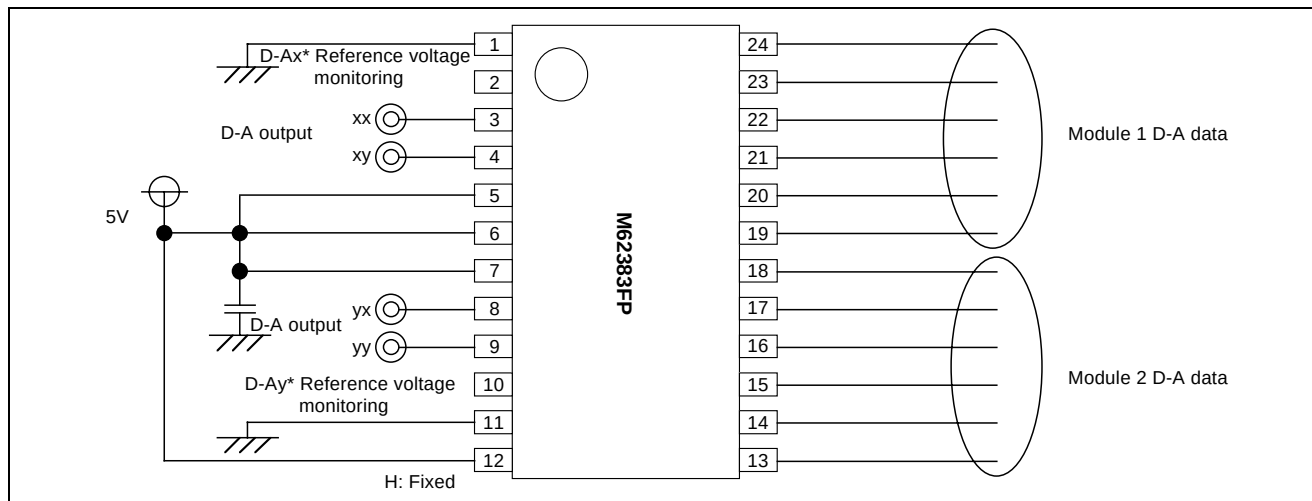







Package Dimensions

24P2Q-A

(MMP)

Plastic 24pin 300mil SSOP

EIAJ Package Code	JEDEC Code	Weight(g)	Lead Material
SSOP24-P-300-0.80	—	0.2	Cu Alloy

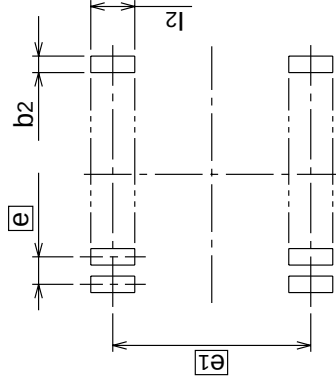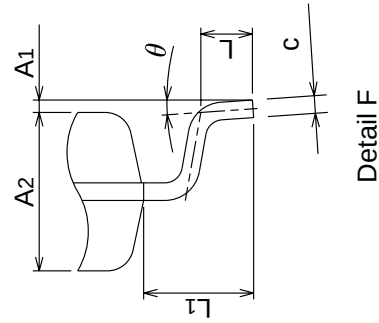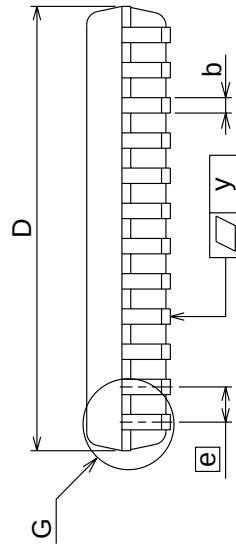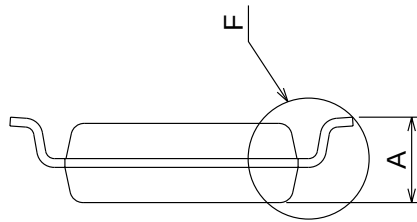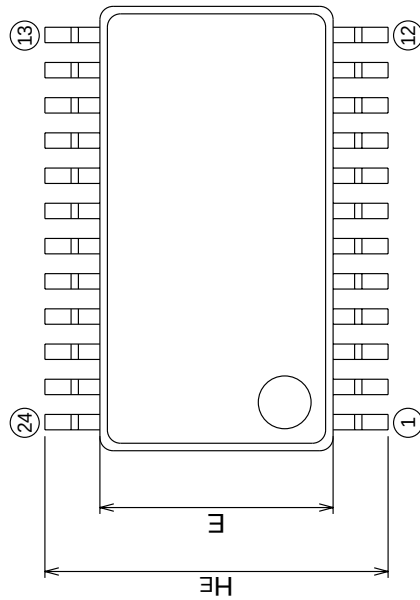

Recommended Mount Pad

Symbol	Dimension in Millimeters		
	Min	Nom	Max
A	—	—	2.1
A1	0	0.1	0.2
A2	—	1.8	—
b	0.3	0.35	0.45
c	0.18	0.2	0.25
D	10.0	10.1	10.2
E	5.2	5.3	5.4
e	—	0.8	—
HE	7.5	7.8	8.1
L	0.4	0.6	0.8
L1	—	1.25	—
Z	—	0.65	—
Z1	—	—	0.8
y	—	—	0.1
theta	0°	—	8°
b2	—	0.5	—
e1	—	7.62	—
l2	1.27	—	—

Renesas Technology Corp. Sales Strategic Planning Div. Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan

Keep safety first in your circuit designs!

1. Renesas Technology Corp. puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage.
Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of nonflammable material or (iii) prevention against any malfunction or mishap.

Notes regarding these materials

1. These materials are intended as a reference to assist our customers in the selection of the Renesas Technology Corp. product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Renesas Technology Corp. or a third party.
 2. Renesas Technology Corp. assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.
 3. All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Renesas Technology Corp. without notice due to product improvements or other reasons. It is therefore recommended that customers contact Renesas Technology Corp. or an authorized Renesas Technology Corp. product distributor for the latest product information before purchasing a product listed herein.
The information described here may contain technical inaccuracies or typographical errors.
Renesas Technology Corp. assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors.
Please also pay attention to information published by Renesas Technology Corp. by various means, including the Renesas Technology Corp. Semiconductor home page (<http://www.renesas.com>).
 4. When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Renesas Technology Corp. assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.
 5. Renesas Technology Corp. semiconductors are not designed or manufactured for use in a device or system that is used under circumstances in which human life is potentially at stake. Please contact Renesas Technology Corp. or an authorized Renesas Technology Corp. product distributor when considering the use of a product contained herein for any specific purposes, such as apparatus or systems for transportation, vehicular, medical, aerospace, nuclear, or undersea repeater use.
 6. The prior written approval of Renesas Technology Corp. is necessary to reprint or reproduce in whole or in part these materials.
 7. If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination.
Any diversion or reexport contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.
 8. Please contact Renesas Technology Corp. for further details on these materials or the products contained therein.
-



RENESAS SALES OFFICES

<http://www.renesas.com>

Renesas Technology America, Inc.
450 Holger Way, San Jose, CA 95134-1368, U.S.A
Tel: <1> (408) 382-7500 Fax: <1> (408) 382-7501

Renesas Technology Europe Limited.
Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, United Kingdom
Tel: <44> (1628) 585 100, Fax: <44> (1628) 585 900

Renesas Technology Europe GmbH
Dornacher Str. 3, D-85622 Feldkirchen, Germany
Tel: <49> (89) 380 70 0, Fax: <49> (89) 929 30 11

Renesas Technology Hong Kong Ltd.
7/F., North Tower, World Finance Centre, Harbour City, Canton Road, Hong Kong
Tel: <852> 2265-6688, Fax: <852> 2375-6836

Renesas Technology Taiwan Co., Ltd.
FL 10, #99, Fu-Hsing N. Rd., Taipei, Taiwan
Tel: <886> (2) 2715-2888, Fax: <886> (2) 2713-2999

Renesas Technology (Shanghai) Co., Ltd.
26/F., Ruijin Building, No.205 Maoming Road (S), Shanghai 200020, China
Tel: <86> (21) 6472-1001, Fax: <86> (21) 6415-2952

Renesas Technology Singapore Pte. Ltd.
1, Harbour Front Avenue, #06-10, Keppel Bay Tower, Singapore 098632
Tel: <65> 6213-0200, Fax: <65> 6278-8001