

## Description

The IS31FL3726 is comprised of constant-current drivers designed for color LEDs. The output current value can be set using an external resistor. The output current value can be adjusted from 5mA to 60mA through the external resistor.

As a result, all outputs will have virtually the same current levels.

This driver incorporates 16-bit constant t-current outputs, a 16-bit shift register, a 16-bit latch and a 16-bit AND-gate circuit.

## Features

- Supply voltage range from 3.3V to 5.5V
- Constant current range: 5mA to 60mA
- Application output voltage:  $\geq 0.4V$
- For anode-common LEDs
- Serial and parallel data transfer rate: 20MHz (Max. cascade connection)
- Package: QFN-24(4mm x 4mm)

## Quick Start

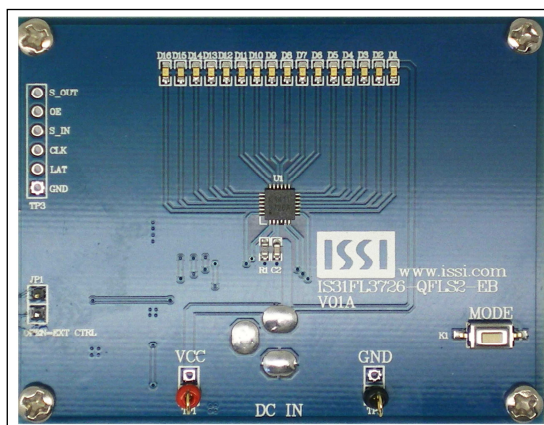


Figure 1: Photo of IS31FL3726 Evaluation Board

## Recommended Equipment

- 5.0V, 2A power supply

## Absolute Maximum Ratings

- $\leq 5.5V$  power supply

**Caution:** Do not exceed the conditions listed above, otherwise the board will be damaged.

## Procedure

The IS31FL3726 evaluation board is fully assembled and tested. Follow the steps listed below to verify board operation.

**Caution:** Do not turn on the power supply until all connections are completed.

- 1) Connect the ground terminal of the power supply to the GND and the positive terminal to the VCC. Or connect the DC power to the connector (DC IN).
- 2) Turn on the power supply and pay attention to the supply current. If the current exceeds 500mA, please check for circuit fault.
- 3) Enter the desired mode of display by toggling the MODE button.

## Evaluation Board Ordering Information

| Part No.            | IC Package        |
|---------------------|-------------------|
| IS31FL3726-QFLS2-EB | QFN-24, Lead-free |

Table1: Ordering Information

**For pricing, delivery, and ordering information, please contacts ISSI's analog marketing team at [analog\\_mkt@issi.com](mailto:analog_mkt@issi.com) or (408) 969-6600.**

## Evaluation Board Operation

The IS31FL3726 evaluation board has two display modes. Press MODE button to switch configurations.

- 1) (Default mode) Blue LEDs turn on and off one by one from right to left.
- 2) Blue LEDs turn on from middle to two sides and trun off from two sides to middle.

**\*Note:**

**IS31FL3726 solely controls the FxLED function on the evaluation board.**

## Software Control

JP1 default setting is close circuit. If it is set to open, the on-board MCU will stop working. The serial control signal pins are set to High Impedance. External serial control signals can be connected to TP3 to control the IS31FL3726 LED driver.

*Please refer to the datasheet to get more information about IS31FL3726.*

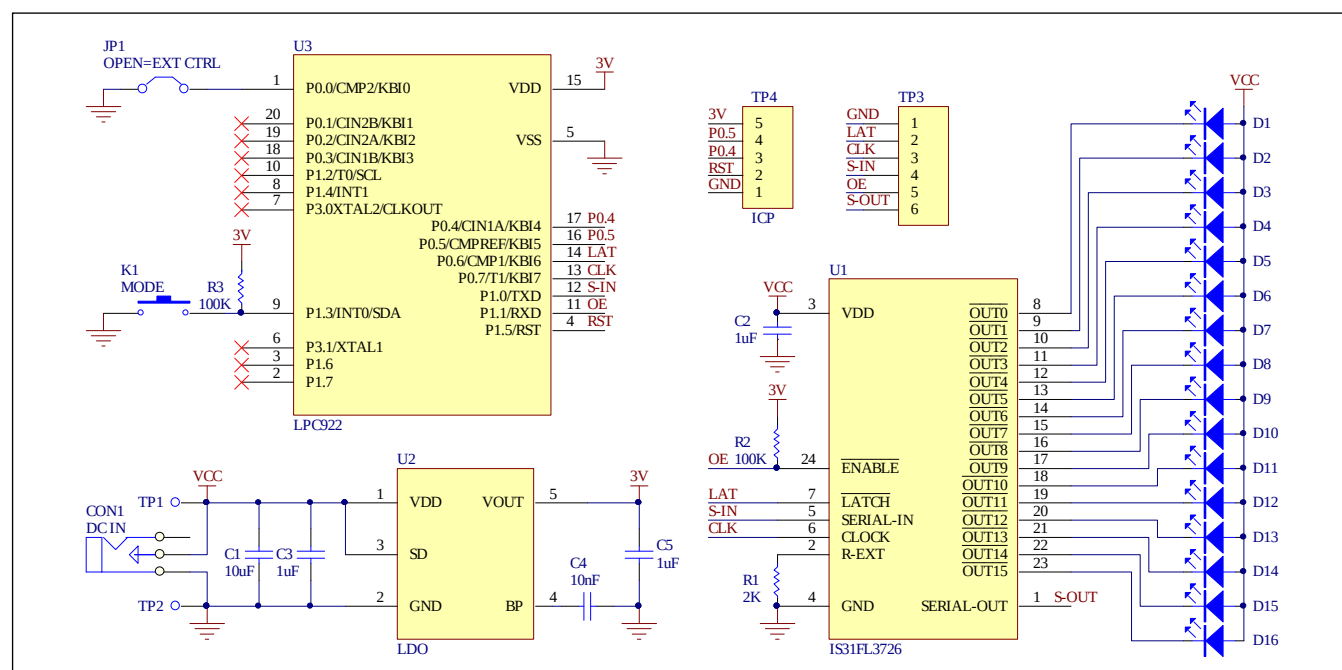


Figure 2: IS31FL3726 Application Schematic

## Bill of Materials

| Name       | Symbol   | Description            | Qty | Supplier  | Part No.               |
|------------|----------|------------------------|-----|-----------|------------------------|
| LED Driver | U1       | 16CH FxLED Driver      | 1   | ISSI      | IS31FL3726             |
| LDO        | U2       | Low-dropout Regulator  | 1   | PAM       | PAM3101                |
| MCU        | U3       | Microcontroller        | 1   | NXP       | LPC922                 |
| Diodes     | D1~D16   | Diode, LED Blue, SMD   | 16  | Everlight | 19-217/BHC-ZL 1M2RY/3T |
| Resistor   | R1       | RES,2k,1/16W,±5%,SMD   | 1   |           |                        |
| Resistors  | R2~R3    | RES,100k,1/16W,±5%,SMD | 2   |           |                        |
| Capacitor  | C1       | CAP,10μF,16V,±20%,SMD  | 1   |           |                        |
| Capacitors | C2,C3,C5 | CAP, 1μF,16V,±20%,SMD  | 3   |           |                        |
| Capacitor  | C4       | CAP,10nF,16V,±20%,SMD  | 1   |           |                        |
| Button     | K1       | Button SMD             | 1   |           |                        |

Table 2: Bill of Materials, refer to Figure 2 above.

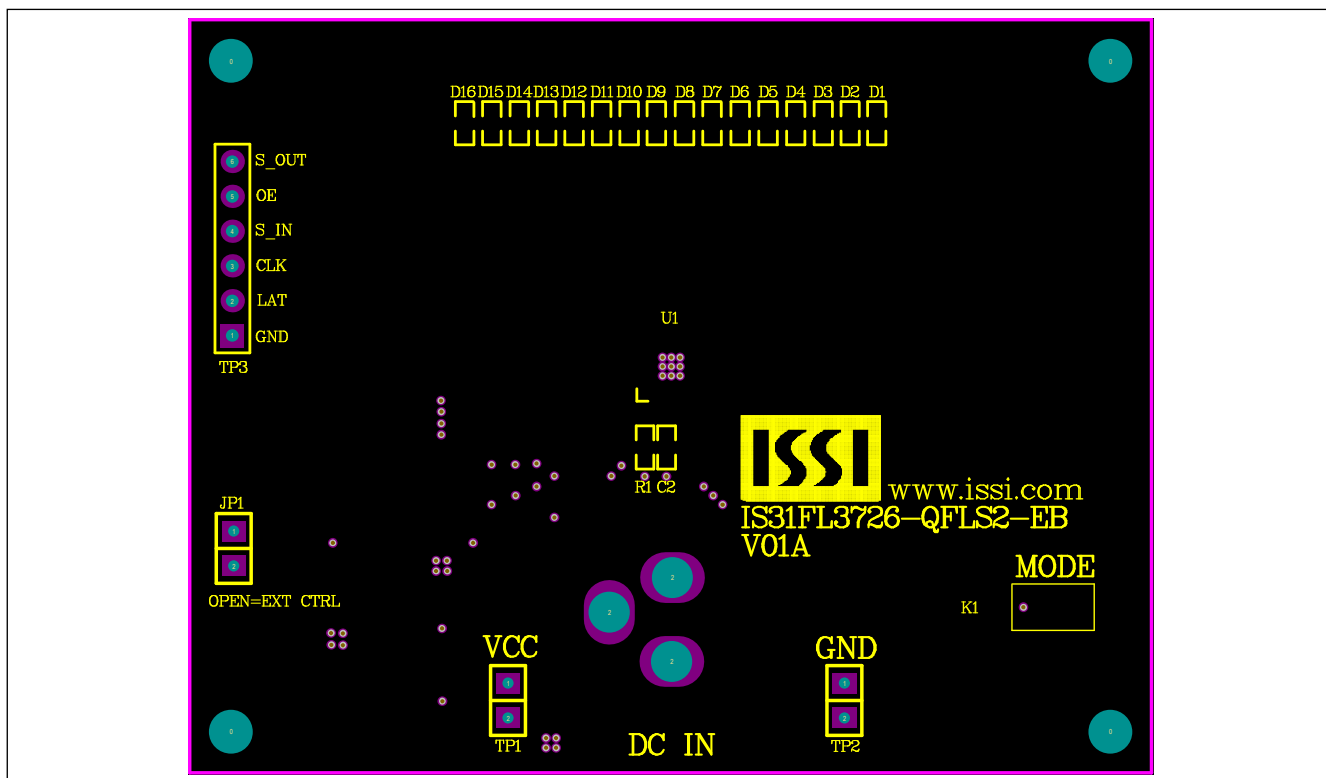


Figure 3: Board Component Placement Guide -Top Layer

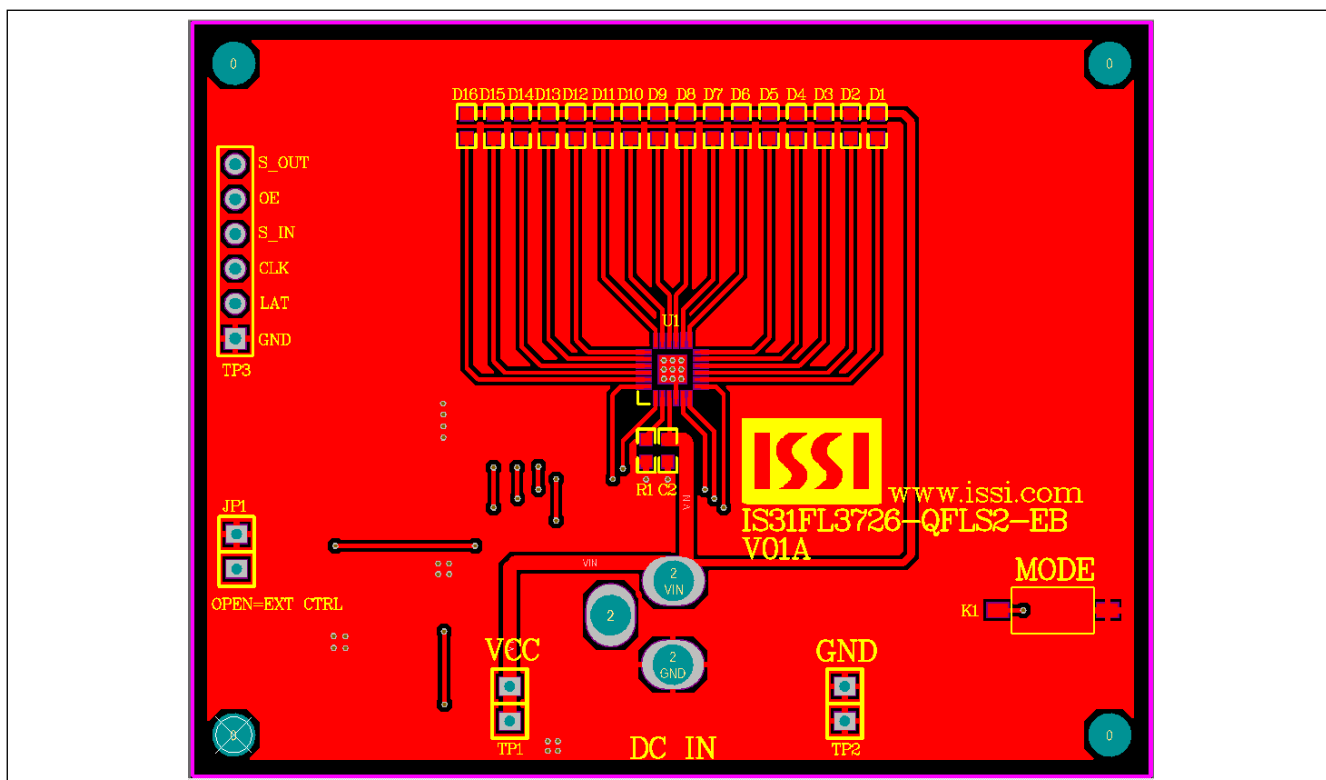


Figure 4: Board PCB Layout- Top Layer

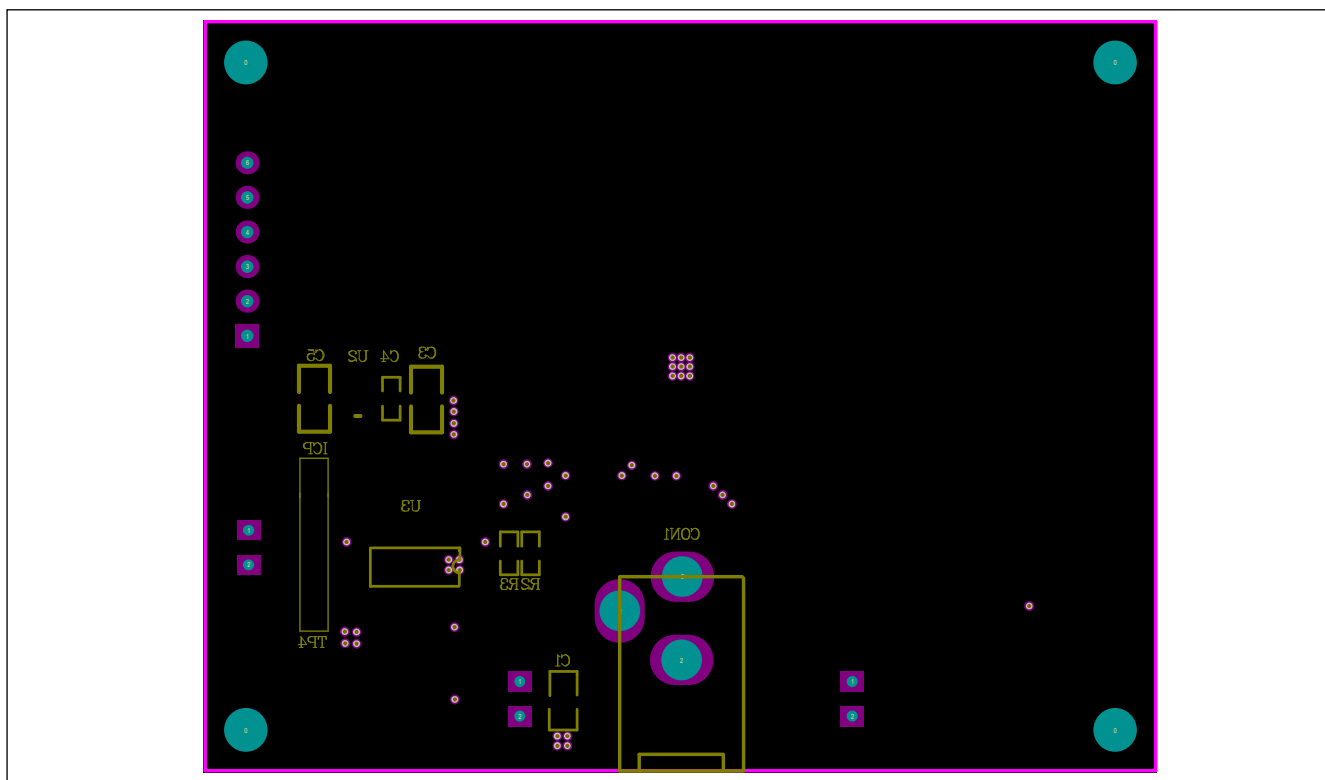


Figure 5: Board Component Placement Guide -Bottom Layer

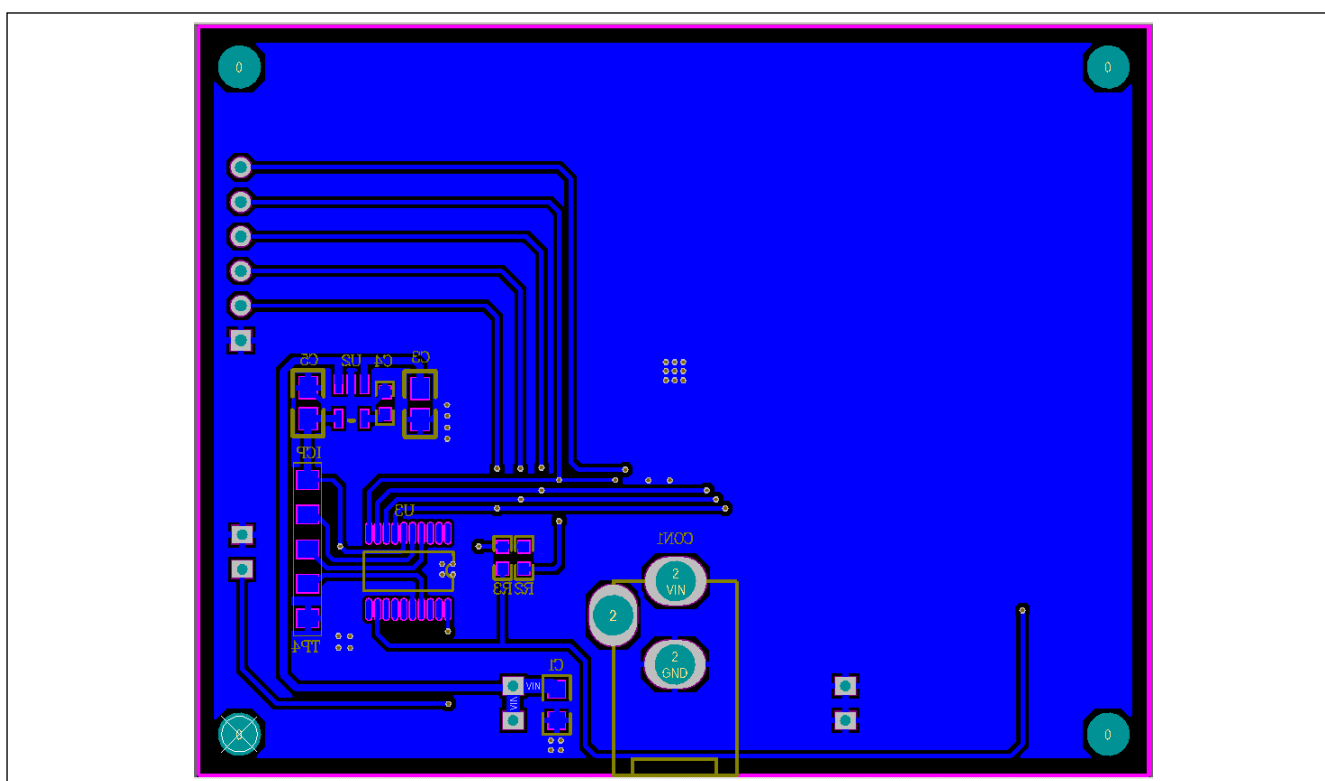


Figure 6: Board PCB Layout-Bottom Layer

## IS31FL3726 16-Bit Color LED Driver With PWM Control Evaluation Board Guide

---

Copyright © 2011 Integrated Silicon Solution, Inc. All rights reserved. ISSI reserves the right to make changes to this specification and its products at any time without notice. ISSI assumes no liability arising out of the application or use of any information, products or services described herein. Customers are advised to obtain the latest version of this device specification before relying on any published information and before placing orders for products.

Integrated Silicon Solution, Inc. does not recommend the use of any of its products in life support applications where the failure or malfunction of the product can reasonably be expected to cause failure of the life support system or to significantly affect its safety or effectiveness. Products are not authorized for use in such applications unless Integrated Silicon Solution, Inc. receives written assurance to its satisfaction, that:

- a.) the risk of injury or damage has been minimized;
- b.) the user assume all such risks; and
- c.) potential liability of Integrated Silicon Solution, Inc is adequately protected under the circumstances