


NPN silicon Digital Transistor


- Switching circuit, inverter, interface circuit, driver circuit
- Built in resistor ($R_1=4.7\text{ k}\Omega$)
- BCR119S: Two internally isolated transistors with good matching in one multichip package



BCR119/F/L3 BCR119T/W



BCR119S



Type	Marking	Pin Configuration						Package
BCR119	WKs	1=B	2=E	3=C	-	-	-	SOT23
BCR119F	WKs	1=B	2=E	3=C	-	-	-	TSFP-3
BCR119L3	WK	1=B	2=E	3=C	-	-	-	TSLP-3-4
BCR119S	WKs	1=E1	2=B1	3=C2	4=E2	5=B2	6=C1	SOT363
BCR119T	WKs	1=B	2=E	3=C	-	-	-	SC75
BCR119W	WKs	1=B	2=E	3=C	-	-	-	SOT323

Maximum Ratings

Parameter	Symbol	Value	Unit
Collector-emitter voltage	V_{CEO}	50	V
Collector-base voltage	V_{CBO}	50	
Emitter-base voltage	V_{EBO}	5	
Input on voltage	$V_{I(on)}$	15	
DC collector current	I_E	100	mA
Total power dissipation- BCR119, $T_S \leq 102^\circ\text{C}$ BCR119F, $T_S \leq 128^\circ\text{C}$ BCR119L3, $T_S \leq 135^\circ\text{C}$ BCR119S, $T_S \leq 115^\circ\text{C}$ BCR119T, $T_S \leq 109^\circ\text{C}$ BCR119W, $T_S \leq 124^\circ\text{C}$	P_{tot}	200 250 250 250 250 250	mW
Junction temperature	T_j	150	
Storage temperature	T_{stg}	-65 ... 150	

Thermal Resistance

Parameter	Symbol	Value	Unit
Junction - soldering point ¹⁾ BCR119 BCR119F BCR119L3 BCR119S BCR119T BCR119W	R_{thJS}	≤ 240 ≤ 90 ≤ 60 ≤ 140 ≤ 165 ≤ 105	K/W

¹⁾For calculation of R_{thJA} please refer to Application Note Thermal Resistance


Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC Characteristics					
Collector-emitter breakdown voltage $I_C = 100\ \mu\text{A}$, $I_B = 0$	$V_{(\text{BR})\text{CEO}}$	50	-	-	V
Collector-base breakdown voltage $I_C = 10\ \mu\text{A}$, $I_E = 0$	$V_{(\text{BR})\text{CBO}}$	50	-	-	
Emitter-base breakdown voltage $I_E = 10\ \mu\text{A}$, $I_C = 0$	$V_{(\text{BR})\text{EBO}}$	5	-	-	
Collector-base cutoff current $V_{\text{CB}} = 40\ \text{V}$, $I_E = 0$	I_{CBO}	-	-	100	nA
DC current gain ¹⁾ $I_C = 5\ \text{mA}$, $V_{\text{CE}} = 5\ \text{V}$	h_{FE}	120	-	630	-
Collector-emitter saturation voltage ¹⁾ $I_C = 10\ \text{mA}$, $I_B = 0.5\ \text{mA}$	V_{CEsat}	-	-	0.3	V
Input off voltage $I_C = 100\ \mu\text{A}$, $V_{\text{CE}} = 5\ \text{V}$	$V_{\text{i(off)}}$	0.4	-	0.8	
Input on voltage $I_C = 2\ \text{mA}$, $V_{\text{CE}} = 0.3\ \text{V}$	$V_{\text{i(on)}}$	0.5	-	1.1	
Input resistor	R_1	3.2	4.7	6.2	kΩ
AC Characteristics					
Transition frequency $I_C = 10\ \text{mA}$, $V_{\text{CE}} = 5\ \text{V}$, $f = 100\ \text{MHz}$	f_{T}	-	150	-	MHz
Collector-base capacitance $V_{\text{CB}} = 10\ \text{V}$, $f = 1\ \text{MHz}$	C_{cb}	-	3	-	pF

¹⁾Pulse test: $t < 300\ \mu\text{s}$; $D < 2\%$


DC current gain $h_{FE} = f(I_C)$

$V_{CE} = 5V$ (common emitter configuration)

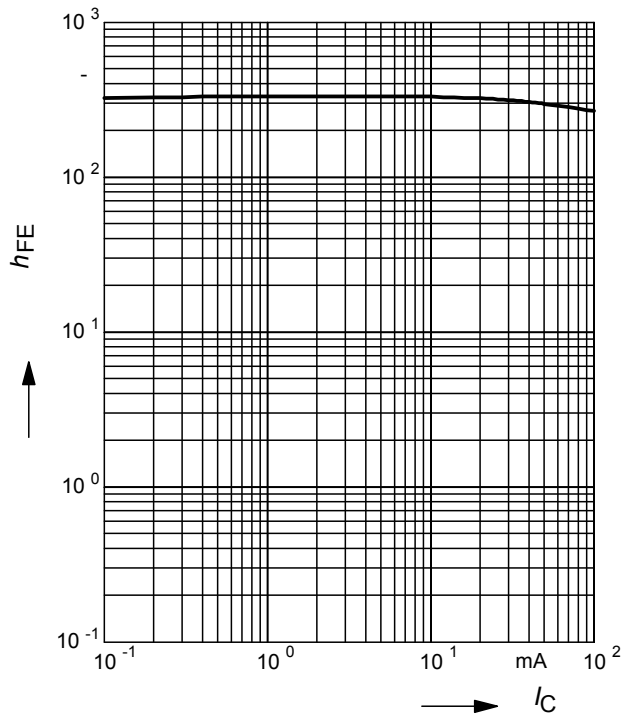


Collector-emitter saturation voltage

$V_{CEsat} = f(I_C), h_{FE} = 20$

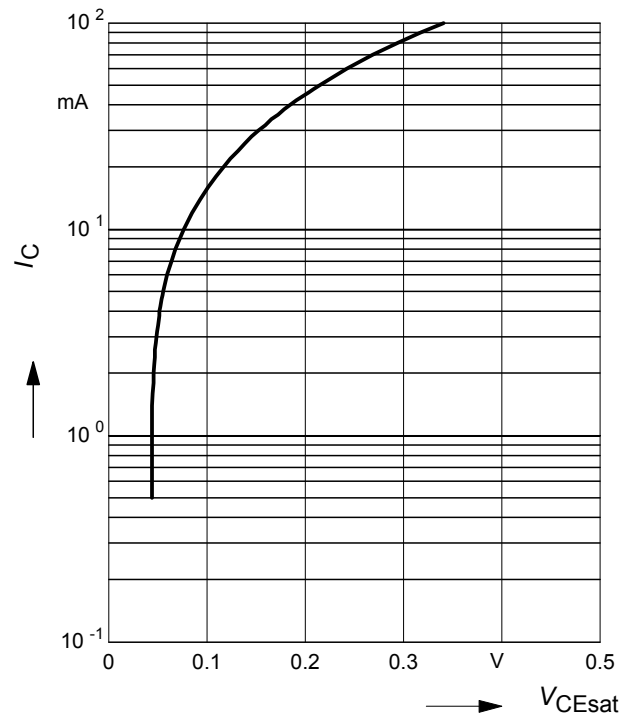


Input on Voltage $V_{i(on)} = f(I_C)$

$V_{CE} = 0.3V$ (common emitter configuration)

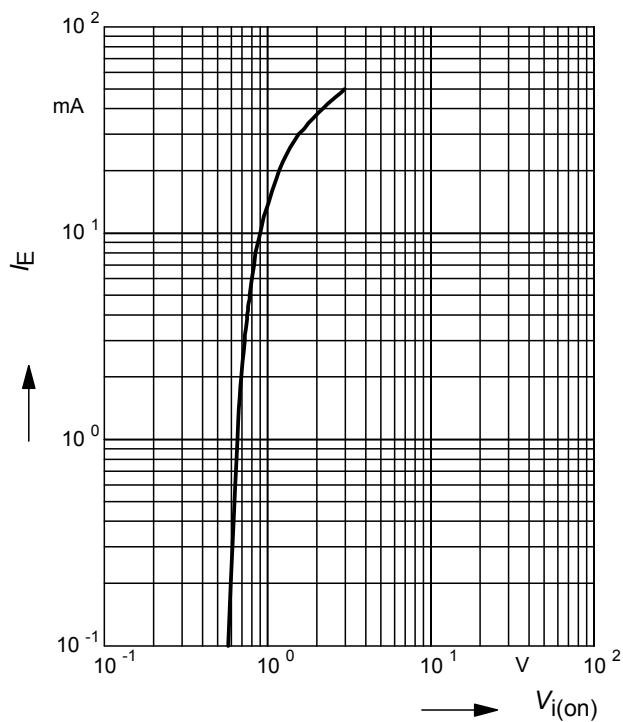

Input off voltage $V_{i(off)} = f(I_C)$

$V_{CE} = 5V$ (common emitter configuration)

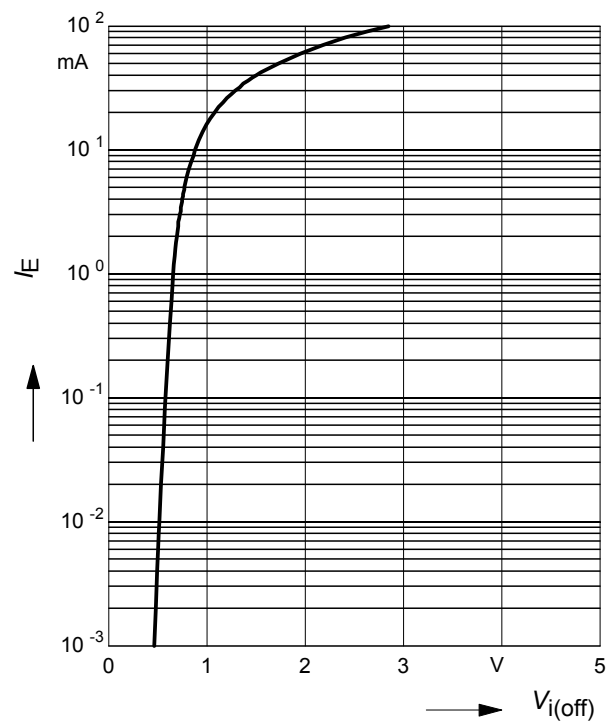

Total power dissipation $P_{\text{tot}} = f(T_S)$

BCR119



Total power dissipation $P_{\text{tot}} = f(T_S)$

BCR119F




Total power dissipation $P_{\text{tot}} = f(T_S)$

BCR119L3




Total power dissipation $P_{\text{tot}} = f(T_S)$

BCR119S

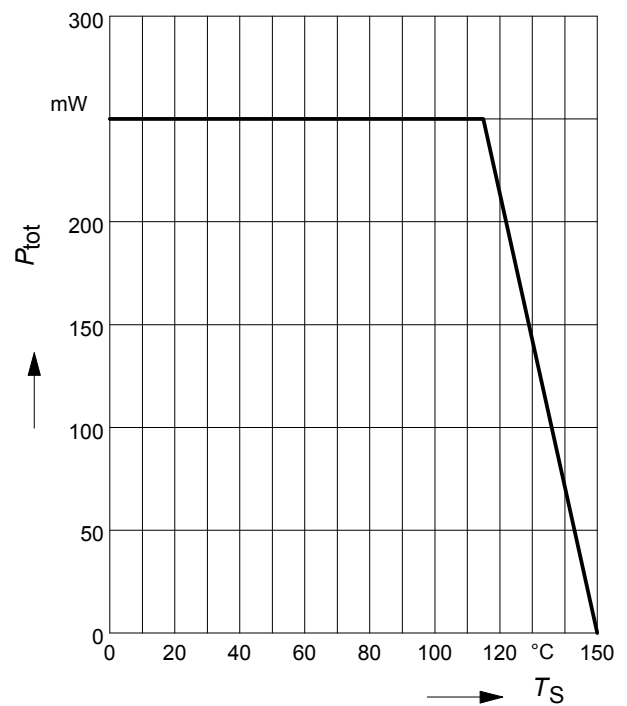


Total power dissipation $P_{\text{tot}} = f(T_S)$

BCR119T

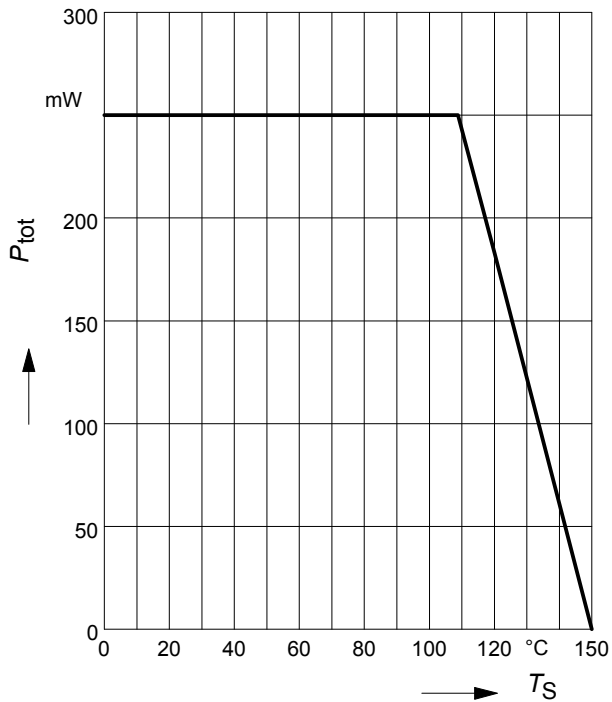


Total power dissipation $P_{\text{tot}} = f(T_S)$

BCR119W

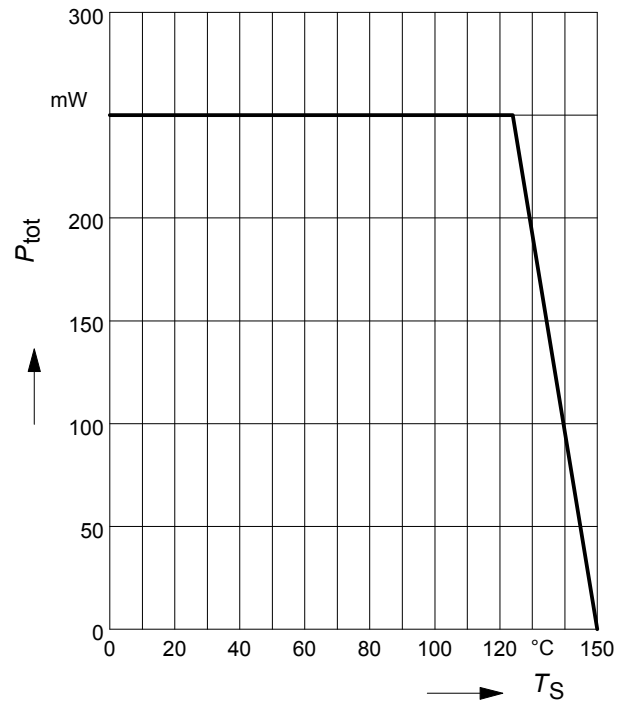

Permissible Pulse Load $R_{\text{thJS}} = f(t_p)$


BCR119

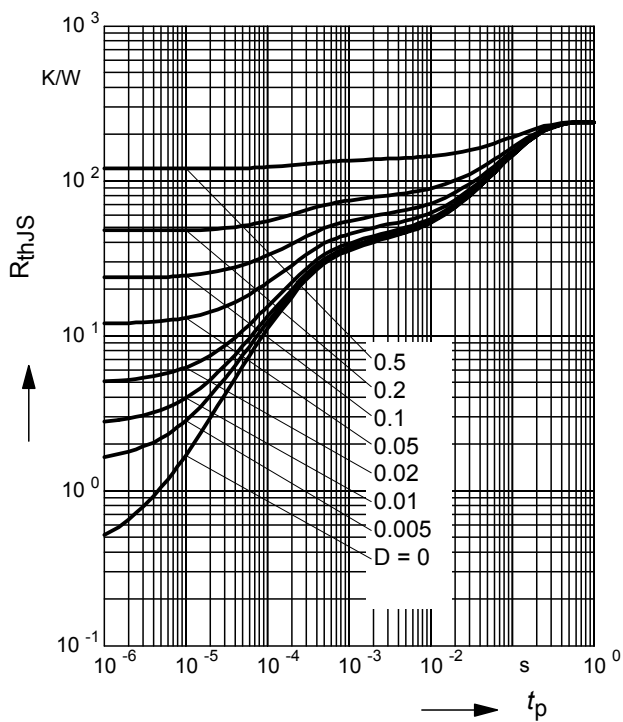

Permissible Pulse Load


$P_{\text{totmax}}/P_{\text{totDC}} = f(t_p)$

BCR119

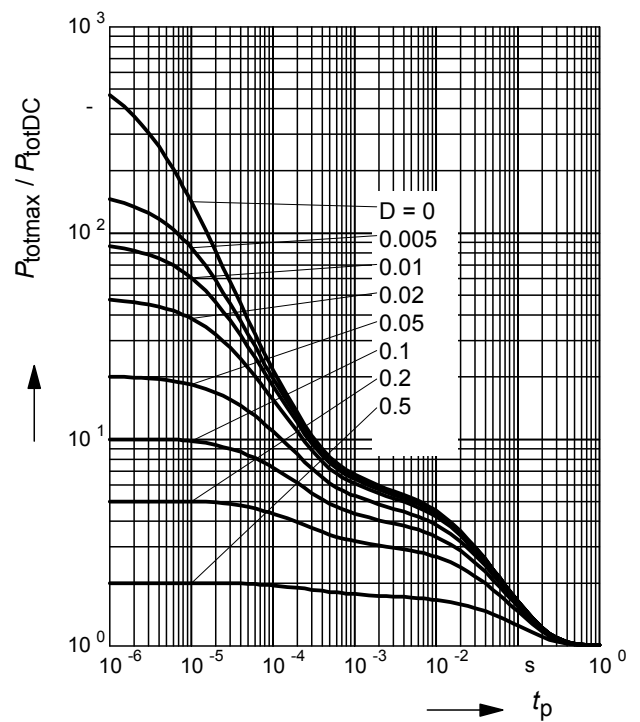

Permissible Puls Load $R_{thJS} = f(t_p)$


BCR119F

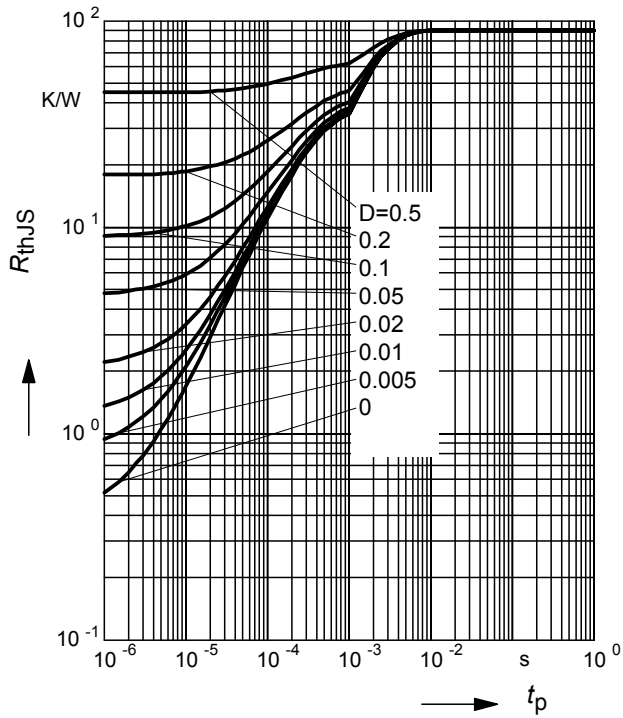

Permissible Pulse Load


$$P_{totmax}/P_{totDC} = f(t_p)$$

BCR119F

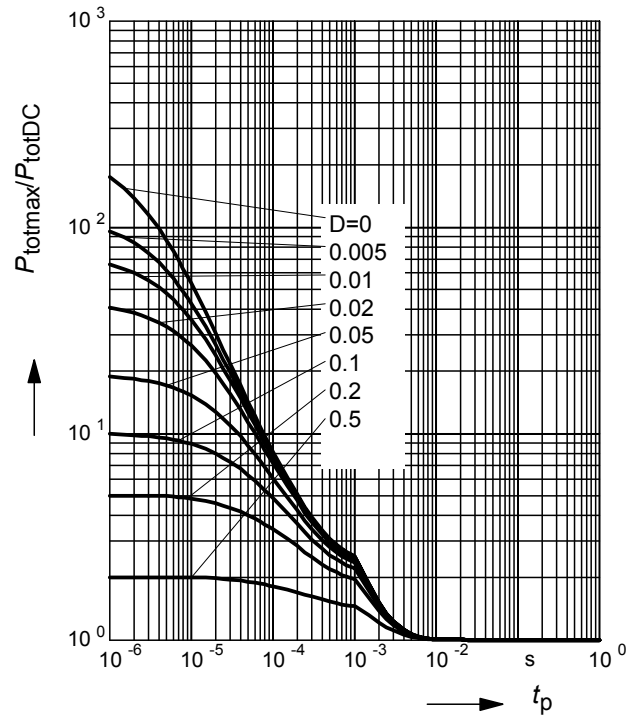

Permissible Puls Load $R_{thJS} = f(t_p)$

BCR119L3

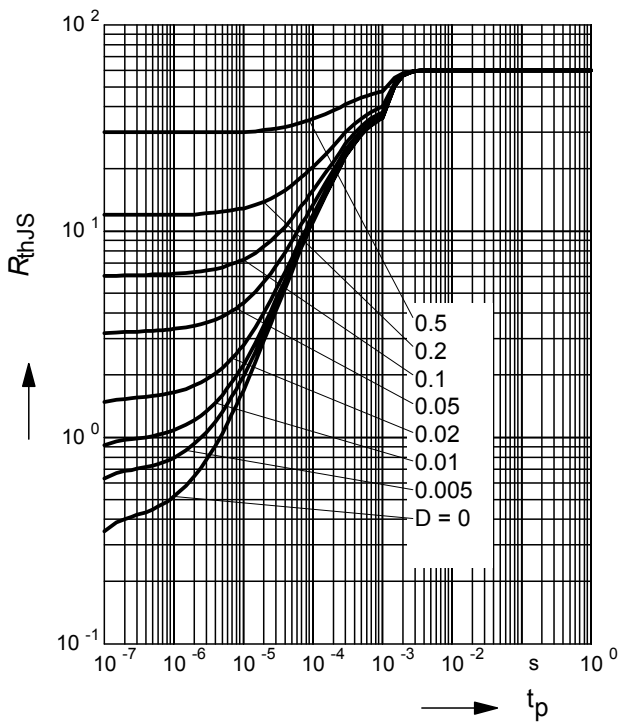

Permissible Pulse Load


$$P_{totmax}/P_{totDC} = f(t_p)$$

BCR119L3



Permissible Puls Load $R_{thJS} = f(t_p)$


BCR119S

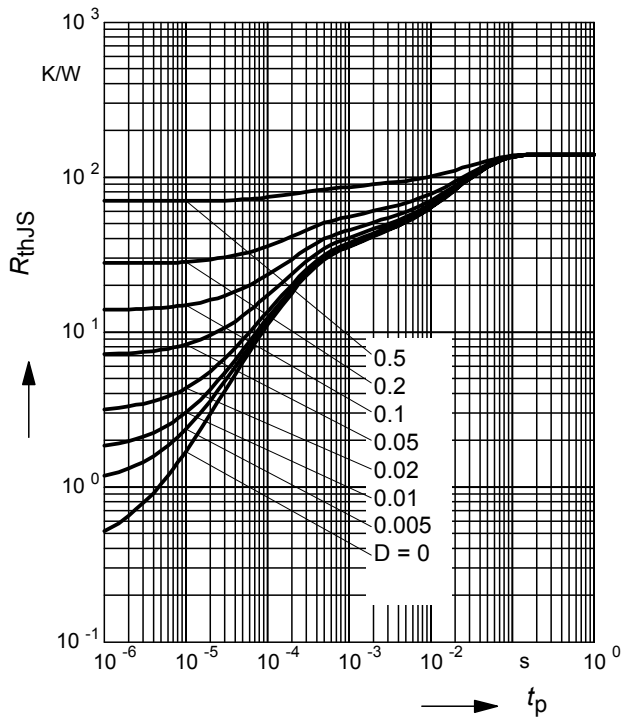

Permissible Pulse Load


$$P_{totmax}/P_{totDC} = f(t_p)$$

BCR119S

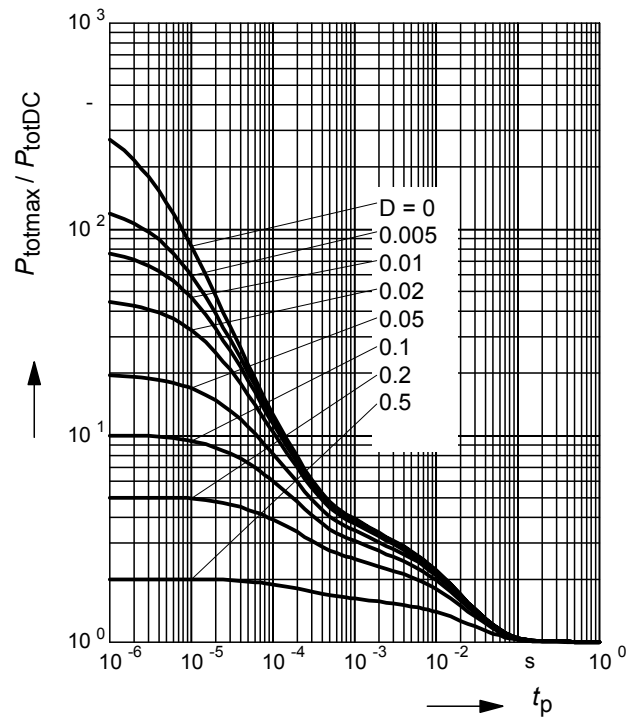

Permissible Puls Load $R_{thJS} = f(t_p)$


BCR119T

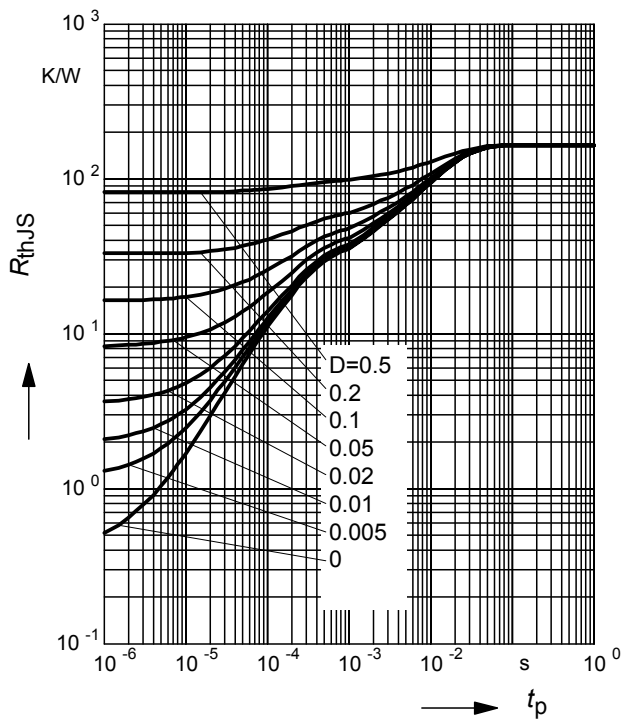

Permissible Pulse Load


$$P_{totmax}/P_{totDC} = f(t_p)$$

BCR119T

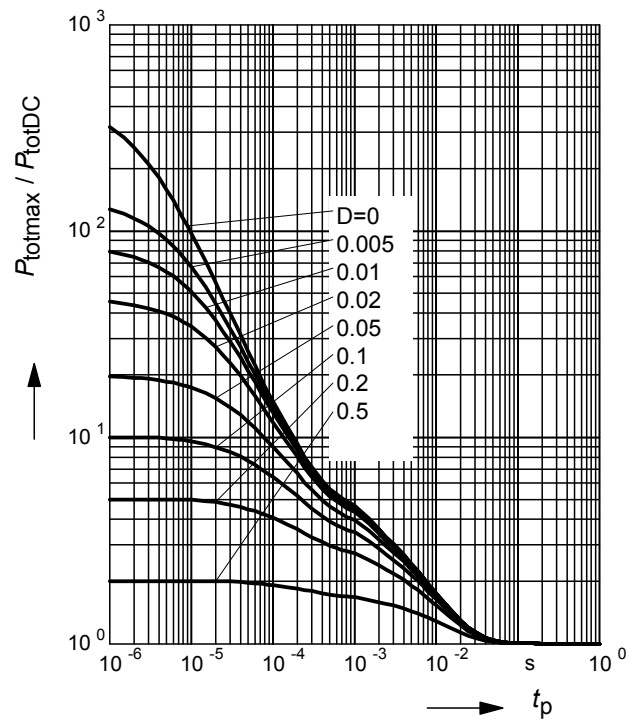

Permissible Puls Load $R_{thJS} = f(t_p)$


BCR119W

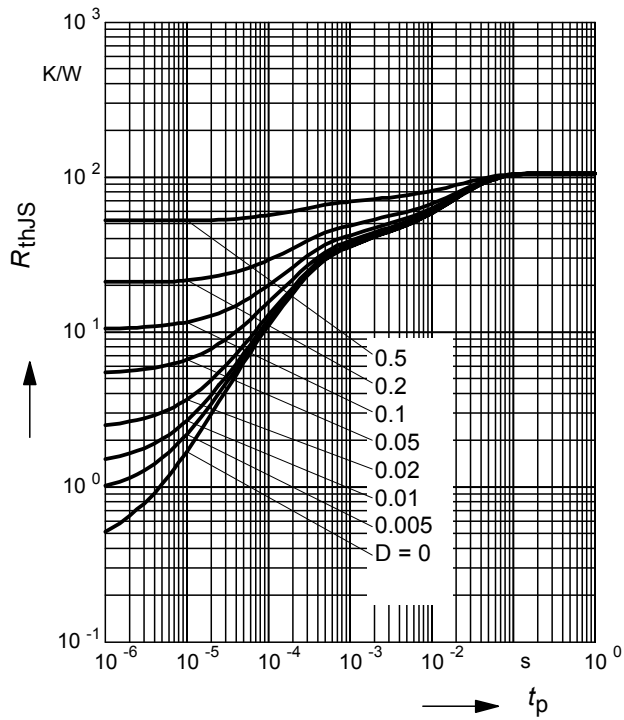


Permissible Pulse Load

$$P_{totmax}/P_{totDC} = f(t_p)$$


BCR119W

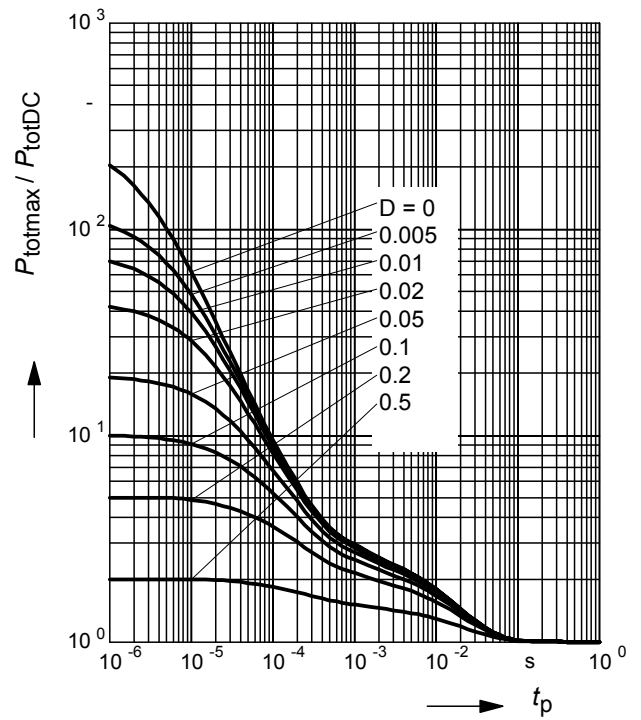


Package Outline

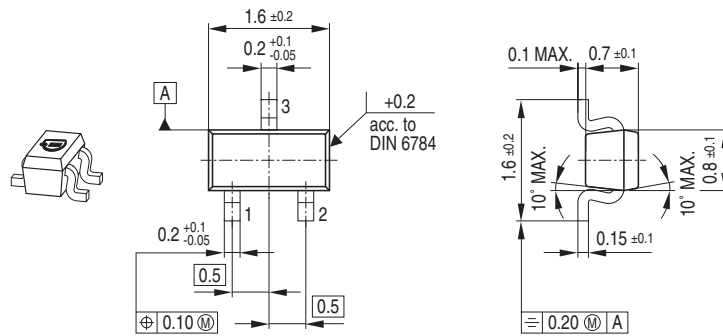

Foot Print




Marking Layout

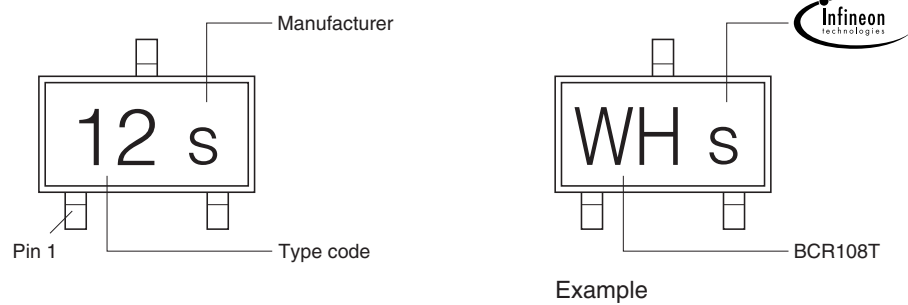


Packing


Code E6327: Reel ø180 mm = 3.000 Pieces/Reel
Code E6433: Reel ø330 mm = 10.000 Pieces/Reel

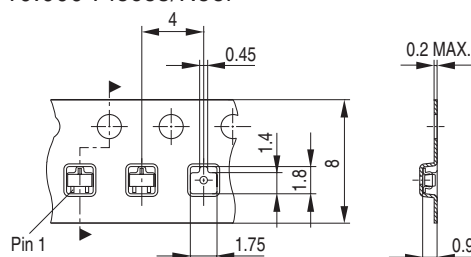



Package Outline

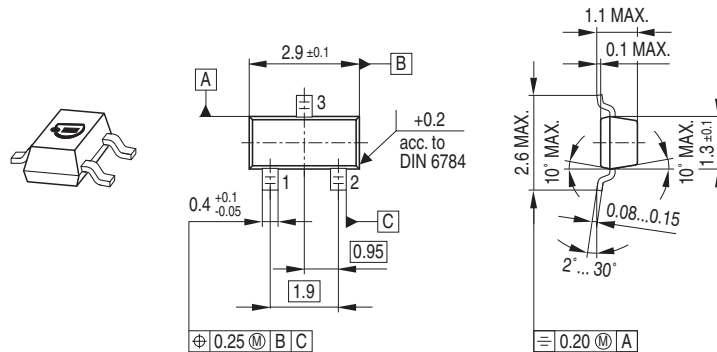

Foot Print



Marking Layout

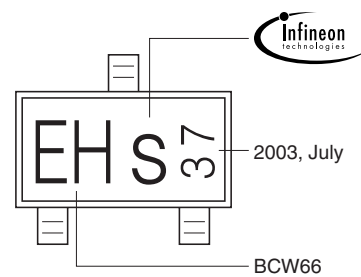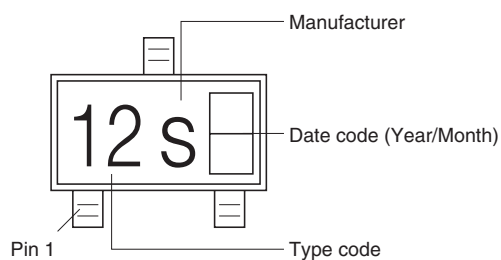


Example

Packing

Code E6327: Reel $\varnothing 180 \text{ mm}$ = 3.000 Pieces/Reel

Code E6433: Reel $\varnothing 330 \text{ mm}$ = 10.000 Pieces/Reel

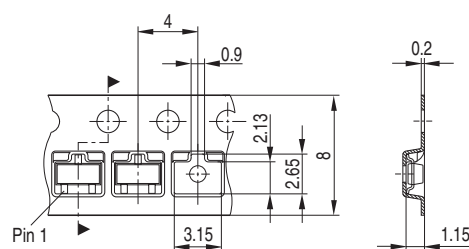

Technical drawing of the 1206 0603W resistor showing top, side, and end views with dimensions and tolerances.

Top View:

- Overall width: 2 ± 0.2
- Width of the central rectangular area: $0.3^{+0.1}_{-0.05}$
- Number of turns: $3x$
- Symbol for tolerance: $\oplus 0.1 \text{ } \textcircled{M}$
- Value: 3
- Dimension line: $+0.2$ acc. to DIN 6784
- Dimensions of the mounting tabs: 0.65 and 0.65
- Labels 1 and 2 indicate the mounting tabs.


Side View:

- Overall height: 2.1 ± 0.1
- Height of the central rectangular area: 0.1 MAX.
- Height of the mounting tabs: 0.1 MIN.
- Symbol for tolerance: $\oplus 0.1 \text{ } \textcircled{M}$
- Height of the central rectangular area: 0.9 ± 0.1
- Height of the mounting tabs: 1.25 ± 0.1
- Label A indicates the mounting tabs.
- Dimension line: $0.15^{+0.1}_{-0.05}$


End View:

- Symbol for tolerance: $\oplus 0.2 \text{ } \textcircled{M} \text{ } \textcircled{A}$


Code E6327: Reel $\varnothing 180$ mm = 3.000 Pieces/Reel
Code E6433: Reel $\varnothing 330$ mm = 10.000 Pieces/Reel

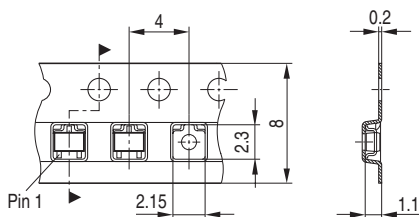


Package Outline

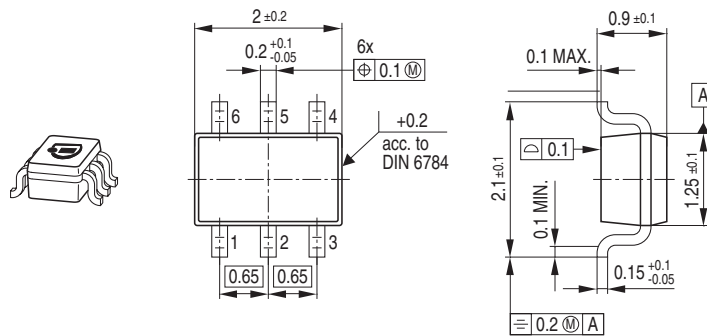

Foot Print




Marking Layout

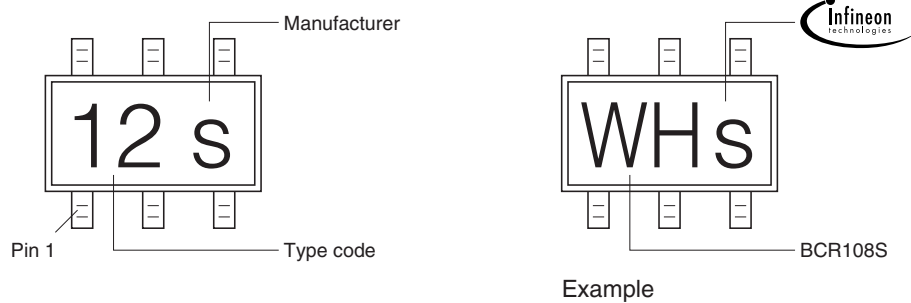


Packing


Code E6327: Reel $\varnothing 180$ mm = 3.000 Pieces/Reel
 Code E6433: Reel $\varnothing 30$ mm = 10.000 Pieces/Reel

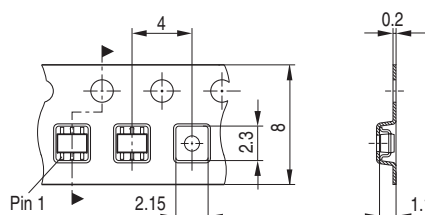


Package Outline

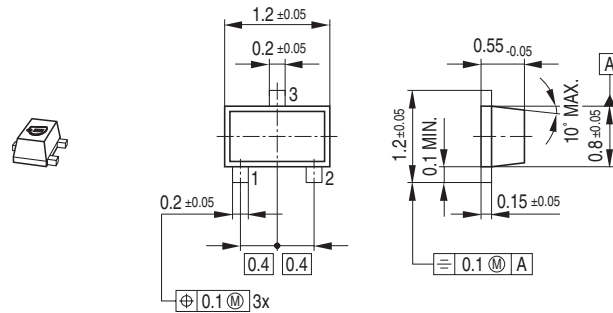

Foot Print




Marking Layout

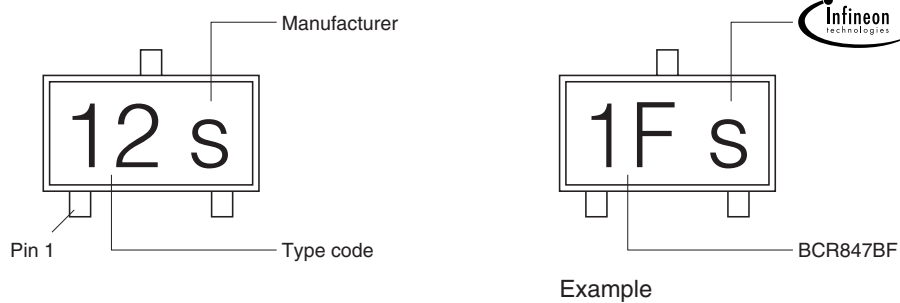


Packing


Code E6327: Reel ø180 mm = 3.000 Pieces/Reel
 Code E6433: Reel ø330 mm = 10.000 Pieces/Reel

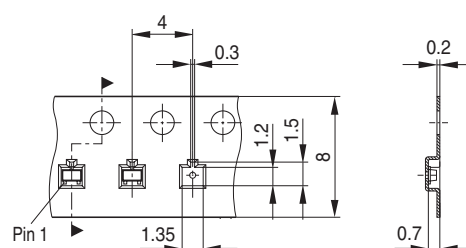


Package Outline

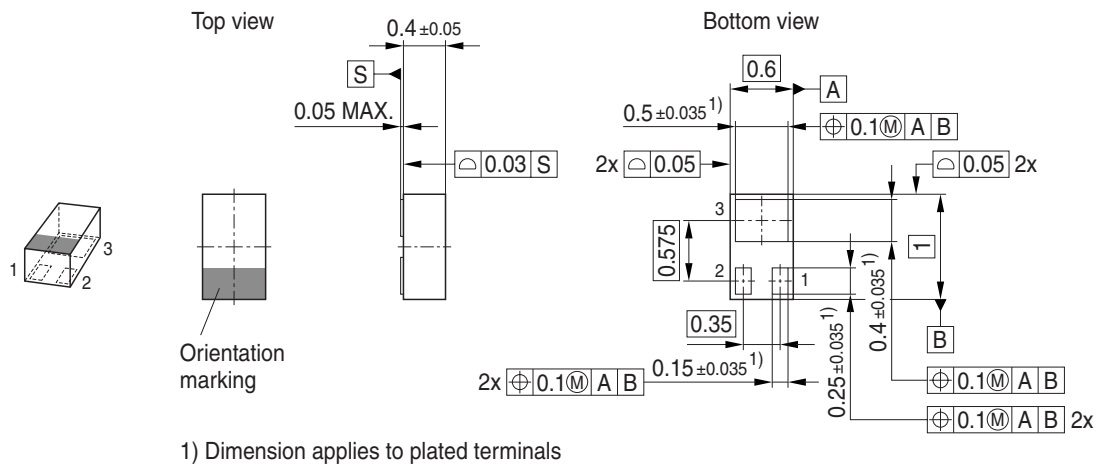

Foot Print

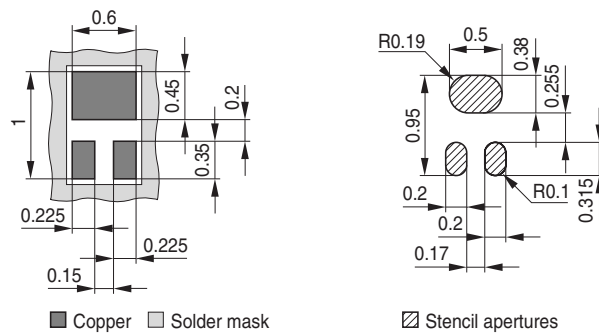


Marking Layout

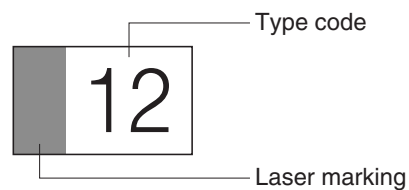

Packing

Code E6327: Reel $\varnothing$ 180 mm = 15.000 Pieces/Reel

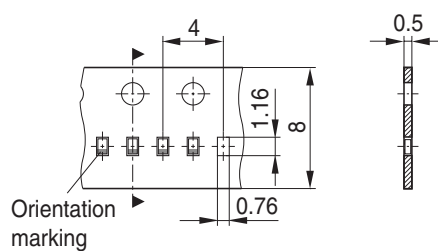

Published by Infineon Technologies AG,
St.-Martin-Strasse 53,
81669 München
© Infineon Technologies AG 2005.
All Rights Reserved.

Attention please!

The information herein is given to describe certain components and shall not be considered as a guarantee of characteristics.

Terms of delivery and rights to technical change reserved.

We hereby disclaim any and all warranties, including but not limited to warranties of non-infringement, regarding circuits, descriptions and charts stated herein.

Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office (www.infineon.com).

Warnings

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.