
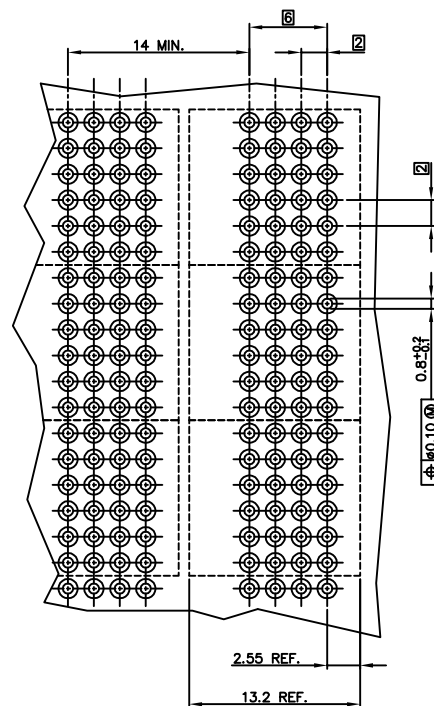
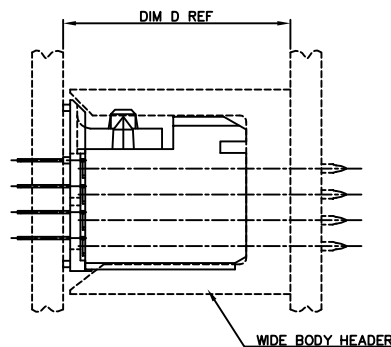
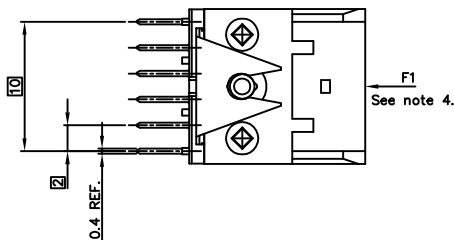
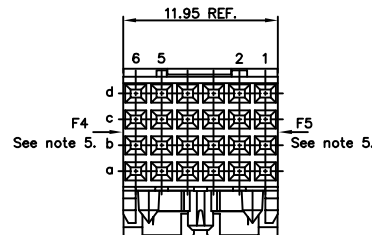


PRODUCT NR.  
85922-XYZ  
85922-XYZLF

| PLATING CONTACT AREA: |                   |
|-----------------------|-------------------|
| DASH NR:              | PERFORMANCE LEVEL |
| -1YY/1YYLF            | TELCORDIA CO      |
| -2YY/2YYLF            | CUSTOMER SPECIAL  |
| -3YY/3YYLF            | CUSTOMER SPECIAL  |

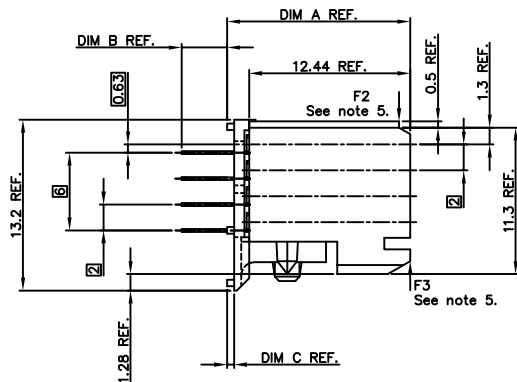

RECOMMENDED HOLE PATTERN,  
COMPONENT SIDE.

| DASH NR | CONFIGURATION |   |   |   |   |   | PCB THICKN. | DIM A | DIM B | DIM C | DIM D |
|---------|---------------|---|---|---|---|---|-------------|-------|-------|-------|-------|
|         | ROW #         | 6 | 5 | 4 | 3 | 2 |             |       |       |       |       |
| -X01    | D             | + | + | + | + | + | 2.4         | 14.14 | 3.50  | 0.54  | 17.64 |
|         | C             | + | + | + | + | + |             |       |       |       |       |
|         | B             | + | + | + | + | + |             |       |       |       |       |
| -X01LF  | A             | + | + | + | + | + | 3.2         | 13.60 | 4.04  | 0.00  | 17.10 |
|         | D             | + | + | + | + | + |             |       |       |       |       |
|         | C             | + | + | + | + | + |             |       |       |       |       |
| -X02    | B             | + | + | + | + | + | 2.4         | 13.60 | 3.24  | 0.00  | 17.10 |
|         | A             | + | + | + | + | + |             |       |       |       |       |
|         | D             | + | + | + | + | + |             |       |       |       |       |
| -X03    | C             | + | + | + | + | + | 1.6         | 13.60 | 2.39  | 0.00  | 17.10 |
|         | B             | + | + | + | + | + |             |       |       |       |       |
|         | A             | + | + | + | + | + |             |       |       |       |       |
| -X04    | D             | + | + | + | + | + | 1.6         | 14.14 | 2.70  | 0.54  | 17.64 |
|         | C             | + | + | + | + | + |             |       |       |       |       |
|         | B             | + | + | + | + | + |             |       |       |       |       |
| -X05    | A             | + | + | + | + | + | 1.6         | 14.64 | 3.00  | 0.54  | 18.14 |
|         | D             | + | + | + | + | + |             |       |       |       |       |
|         | C             | + | + | + | + | + |             |       |       |       |       |
| -X06    | B             | + | + | + | + | + | 1.6         | 15.14 | 2.50  | 0.54  | 18.64 |
|         | A             | + | + | + | + | + |             |       |       |       |       |
|         | D             | + | + | + | + | + |             |       |       |       |       |
| -X07    | C             | + | + | + | + | + | 2.4         | 14.14 | 3.50  | 0.54  | 17.64 |
|         | B             | + | + | + | + | + |             |       |       |       |       |
|         | A             | + | + | + | + | + |             |       |       |       |       |
| -X20    | D             | + | + | + | + | + | 2.4         | 14.14 | 3.50  | 0.54  | 17.64 |
|         | C             | + | + | + | + | + |             |       |       |       |       |
|         | B             | + | + | + | + | + |             |       |       |       |       |
| -X20LF  | A             | + | + | + | + | + |             |       |       |       |       |
|         | D             | + | + | + | + | + |             |       |       |       |       |
|         | C             | + | + | + | + | + |             |       |       |       |       |
|         | B             | + | + | + | + | + |             |       |       |       |       |
|         | A             | + | + | + | + | + |             |       |       |       |       |

"-" POSITION NOT LOADED  
"+" POSITION LOADED

#### NOTES:

1. BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS  
FLAME RETARDANT ACC. UL 94-V0
2. TERMINAL MATERIAL: PHOSPHOR BRONZE.
3. PLATING SOLDER TAILS 2-8  $\mu$ m SnPb 90-97 OR 2-8  $\mu$ m PURE FOR LF.
4. LOAD IN THIS DIRECTION (E.G. THROUGH CODING) 30 NEWTON MAXIMUM PER CONNECTOR.
5. LOAD IN THIS DIRECTION 15 NEWTON MAXIMUM PER CONNECTOR.
6. TO ENSURE PROPER ALIGNMENT OF MULTIPLE MODULES ON A BOARD THE USE OF A FIXTURE IS RECOMMENDED.
7. PRODUCT MARKING: PARTNUMBER & BATCH I.D.
8. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
9. THE HOUSING WILL WITHSTAND EXPOSURE TO 260 DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.

| mat'l. code                               | tolerances unless otherwise specified | CUSTOMER COPY | projection | title                           |
|-------------------------------------------|---------------------------------------|---------------|------------|---------------------------------|
| lit/ecn no dr date                        |                                       |               |            |                                 |
| H 0007-0720/0005/22/07 linear             |                                       |               |            | STR SIGN RCP                    |
| J 0008-0711 TER 9/10/08                   |                                       |               |            | STB + WAFER 12mm                |
| K 0009-0008/0005/20/08/08                 |                                       |               |            | product family METRAL (cm) code |
| E 1170302 JDC 070604 mngl M. MEIER 080313 |                                       |               |            | size dvg no 213                 |
| F 1180380 PHE 080810 chr P. SCHALK 080313 |                                       |               |            | sheet 1 of 1                    |
| G 1180380 GLO 080811 bpp P. SCHALK 080313 |                                       |               |            |                                 |
| index sheet 1                             |                                       |               |            |                                 |