

ZXFBV201, ZFBV203, ZFBV204

QUAD, TRIPLE AND DUAL VIDEO AMPLIFIERS

Device description

The ZFBV201, ZFBV203 and ZFBV204 are quad, triple and dual, high speed amplifiers designed for video and other high speed applications.

Their low differential gain and phase errors make them ideal for video line driving and buffer applications.

The ZFBV203 is ideal for RGB/YPbPr applications, while the ZFBV201 is ideal for RGSB applications. The ZFBV204 is ideal for S-video applications and differential line drive applications; as well as more general purpose applications.


Together with high output drive and slew rate capability, they bring high performance to both standard definition and high definition video applications.

Features and benefits

- High Speed
 - Unity gain -3dB bandwidth 300MHz
 - Slew rate 400V/μs
- Good Video performance
 - 30 MHz 0.1dB bandwidth
 - Differential gain 0.01%
 - Differential phase 0.01°
- Output current drive 40mA
- Characterized up to 300pF load
- ±5 Volt supply operation
- Supply current 7mA per amplifier

Applications

- Video gain stages
- CCTV buffer
- Video distribution
- RGB buffering
- Home theatre
- Fast ADC signal input drive
- Cable driving

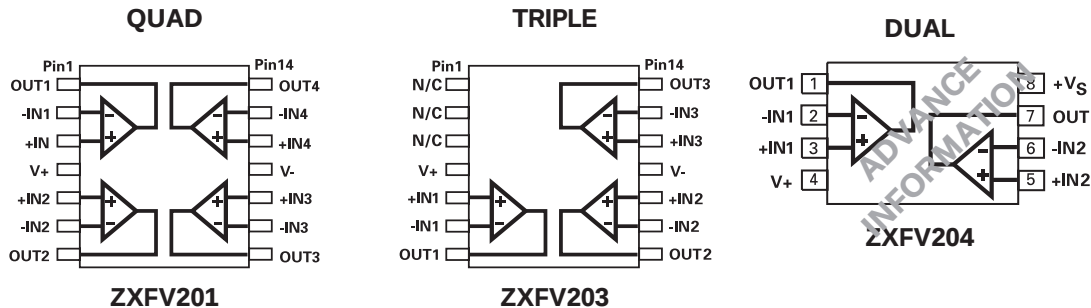

Ordering Information

Part number	Description	Container	Increment
ZFBV201N14TA	Quad	Reel 7"	500
ZFBV201N14TC	Quad	Reel 13"	2500
ZFBV203N14TA	Triple	Reel 7"	500
ZFBV203N14TC	Triple	Reel 13"	2500
ZFBV204N8TA	Dual	Reel 7"	500
ZFBV204N8TC	Dual	Reel 13"	2500

ZXFBV201, ZFBV203, ZFBV204

ABSOLUTE MAXIMUM RATINGS

Supply voltage, V+ to V-	-0.5V to +11V
Input voltage (V _{-IN} , V _{+IN})*	V ₋ -0.5V to V ₊ +0.5V
Differential input voltage, VID	±3V
Inverting input current (I _{-IN}) ⁽²⁾	±5 mA
Output current, (continuous, T _J < 110°C)	±60 mA
Internal power dissipation	See power dissipation derating table
Operating free air temperature range, T _A	-40 to 85°C
Storage temperature range	-65°C to +150°C
Operating ambient junction temperature T _{JMAX}	150°C

Notes:

- (1) Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.
- (2) At high closed loop gains and low gain setting resistors care must be taken if large input signals are applied to the device which cause the output stage to saturate for extended periods of time.
- (3) The power dissipation of the device when loaded must be designed to keep the device junction temperature below T_{JMAX}.

Package	Theta-ja	Power rating at 25°C
SO14	120°C/W	1.04W
SO8	128.4°C/W	0.97W

*During power-up and power-down, these voltage ratings require that signals be applied only when the power supply is connected.

ESD: This device is sensitive to static discharge and proper handling precautions are required.

ELECTRICAL CHARACTERISTICS

±5V power supplies, T_{amb} = 25°C unless otherwise stated. R_f = 1kΩ, R_L = 150Ω, C_L ≤ 10pF

PARAMETER	CONDITIONS	TEST	MIN	TYP	MAX	UNIT
Supply voltage V+ operating range			4.75	5	5.25	V
Supply voltage V- operating range			-5.25	-5	-4.75	V
Supply current/per channel		P	5.0	7.5	10	mA
Input common mode voltage range		P		±3		V
Input offset voltage		P		1	10	mV
Output offset voltage		P		2	20	mV
Input bias current, non-inverting input		P		5	10	μA
Input resistance		P	1.5	2	6.5	MΩ
Output voltage swing	I _{OUT} = 40mA	P		±3		V
Output drive current	V _{IN} = 3V	P	40			mA
Positive PSRR	ΔV ₊ = ±0.25	P	49	57		dB
Negative PSRR	ΔV ₋ = ±0.25	P	49	57		dB
Bandwidth -3dB	Av = +1, V _{out} = 200mV _{pp}	C		300		MHz
Bandwidth -0.1dB	Av = +1, V _{out} = 200mV _{pp}	C		30		MHz
Slew rate	Av = +1 Av = +2 Av = +10	C		400 400 400		V/μs
Rise time	V _{OUT} = ±1 V, 10% - 90%	C		4.0		ns
Fall time	V _{OUT} = ±1 V, 10% - 90%	C		3.2		ns
Propagation delay	V _{OUT} = ±2 V, 50%	C		4.0		ns
Differential gain	3.58MHz (NTSC) and 4.43MHz (PAL) DC = -714 to +714 mV, 280mV _{pp}	C		0.02		%
Differential phase		C		0.02		deg

Test – P = production tested. C = characterized

ZXFV201, ZXFV203, ZXFV204

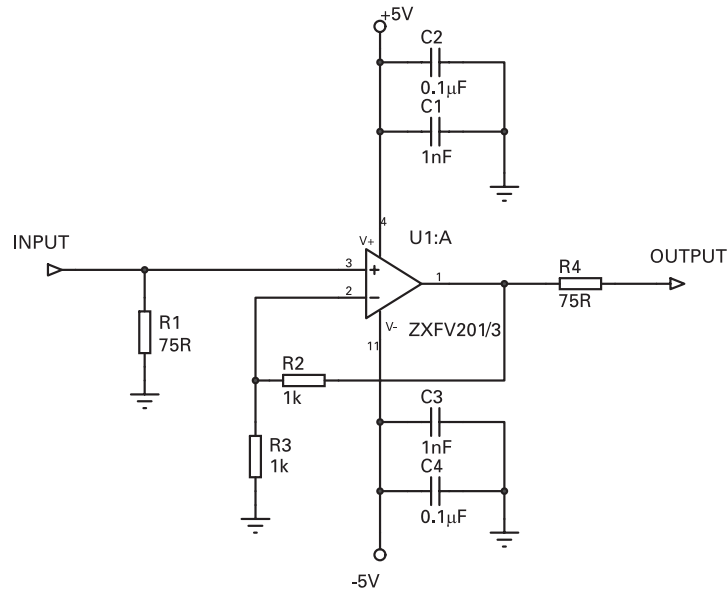


Figure 1: Typical video signal application circuit, gain = 2 (overall gain = 1 for 75Ω load)

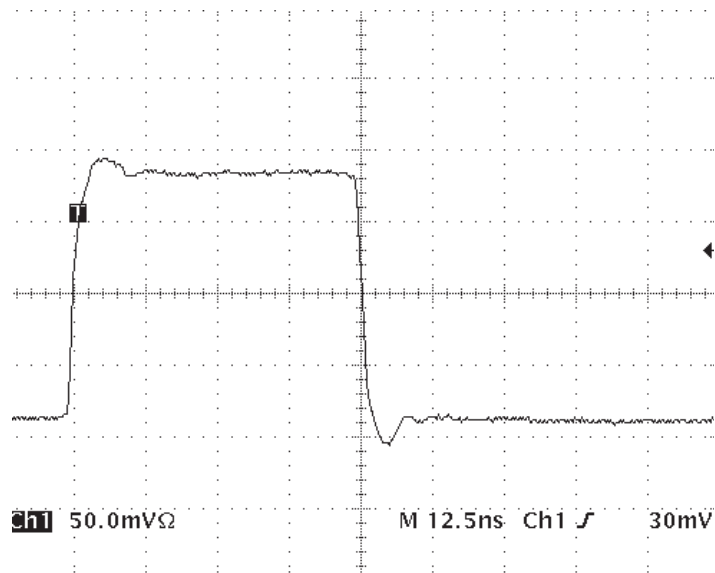


Figure 2: Pulse response, unity gain, 1V_{pp}, R_F = 510Ω

ZXFBV201, ZXFBV203, ZXFBV204

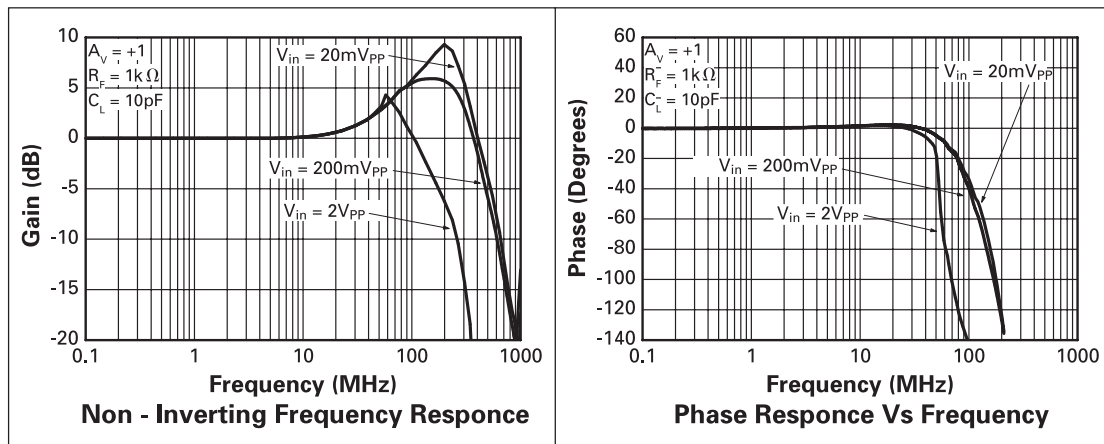


Figure 3: Graphs of gain and phase vs frequency ($R_L=150\Omega$)

APPLICATIONS INFORMATION

Introduction

A typical circuit application is shown in Figure 1, above. This is suitable for 75Ω transmission line connections at both the input and the output and is useful for distribution of wide-band signals such as video via cables. The 75Ω reverse terminating resistor R_4 gives the correct matching condition to a terminated video cable. The amplifier load is then 150Ω in parallel with the local feedback network.

The wide bandwidth of this device necessitates some care in the layout of the printed circuit. A continuous ground plane is required under the device and its signal connection paths, to provide the shortest possible ground return paths for signals and power supply filtering. A double-sided or multi-layer PCB construction is required, with plated-through via holes providing closely spaced low-inductance connections from some components to the continuous ground plane.


For the power supply filtering, low inductance surface mount capacitors are normally required. It has been found that very good RF decoupling is provided on each supply using a 1000pF NPO size 0805 or smaller ceramic surface mount capacitor, closest to the device pin, with an adjacent $0.1\mu\text{F}$ X7R capacitor. Other configurations are possible and it may be found that a single $0.01\mu\text{F}$ X7R capacitor on each supply gives good results. However this should be supported by larger decoupling capacitors elsewhere on the printed circuit board. Values of 1 to $10\mu\text{F}$ are recommended, particularly where the voltage regulators are located more than a few inches from the device. These larger capacitors are recommended to be solid tantalum electrolytic or ceramic types.

Note particularly that the inverting input of this current feedback type of amplifier is sensitive to small amounts of capacitance to ground which occur as part of the practical circuit board layout. This capacitance affects bandwidth, frequency response peaking and pulse overshoot. Therefore to minimise this capacitance, the feedback components R_2 and R_3 of Figure 1 should be positioned as close as possible to the inverting input connection.

The frequency response and pulse response will vary according to particular values of resistors and layout capacitance. The response can be tailored for the application to some extent by choice of the value of feedback resistor. Figure 2 shows an oscilloscope display of the pulse response for a practical double sided printed circuit board where $R_F = 510\Omega$.

ZXFBV201, ZFBV203, ZFBV204

PACKAGE OUTLINE - SO8, SO14

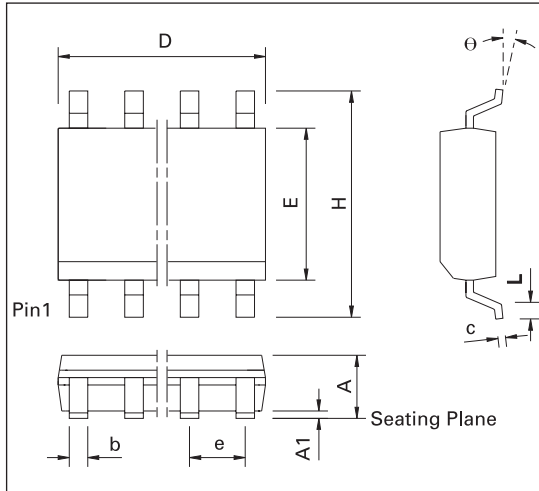

PACKAGE DIMENSIONS

DIM	Millimeters		Inches		DIM	Millimeters		Inches	
	Min	Max	Min	Max		Min	Max	Min	Max
A	1.35	1.75	0.053	0.069	L	0.40	1.27	0.016	0.050
A1	0.10	0.25	0.004	0.010	e	1.27 BSC		0.050 BSC	
D 8 pin	4.80	5.00	0.189	0.197	b	0.33	0.51	0.013	0.020
D 14 pin	8.55	8.75	0.337	0.197	c	0.19	0.25	0.008	0.010
H	5.80	6.20	0.228	0.244	Θ	0°	8°	0°	8°

© Zetex Semiconductors plc 2004

Europe	Americas	Asia Pacific	Corporate Headquarters
Zetex GmbH Streitfeldstraße 19 D-81673 München Germany	Zetex Inc 700 Veterans Memorial Hwy Hauppauge, NY 11788 USA	Zetex (Asia) Ltd 3701-04 Metroplaza Tower 1 Hing Fong Road, Kwai Fong Hong Kong	Zetex Semiconductors plc Lansdowne Road, Chadderton Oldham, OL9 9TY United Kingdom
Telephone: (49) 89 45 49 49 0 Fax: (49) 89 45 49 49 49 europa.sales@zetex.com	Telephone: (1) 631 360 2222 Fax: (1) 631 360 8222 usa.sales@zetex.com	Telephone: (852) 26100 611 Fax: (852) 24250 494 asia.sales@zetex.com	Telephone (44) 161 622 4444 Fax: (44) 161 622 4446 hq@zetex.com

These offices are supported by agents and distributors in major countries world-wide.

This publication is issued to provide outline information only which (unless agreed by the Company in writing) may not be used, applied or reproduced for any purpose or form part of any order or contract or be regarded as a representation relating to the products or services concerned. The Company reserves the right to alter without notice the specification, design, price or conditions of supply of any product or service.

For the latest product information, log on to www.zetex.com

ISSUE 1 - JULY 2004