

(2.54 mm) .100"

IPL1-106-01-L-D-RE1-K

IPL1-105-02-L-D-K-TR

IPL1-110-02-L-S-K-TR

IPL1-120-01-L-D-RA-K

IPL1 SERIES

DISCRETE WIRE HEADER

SPECIFICATIONS

For complete specifications
www.samtec.com?IPL1

Insulator Material:

Natural LCP

Terminal Material:

Phosphor Bronze

Plating:

Sn or Au over

50 μ " (1.27 μ m) Ni

Operating Temp Range:

-55 °C to +125 °C

Voltage Rating:

675 VAC/954 VDC

RoHS Compliant:

Yes

PROCESSING

Lead-Free Solderable:

Yes

-S & -D (-02 Lead Style)

SMT Lead Coplanarity:

(0.10 mm) .004" max (02-05)

(0.13 mm) .005" max (06-10)

(0.15 mm) .006" max (11-25)

-SH SMT Lead Coplanarity:


(0.15 mm) .006" max (02-25)

RECOGNITIONS

For complete scope of
recognitions see
www.samtec.com/quality



-RE1 APPLICATION



ALSO AVAILABLE (MOQ Required)

- Other sizes
 - With or without plug polarization
 - Guide post holes
 - Other platings
 - Weld tab
- Contact Samtec.

Note: Some lengths, styles and options are non-standard, non-returnable.

Mates with:
MMSD, MMSS,
MMSDT, MMSST


Mates with
discrete wire cable
assemblies

Align &
Latch™

Keyed
polarization

(2.54 mm)
.100" pitch

Surface mount, right-angle,
right-angle elevated
and vertical through-hole

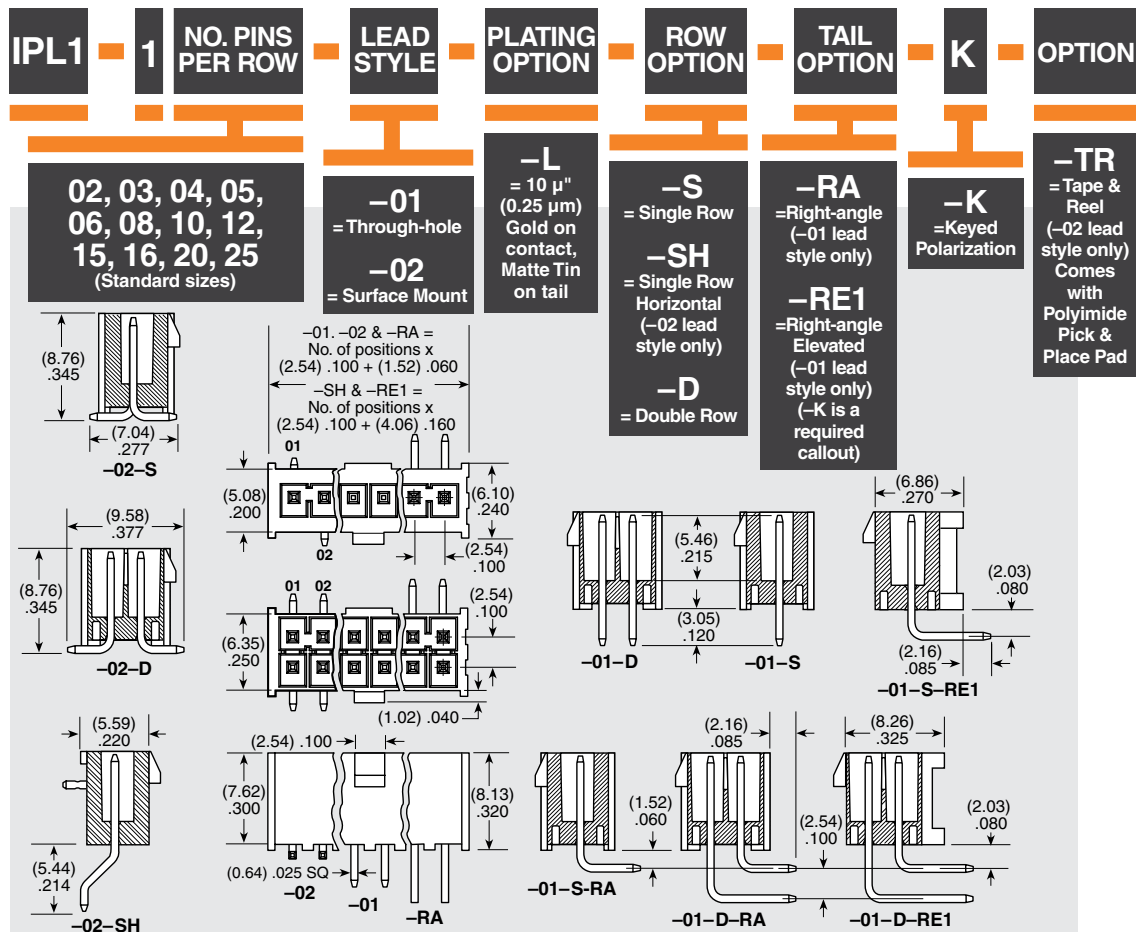

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

All parts within this catalog are built to Samtec's specifications.
Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.