

SI-8000S Series

Full-Mold, Separate Excitation Step-down Switching Mode

Features

- Compact full-mold package (equivalent to TO220)
- Output current: 3.0A
- High efficiency: 79 to 91%
- Requires only 4 discrete components
- Internally-adjusted phase correction and output voltage
- Built-in reference oscillator (60kHz)
- Built-in overcurrent and thermal protection circuits
- Built-in soft start circuit (Output ON/OFF available)

Lineup

Part Number	SI-8033S	SI-8050S	SI-8090S	SI-8120S	SI-8150S
Vo(V)	3.3	5.0	9.0	12.0	15.0
Io(A)	3.0				

Absolute Maximum Ratings

Parameter	Symbol	Ratings	Unit
DC Input Voltage	VIN	43*	V
Power Dissipation	Pd1	18(With infinite heatsink)	W
	Pd2	1.5(Without heatsink, stand-alone operation)	W
Junction Temperature	Tj	+125	°C
Storage Temperature	Tstg	−40 to +125	°C
SW Terminal Applied Reverse Voltage	Vsw	−1	V
Thermal Resistance(junction to case)	θj-c	5.5	°C/W

*35V for SI-8033S

Applications

- Power supplies for telecommunication equipment
- Onboard local power supplies

Recommended Operating Conditions

Parameter	Symbol	Ratings					Unit
		SI-8033S	SI-8050S	SI-8090S	SI-8120S	SI-8150S	
DC Input Voltage Range	VIN	5.5 to 28	7 to 40	12 to 40	15 to 40	18 to 40	V
Output Current Range	Io	0 to 3.0					A
Operating Junction Temperature Range	Tjop	−30 to +125					°C

Electrical Characteristics

(Ta=25°C)

Parameter		Symbol	Ratings															Unit		
			SI-8033S			SI-8050S			SI-8090S			SI-8120S			SI-8150S					
			min.	typ.	max.	min.	typ.	max.	min.	typ.	max.	min.	typ.	max.	min.	typ.	max.			
Output Voltage	SI-8000S*1	V _O	3.17	3.30	3.43	4.80	5.00	5.20	8.55	9.00	9.45	11.50	12.00	12.50	14.25	15.00	15.75	V		
	SI-8000SS		3.234	3.30	3.366	4.90	5.00	5.10												
	Conditions		V _{IN} =15V, I _O =1.0A			V _{IN} =20V, I _O =1.0A			V _{IN} =21V, I _O =1.0A			V _{IN} =24V, I _O =1.0A			V _{IN} =25V, I _O =1.0A					
Efficiency	η		79			84			88			90			91			%		
		Conditions	V _{IN} =15V, I _O =1.0A			V _{IN} =20V, I _O =1.0A			V _{IN} =21V, I _O =1.0A			V _{IN} =24V, I _O =1.0A			V _{IN} =25V, I _O =1.0A					
Oscillation Frequency	f		60			60			60			60			60			kHz		
		Conditions	V _{IN} =15V, I _O =1.0A			V _{IN} =20V, I _O =1.0A			V _{IN} =21V, I _O =1.0A			V _{IN} =24V, I _O =1.0A			V _{IN} =25V, I _O =1.0A					
Line Regulation	ΔV _{OLINE}		25	80	40			100	50			120	60			130	60	130	mV	
		Conditions	V _{IN} =8 to 28V, I _O =1.0A			V _{IN} =10 to 30V, I _O =1.0A			V _{IN} =15 to 30V, I _O =1.0A			V _{IN} =18 to 30V, I _O =1.0A			V _{IN} =21 to 30V, I _O =1.0A					
Load Regulation	ΔV _{LOAD}		10	30	10			40	10			40	10			40	10	40	mV	
		Conditions	V _{IN} =15V, I _O =0.5 to 1.5A			V _{IN} =20V, I _O =0.5 to 1.5A			V _{IN} =21V, I _O =0.5 to 1.5A			V _{IN} =24V, I _O =0.5 to 1.5A			V _{IN} =25V, I _O =0.5 to 1.5A					
Temperature Coefficient of Output Voltage		ΔV _O /ΔT _a		±0.5				±0.5				±1.0				±1.0				mV/°C
Overcurrent Protection Starting Current		I _{SI}	3.1			3.1			3.1			3.1			3.1					
		Conditions	V _{IN} =15V			V _{IN} =20V			V _{IN} =21V			V _{IN} =24V			V _{IN} =25V			A		
Soft Start Pin*2	Low-Level Voltage	V _{SSL}		0.2				0.2				0.2				0.2				
	Outflow Current at Low Voltage	I _{SSL}	15	25	35	15	25	35	15	25	35	15	25	35	15	25	35	V		
		Conditions	V _{SSL} =0.2V															μA		

*1: "S" may be printed to the right of the marking (except SI-8090S, SI-8120S, SI-8150S).

*2: Pin 5 is a soft start pin. Soft start at power on can be performed with a capacitor connected to this pin.

The output can also be turned ON/OFF with this pin.


The output is stopped by setting the voltage of this pin to VSSL or lower.


Soft-start pin voltage can be changed with an open-collector drive circuit of a transistor.

When using both the soft-start and ON/OFF functions together, the discharge current from C3 flows into the ON/OFF control transistor. Therefore, limit the current securely to protect the transistor if C3 capacitance is large.

The ON/OFF pin is pulled up to the power supply in the IC, so applying the external voltage is prohibited.

If this pin is not used, leave it open.

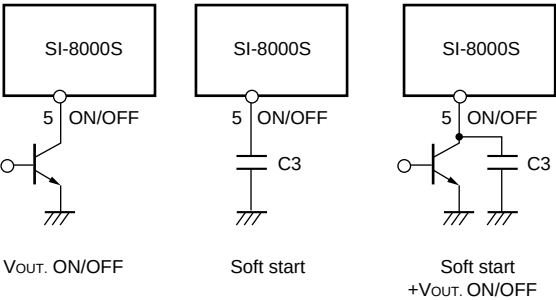



ICs ■ 47