

DK-LM3S9B96-FS8 README FIRST

Stellaris® Flash and SRAM Memory Expansion Board

The Stellaris® Flash and SRAM memory expansion board (DK-LM3S9B96-FS8) provides an easy way to evaluate the capabilities of the Stellaris External Peripheral Interface (EPI) using the highly integrated DK-LM3S9B96 Development Board or the DK-LM3S9D96 Development Board (each sold separately). For the remainder of this document, all references will be to the DK-LM3S9x96 including references to directories, documents, files, and so on.

Flash and SRAM Memory Expansion Board

Requirements

- You have a DK-LM3S9x96 development platform
- You have the Stellaris LM3S9x96 Development Kit Documentation and Software CD


Board Set-Up

The Flash and SRAM memory expansion board interfaces to the EPI interface of the DK-LM3S9x96 development board using shared pins on the development board's LCD interface. Before installing the Flash and SRAM memory expansion board, you must remove the jumpers from JP16-31 in the QVGA LCD section of the development board (this is all of the jumpers). If the jumpers are not removed, the Flash and SRAM memory expansion board cannot be installed on the DK-LM3S9x96 development board. See Figure 1. DK-LM3S9x96 Development Board.

With the jumpers removed, then remove any expansion board that is currently fitted to the expansion connector. This includes both the SDRAM expansion board and the EPI breakout expansion board.

DK-LM3S9B96-FS8 README FIRST

Figure 1. DK-LM3S9x96 Development Board

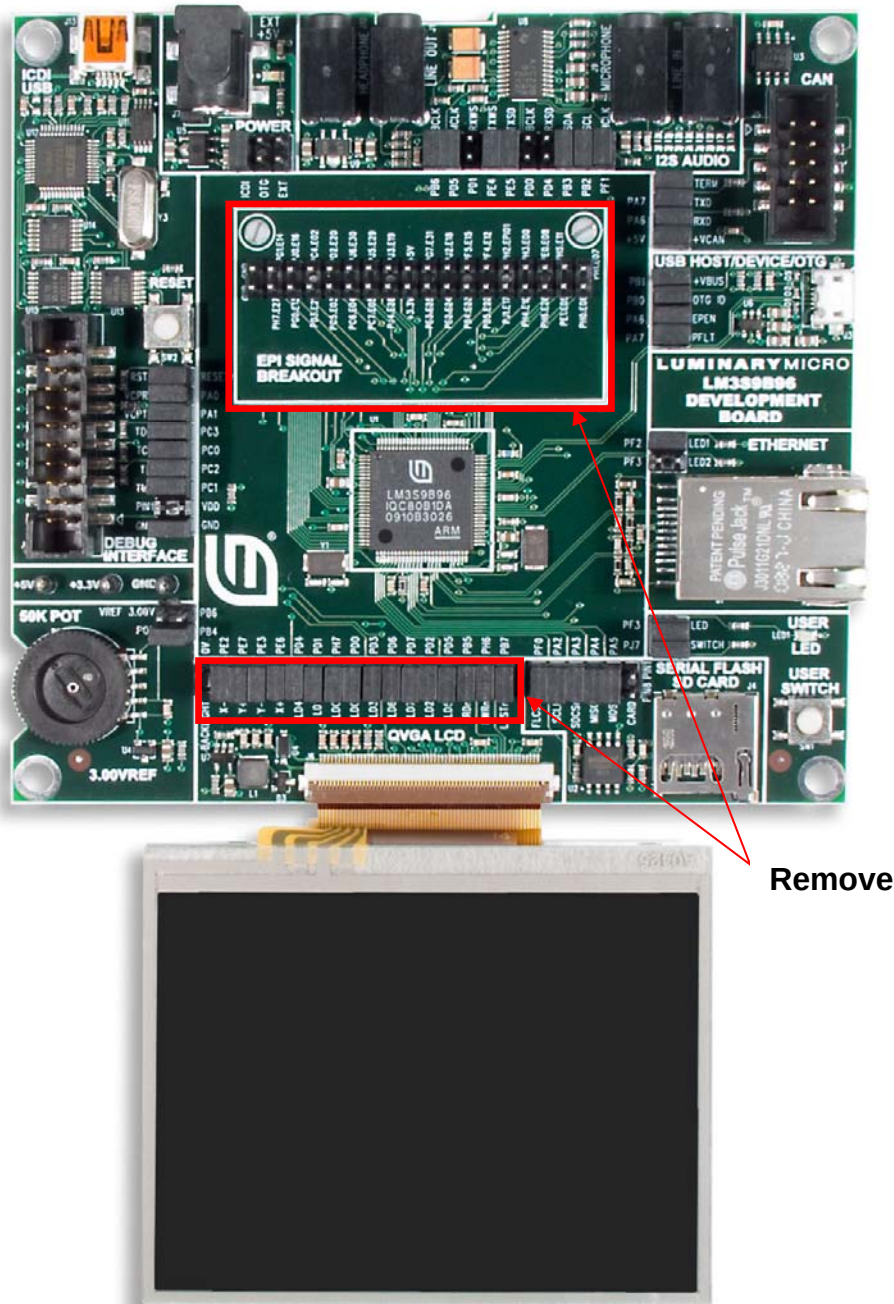

Once the jumpers and expansion boards have been removed, simply fit the Flash and SRAM memory expansion board onto the DK-LM3S9x96 development board. There is a male EPI expansion connector on the bottom side of the Flash and SRAM memory expansion board

DK-LM3S9B96-FS8 README FIRST

that connects to the female EPI expansion connector of the DK-LM3S9x96 development board (J2). Since the Flash and SRAM memory expansion board also interfaces to the LCD, there are holes to fit the LCD header pins through the PCB.

Quickstart Application

The Flash and SRAM memory expansion board comes loaded with the same files system that is loaded into the external SPI flash on the DK-LM3S9x96 development board. If the 'qs-checkout' application is loaded onto the DK-LM3S9x96 development board, it will automatically choose to load the images from the external flash of the Flash and SRAM memory expansion board instead of the external SPI flash. You must have version 5125 or later of StellarisWare® for the quickstart application to detect the Flash and SRAM memory expansion board correctly. The version included on the kit CD is up-to-date.

The quickstart application is actually a collection of smaller applications. These include:

- IO Examples
Ethernet IP address, file system status, board IO status (POT value, mouse pointer location, LED on/off)
- Graphics Demo
Demonstrates the features of the Stellaris Graphics Library
- Audio Player
Browse and play WAV files from the included microSD card or USB stick
- Image Viewer
Browse and view images from the installed file system image in the external Flash
- Web Server
Browse and view web pages and images from internal Flash

When the quickstart application starts running, you can use the touchscreen to navigate through the different applications.

DK-LM3S9B96-FS8 README FIRST

References

The following references are included on the Stellaris LM3S9x96 Development Kit Documentation and Software CD and are also available for download at the www.ti.com/stellaris web site:

- *Stellaris LM3S9x96 Development Kit User's Manual*
- *DK-LM3S9x96 Firmware Development Package User's Guide*
- DK-LM3S9x96 Firmware Development Package
- *Stellaris® Peripheral Driver Library User's Guide*
- *Stellaris LM3S9x96 Microcontroller Data Sheet*

Copyright © 2009-2011 Texas Instruments, Inc. All rights reserved. Stellaris and StellarisWare are registered trademarks of Texas Instruments. ARM and Thumb are registered trademarks, and Cortex is a trademark of ARM Limited. Other names and brands may be claimed as the property of others.

Texas Instruments
108 Wild Basin Rd., Suite 350
Austin, TX 78746
<http://www.ti.com/stellaris>



IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
RF/IF and ZigBee® Solutions	www.ti.com/lprf

Applications

Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Transportation and Automotive	www.ti.com/automotive
Video and Imaging	www.ti.com/video
Wireless	www.ti.com/wireless-apps

TI E2E Community Home Page

e2e.ti.com

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2011, Texas Instruments Incorporated