

---

**MULTI-HDLC WITH  $n \times 64$  SWITCHING MATRIX ASSOCIATED**


---

- 32 TxHDLCs WITH BROADCASTING CAPABILITY AND/OR CSMA/CR FUNCTION WITH AUTOMATIC RESTART IN CASE OF TX FRAME ABORT
- 32 RxHDLCs INCLUDING ADDRESS RECOGNITION
- 16 COMMAND/INDICATE CHANNELS (4 OR 6-BIT PRIMITIVE)
- 16 MONITOR CHANNELS PROCESSED IN ACCORDANCE WITH GCI OR V\*
- 256 x 256 SWITCHING MATRIX WITHOUT BLOCKING AND WITH TIME SLOT SEQUENCE INTEGRITY AND LOOPBACK PER BIDIRECTIONAL CONNECTION
- DMA CONTROLLER FOR 32 Tx CHANNELS AND 32 Rx CHANNELS
- HDLCs AND DMA CONTROLLER ARE CAPABLE OF HANDLING A MIX OF LAPD, LAPB, SS7, CAS AND PROPRIETARY SIGNALLINGS
- EXTERNAL SHARED MEMORY ACCESS BETWEEN DMA CONTROLLER AND MICROPROCESSOR
- SINGLE MEMORY SHARED BETWEEN  $n \times$  MULTI-HDLCs AND SINGLE MICROPROCESSOR ALLOWS TO HANDLE  $n \times$  32 CHANNELS
- BUS ARBITRATION
- INTERFACE FOR VARIOUS 8, 16 OR 32 BIT MICROPROCESSORS
- RAM CONTROLLER ALLOWS TO INTERFACE UP TO :
  - 16 MEGABYTES OF DYNAMIC RAM OR
  - 1 MEGABYTE OF STATIC RAM
- INTERRUPT CONTROLLER TO STORE AUTOMATICALLY EVENTS IN SHARED MEMORY
- PQFP160 PACKAGE

**DESCRIPTION**

The STLC5464 is a Subscriber line interface card controller for Central Office, Central Exchange, NT2 and PBX capable of handling :

- 16 U Interfaces or
- 2 Megabits line interface cards or
- 16 SLICs (Plain Old Telephone Service) or
- Mixed analogue and digital Interfaces (SLICs or U Interfaces) or
- 16 S Interfaces
- Switching Network with centralized processing

**PQFP160**

(Plastic Quad Flat Pack)

**ORDER CODE : STLC5464**

| <b>CONTENTS</b> |   | <b>Page</b> |
|-----------------|---|-------------|
| <b>I</b>        | <b>PIN INFORMATION</b> .....  | <b>8</b>    |
| I.1             | PIN CONNECTIONS .....   | 8           |
| I.2             | PIN DESCRIPTION .....   | 9           |
| I.3             | PIN DEFINITION .....  | 13          |
| I.3.1           | Input Pin Definition .....  | 13          |
| I.3.2           | Output Pin Definition .....   | 13          |
| I.3.3           | Input/Output Pin Definition .....                                   | 13          |
| <b>II</b>       | <b>BLOCK DIAGRAM</b> .....  | <b>14</b>   |
| <b>III</b>      | <b>FUNCTIONAL DESCRIPTION</b> .....                                 | <b>15</b>   |
| III.1           | THE SWITCHING MATRIX N x 64 KBits/S .....                           | 15          |
| III.1.1         | Function Description .....  | 15          |
| III.1.2         | Architecture of the Matrix .....                                    | 15          |
| III.1.3         | Connection Function .....   | 15          |
| III.1.4         | Loop Back Function .....  | 15          |
| III.1.5         | Delay through the Matrix .....                                      | 17          |
| III.1.5.1       | Variable Delay Mode .....   | 17          |
| III.1.5.2       | Sequence Integrity Mode .....                                       | 17          |
| III.1.6         | Connection Memory .....   | 21          |
| III.1.6.1       | Description .....   | 21          |
| III.1.6.2       | Access to Connection Memory .....                                   | 21          |
| III.1.6.3       | Access to Data Memory .....   | 21          |
| III.2           | HDLC CONTROLLER .....   | 21          |
| III.2.1         | Function description .....  | 21          |
| III.2.1.1       | Format of the HDLC Frame .....                                      | 21          |
| III.2.1.2       | Composition of an HDLC Frame .....                                  | 21          |
| III.2.1.3       | Description and Functions of the HDLC Bytes .....                   | 23          |
| III.2.2         | CSMA/CR Capability .....  | 23          |
| III.2.3         | Time Slot Assigner Memory .....                                     | 24          |
| III.2.4         | Data Storage Structure .....  | 24          |
| III.2.4.1       | Reception .....   | 24          |
| III.2.4.2       | Transmission .....  | 24          |
| III.2.4.3       | Frame Relay .....   | 24          |
| III.2.5         | Transparent Modes .....   | 26          |
| III.2.6         | Command of the HDLC Channels .....                                  | 26          |
| III.2.6.1       | Reception Control .....   | 26          |
| III.2.6.2       | Transmission Control .....  | 26          |
| III.3           | C/I AND MONITOR .....   | 26          |
| III.3.1         | Function Description .....  | 26          |
| III.3.2         | GCI and V* Protocol .....   | 27          |
| III.3.3         | Structure of the Treatment .....                                    | 27          |
| III.3.4         | CI and Monitor Channel Configuration .....                          | 27          |
| III.3.5         | CI and Monitor Transmission/Reception Command .....                 | 27          |
| III.4           | MICROPROCESSOR INTERFACE .....                                      | 28          |
| III.4.1         | Description .....   | 28          |
| III.4.2         | Definition of the Interface for the different microprocessors ..... | 28          |

**CONTENTS (continued)****Page**

|            |  |           |
|------------|--|-----------|
| III.5      | MEMORY INTERFACE .....   | 31        |
| III.5.1    | Function Description .....   | 31        |
| III.5.2    | Choice of memory versus microprocessor and capacity required ..... | 31        |
| III.5.3    | Memory Cycle .....   | 31        |
| III.5.4    | SRAM interface .....   | 32        |
| III.5.4.1  | 18K x n SRAM .....   | 32        |
| III.5.4.2  | 512K x n SRAM .....  | 32        |
| III.5.5    | DRAM Interface .....   | 32        |
| III.5.5.1  | 256K x n DRAM .....  | 32        |
| III.5.5.2  | 1M x n DRAM .....  | 33        |
| III.5.5.3  | 4M x n DRAM .....  | 33        |
| III.6      | BUS ARBITRATION .....  | 33        |
| III.7      | CLOCK SELECTION AND TIME SYNCHRONIZATION .....                     | 34        |
| III.7.1    | Clock Distribution Selection and Supervision .....                 | 34        |
| III.7.2    | VCXO Frequency Synchronization .....                               | 34        |
| III.8      | INTERRUPT CONTROLLER .....   | 35        |
| III.8.1    | Description .....  | 35        |
| III.8.2    | Operating Interrupts (INT0 Pin) .....                              | 35        |
| III.8.3    | Time Base Interrupts (INT1 Pin) .....                              | 35        |
| III.8.4    | Emergency Interrupts (WDO Pin) .....                               | 35        |
| III.8.5    | Interrupt Queues .....   | 35        |
| III.9      | WATCHDOG .....   | 36        |
| III.10     | RESET .....  | 36        |
| <b>IV</b>  | <b>DC SPECIFICATIONS</b> .....                                     | <b>37</b> |
| <b>V</b>   | <b>CLOCK TIMING</b> .....  | <b>38</b> |
| V.1        | SYNCHRONIZATION SIGNALS DELIVERED BY THE SYSTEM .....              | 38        |
| V.2        | TDM SYNCHRONIZATION .....  | 39        |
| V.3        | GCI INTERFACE .....  | 40        |
| V.4        | V* INTERFACE .....   | 41        |
| <b>VI</b>  | <b>MEMORY TIMING</b> .....   | <b>42</b> |
| VI.1       | DYNAMIC MEMORIES .....   | 42        |
| VI.2       | STATIC MEMORIES .....  | 44        |
| <b>VII</b> | <b>MICROPROCESSOR TIMING</b> .....                                 | <b>46</b> |
| VII.1      | ST9 FAMILY MOD0=1, MOD1=0, MOD2=0 .....                            | 46        |
| VII.2      | 80C188 MOD0=1, MOD1=1, MOD2=0 .....                                | 48        |
| VII.3      | 80C186 MOD0=1, MOD1=1, MOD2=1 .....                                | 50        |
| VII.4      | 68000 MOD0=0, MOD1=0, MOD2=1 .....                                 | 52        |
| VII.5      | TOKEN RING TIMING .....  | 54        |
| VII.6      | MASTER CLOCK TIMING .....  | 54        |

| <b>CONTENTS (continued)</b> |  | <b>Page</b> |
|-----------------------------|--|-------------|
| <b>VIII</b>                 | <b>INTERNAL REGISTERS</b> .....                              | <b>55</b>   |
| VIII.1                      | IDENTIFICATION AND DYNAMIC COMMAND REGISTER ..... IDCR (00)H | 55          |
| VIII.2                      | GENERAL CONFIGURATION ..... GCR (02)H                        | 55          |
| VIII.3                      | INPUT MULTIPLEX CONFIGURATION REGISTER 0 ..... IMCR0 (04)H   | 57          |
| VIII.4                      | INPUT MULTIPLEX CONFIGURATION REGISTER 1 ..... IMCR1 (06)H   | 57          |
| VIII.5                      | OUTPUT MULTIPLEX CONFIGURATION REGISTER 0 ..... OMCR0 (08)H  | 57          |
| VIII.6                      | OUTPUT MULTIPLEX CONFIGURATION REGISTER 1 ..... OMCR1 (0A)H  | 58          |
| VIII.7                      | SWITCHING MATRIX CONFIGURATION REGISTER ..... SMCR (0C)H     | 58          |
| VIII.8                      | CONNECTION MEMORY DATA REGISTER ..... CMDR (0E)H             | 59          |
| VIII.9                      | CONNECTION MEMORY ADDRESS REGISTER ..... CMAR (10)H          | 60          |
| VIII.10                     | SEQUENCE FAULT COUNTER REGISTER ..... SFCR (12)H             | 61          |
| VIII.11                     | TIME SLOT ASSIGNER ADDRESS REGISTER ..... TAAR (14)H         | 61          |
| VIII.12                     | TIME SLOT ASSIGNER DATA REGISTER ..... TADR (16)H            | 62          |
| VIII.13                     | HDLC TRANSMIT COMMAND REGISTER ..... HPCR (18)H              | 62          |
| VIII.14                     | HDLC RECEIVE COMMAND REGISTER ..... HRCR (1A)H               | 64          |
| VIII.15                     | ADDRESS FIELD RECOGNITION ADDRESS REGISTER ..... AFRAR (1C)H | 65          |
| VIII.16                     | ADDRESS FIELD RECOGNITION DATA REGISTER ..... AFRDR (1E)H    | 66          |
| VIII.17                     | FILL CHARACTER REGISTER ..... FCR (20)H                      | 66          |
| VIII.18                     | GCI CHANNELS DEFINITION REGISTER 0 ..... GCIR0 (22)H         | 66          |
| VIII.19                     | GCI CHANNELS DEFINITION REGISTER 1 ..... GCIR1 (24)H         | 67          |
| VIII.20                     | GCI CHANNELS DEFINITION REGISTER 2 ..... GCIR2 (26)H         | 67          |
| VIII.21                     | GCI CHANNELS DEFINITION REGISTER 3 ..... GCIR3 (28)H         | 67          |
| VIII.22                     | TRANSMIT COMMAND / INDICATE REGISTER ..... TCIR (2A)H        | 68          |
| VIII.23                     | TRANSMIT MONITOR ADDRESS REGISTER ..... TMAR (2C)H           | 69          |
| VIII.24                     | TRANSMIT MONITOR DATA REGISTER ..... TMDR (2E)H              | 70          |
| VIII.25                     | TRANSMIT MONITOR INTERRUPT REGISTER ..... TMIR (30)H         | 70          |
| VIII.26                     | MEMORY INTERFACE CONFIGURATION REGISTER ..... MICR (32)H     | 70          |
| VIII.27                     | INITIATE BLOCK ADDRESS REGISTER ..... IBAR (34)H             | 72          |
| VIII.28                     | INTERRUPT QUEUE SIZE REGISTER ..... IQSR (36)H               | 72          |
| VIII.29                     | INTERRUPT REGISTER ..... IR (38)H                            | 73          |
| VIII.30                     | INTERRUPT MASK REGISTER ..... IMR (3A)H                      | 74          |
| VIII.31                     | TIME REGISTER ..... TIMR (3C)H                               | 74          |
| VIII.32                     | TEST REGISTER ..... TR (3E)H                                 | 74          |

**CONTENTS (continued)**

|  | <b>Page</b> |
|--|-------------|
| <b>IX EXTERNAL REGISTERS</b> .....                             | 75          |
| IX.1 INITIALIZATION BLOCK IN EXTERNAL MEMORY .....             | 75          |
| IX.2 RECEIVE DESCRIPTOR .....                                  | 76          |
| IX.2.1 Bits written by the Microprocessor only .....           | 76          |
| IX.2.2 Bits written by the Rx DMAC only .....                  | 76          |
| IX.2.3 Receive Buffer .....                                    | 76          |
| IX.3 TRANSMIT DESCRIPTOR .....                                 | 77          |
| IX.3.1 Bits written by the Microprocessor only .....           | 77          |
| IX.3.2 Bits written by the Rx DMAC only .....                  | 78          |
| IX.3.3 Transmit Buffer .....                                   | 78          |
| IX.4 RECEIVE & TRANSMIT HDLC FRAME INTERRUPT .....             | 78          |
| IX.5 RECEIVE COMMAND / INDICATE INTERRUPT .....                | 79          |
| IX.5.1 Receive Command / Indicate Interrupt when TSV = 0 ..... | 79          |
| IX.5.2 Receive Command / Indicate Interrupt when TSV = 1 ..... | 80          |
| IX.6 RECEIVE MONITOR INTERRUPT .....                           | 80          |
| IX.6.1 Receive Monitor Interrupt when TSV = 0 .....            | 80          |
| IX.6.2 Receive Monitor Interrupt when TSV = 1 .....            | 81          |
| <b>X PACKAGE MECHANICAL DATA</b> .....                         | 82          |


| LIST OF FIGURES |   | Page |
|-----------------|---|------|
| I               | PIN INFORMATION .....   | 8    |
| II              | BLOCK DIAGRAM .....   | 14   |
|                 | Figure 1 : General Block Diagram .....  | 14   |
| III             | FUNCTIONAL DESCRIPTION .....  | 15   |
|                 | Figure 2 : Switching Matrix Data Path .....   | 16   |
|                 | Figure 3 : Unidirectional and Bidirectional Connections .....                       | 17   |
|                 | Figure 4 : Loop Back .....  | 17   |
|                 | Figure 5 : Variable Delay through the matrix with ITDM = 1 .....                    | 18   |
|                 | Figure 6 : Variable Delay through the matrix with ITDM = 0 .....                    | 19   |
|                 | Figure 7 : Constant Delay through the matrix with SI = 1 .....                      | 20   |
|                 | Figure 8 : HDLC and DMA Controller Block Diagram .....                              | 22   |
|                 | Figure 9 : Structure of the Receive Circular Queue .....                            | 25   |
|                 | Figure 10 : Structure of the Transmit Circular Queue .....                          | 25   |
|                 | Figure 11 : D, C/I and Monitor Channel Path .....                                   | 28   |
|                 | Figure 12 : <i>Multi-HDLC</i> connected to $\mu$ P with multiplexed buses .....     | 29   |
|                 | Figure 13 : <i>Multi-HDLC</i> connected to $\mu$ P with non-multiplexed buses ..... | 29   |
|                 | Figure 14 : Microprocessor Interface for INTEL 80C188 .....                         | 29   |
|                 | Figure 15 : Microprocessor Interface for INTEL 80C186 .....                         | 29   |
|                 | Figure 16 : Microprocessor Interface for MOTOROLA 68000 .....                       | 30   |
|                 | Figure 17 : Microprocessor Interface for ST9 .....                                  | 30   |
|                 | Figure 18 : 128K x 8 SRAM Circuit Memory Organization .....                         | 32   |
|                 | Figure 19 : 512K x 8 SRAM Circuit Memory Organization .....                         | 32   |
|                 | Figure 20 : 256K x 16 DRAM Circuit Organization .....                               | 32   |
|                 | Figure 21 : 1M x 16 DRAM Circuit Organization .....                                 | 33   |
|                 | Figure 22 : 4M x 16 DRAM Circuit Organization .....                                 | 33   |
|                 | Figure 23 : Chain of n <i>Multi-HDLC</i> Components .....                           | 33   |
|                 | Figure 24 : MHDLC Clock Generation .....  | 34   |
|                 | Figure 25 : VCXO Frequency Synchronization .....                                    | 35   |
|                 | Figure 26 : The Three Circular Interrupt Memories .....                             | 36   |
| IV              | DC SPECIFICATIONS .....   | 37   |
| V               | CLOCK TIMING .....  | 38   |
|                 | Figure 27 : Clocks received and delivered by the <i>Multi-HDLC</i> .....            | 38   |
|                 | Figure 28 : Synchronization Signals received by the <i>Multi-HDLC</i> .....         | 39   |
|                 | Figure 29 : GCI Synchro Signal delivered by the <i>Multi-HDLC</i> .....             | 40   |
|                 | Figure 30 : V* Synchronization Signal delivered by the <i>Multi-HDLC</i> .....      | 41   |
| VI              | MEMORY TIMING .....   | 42   |
|                 | Figure 31 : Dynamic Memory Read Signals from the <i>Multi-HDLC</i> .....            | 42   |
|                 | Figure 32 : Dynamic Memory Write Signals from the <i>Multi-HDLC</i> .....           | 43   |
|                 | Figure 33 : Static Memory Read Signals from the <i>Multi-HDLC</i> .....             | 44   |
|                 | Figure 34 : Static Memory Write Signals from the <i>Multi-HDLC</i> .....            | 45   |

---

| LIST OF FIGURES (continued) |                                      | Page |
|-----------------------------|--------------------------------------|------|
| VII                         | MICROPROCESSOR TIMING .....          | 46   |
|                             | Figure 35 : ST9 Read Cycle .....     | 46   |
|                             | Figure 36 : ST9 Write Cycle .....    | 47   |
|                             | Figure 37 : 80C188 Read Cycle .....  | 48   |
|                             | Figure 38 : 80C188 Write Cycle ..... | 49   |
|                             | Figure 39 : 80C186 Read Cycle .....  | 50   |
|                             | Figure 40 : 80C186 Write Cycle ..... | 51   |
|                             | Figure 41 : 68000 Read Cycle .....   | 52   |
|                             | Figure 42 : 68000 Write Cycle .....  | 53   |
|                             | Figure 43 : Token Ring .....         | 54   |
|                             | Figure 44 : Master Clock .....       | 54   |
| VIII                        | INTERNAL REGISTERS .....             | 55   |
| IX                          | EXTERNAL REGISTERS .....             | 75   |
| X                           | PACKAGE MECHANICAL DATA .....        | 82   |

I - PIN INFORMATION

I.1 - Pin Connections

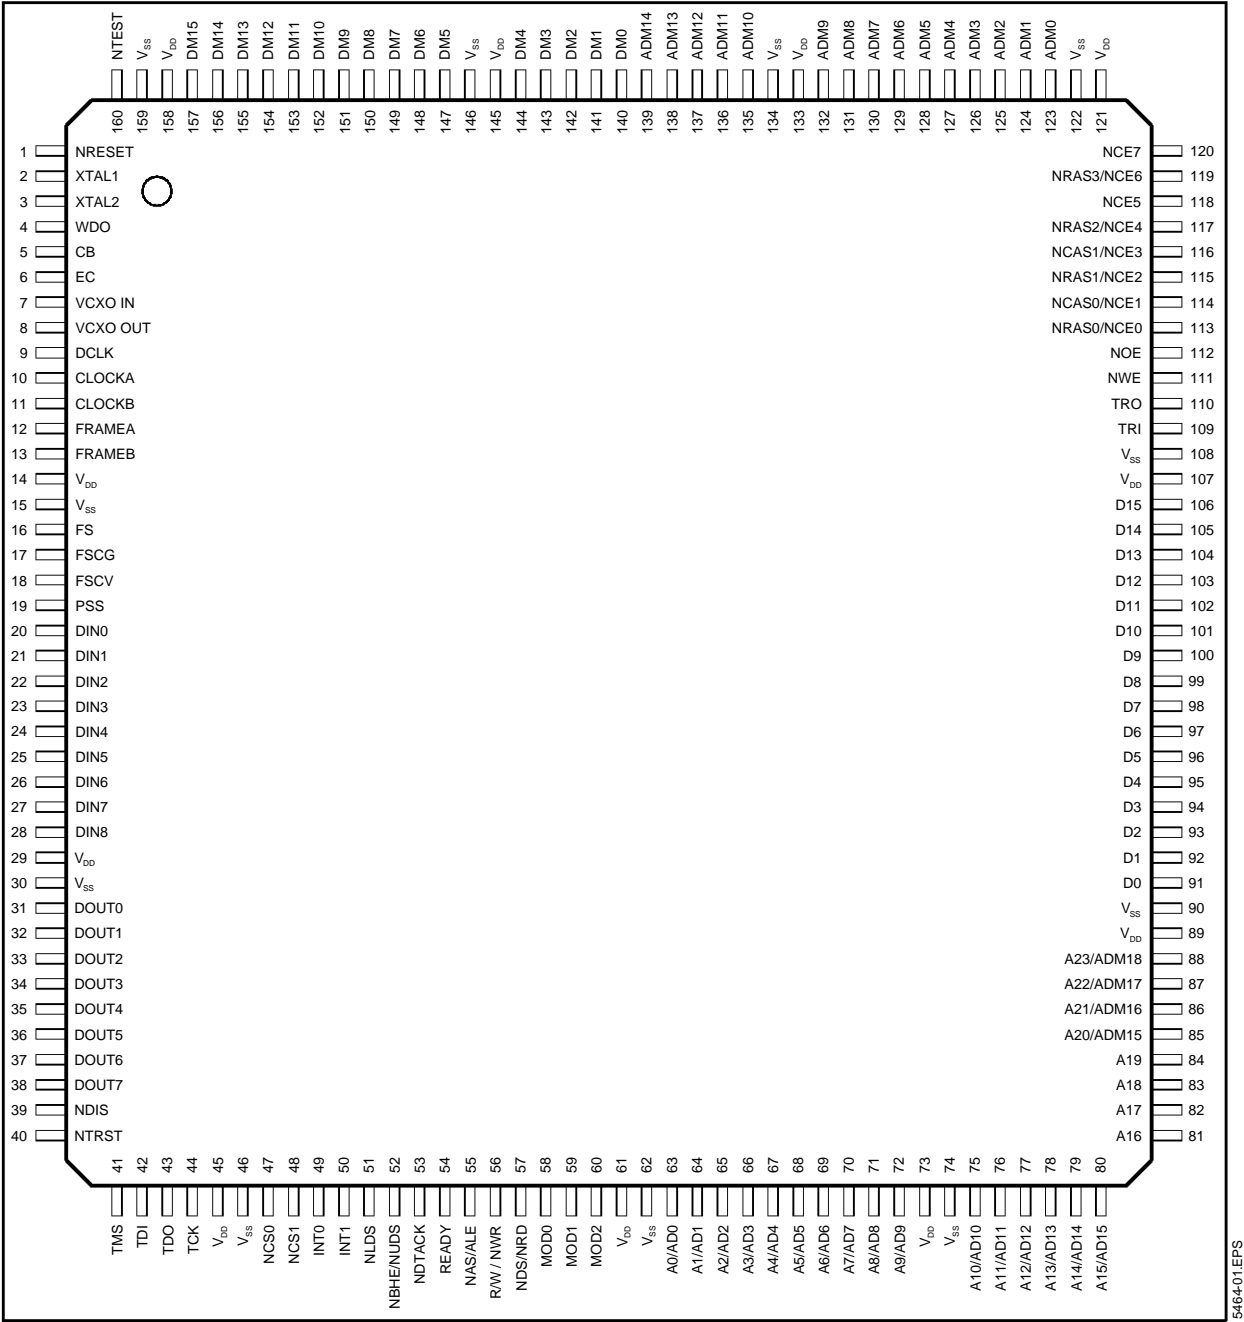

5464-01EPS



## I - PIN INFORMATION (continued)

## I.2 - Pin Description

| Pin N°   | Symbol            | Type   | Function             |
|--|-------------------|--------|----------------------|
| POWER PINS (all the power and ground pins must be connected) |                   |        |                      |
| 14   | V <sub>DD1</sub>  | Power  | DC supply            |
| 15   | V <sub>SS1</sub>  | Ground | DC ground            |
| 29   | V <sub>DD2</sub>  | Power  | DC supply            |
| 30   | V <sub>SS2</sub>  | Ground | DC ground            |
| 45   | V <sub>DD3</sub>  | Power  | DC supply            |
| 46   | V <sub>SS3</sub>  | Ground | DC ground            |
| 61   | V <sub>DD4</sub>  | Power  | DC supply            |
| 62   | V <sub>SS4</sub>  | Ground | DC ground            |
| 73   | V <sub>DD5</sub>  | Power  | DC supply            |
| 74   | V <sub>SS5</sub>  | Ground | DC ground            |
| 89   | V <sub>DD6</sub>  | Power  | DC supply            |
| 90   | V <sub>SS6</sub>  | Ground | DC ground            |
| 107  | V <sub>DD7</sub>  | Power  | DC supply            |
| 108  | V <sub>SS7</sub>  | Ground | DC ground            |
| 121  | V <sub>DD8</sub>  | Power  | DC supply            |
| 122  | V <sub>SS8</sub>  | Ground | DC ground            |
| 133  | V <sub>DD9</sub>  | Power  | DC supply            |
| 134  | V <sub>SS9</sub>  | Ground | DC ground            |
| 145  | V <sub>DD10</sub> | Power  | DC supply            |
| 146  | V <sub>SS10</sub> | Ground | DC ground            |
| 158  | V <sub>DD11</sub> | Power  | DC supply            |
| 159  | V <sub>SS11</sub> | Ground | DC ground (Total 22) |

## CLOCKS

|    |          |    |  |
|----|----------|----|--|
| 2  | XTAL1    | I  | Crystal 1. A clock pulse at $f_{Min.} = 32000\text{kHz}$ can be applied to this input (or one pin of two crystal pins) with : $-50.10^{-6} < \Delta f < +50.10^{-6}$ .   |
| 3  | XTAL2    | O  | Crystal 2. If the internal crystal oscillator is used, the second crystal pin is applied to this output.   |
| 7  | VCXO IN  | O4 | VCXO input signal. This signal is compared to clock A(or B) selected inside the <i>Multi-HDLC</i> .  |
| 8  | VCXO OUT | I3 | VCXO error signal. This pin delivers the result of the comparison.   |
| 10 | CLOCKA   | I3 | Input Clock A (4096kHz or 8192kHz)   |
| 11 | CLOCKB   | I3 | Input Clock B (4096kHz or 8192kHz)   |
| 12 | FRAMEA   | I3 | Clock A at 8kHz  |
| 13 | FRAMEB   | O8 | Clock B at 8kHz  |
| 9  | DCLK     | O8 | Data Clock issued from Input Clock A (or B). This clock is delivered by the circuit at 4096kHz (or 2048kHz). DOUT0/7 are transmitted on the rising edge of this signal. DIN0/7 are sampled on the falling edge of this signal. |
| 17 | FSCG     | O8 | Frame synchronization for GC1 at 8kHz. This clock is issued from FRAME A (or B).   |
| 18 | FSCV*    | I3 | Frame synchronization for V Star at 8kHz   |
| 16 | FS       | O8 | Frame synchronization. This signal synchronizes DIN0/7 and DOUT0/7.  |
| 19 | PSS      | I3 | Programmable synchronization Signal. The PS bit of connection memory is read in real time.   |

Type : I1 = Input TTL ;

I2 = I1 + Pull-up ;

I3 = I1 + Hysteresis ;

I4 = I3 + Pull-up ;

O4 = Output CMOS 4mA ;

O4T = O4 + Tristate ;

O8 = Output CMOS 8mA, "1" and "0" at Low Impedance ;

O8D = Output CMOS 8mA, Open Drain ;

O8DT = Output CMOS 8mA, Open Drain or Tristate ;

O8T = Output CMOS 8mA, Tristate

## I - PIN INFORMATION (continued)

## I.2 - Pin Description (continued)

| Pin N°                          | Symbol | Type | Function   |
|---------------------------------|--------|------|--|
| TIME DIVISION MULTIPLEXES (TDM) |        |      |  |
| 20                              | DIN0   | I1   | TDM0 Data Input 0  |
| 21                              | DIN1   | I1   | TDM1 Data Input 1  |
| 22                              | DIN2   | I1   | TDM2 Data Input 2  |
| 23                              | DIN3   | I1   | TDM3 Data Input 3  |
| 24                              | DIN4   | I1   | TDM4 Data Input 4  |
| 25                              | DIN5   | I1   | TDM5 Data Input 5  |
| 26                              | DIN6   | I1   | TDM6 Data Input 6  |
| 27                              | DIN7   | I1   | TDM7 Data Input 7  |
| 28                              | DIN8   | I1   | TDM8 Data Input 8  |
| 31                              | DOUT0  | O8DT | TDM0 Data Output 0   |
| 32                              | DOUT1  | O8DT | TDM1 Data Output 1   |
| 33                              | DOUT2  | O8DT | TDM2 Data Output 2   |
| 34                              | DOUT3  | O8DT | TDM3 Data Output 3   |
| 35                              | DOUT4  | O8DT | TDM4 Data Output 4   |
| 36                              | DOUT5  | O8DT | TDM5 Data Output 5   |
| 37                              | DOUT6  | O8DT | TDM6 Data Output 6   |
| 38                              | DOUT7  | O8DT | TDM7 Data Output 7   |
| 39                              | NDIS   | I1   | DOUT 0/7 Not Disable. When this pin is at 0V, the Data Output 0/7 are at high impedance. Wired at VDD if not used. |
| 5                               | CB     | O8D  | Contention Bus for CSMA/CR   |
| 6                               | EC     | I1   | Echo. Wired at VSS if not used.  |

## BOUDARY SCAN

|    |       |    |                                  |
|----|-------|----|----------------------------------|
| 40 | NTRST | I4 | Reset for boundary scan          |
| 41 | TMS   | I2 | Mode Selection for boundary scan |
| 42 | TDI   | I2 | Input Data for boundary scan     |
| 43 | TDO   | O4 | Output Data for boundary scan    |
| 44 | TCK   | I4 | Clock for boundary scan          |

## MICROPROCESSOR INTERFACE

|    |        |    |  |
|----|--------|----|--|
| 58 | MOD0   | I1 | 1 1 0 1  |
| 59 | MOD1   | I1 | 1 1 0 0  |
| 60 | MOD2   | I1 | 0 1 1 0  |
|    |        |    | 80C188 80C186 68000 ST9  |
| 1  | NRESET | I3 | Circuit Reset  |
| 47 | NCS0   | I3 | Chip Select 0 : internal registers are selected  |
| 48 | NCS1   | I3 | Chip Select 1 : external memory is selected  |
| 49 | INT0   | O4 | Interrupt generated by HDLC, RxC/I or RxMON. Active high.  |
| 50 | INT1   | O4 | Interrupt1. This pin goes to 5V when the selected clock A (or B) has disappeared ; 250µs after reset this pin goes to 5V also if clock A is not present. |
| 4  | WDO    | O4 | Watch Dog Output. This pin goes to 5V during 1ms when the microprocessor has not reset the Watch Dog during the programmable time.                       |

**Type :** I1 = Input TTL ; I2 = I1 + Pull-up ; I3 = I1 + Hysteresis ; I4 = I3 + Pull-up ;  
O4 = Output CMOS 4mA ; O4T = O4 + Tristate ; O8 = Output CMOS 8mA, "1" and "0" at Low Impedance ;  
O8D = Output CMOS 8mA, Open Drain ; O8DT = Output CMOS 8mA, Open Drain or Tristate ;  
O8T = Output CMOS 8mA, Tristate

**I - PIN INFORMATION** (continued)**I.2 - Pin Description** (continued)

| Pin N°                               | Symbol    | Type | Function   |
|--------------------------------------|-----------|------|--|
| MICROPROCESSOR INTERFACE (continued) |           |      |  |
| 51                                   | NLDS      | I3   | Lower Data Strobe (68000)  |
| 52                                   | NUDS      | I3   | Bus High Enable (Intel) / Upper Data Strobe (68000)                    |
| 53                                   | NDTACK    | O8D  | Data Transfer Acknowledge (68000)                                      |
| 54                                   | READY     | O8T  | Data Transfer Acknowledge (Intel)                                      |
| 55                                   | NAS/ALE   | I3   | Address Strobe(Motorola) / Addresss Latch Enable(Intel)                |
| 56                                   | R/W / NWR | I3   | Read/Write (Motorola) / Write(Intel)                                   |
| 57                                   | NDS/NRD   | I3   | Data Strobe (Motorola) /Read Data (Intel)                              |
| 63                                   | A0/AD0    | I/O  | Address bit 0 (Motorola) / Address/Data bit 0 (Intel)                  |
| 64                                   | A1/AD1    | I/O  | Address bit 1 (Motorola) / Address/Data bit 1 (Intel)                  |
| 65                                   | A2/AD2    | I/O  | Address bit 2 (Motorola) / Address/Data bit 2 (Intel)                  |
| 66                                   | A3/AD3    | I/O  | Address bit 3 (Motorola) / Address/Data bit 3 (Intel)                  |
| 67                                   | A4/AD4    | I/O  | Address bit 4 (Motorola) / Address/Data bit 4 (Intel)                  |
| 68                                   | A5/AD5    | I/O  | Address bit 5 (Motorola) / Address/Data bit 5 (Intel)                  |
| 69                                   | A6/AD6    | I/O  | Address bit 6 (Motorola) / Address/Data bit 6 (Intel)                  |
| 70                                   | A7/AD7    | I/O  | Address bit 7 (Motorola) / Address/Data bit 7 (Intel)                  |
| 71                                   | A8/AD8    | I/O  | Address bit 8 (Motorola) / Address/Data bit 8 (Intel)                  |
| 72                                   | A9/AD9    | I/O  | Address bit 9 (Motorola) / Address/Data bit 9 (Intel)                  |
| 75                                   | A10/AD10  | I/O  | Address bit 10 (Motorola) / Address/Data bit 10 (Intel)                |
| 76                                   | A11/AD11  | I/O  | Address bit 11 (Motorola) / Address/Data bit 11 (Intel)                |
| 77                                   | A12/AD12  | I/O  | Address bit 12 (Motorola) / Address/Data bit 12 (Intel)                |
| 78                                   | A13/AD13  | I/O  | Address bit 13 (Motorola) / Address/Data bit 13 (Intel)                |
| 79                                   | A14/AD14  | I/O  | Address bit14 (Motorola) / Address/Data bit 14 (Intel)                 |
| 80                                   | A15/AD15  | I/O  | Address bit15 (Motorola) / Address/Data bit 15 (Intel)                 |
| 81                                   | A16       | I1   | Address bit16 (Motorola) / Address bit 16 (Intel)                      |
| 82                                   | A17       | I1   | Address bit17 (Motorola) / Address bit 17 (Intel)                      |
| 83                                   | A18       | I1   | Address bit18 (Motorola) / Address bit 18 (Intel)                      |
| 84                                   | A19       | I1   | Address bit19 (Motorola) / Address bit 19 (Intel)                      |
| 85                                   | A20/ADM15 | I/O  | Address bit 20 from $\mu$ P (input) / Address bit 15 for SRAM (output) |
| 86                                   | A21/ADM16 | I/O  | Address bit 21 from $\mu$ P (input) / Address bit 16 for SRAM (output) |
| 87                                   | A22/ADM17 | I/O  | Address bit 22 from $\mu$ P (input) / Address bit 17 for SRAM (output) |
| 88                                   | A23/ADM18 | I/O  | Address bit 23 from $\mu$ P (input) / Address bit 18 for SRAM (output) |
| 91                                   | DO        | I/O  | Data bit 0 for $\mu$ P if not multiplexed (see Note 1).                |
| 92                                   | D1        | I/O  | Data bit 1 for $\mu$ P if not multiplexed                              |
| 93                                   | D2        | I/O  | Data bit 2 for $\mu$ P if not multiplexed                              |
| 94                                   | D3        | I/O  | Data bit 3 for $\mu$ P if not multiplexed                              |
| 95                                   | D4        | I/O  | Data bit 4 for $\mu$ P if not multiplexed                              |
| 96                                   | D5        | I/O  | Data bit 5 for $\mu$ P if not multiplexed                              |
| 97                                   | D6        | I/O  | Data bit 6 for $\mu$ P if not multiplexed                              |
| 98                                   | D7        | I/O  | Data bit 7 for $\mu$ P if not multiplexed                              |
| 99                                   | D8        | I/O  | Data bit 8 for $\mu$ P if not multiplexed                              |

Type : I1 = Input TTL ;

I2 = I1 + Pull-up ;

I3 = I1 + Hysteresis ;

I4 = I3 + Pull-up ;

O4 = Output CMOS 4mA ;

O4T = O4 + Tristate ;

O8 = Output CMOS 8mA, "1" and "0" at Low Impedance ;

O8D = Output CMOS 8mA, Open Drain ;

O8DT = Output CMOS 8mA, Open Drain or Tristate ;

O8T = Output CMOS 8mA, Tristate

## I - PIN INFORMATION (continued)

## I.2 - Pin Description (continued)

| Pin N° | Symbol | Type | Function |
|--------|--------|------|----------|
|--------|--------|------|----------|

## MICROPROCESSOR INTERFACE (continued)

|     |     |     |  |
|-----|-----|-----|--|
| 100 | D9  | I/O | Data bit 9 for $\mu$ P if not multiplexed  |
| 101 | D10 | I/O | Data bit 10 for $\mu$ P if not multiplexed |
| 102 | D11 | I/O | Data bit 11 for $\mu$ P if not multiplexed |
| 103 | D12 | I/O | Data bit 12 for $\mu$ P if not multiplexed |
| 104 | D13 | I/O | Data bit 13 for $\mu$ P if not multiplexed |
| 105 | D14 | I/O | Data bit 14 for $\mu$ P if not multiplexed |
| 106 | D15 | I/O | Data bit 15 for $\mu$ P if not multiplexed |

## MEMORY INTERFACE

|     |            |     |   |
|-----|------------|-----|---|
| 109 | TRI        | I3  | Token Ring Input (for use <i>Multi-HDLCs</i> in cascade)  |
| 110 | TRO        | O4  | Token Ring Output (for use <i>Multi-HDLCs</i> in cascade) |
| 111 | NWE        | O4T | Write Enable for memory circuits                          |
| 112 | NOE        | O4T | Control Output Enable for memory circuits                 |
| 113 | NRAS0/NCE0 | O4T | Row Address Strobe Bank 0 / Chip Enable 0 for SRAM        |
| 114 | NCAS0/NCE1 | O4T | Column Address Strobe Bank 0 / Chip Enable1 for SRAM      |
| 115 | NRAS1/NCE2 | O4T | Row Address Strobe Bank 1 / Chip Enable 2 for SRAM        |
| 116 | NCAS1/NCE3 | O4T | Column Address Strobe Bank 1 / Chip Enable 3 for SRAM     |
| 117 | NRAS2/NCE4 | O4T | Row Address Strobe Bank 2 / Chip Enable 4 for SRAM        |
| 118 | NCE5       | O4T | Chip Enable 5 for SRAM                                    |
| 119 | NRAS3/NCE6 | O4T | Row Address Strobe Bank 3 / Chip Enable 6 for SRAM        |
| 120 | NCE7       | O4T | Chip Enable 7 for SRAM                                    |
| 123 | ADM0       | O8T | Address bit 0 for SRAM and DRAM                           |
| 124 | ADM1       | O8T | Address bit 1 for SRAM and DRAM                           |
| 125 | ADM2       | O8T | Address bit 2 for SRAM and DRAM                           |
| 126 | ADM3       | O8T | Address bit 3 for SRAM and DRAM                           |
| 127 | ADM4       | O8T | Address bit 4 for SRAM and DRAM                           |
| 128 | ADM5       | O8T | Address bit 5 for SRAM and DRAM                           |
| 129 | ADM6       | O8T | Address bit 6 for SRAM and DRAM                           |
| 130 | ADM7       | O8T | Address bit 7 for SRAM and DRAM                           |
| 131 | ADM8       | O8T | Address bit 8 for SRAM and DRAM                           |
| 132 | ADM9       | O8T | Address bit 9 for SRAM and DRAM                           |
| 135 | ADM10      | O8T | Address bit 10 for SRAM and DRAM                          |
| 136 | ADM11      | O8T | Address bit 11 for SRAM only                              |
| 137 | ADM12      | O8T | Address bit 12 for SRAM only                              |
| 138 | ADM13      | O8T | Address bit 13 for SRAM only                              |
| 139 | ADM14      | O8T | Address bit 14 for SRAM only                              |

**Type :** I1 = Input TTL ; I2 = I1 + Pull-up ; I3 = I1 + Hysteresis ; I4 = I3 + Pull-up ;  
 O4 = Output CMOS 4mA ; O4T = O4 + Tristate ; O8 = Output CMOS 8mA, "1" and "0" at Low Impedance ;  
 O8D = Output CMOS 8mA, Open Drain ; O8DT = Output CMOS 8mA, Open Drain or Tristate ;  
 O8T = Output CMOS 8mA, Tristate

**I - PIN INFORMATION** (continued)**I.2 - Pin Description** (continued)

| Pin N°                       | Symbol | Type | Function   |
|------------------------------|--------|------|--|
| MEMORY INTERFACE (continued) |        |      |  |
| 140                          | DM0    | I/O  | Memory Data bit 0  |
| 141                          | DM1    | I/O  | Memory Data bit 1  |
| 142                          | DM2    | I/O  | Memory Data bit 2  |
| 143                          | DM3    | I/O  | Memory Data bit 3  |
| 144                          | DM4    | I/O  | Memory Data bit 4  |
| 147                          | DM5    | I/O  | Memory Data bit 5  |
| 148                          | DM6    | I/O  | Memory Data bit 6  |
| 149                          | DM7    | I/O  | Memory Data bit 7  |
| 150                          | DM8    | I/O  | Memory Data bit 8  |
| 151                          | DM9    | I/O  | Memory Data bit 9  |
| 152                          | DM10   | I/O  | Memory Data bit 10   |
| 153                          | DM11   | I/O  | Memory Data bit 11   |
| 154                          | DM12   | I/O  | Memory Data bit 12   |
| 155                          | DM13   | I/O  | Memory Data bit 13   |
| 156                          | DM14   | I/O  | Memory Data bit 14   |
| 157                          | DM15   | I/O  | Memory Data bit 15   |
| 160                          | NTEST  | I2   | Test Control. When this pin is at 0V each output is high impedance except XTAL2 Pin. |

**Type :** I1 = Input TTL ; I2 = I1 + Pull-up ; I3 = I1 + Hysteresis ; I4 = I3 + Pull-up ;  
 O4 = Output CMOS 4mA ; O4T = O4 + Tristate ; O8 = Output CMOS 8mA, "1" and "0" at Low Impedance ;  
 O8D = Output CMOS 8mA, Open Drain ; O8DT = Output CMOS 8mA, Open Drain or Tristate ;  
 O8T = Output CMOS 8mA, Tristate

**Note :** D0/15 input/output pins must be connected to one single external pull up resistor if not used.

**I.3 - Pin Definition****I.3.1 - Input Pin Definition**

I1 : Input 1 TTL  
 I2 : Input 2 TTL + pull-up  
 I3 : Input 3 TTL + hysteresis  
 I4 : Input 4 TTL + hysteresis +pull-up

**I.3.2 - Output Pin Definition**

O4 : Output CMOS 4mA  
 O4T : Output CMOS 4mA, Tristate  
 O8 : Output CMOS 8mA  
 O8T : Output CMOS 8mA, Tristate  
 O8D : Output CMOS 8mA, Open Drain  
 O8DT : Output CMOS 8mA, Open Drain or Tristate (Programmable pin)

Moreover, each output is high impedance when the NTEST Pin is at 0 volt except XTAL2 Pin.

**I.3.3 - Input/Output Pin Definition**

I/O : Input TTL/ Output CMOS 8mA.


**N.B.** XTAL1 : this input is CMOS.

XTAL2 : NTEST pin at 0 has no effect on this pin.

## II - BLOCK DIAGRAM

The top level functionalities of *Multi-HDLC* appear on the general block diagram.

**Figure 1 : General Block Diagram**

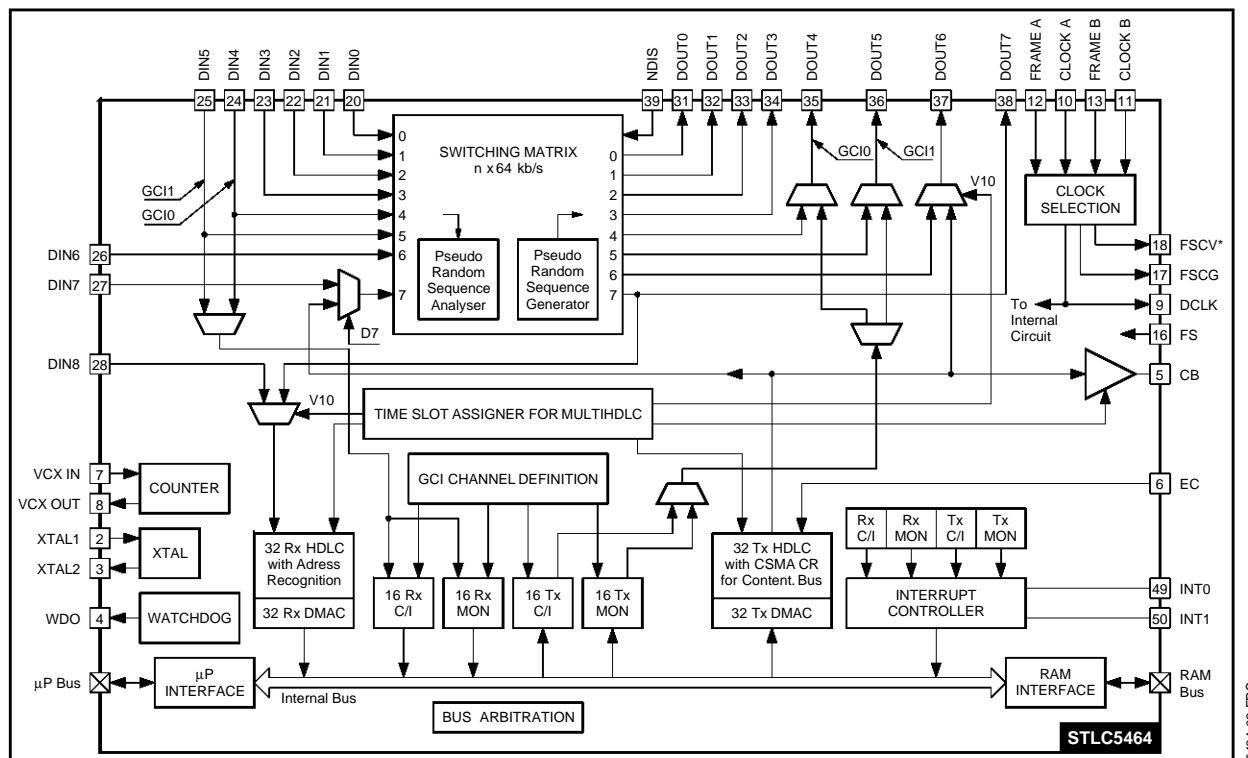

There are :

- The switching matrix,
- The time slot assigner,
- The 32 HDLC transmitters with associated DMA controllers,
- The 32 HDLC receivers with associated DMA controllers,
- The 16 Command/Indicate and Monitor Channel transmitters belonging to two General Component Interfaces (GCI),
- The memory interface,
- The microprocessor interface,
- The bus arbitration,
- The clock selection and time synchronization function,
- The interrupt controller,
- The watchdog,

### III - FUNCTIONAL DESCRIPTION

#### III.1 - The Switching Matrix N x 64 KBits/S

##### III.1.1 - Function Description

The matrix performs a non-blocking switch of 256 time slots from 8 Input Time Division Multiplex (TDM) at 2 Mbit/s to 8 output Time Division Multiplex. A TDM is composed of 32 Time Slots (TS) at 64 kbit/s. The matrix is designed to switch a 64 kbit/s channel (Variable delay mode) or an hyperchannel of data (Sequence integrity mode). So, it will both provide minimum throughput switching delay for voice applications and time slot sequence integrity for data applications on a per channel basis.

The requirements of the Sequence Integrity (n\*64 kbit/s) mode are the following:

All the time slots of a given input frame must be put out during a same output frame.

The time slots of an hyperchannel (concatenation of TS in the same TDM) are not crossed together at output in different frames.

In variable delay mode, the time slot is put out as soon as possible. (The delay is two or three time slots minimum between input and output).

For test facilities, any time slot of an Output TDM (OTDM) can be internally looped back into the same Input TDM number (ITDM) at the same time slot number.

A Pseudo Random Sequence Generator and a Pseudo Random Sequence Analyzer are implemented in the matrix. They allow the generation a sequence on a channel or on a hyperchannel, to analyse it and verify its integrity after several switching in the matrix or some passing of the sequence across different boards.

The Frame Signal (FS) synchronises ITDM and OTDM but a programmable delay or advance can be introduced separately on each ITDM and OTDM (a half bit time, a bit time or two bit times).

An additional pin (PSS) permits the generation of a programmable signal composed of 256 bits per frame at a bit rate of 2048 kbit/s.

An external pin (NDIS) asserts a high impedance on all the TDM outputs of the matrix when active (during the initialization of the board for example).

##### III.1.2 - Architecture of the Matrix

The matrix is essentially composed of buffer data memories and a connection memory.

The received serial data is first converted to parallel by a serial to parallel converter and stored consecutively in a 256 position Buffer Data Memory (see Figure 2 on Page 16).

To satisfy the Sequence Integrity (n\*64 kbit/s) requirements, the data memory is built with an even memory, an odd memory and an output memory. Two consecutive frames are stored alternatively in the odd and even memory. During the time an input frame is stored, the one previously stored is transferred into the output memory according to the connection memory switching orders. A frame later, the output memory is read and data is converted to serial and transferred to the output TDM.

##### III.1.3 - Connection Function

Two types of connections are offered :

- unidirectional connection and
- bidirectional connection.

An unidirectional connection makes only the switch of an input time slot through an output one whereas a bidirectional connection establishes the link in the other direction too. So a double connection can be achieved by a single command (see Figure 3 on Page 17).

##### III.1.4 - Loop Back Function


Any time slot of an Output TDM can be internally looped back on the time slot which has the same TDM number and the same TS number

(OTDM<sub>i</sub>, TS<sub>j</sub>) ----> (ITDM<sub>i</sub>, TS<sub>j</sub>).

In the case of a bidirectional connection, only the one specified by the microprocessor is concerned by the loop back (see Figure 4 on Page 17).

## III - FUNCTIONAL DESCRIPTION (continued)


Figure 2 : Switching Matrix Data Path

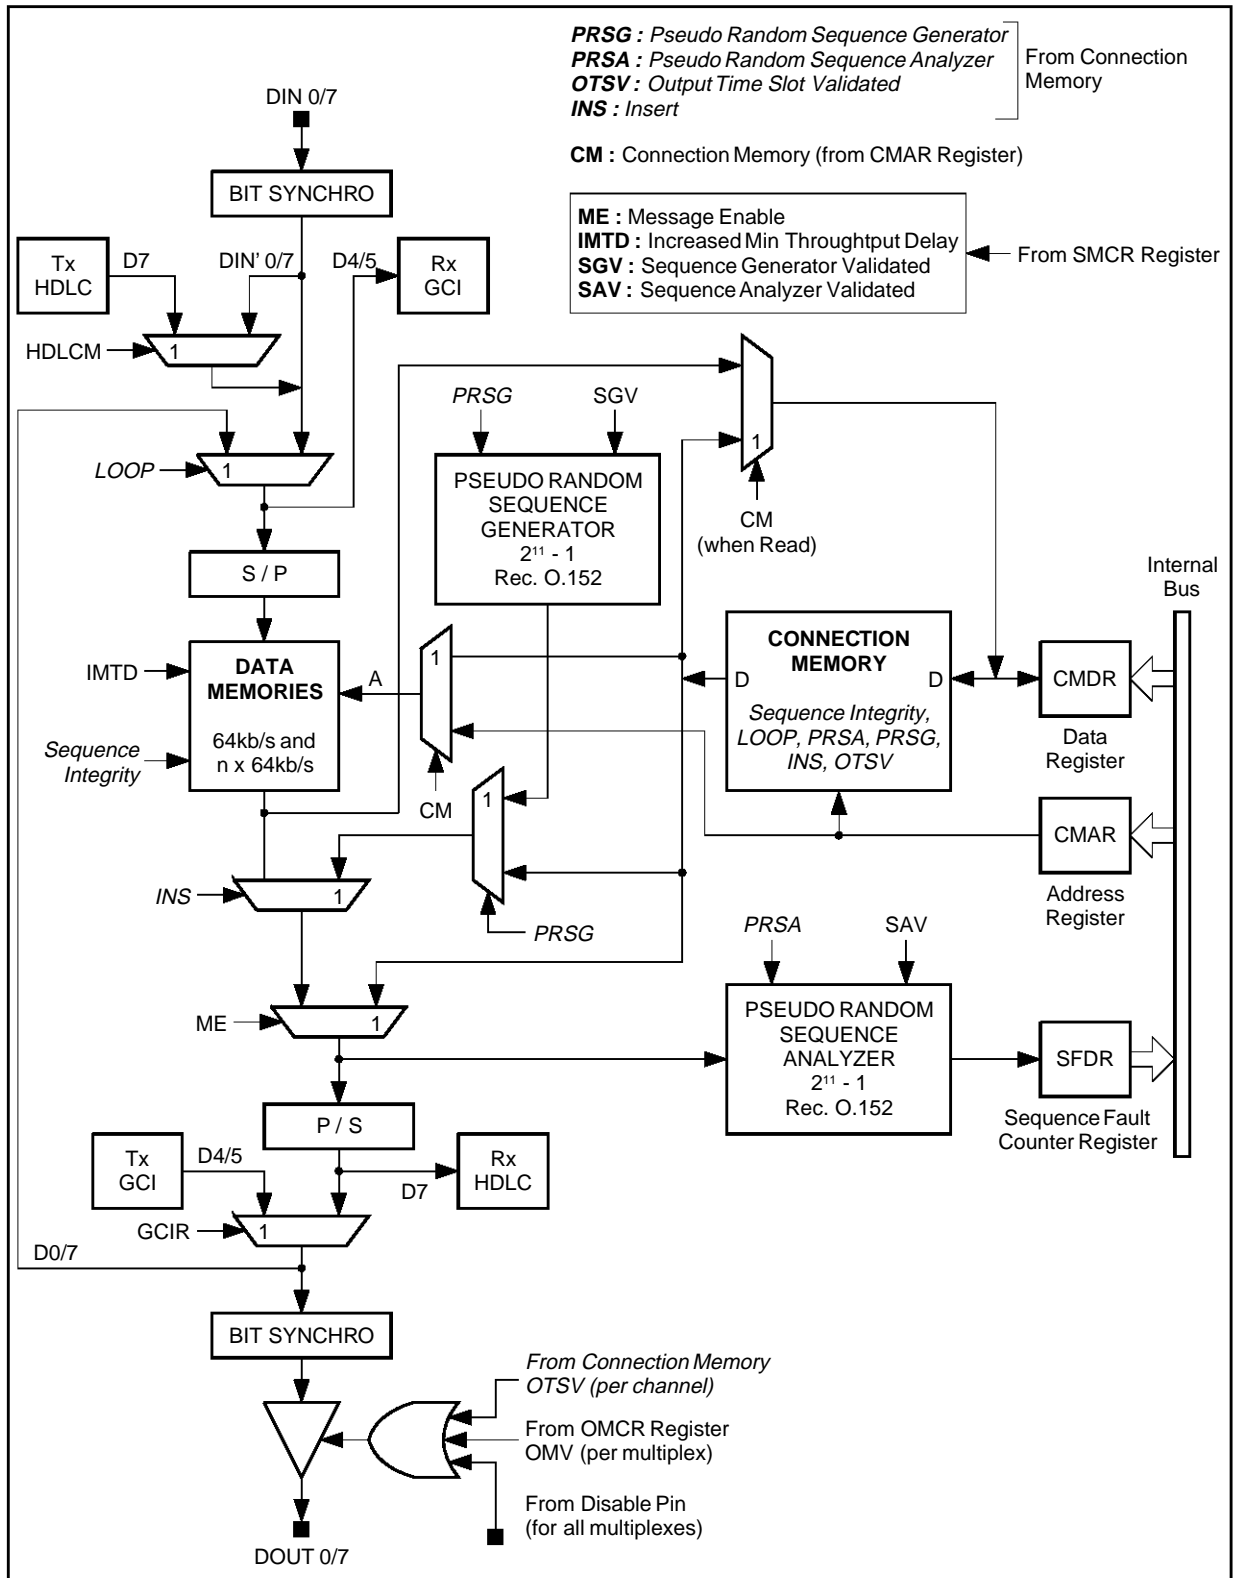




### III - FUNCTIONAL DESCRIPTION (continued)

**Figure 3 : Unidirectional and Bidirectional Connections**

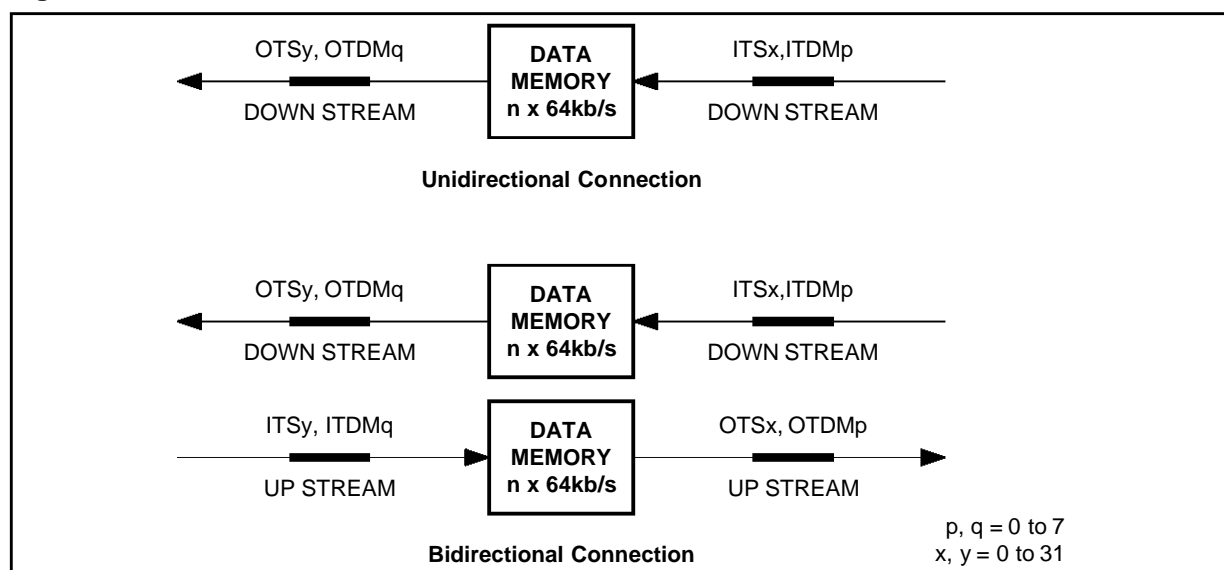

5464-04.EPS

**Figure 4 : Loop Back**

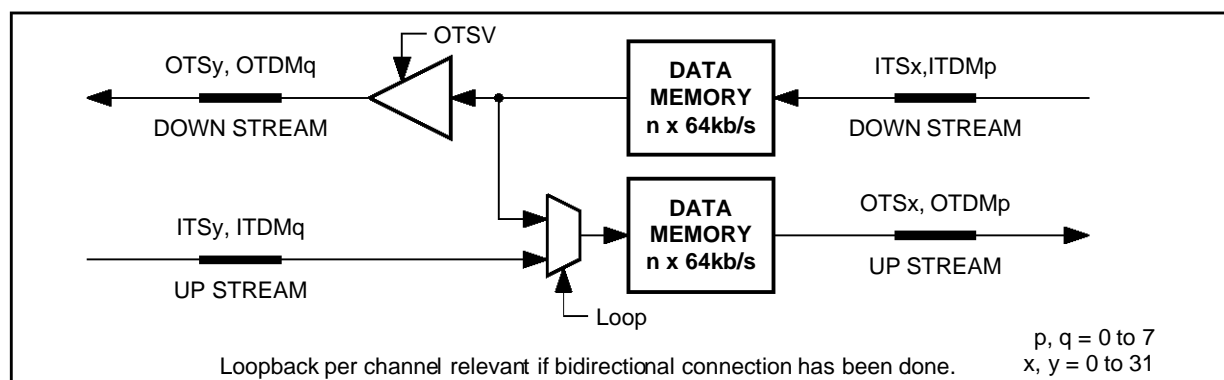

5464-05.EPS

#### III.1.5 - Delay through the Matrix

##### III.1.5.1 - Variable Delay Mode

In the variable delay mode, the delay through the matrix depends on the relative positions of the input and output time slots in the frame.

So, some limits are fixed :

- the maximum delay is a frame + 2 time slots,
- the minimum delay is programmable.

Three time slots if IMTD = 1, in this case  $n = 2$  in the formula hereafter or two time slots if IMTD = 0, in this case  $n = 1$  in the same formula (see Paragraph "Switching Matrix Configuration Reg SMCR (0C)H" on Page 60).

All the possibilities can be ranked in three cases :

a) If  $OTSy > ITSx + n$  then the variable delay is :

$$OTSy - ITSx \text{ Time slots}$$

b) If  $ITSx < OTSy < ITSx + n$  then the variable delay is :

$$OTSy - ITSx + 32 \text{ Time slots}$$

c)  $OTSy < ITSx$  then the variable delay is :

$$32 - (ITSx - OTSy) \text{ Time slots.}$$

N.B. Rule b) and rule c) are identical.

For  $n = 1$  and  $n = 2$ , see Figure 5 on Page 18.


##### III.1.5.2 - Sequence Integrity Mode

In the sequence integrity mode ( $SI = 1$ , bit located in the Connection Memory), the input time slots are put out 2 frames later (see Figure 6 on Page 19). In this case, the delay is defined by a single expression :

$$\text{Constant Delay} = (32 - ITSx) + 32 + OTSy$$


So, the delay in sequence integrity mode varies from 33 to 95 time slots.

## III - FUNCTIONAL DESCRIPTION (continued)

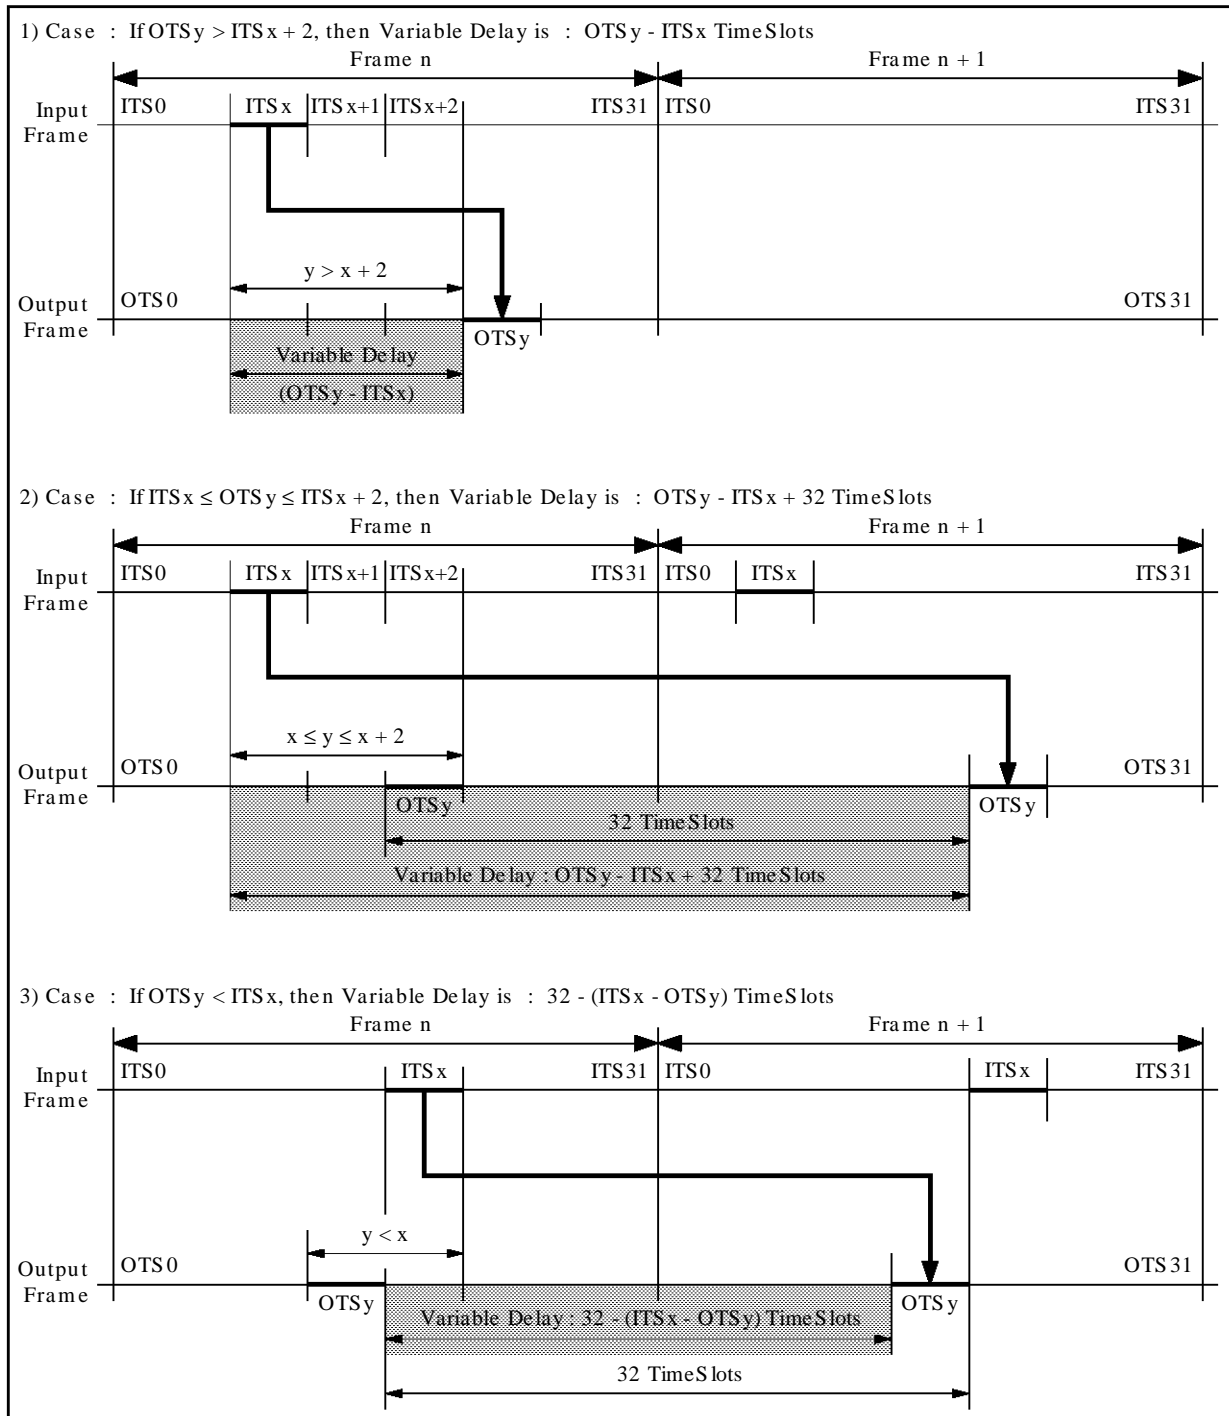**Figure 5** : Variable Delay through the matrix with ITDM = 1

## III - FUNCTIONAL DESCRIPTION (continued)


Figure 6 : Variable Delay through the matrix with ITDM = 0

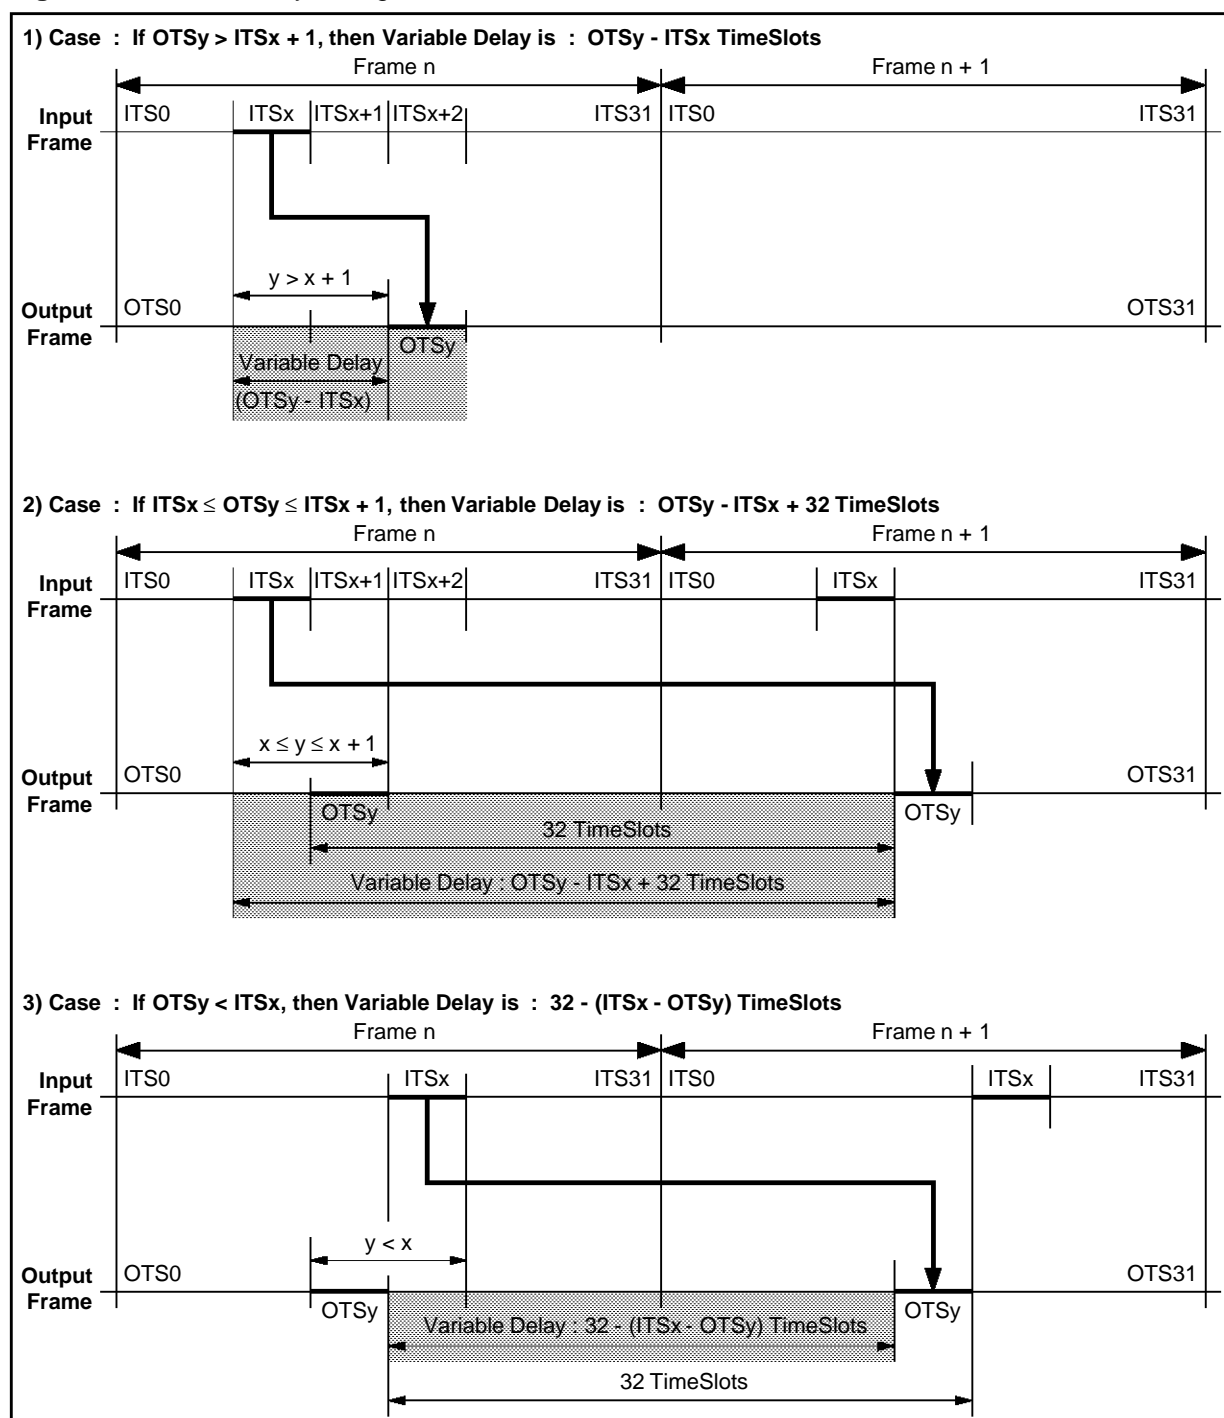

5464-07.EPS

III - FUNCTIONAL DESCRIPTION (continued)

Figure 7 : Constant Delay through the matrix with SI = 1

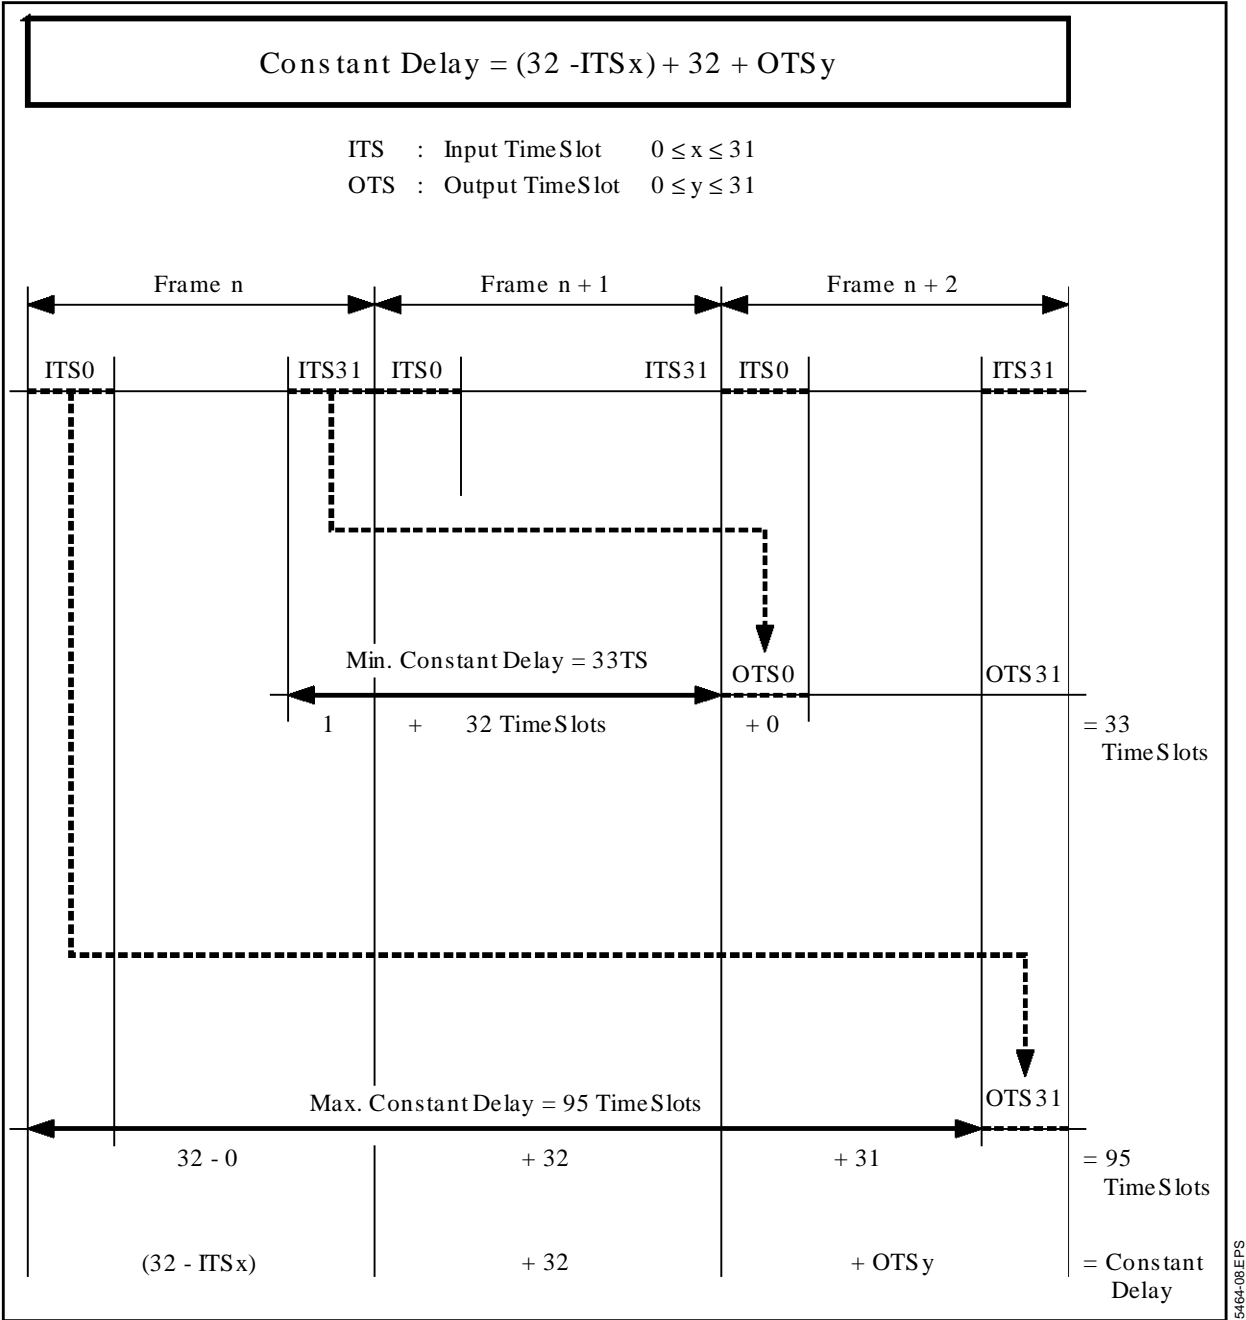

### III - FUNCTIONAL DESCRIPTION (continued)

#### III.1.6 - Connection Memory

##### III.1.6.1 - Description

The connection memory is composed of 256 locations addressed by the number of OTDM and TS (8x32).

Each location permits :

- to connect each input time slot to one output time slot (If two or more output time slots are connected to the same input time slot number, there is broadcasting).
- to select the variable delay mode or the sequence integrity mode for any time slot.
- to loop back an output time slot. In this case the contents of an input time slot (ITSx, ITDMP) is the same as the output time slot (OTSx, OTDMP).
- to output the contents of the corresponding connection memory instead of the data which has been stored in data memory.
- to output the sequence of the pseudo random sequence generator on an output time slot: a pseudo random sequence can be inserted in one or several time slots (hyperchannel) of the same Output TDM ; this insertion must be enabled by the microprocessor in the configuration register of the matrix.
- to define the source of a sequence by the pseudo random sequence analyzer: a pseudo random sequence can be extracted from one or several time slots (hyperchannel) of the same Input TDM and routed to the analyzer; this extraction can be enabled by the microprocessor in the configuration register of the matrix (SMCR).
- to assert a high impedance level on an output time slot (disconnection).
- to deliver a programmable 256-bit sequence during 125 microseconds on the Programmable synchronization Signal pin (PSS).

##### III.1.6.2 - Access to Connection Memory

Supposing that the Switching Matrix Configuration Register (SMCR) has been already written by the microprocessor, it is possible to access to the connection memory from microprocessor with the help of two registers :

- Connection Memory Data Register (CMDR) and
- Connection Memory Address Register (CMAR).

##### III.1.6.3 - Access to Data Memory

To extract the contents of the data memory it is possible to read the data memory from microprocessor with the help of the two registers :

- Connection Memory Data Register (CMDR) and

- Connection Memory Address Register (CMAR).

#### III.2 - HDLC Controller

##### III.2.1 - Function Description

The internal HDLC controller can run up to 32 channels in a conventional HDLC mode or in a transparent (non-HDLC) mode (configurable per channel).

Each channel bit rate is programmable from 4kbit/s to 64kbit/s. All the configurations are also possible from 32 channels (from 4 to 64 kbit/s) to one channel at 2 Mbit/s.

In reception, the HDLC time slots can directly come from the input TDM DIN8 (direct HDLC Input) or from any other TDM input after switching towards the output 7 of the matrix (configurable per time slot).

In transmission, the HDLC frames are sent on the output DOUT6 and on the output CB (with or without contention mechanism), or are switched towards the other TDM output via the input 7 of the matrix (see Figure 8 on Page 22 and Paragraph III.2.2 on Page 23).

##### III.2.1.1 - Format of the HDLC Frame

The format of an HDLC frame is the same in receive and transmit direction and shown here after.


##### III.2.1.2 - Composition of an HDLC Frame

|                             |
|-----------------------------|
| Opening Flag                |
| Address Field (first byte)  |
| Address Field (second byte) |
| Command Field (first byte)  |
| Command Field (second byte) |
| Data (first byte)           |
| Data (optional)             |
| Data (last byte)            |
| FCS (first byte)            |
| FCS (second byte)           |
| Closing Flag                |

- Opening Flag
- One or two bytes for address recognition (reception) and insertion (transmission)
- Data bytes with bit stuffing
- Frame Check Sequence: CRC with polynomial  $G(x) = x^{16} + x^{12} + x^5 + 1$
- Closing Flag.

III - FUNCTIONAL DESCRIPTION (continued)

Figure 8 : HDLC and DMA Controller Block Diagram

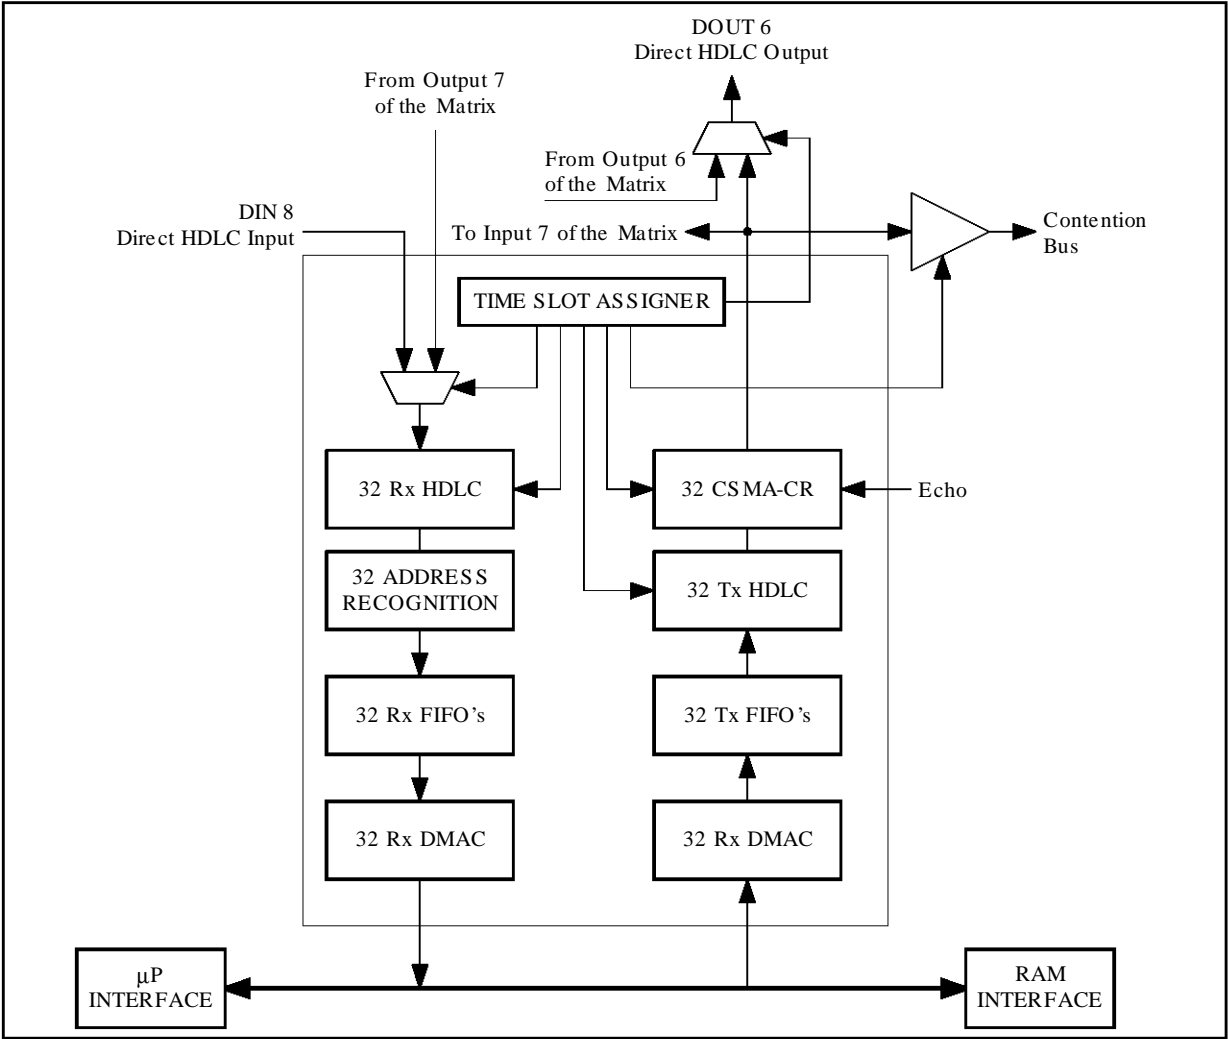

5464-09 EPS

### III - FUNCTIONAL DESCRIPTION (continued)

#### III.2.1.3 - Description and Functions of the HDLC Bytes

##### - FLAG

The binary sequence 01111110 marks the beginning and the end of the HDLC Frame.

Note : In reception, three possible flag configurations are allowed and correctly detected :

- two normal consecutive flags :  
...0111111001111110...
- two consecutive flags with a "0" common :  
...011111101111110...

- a global common flag : ...01111110...

this flag is the closing flag for the current frame and the opening flag for the next frame

##### - ABORT

The binary sequence 1111111 marks an Abort command.

In reception, seven consecutive 1's, inside a message, are detected as an abort command and generates an interrupt to the host.

In transmit direction, an abort is sent upon command of the micro-processor. No ending flag is expected after the abort command.

##### - BIT STUFFING AND UNSTUFFING

This operation is done to avoid the confusion of a data byte with a flag.

In transmission, if five consecutive 1's appear in the serial stream being transmitted, a zero is automatically inserted (bit stuffing) after the fifth "1".

In reception, if five consecutive "1" followed by a zero are received, the "0" is assumed to have been inserted and is automatically deleted (bit unstuffing).

##### - FRAME CHECK SEQUENCE

The Frame Check Sequence is calculated according to the recommendation Q921 of the CCITT.

##### - ADDRESS RECOGNITION

In the frame, one or two bytes are transmitted to indicate the destination of the message.

Two types of addresses are possible :

- a specific destination address
- a broadcast address.

In reception, the controller compares the receive addresses to internal registers, which contain the address message. 4 bits in the receive command register (HRCR) inform the receiver of which registers, it has to take into account for the comparison. The receiver compares the two address bytes of the message to the specific board address and the broadcast address. Upon an address match, the address and the data following are written to the data buffers; upon an address mismatch, the frame is ignored. So, it authorizes the filtering of the messages. If no comparison is

specified, each frame is received whatever its address field.

In Transmission, the controller sends the frame including the destination or broadcast addresses.

#### III.2.2 - CSMA/CR Capability

An HDLC channel can come in and go out by any TDM input on the matrix. For time constraints, direct HDLC Access is achieved by the input TDM (DIN 8) and the output TDM (DOUT6).

In transmission, a time slot of a TDM can be shared between different sources in Multi-point to point configuration (different subscriber's boards for example). The arbitration system is the CSMA/CR (Carrier Sense Multiple access with Contention Resolution).

The contention is resolved by a bus connected to the CB pin (Contention Bus). This bus is a 2Mbit/s wire line common to all the potential sources.

If a *Multi-HDLC* has obtained the access to the bus, the data to transmit is sent simultaneously on the CB line and the output TDM. The result of the contention is read back on the Echo line. If a collision is detected, the transmission is stopped immediately. A contention on a bit basis is so achieved. Each message to be sent with CSMA/CR has a priority class (PRI = 8, 10) indicated by the Transmit Descriptor and some rules are implemented to arbitrate the access to the line. The CSMA/CR Algorithm is given. When a request to send a message occurs, the transmitter determines if the shared channel is free. The *Multi-HDLC* listens to the Echo line. If C or more consecutive "1" are detected (C depending on the message's priority), the *Multi-HDLC* begins to send its message. Each bit sent is sampled back and compared with the original value to send. If a bit is different, the transmission is instantaneously stopped (before the end of this bit time) and will restart as soon as the *Multi-HDLC* will detect that the channel is free without interrupting the microprocessor.

After a successful transmission of a message, a programmable penalty PEN(1 or 2) is applied to the transmitter (see Paragraph HDLC Transmit Command Register on Page 65). It guarantees that the same transmitter will not take the bus another time before a transmitter which has to send a message of same priority.

In case of a collision, the frame which has been aborted is automatically retransmitted by the DMA controller without warning the microprocessor of this collision. The frame can be located in several buffers in external memory. The collision can be detected from the second bit of the opening frame to the last but one bit of the closing frame.

### III - FUNCTIONAL DESCRIPTION (continued)

#### III.2.3 - Time Slot Assigner Memory

Each HDLC channel is bidirectional and configured by the Time Slot Assigner (TSA).

The TSA is a memory of 32 words (one per physical Time Slot) where all of the 32 input and output time slots of the HDLC controllers can be associated to logical HDLC channels. Super channels are created by assigning the same logical channel number to several physical time slots.

The following features are configured for each HDLC time slot :

- Time slot used or not
- One logical channel number
- Its source : (DIN 8 or the output 7 of the matrix)
- Its bit rate and concerned bits (4kbit/s to 64kbit/s). 4kbit/s correspond to one bit transmitted each two frames. This bit must be present in two consecutive frames in reception, and repeated twice in transmission.
- Its destination :
  - direct output on DOUT6
  - direct output on DOUT6 and on the Contention Bus (CB)
  - on another OTDM via input 7 of the matrix and on the Contention Bus (CB)

#### III.2.4 - Data Storage Structure

Data associated with each Rx and Tx HDLC channel is stored in external memory; The data transfers between the HDLC controllers and memory are ensured by 32 DMAC (Direct Memory Access Controller) in reception and 32 DMAC in transmission.

The storage structure chosen in both directions is composed of one circular queue of buffers per channel. In such a queue, each data buffer is pointed to by a Descriptor located in external memory too. The main information contained in the Descriptor is the address of the Data Buffer, its length and the address of the next Descriptor; so the descriptors can be linked together.

This structure allows to :

- Store receive frames of variable and unknown length
- Read transmit frames stored in external memory by the host
- Easily perform the frame relay function.

#### III.2.4.1 - Reception

At the initialization of the application, the host has to prepare an Initialization Block memory, which contains the first receive buffer descriptor address for each channel, and the receive circular queues. At the opening of a receive channel, the DMA controller reads the address of the first buffer descriptor corresponding to this channel in the initialization Block. Then, the data transfer can occur without intervention of the processor (see Figure 9 on Page 25).

A new HDLC frame always begins in a new buffer. A long frame can be split between several buffers if the buffer size is not sufficient. All the information concerning the frame and its location in the circular queue is included in the Receive Buffer Descriptor :

- The Receive Buffer Address (RBA),
- The size of the receive buffer (SOB),
- The number of bytes written into the buffer (NBR),
- The Next Receive Descriptor Address (NRDA),
- The status concerning the receive frame,
- The control of the queue.

#### III.2.4.2 - Transmission

In transmission, the data is managed by a similar structure as in reception (see Figure 10 on Page 25).

By the same way, a frame can be split up between consecutive transmit buffers.

The main information contained in the Transmit Descriptor are :

- transmit buffer address (TBA),
- number of bytes to transmit (NBT) concerning the buffer,
- next transmit descriptor address (NTDA),
- status of the frame after transmission,
- control bit of the queue,
- CSMA/CR priority (8 or 10).


#### III.2.4.3 - Frame Relay

The principle of the frame relay is to transmit a frame which has been received without treatment. A new heading is just added. This will be easily achieved, taking into account that the queue structure allows the transmission of a frame split between several buffers.




## III - FUNCTIONAL DESCRIPTION (continued)

Figure 9 : Structure of the Receive Circular Queue

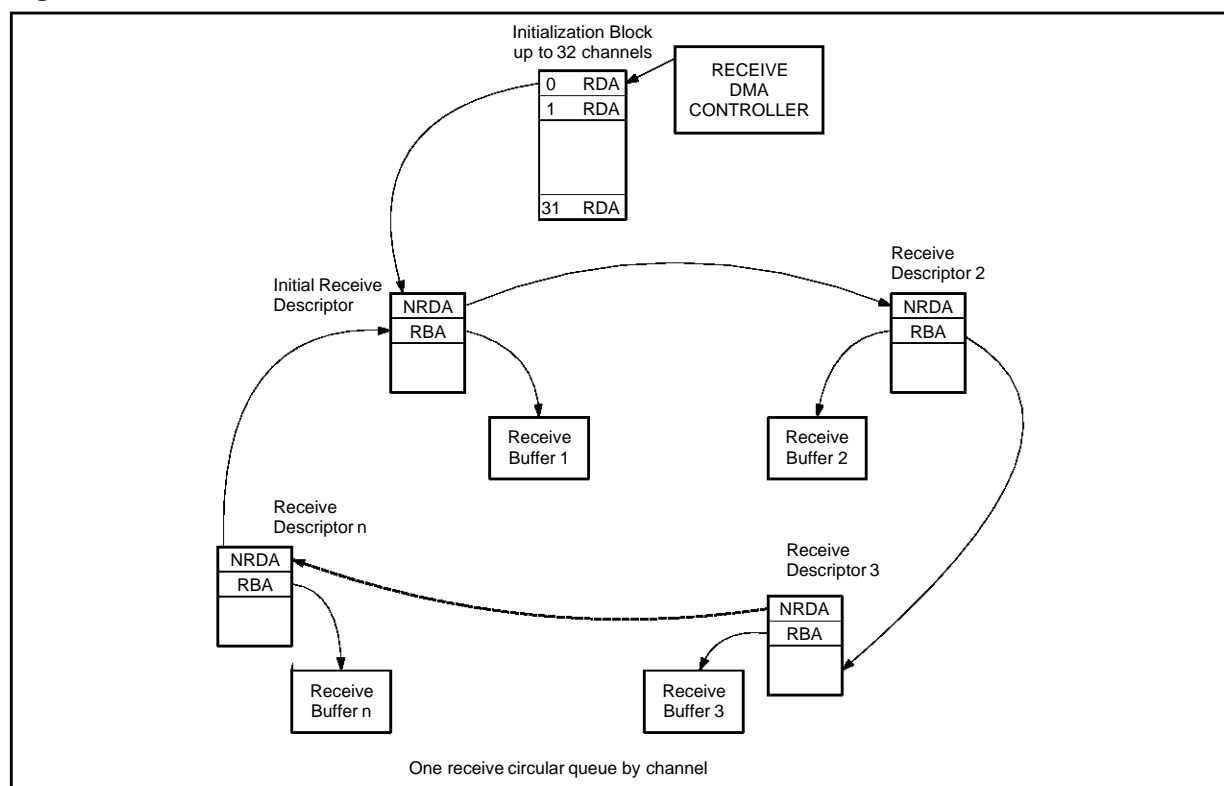

5464-10.EPS

Figure 10 : Structure of the Transmit Circular Queue

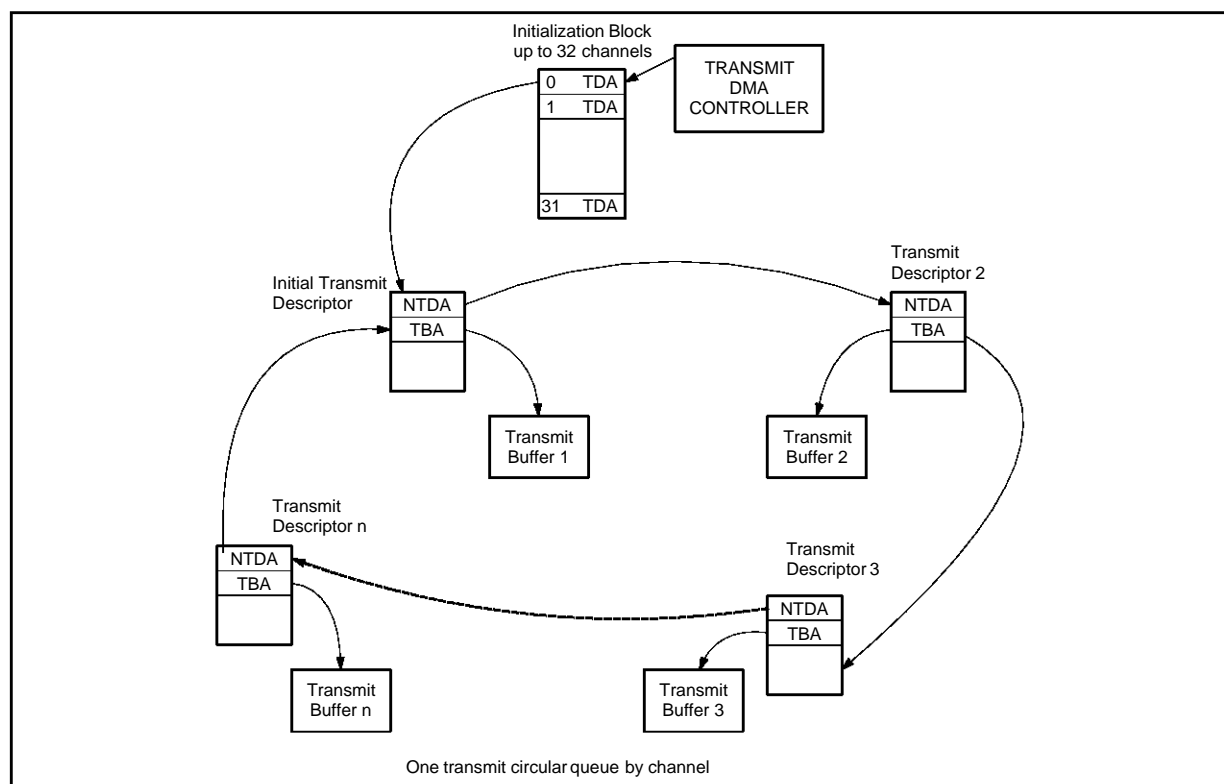

5464-11.EPS

### III - FUNCTIONAL DESCRIPTION (continued)

#### III.2.5 - Transparent Modes

In the transparent mode, the *Multi-HDLC* transmits data in a completely transparent manner without performing any bit manipulation or Flag insertion. The transparent mode is per byte function.

Two transparent modes are offered :

- First mode : for the receive channels, the *Multi-HDLC* continuously writes received bytes into the external memory as specified in the current receive descriptor without taking into account the Fill Character Register.
- Second mode : the Fill Character Register specifies the "fill character" which must be taken into account. In reception, the "fill character" will not be transferred to the external memory. The detection of "Fill character" marks the end of a message and generates an interrupt if BINT = 1 (see Transmit Descriptor on Page 78). When the "Fill character" is not detected a new message is receiving.

As for the HDLC mode the correspondence between the physical time slot and the logical channel is fully defined in the Time Slot Assigner memory (Time slot used or not used, logical channel number, source, destination).

#### III.2.6 - Command of the HDLC Channels

The microprocessor is able to control each HDLC receive and transmit channel. Some of the commands are specific to the transmission or the reception but others are identical.

##### III.2.6.1 - Reception Control

The configuration of the controller operating mode is: HDLC mode or Transparent mode.

The control of the controller: START, HALT, CONTINUE, ABORT.

- START : On a start command, the Rx DMA controller reads the address of the first descriptor in the initialization block memory and is ready to receive a frame.
- HALT : For overloading reasons, the microprocessor can decide to halt the reception. The DMA controller finishes transfer of the current frame to external memory and stops. The channel can be restarted on CONTINUE command.
- CONTINUE : The reception restarts in the next descriptor.
- ABORT: On an abort command, the reception is instantaneously stopped. The channel can be restarted on a START or CONTINUE command.

Reception of FLAG (01111110) or IDLE (11111111) between Frames.

Address recognition. The microprocessor defines

the addresses that the Rx controller has to take into account.

In transparent mode: "fill character" register selected or not.

##### III.2.6.2 - Transmission Control

The configuration of the controller operating mode is : HDLC mode or Transparent mode.

The control of the controller : START, HALT, CONTINUE, ABORT.

- START : On a start command, the Tx DMA controller reads the address of the first descriptor in the initialization block memory and tries to transmit the first frame if End Of Queue is not at "1".
- HALT : The transmitter finishes to send the current frame and stops. The channel can be restarted on a CONTINUE command.
- CONTINUE : if the CONTINUE command occurs after HALT command, the HDLC Transmitter restarts by transmitting the next buffer associated to the next descriptor.  
If the CONTINUE command occurs after an ABORT command which has occurred during a frame, the HDLC transmitter restarts by transmitting the frame which has been effectively aborted by the microprocessor.
- ABORT: On an abort command, the transmission of the current frame is instantaneously stopped, an ABORT sequence "1111111" is sent, followed by IDLE or FLAG bytes. The channel can be restarted on a START or CONTINUE command.

Transmission of FLAG (01111110) or IDLE (11111111) between frames can be selected.

CRC can be generated or not. If the CRC is not generated by the HDLC Controller, it must be located in the shared memory.

In transparent mode: "fill character" register can be selected or not.

### III.3 - C/I and Monitor

#### III.3.1 - Function Description

The *Multi-HDLC* is able to operate both GCI and V\* links. The TDM DIN/DOUT 4 and 5 are internally connected to the CI and Monitor receivers/transmitters. Since the controllers handle up to 16 CI and 16 Monitor channels simultaneously, the *Multi-HDLC* can manage up to 16 level 1 circuits.

The *Multi-HDLC* can be used to support the CI and monitor channels based on the following protocols :

- ISDN V\* protocol
- ISDN GCI protocol
- Analog GCI protocol.

### III - FUNCTIONAL DESCRIPTION (continued)

#### III.3.2 - GCI and V\* Protocol

A TDM can carry 8 GCI channels or V\* channels. The monitor and S/C bytes always stand at the same position in the TDM in both cases.

| CGI Channel 0 |     |     |     | CGI Channel 1 to Channel 6 | CGI Channel 7 |      |      |      |
|---------------|-----|-----|-----|----------------------------|---------------|------|------|------|
| TS0           | TS1 | TS2 | TS3 |                            | TS28          | TS29 | TS30 | TS31 |
| B1            | B2  | MON | S/C |                            | B1            | B2   | MON  | S/C  |

The GCI or V\* channels are composed of 4 bytes and have both the same general structure.

| B1 | B2 | MON | S/C |
|----|----|-----|-----|
|----|----|-----|-----|

B1, B2 : Bytes of data. Those bytes are not affected by the monitor and CI protocols.

MON : Monitor channel for operation and maintenance information.

S/C : Signalling and control information.

Only Monitor handshakes and S/C bytes are different in the three protocols :

ISDN V\* S/C byte

| D | C/I 4 bits | T | E |
|---|------------|---|---|
|---|------------|---|---|

ISDN GCI S/C byte

| D | C/I 4 bits | A | E |
|---|------------|---|---|
|---|------------|---|---|

Analog GCI S/C byte

| C/I 6 bits | A | E |
|------------|---|---|
|------------|---|---|

CI : The Command/Indicate channel is used for activation/deactivation of lines and control functions.

D : These 2 bits carry the 16 kbit/s ISDN basic access D channel.

In GCI protocol, A and E are the handshake bits and are used to control the transfer of information on monitor channels. The E bit indicates the transfer of each new byte in one direction and the A bit acknowledges this byte transfer in the reverse direction.

In V\* protocol, there isn't any handshake mode. The transmitter has only to mark the validity of the Monitor byte by positioning the E bit (T is not used and is forced to "1").

For more information about the GCI and V\*, refer to the General Interface Circuit Specification (issue 1.0, march 1989) and the France Telecom Specification about ISDN Basic Access second generation (November 1990).

#### III.3.3 - Structure of the Treatment

GCI/V\* TDM's are connected to DIN 4 and DIN 5. The D channels are switched through the matrix towards the output 7 and the HDLC receiver. The Monitor and S/C bytes are multiplexed and sent to the CI and Monitor receivers (see Figure 11 on Page 28).

In transmission, the S/C and Monitor bytes are recombined by multiplexing the information provided by the Monitor, C/I and the HDLC Transmitter. Like in reception, the D channel is switched through the matrix.

#### III.3.4 - CI and Monitor Channel Configuration

Monitor channel data is located in a time slot ; the CI and monitor handshake bits are in the next time slot.

Each channel can be defined independently. A table with all the possible configurations is presented hereafter (Table 13).

**Table 13 : C/I and MON Channel Configuration**

| C/I validated or not     | CI For analog subscriber (6 bits) |
|--------------------------|-----------------------------------|
|                          | CI For ISDN subscriber (4 bits)   |
| Monitor validated or not | Monitor V*                        |
|                          | Monitor GCI                       |

**Note :** A mix of V\* and GCI monitoring can be performed for two distinct channels in the same application.


#### III.3.5 - CI and Monitor Transmission/Reception Command

The reception of C/I and Monitor messages are managed by two interrupt queues.

In transmission, a transmit command register is implemented for each C/I and monitor channel (16 C/I transmit command registers and 16 Monitor transmit command registers). Those registers are accessible in read and write modes by the micro-processor.

### III - FUNCTIONAL DESCRIPTION (continued)

**Figure 11 : D, C/I and Monitor Channel Path**

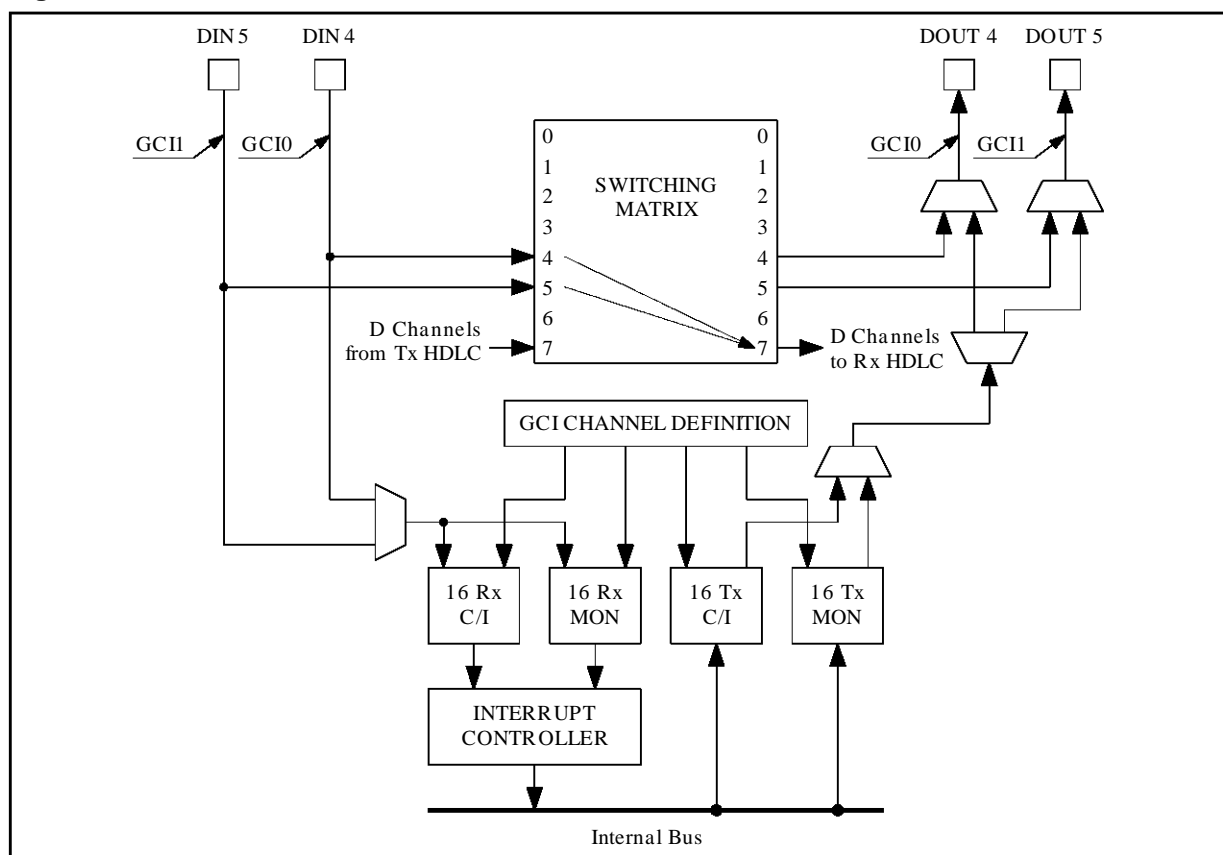

### III.4 - Microprocessor Interface

### III.4.1 - Description

The *Multi-HDLC* circuit can be controlled by several types of microprocessors (ST9, Intel/Motorola 8 or 16 data bits interfaces) such as :

- ST9 family
- INTEL 80C188 8 bits
- INTEL 80C186 16 bits
- MOTOROLA 68000 16 bits

During the initialization of the *Multi-HDLC* circuit, the microprocessor interface is informed of the type of microprocessor that is connected by polarisation of three external pins MOD 0/2).

Two chip Select (CS0/1) pins are provided. CS0 will select the internal registers and CS1 the external memory.

### Table 14 : Microprocessor Interface Selection


| MOD2 Pin | MOD1 Pin | MOD0 Pin | Microprocessor |
|----------|----------|----------|----------------|
| 0        | 1        | 1        | 80C188         |
| 1        | 1        | 1        | 80C186         |
| 1        | 0        | 0        | 68000          |
| 0        | 0        | 0        | Reserved       |
| 0        | 0        | 1        | ST9            |

### III.4.2 - Definition of the Interface for the different microprocessors

The signals connected to the microprocessor interface are presented on the following figures for the different microprocessor (see Figures 12, 13, 14, 15, 16 and 17 on Pages 29-30).


### III - FUNCTIONAL DESCRIPTION (continued)

**Figure 12 :** Multi-HDLC connected to  $\mu$ P with multiplexed buses

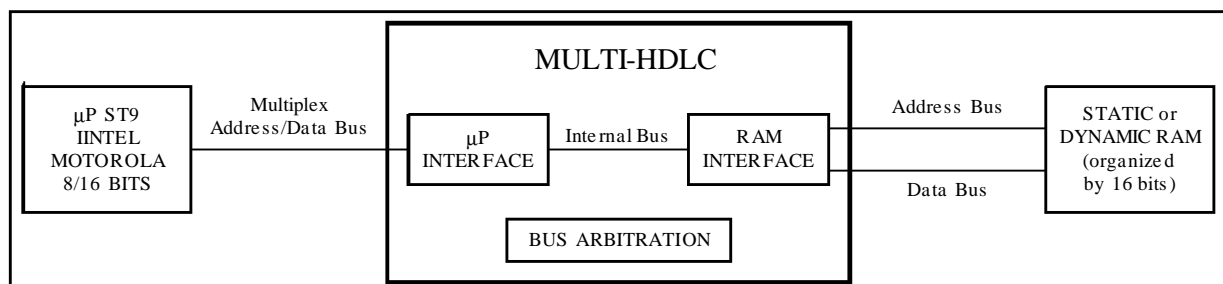


5464-13.EPS

**Figure 13 :** Multi-HDLC connected to  $\mu$ P with non-multiplexed buses

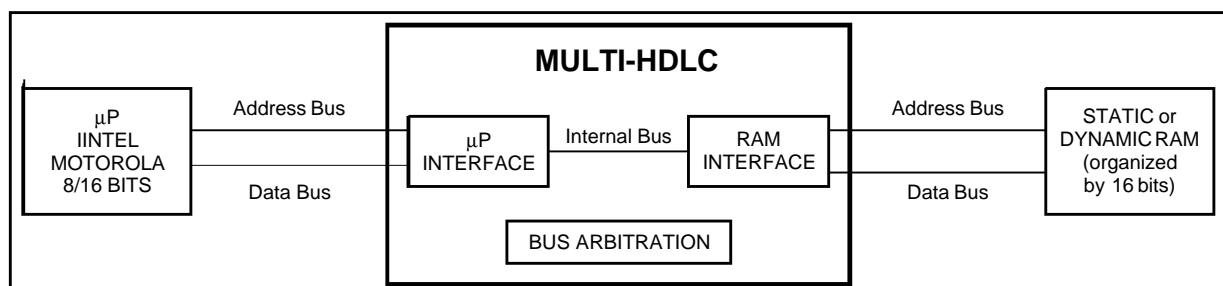


5464-14.EPS

**Figure 14 :** Microprocessor Interface for INTEL 80C188

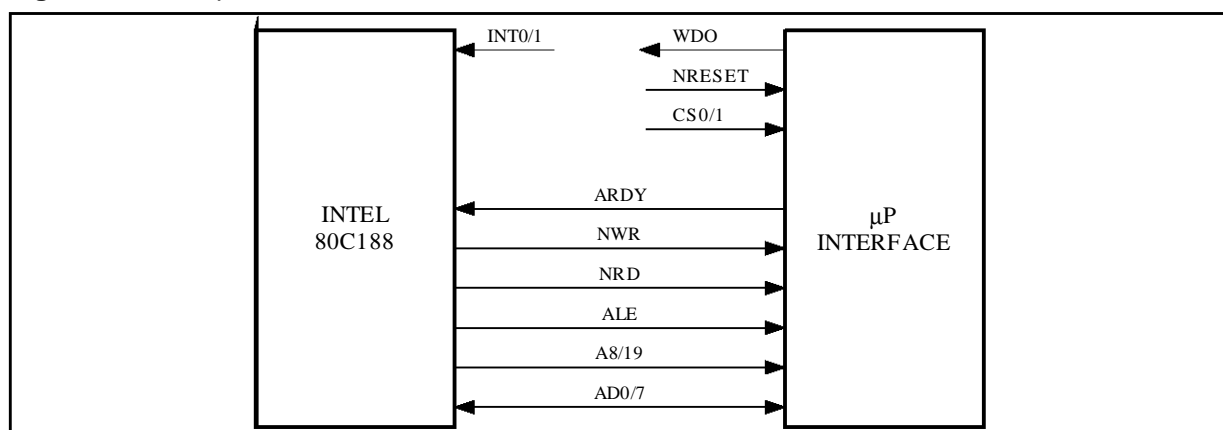

5464-15.EPS

**Figure 15 :** Microprocessor Interface for INTEL 80C186

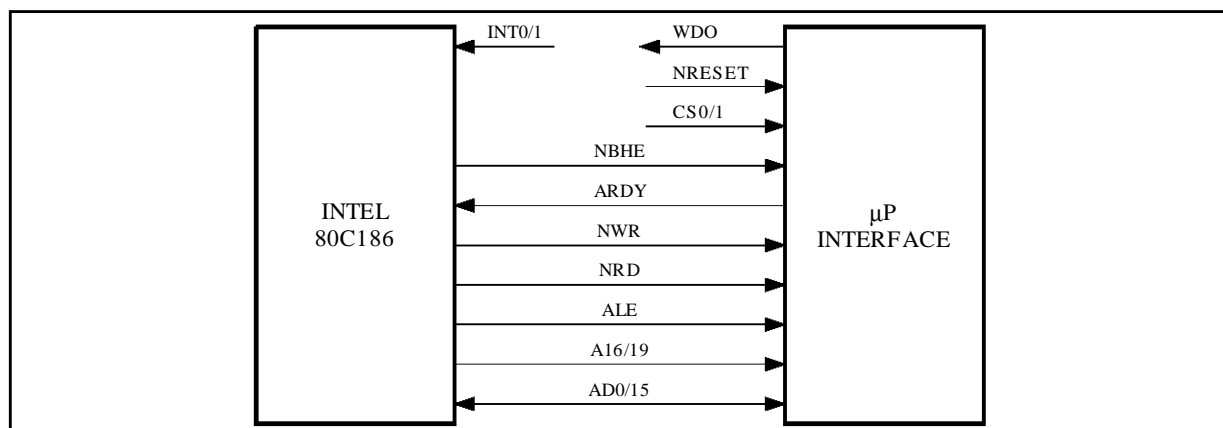

5464-16.EPS

III - FUNCTIONAL DESCRIPTION (continued)

Figure 16 : Microprocessor Interface for MOTOROLA 68000


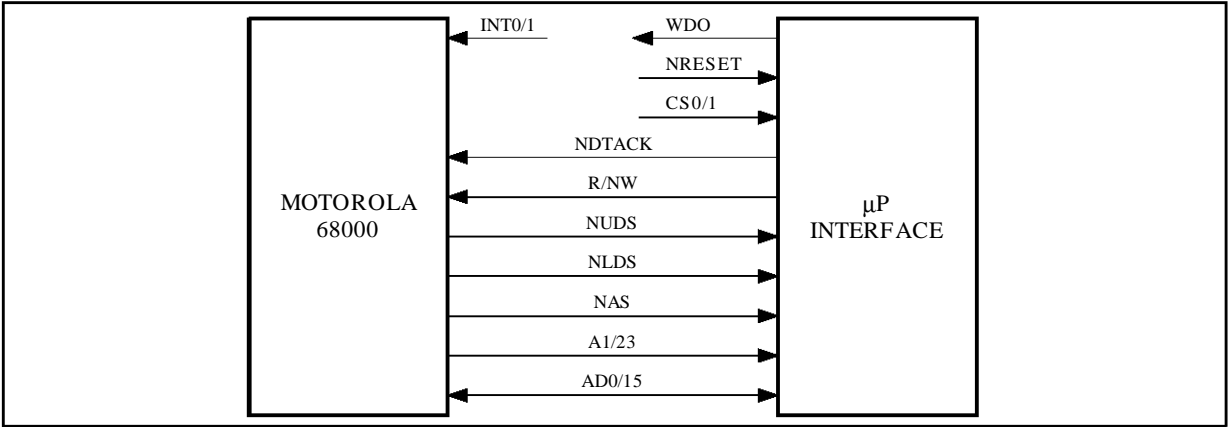


Figure 17 : Microprocessor Interface for ST9

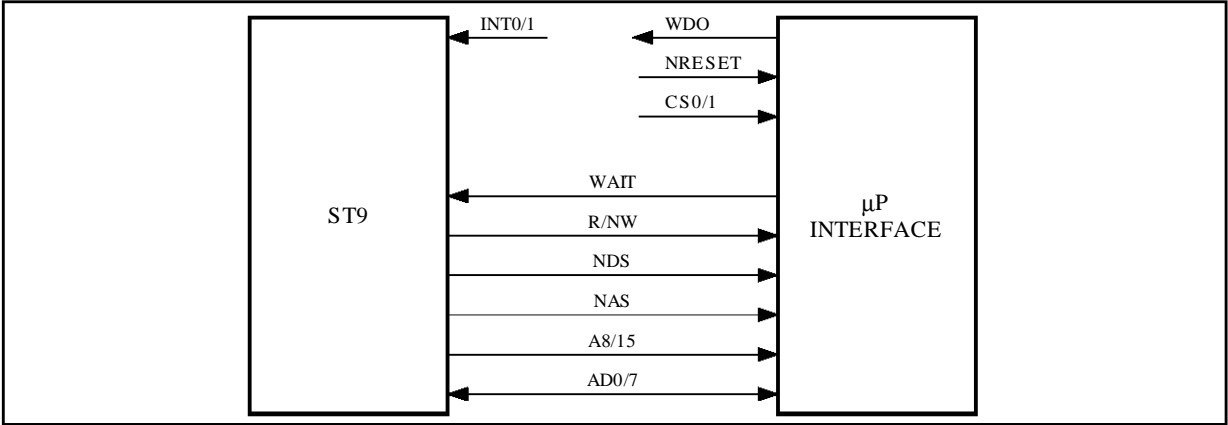

### III - FUNCTIONAL DESCRIPTION (continued)

#### III.5 - Memory Interface

##### III.5.1 - Function Description

The memory interface allows the connection of Static or Dynamic RAM. The memory space addressable in the two configurations is not the same. In the case of dynamic memory (DRAM), the memory interface will address up to 16 Megabytes. In case of static memory (SRAM) only 1 Megabyte will be addressed. The memory location is always organized in 16 bits.

The memory is shared between the *Multi-HDLC* and the microprocessor. The access to the memory is arbitrated by an internal function of the circuit: the bus arbitration.

##### III.5.2 - Choice of memory versus microprocessor and capacity required

The memory interface depends on the memory chips which are connected. As the memory chips will be chosen versus the microprocessor and the wanted memory space, the Table 22 presents the different configurations.

Example 1 : if the application requires 16 bit mProcessor and 1 Megaword Shared memory size, three capabilities are offered :

- 4 DRAM Circuits (256Kx16) or
- 4 DRAM Circuits (1Mx4) or
- 1 DRAM Circuit (1Mx16).

Example 2 : if the application requires 8 bit mProcessor and 1 Megabyte Shared memory size, three capabilities are offered:

- 2 DRAM Circuits (256Kx16) or
- 8 SRAM Circuits (128Kx8) or
- 2 SRAM Circuits (512Kx8).

Example 3 : for small applications it is possible to connect 2 SRAM Circuits (128Kx8) to obtain 256 Kilobytes shared memory.

##### III.5.3 - Memory Cycle

For SRAM and DRAM, the different cycles are programmable (see Paragraph "Memory Interface Configuration Register MICR (32)H" on Page 71).

Each cycle is equal to :  $p \times 1/f$   
with  $f$  the frequency of signal applied to the Crystal  
1 input and  $p$  selected by the user.

**Table 22** : DRAM and SDRAM Selection versus  $\mu P$

| Microprocessor and shared memory |                     | Shared memory size required by the application |            |              |          |          |          |
|----------------------------------|---------------------|--|------------|--------------|----------|----------|----------|
| 8 bits $\mu$ Processor           | Number of Megabytes | 0.5  | 1          | 2            | 4        | 8        | 16       |
| 16 bits $\mu$ Processor          | Number of Megawords | 0.25   | 0.5        | 1            | 2        | 4        | 8        |
| DRAM Circuits proposed           |                     |  |            |              |          |          |          |
| Capacity                         | Organization        |  |            |              |          |          |          |
| 4 Megabits                       | 256Kx16             | 1(256Kx16)                                     | 2(256Kx16) | 4(256Kx16)   |          |          |          |
|                                  | 1Mx4                |  |            | 4(1Mx4)      | 8(1Mx4)  | 16(1Mx4) |          |
| 16 Megabits                      | 1Mx16               |  |            | 1(1Mx16)     | 2(1Mx16) | 4(1Mx16) |          |
|                                  | 4Mx4                |  |            |              |          | 4(4Mx4)  | 8(4Mx4)  |
| 64 Megabits                      | 4Mx16               |  |            |              |          | 1(4Mx16) | 2(4Mx16) |
| SRAM Circuits proposed           |                     |  |            | Not possible |          |          |          |
| Capacity                         | Organization        |  |            |              |          |          |          |
| 1 Megabits                       | 128Kx8              | 4(128Kx8)                                      | 8(128Kx8)  |              |          |          |          |
| 4 Megabits                       | 512Kx8              |  | 2(512Kx8)  |              |          |          |          |

### III - FUNCTIONAL DESCRIPTION (continued)

#### III.5.4 - SRAM interface


| Signals | A19 | A18 | A0 or equiv. |
|---------|-----|-----|--------------|
| NCE7    | 1   | 1   | 1            |
| NCE6    | 1   | 1   | 0            |
| NCE5    | 1   | 0   | 1            |
| NCE4    | 1   | 0   | 0            |
| NCE3    | 0   | 1   | 1            |
| NCE2    | 0   | 1   | 0            |
| NCE1    | 0   | 0   | 1            |
| NCE0    | 0   | 0   | 0            |

The SRAM space achieves 1 Mbyte max. It is always organized in 16 bits. The structure of the memory plane is shown in the following figures. Because of the different chips usable, 19 address wires and 8 NCE (Chip Enable) are necessary to address the 1 Mbyte. The NCE selects the Most or Least Significant Byte versus the value of A0 delivered by the  $\mu$ P and the location of chip in the memory space.

##### III.5.4.1 - 128K x n SRAM

The Address bits delivered by the *Multi-HDLC* for 128K x n SRAM circuits are : ADM0/14 and ADM15/16 (17 bits) corresponding with A1/17 delivered by the  $\mu$ P.

**Figure 18 :** 128K x 8 SRAM Circuit Memory Organization

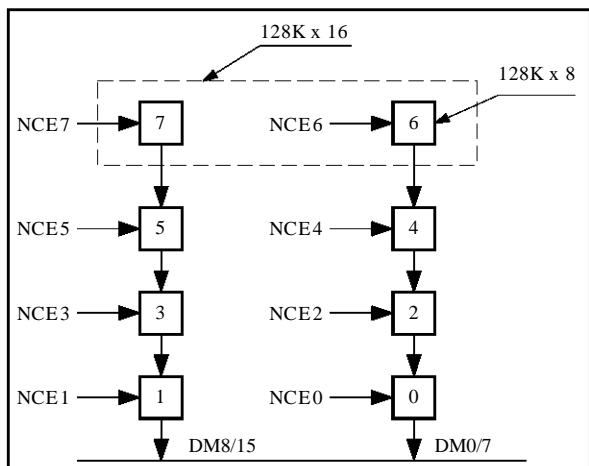


##### III.5.4.2 - 512K x n SRAM

| Signals | A0 or equiv. |
|---------|--------------|
| NCE1    | 1            |
| NCE0    | 0            |

The Address bits delivered by the *Multi-HDLC* for 512K x n SRAM circuits are : ADM0/14 and ADM15/18 (19 bits) corresponding with A1/19 delivered by the  $\mu$ P.

**Figure 19 :** 512K x 8 SRAM Circuit Memory Organization

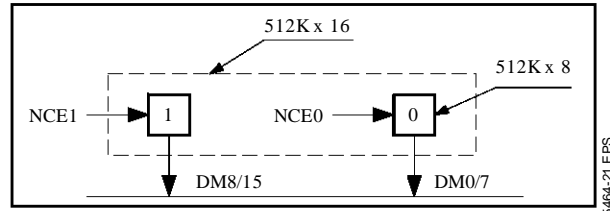

#### III.5.5 - DRAM Interface


In DRAM, the memory space can achieve up to 16 megabytes organized by 16 bits. Eleven address wires, four NRAS and two NCAS are needed to select any byte in the memory. One NRAS signal selects 1 bank of 4 and the NCAS signals select the bytes concerned by the transfer (1 or 2 selecting a byte or a word). The DRAM memory interface is then defined. The "RAS only" refresh cycles will refresh all memory locations. The refresh is programmable. The frequency of the refresh is fixed by the memory requirements.

##### III.5.5.1 - 256K x n DRAM Signals

| Signals | A20 | A19 | A0 or equiv. |
|---------|-----|-----|--------------|
| NRAS3   | 1   | 1   |              |
| NRAS2   | 1   | 0   |              |
| NRAS1   | 0   | 1   |              |
| NRAS0   | 0   | 0   |              |
| NCAS1   |     |     | 1            |
| NCAS0   |     |     | 0            |

The Address bits delivered by the *Multi-HDLC* for 256K x n DRAM circuits are : ADM0/8 (2 x 9 = 18 bits) corresponding with A1/18 delivered by the  $\mu$ P.

**Figure 20 :** 256K x 16 DRAM Circuit Organization

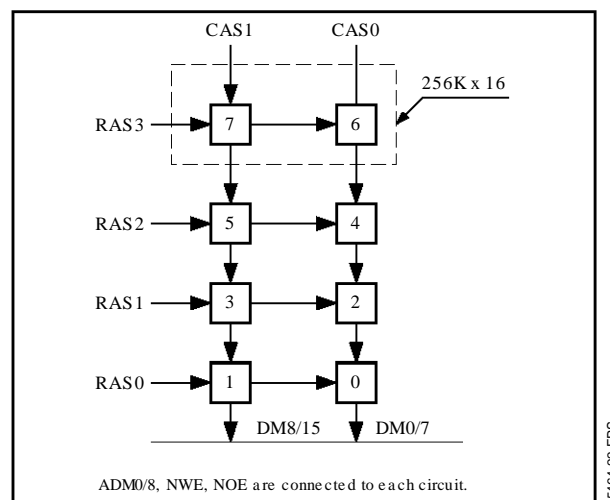




### III - FUNCTIONAL DESCRIPTION (continued)

#### III.5.5.2 - 1M x n DRAM Signals

| Signals | A22 | A20 | A0 or equiv. |
|---------|-----|-----|--------------|
| NRAS3   | 1   | 1   |              |
| NRAS2   | 1   | 0   |              |
| NRAS1   | 0   | 1   |              |
| NRAS0   | 0   | 0   |              |
| NCAS1   |     |     | 1            |
| NCAS0   |     |     | 0            |

The Address bits delivered by the *Multi-HDLC* for 1M x n DRAM circuits are :  
ADM0/9 (2 x 10 = 18 bits) corresponding with A1/20 delivered by the  $\mu$ P.

**Figure 21 : 1M x 16 DRAM Circuit Organization**

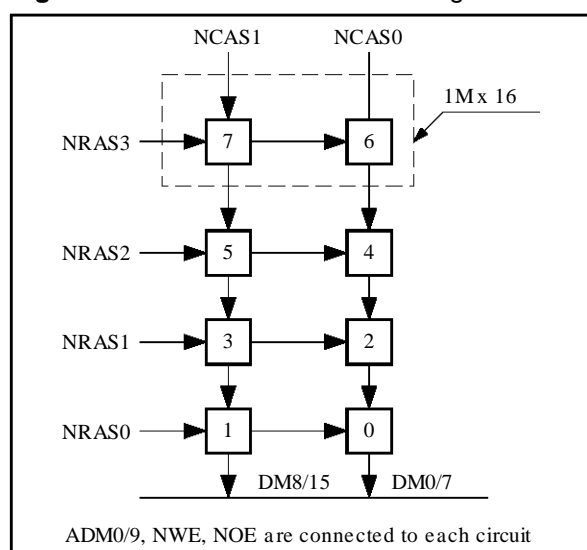


#### III.5.5.3 - 4M x n DRAM Signals

| Signals | A23 | A0 or equiv. |
|---------|-----|--------------|
| NRAS1   | 1   |              |
| NRAS0   | 0   |              |
| NCAS1   |     | 1            |
| NCAS0   |     | 0            |

The Address bits delivered by the *Multi-HDLC* for 4M x n DRAM circuits are :  
ADM0/10 (2 x 11 = 22 bits) corresponding with A1/22 delivered by the  $\mu$ P.

**Figure 22 : 4M x 16 DRAM Circuit Organization**

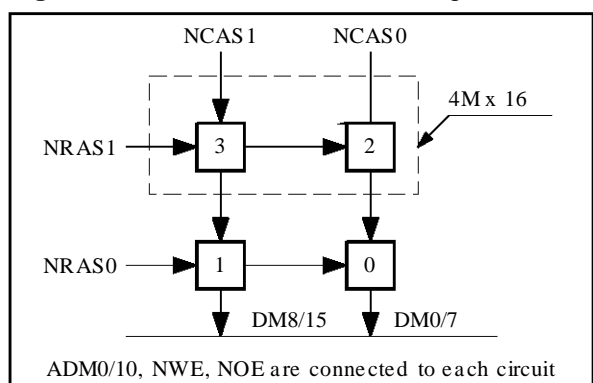

### III.6 - Bus Arbitration

The Bus arbitration function arbitrates the access to the bus between different entities of the circuit. Those entities which can call for the bus are the following :


- The receive DMA controller,
- The microprocessor,
- The transmit DMA controller,
- The Interrupt controller,
- The memory interface for refreshing the DRAM.

This list gives the memory access priorities per default.

If the treatment of more than 32 HDLC channels is required by the application, it is possible to chain several *Multi-HDLC* components. That is done with two external pins (TRI, TRO) and a token ring system.

The TRI, TRO signals are managed by the bus arbitration function too. When a chip has finished its tasks, it sends a pulse of 30 ns to the next chip.

**Figure 23 : Chain of n Multi-HDLC Components**

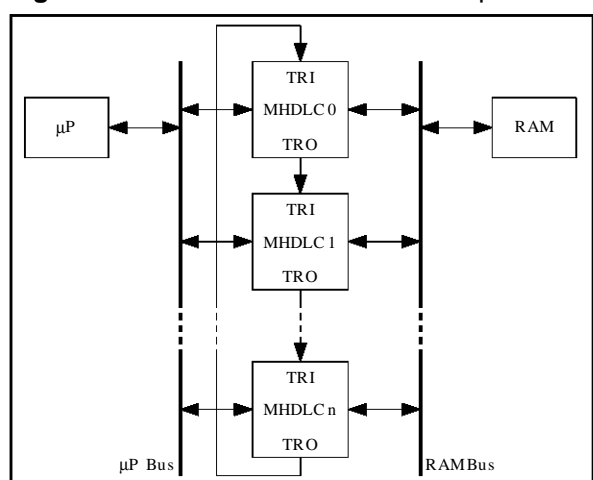

### III - FUNCTIONAL DESCRIPTION (continued)

#### III.7 - Clock Selection and Time Synchronization

##### III.7.1 - Clock Distribution Selection and Supervision

Two clock distributions are available : Clock at 4.096MHz or 8.192MHz and a synchronization signal at 8kHz. The component has to select one of these two distributions and to check its integrity (see Figure 25 and Paragraph "General Configuration Register GCR (02)H" on Page 57).

DCLK, FSCGCI and FSCV\* are output on three external pins of the *Multi-HDLC*. DCLK is the clock selected between Clock A and Clock B. FSCGCI and FSCV\* are functions of the selected distribution and respect the GCI and V\* frame synchronization specifications.

The supervision of the clock distribution consists of verifying its availability. The detection of the clock absence is done in less than 250µs. In case the clock is absent, an interrupt is generated with a 4kHz recurrence. Then the clock distribution is switched by the microprocessor. This change of clock occurs on a falling edge of the new selected distribution.

Depending on the applications, three different signals of synchronization (GCI, V\* or Sy) can be provided to the component. The clock A/B frequency can be a 4096 or 8192kHz clock. The component is informed of the synchronization and clocks that are connected by software. The timings of the different synchronization are given Page 38.


##### III.7.2 - VCXO Frequency Synchronization

An external VCXO can be used to provide a clock to the transmission components. This clock is controlled by the main clock distribution (Clock A or Clock B at 4096kHz). As the clock of the transmission component is 15360 or 16384kHz, a configurable function is necessary.

The VCXO frequency is divided by P (30 or 32) to provide a common sub-multiple (512kHz) of the reference frequency CLOCKS or CLOCKS (4096kHz). The comparison of these two signals gives an error signal which commands the VCXO.


Two external pins are needed to perform this function : VCXO-IN and VCXO-OUT (see Figure 26 on Page 35).

**Figure 24 : MHDLC Clock Generation**

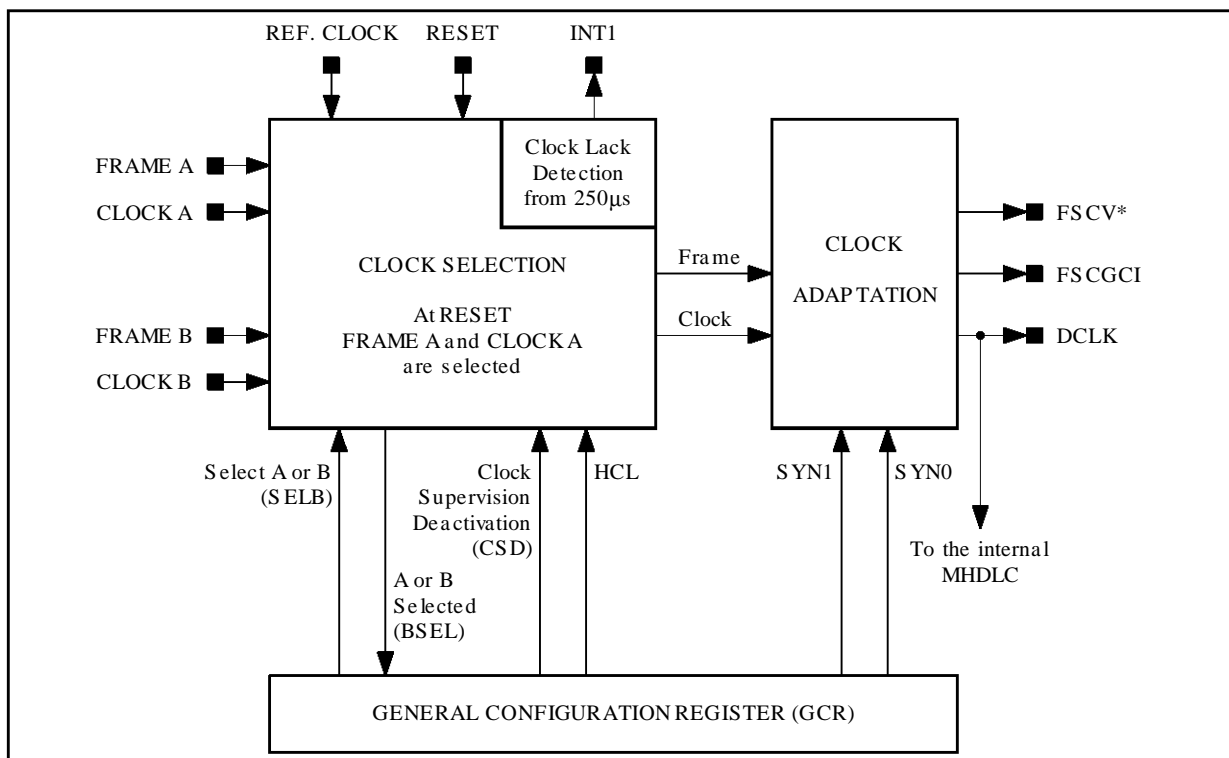

### III - FUNCTIONAL DESCRIPTION (continued)

**Figure 25 : VCXO Frequency Synchronization**

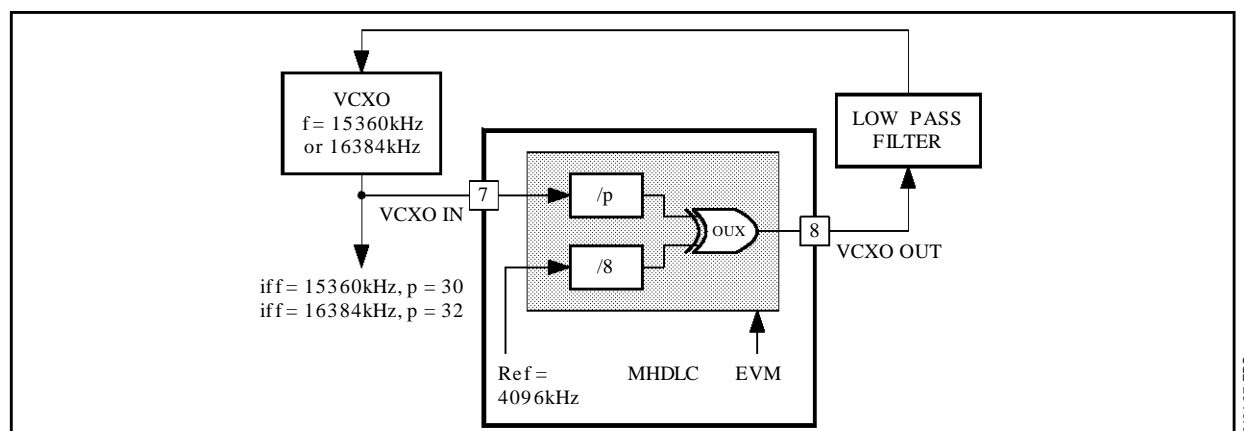

### III.8 - Interrupt Controller

#### III.8.1 - Description

Three external pins are used to manage the interrupts generated by the *Multi-HDLC*. The interrupts have three main sources :

- The operating interrupts generated by the HDLC receivers/transmitters, the CI receivers and the monitor transmitters/receivers. INT0 Pin is reserved for this use.
- The interrupt generated by an abnormal working of the clock distribution. INT1 Pin is reserved for this use.
- The non-activity of the microprocessor (Watchdog). WDO Pin is reserved for this use.

#### III.8.2 - Operating Interrupts (INT0 Pin)

There are five main sources of operating interrupts in the *Multi-HDLC* circuit :

- The HDLC receiver,
- The HDLC transmitter,
- The CI receiver,
- The Monitor receiver,
- The Monitor transmitter.

When an interrupt is generated by one of these functions, the interrupt controller :

- Collects all the information about the reasons of this interrupt,
- Stores them in external memory,
- Informs the microprocessor by positioning the INT0 pin in the high level.

Three interrupt queues are built in external memory to store the information about the interrupts :

- A single queue for the HDLC receivers and transmitters,
- One for the CI receivers,
- One for the monitor receivers.

The microprocessor takes the interrupts into account by reading the Interrupt Register (IR) of the interrupt controller.

This register informs the microprocessor of the interrupt source. The microprocessor will have information about the interrupt source by reading the corresponding interrupt queue (see Paragraph "Interrupt Register IR (38)<sub>H</sub>" on Page 74).

On an overflow of the circular interrupt queues and an overrun or underrun of the different FIFO, the INT0 Pin is activated and the origin of the interrupt is stored in the Interrupt Register.

A 16 bits register is associated with the Tx Monitor interrupt. It informs the microprocessor of which transmitter has generated the interrupt (see Paragraph "Transmit Monitor Interrupt Register TMIR (30)<sub>H</sub>" on Page 71).

#### III.8.3 - Time Base Interrupts (INT1 Pin)

The Time base interrupt is generated when an absence or an abnormal working of clock distribution is detected. The INT1 Pin is activated.

#### III.8.4 - Emergency Interrupts (WDO Pin)

The WDO signal is activated by an overflow of the watchdog register.

#### III.8.5 - Interrupt Queues

There are three different interrupt queues :


- Tx and Rx HDLC interrupt queue,
- Rx C/I interrupt queue,
- Rx Monitor interrupt queue.

Their length can be defined by software.

For debugging function, each interrupt word of the CI interrupt queue and monitor interrupt queue can be followed by a timestamped word. It is composed of a counter which runs in the range of 250μs. The counter is the same as the watchdog counter. Consequently, the watchdog function isn't available at the same time.

III - FUNCTIONAL DESCRIPTION (continued)

Figure 26 : The Three Circular Interrupt Memories

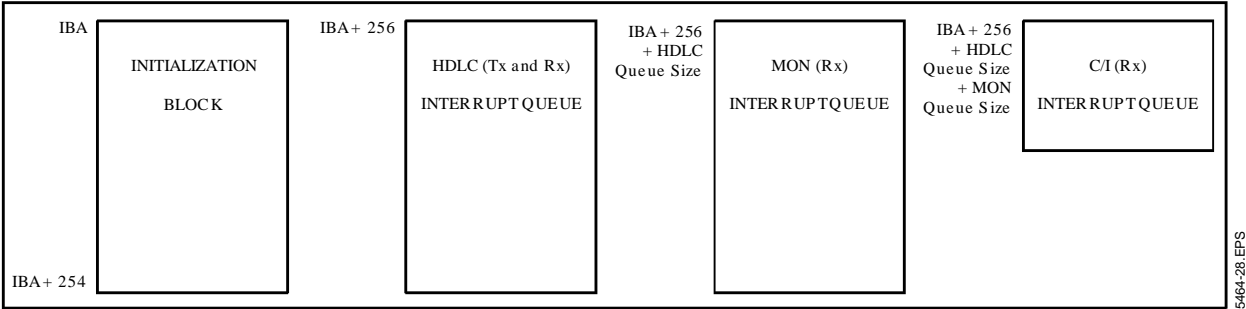

III.9 - Watchdog

This function is used to control the activity of the application. It is composed of a counter which counts down from an initial value loaded in the Timer register by the microprocessor.

If the microprocessor doesn't reset this counter before it is totally decremented, the external Pin WDO is activated ; this signal can be used to reset the microprocessor and all the application.

The initial time value of the counter is programmable from 0 to 15s in increments of 0.25ms.

At the reset of the component, the counter is automatically initialized by the value corresponding to 512ms which are indicated in the Timer register.

The microprocessor must put WDR (IDCR Register) to "1" to reset this counter and to confirm that the application started correctly.

In the reverse case, the WDO signal could be used to reset the board a second time.

III.10 - Reset

There are two possibilities to reset the circuit :

- by software,
- by hardware.

Each programmable register receives its default value. After that, the default value of each data register is stored in the associated memory except for Time slot Assigner memory.

## IV - DC SPECIFICATIONS

### Absolute Maximum Ratings

| Symbol    | Parameter               | Value                | Unit |
|-----------|-------------------------|----------------------|------|
| $V_{DD}$  | 5V Power Supply Voltage | -0.5, 6.5            | V    |
|           | Input or Output Voltage | -0.5, $V_{DD} + 0.5$ | V    |
| $T_{stg}$ | Storage Temperature     | -55, +125            | °C   |

### Power Dissipation

| Symbol | Parameter         | Test Conditions | Min. | Typ. | Max. | Unit |
|--------|-------------------|-----------------|------|------|------|------|
| P      | Power Consumption | $V_{DD} = 5V$   |      | 400  |      | mW   |

### Recommended DC Operating Conditions

| Symbol     | Parameter               | Test Conditions | Min. | Typ. | Max. | Unit |
|------------|-------------------------|-----------------|------|------|------|------|
| $V_{DD}$   | 5V Power Supply Voltage |                 | 4.75 |      | 5.25 | V    |
| $T_{oper}$ | Operating Temperature   |                 | 0    |      | +70  | °C   |

**Note 1 :** All the following specifications are valid only within these recommended operating conditions.

### TTL Input DC Electrical Characteristics

| Symbol     | Parameter                      | Test Conditions | Min. | Typ. | Max. | Unit |
|------------|--------------------------------|-----------------|------|------|------|------|
| $V_{IL}$   | Low Level Input Voltage        |                 |      |      | 0.8  | V    |
| $V_{IH}$   | High Level Input Voltage       |                 | 2.0  |      |      | V    |
| $I_{IL}$   | Low Level Input Current        | $V_I = 0V$      |      |      | 1    | μA   |
| $I_{IH}$   | High Level Input               | $V_I = V_{DD}$  |      |      | -1   | μA   |
| $V_{hyst}$ | SchmittTrigger hysteresis      |                 | 0.4  | 0.7  | 1    | V    |
| $V_{T+}$   | Positive Trigger Voltage       |                 |      | 2    | 2.4  | V    |
| $V_{T-}$   | Negative Trigger Voltage       |                 | 0.6  | 0.8  |      | V    |
| $C_{IN}$   | Input Capacitance (see Note 2) | $f = 1MHz @ 0V$ |      | 2    | 4    | pF   |
| $C_{OUT}$  | Output Capacitance             |                 |      | 4    |      |      |
| $C_{I/O}$  | Bidirectional I/O Capacitance  |                 | 4    | 8    |      |      |

**Note 2 :** Excluding package

### CMOS Output DC Electrical Characteristics

| Symbol   | Parameter                 | Test Conditions                       | Min.          | Typ. | Max. | Unit |
|----------|---------------------------|---------------------------------------|---------------|------|------|------|
| $V_{OL}$ | Low Level Output Voltage  | $I_{OL} = X \text{ mA}$ (see Note 3)  |               |      | 0.4  | V    |
| $V_{OH}$ | High Level Output Voltage | $I_{OH} = -X \text{ mA}$ (see Note 3) | $V_{DD5-0.4}$ |      |      | V    |

**Note 3 :** X is the source/sink current under worst case conditions and is reflected in the name of the I/O cell according to the drive capability.  
X = 4 or 8mA.

### Protection


| Symbol | Parameter                | Test Conditions             | Min. | Typ. | Max. | Unit |
|--------|--------------------------|-----------------------------|------|------|------|------|
| VESD   | Electrostatic Protection | $C = 100pF, R = 1.5k\Omega$ | 2000 |      |      | V    |

## V - CLOCK TIMING

### V.1 - Synchronization Signals delivered by the system

For one of three different input synchronizations which is programmed, FSCG and FSCV\* signals delivered by the *Multi-HDLC* are in accordance with the figure hereafter.


**Figure 27 :** Clocks received and delivered by the *Multi-HDLC*

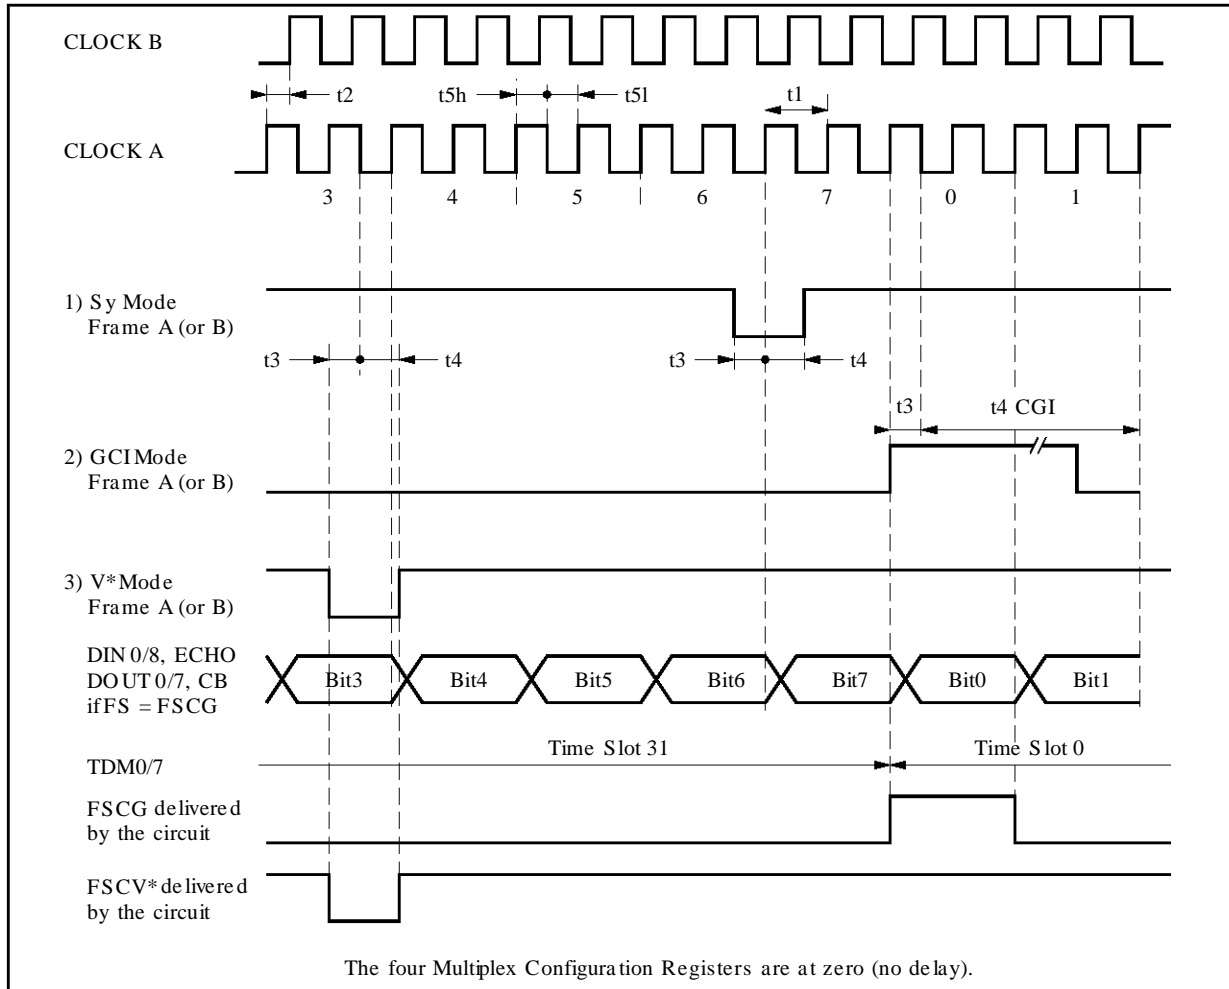

| Symbol      | Parameter  | Min.       | Typ.       | Max.                        | Unit     |
|-------------|--|------------|------------|-----------------------------|----------|
| t1          | Clock Period if 4096kHz<br>Clock Period if 8192kHz | 239<br>120 | 244<br>122 | 249<br>125                  | ns<br>ns |
| t2          | Delay between Clock A and Clock B                  | - 60       | 0          | +60                         | ns       |
| t3          | Set up time Frame A (or B)/CLOCK A (or B)          | 10         |            | t1-10                       | ns       |
| t4<br>t4GCI | Hold time Frame A (or B)/CLOCK A (or B)            | 10<br>10   |            | t1-10<br>125000 - (t1 - 10) | ns       |
| t5          | Clock ratio t5h/t5l                                | 75         | 100        | 125                         | %        |

## V - CLOCK TIMING (continued)

## V.2 - TDM Synchronization

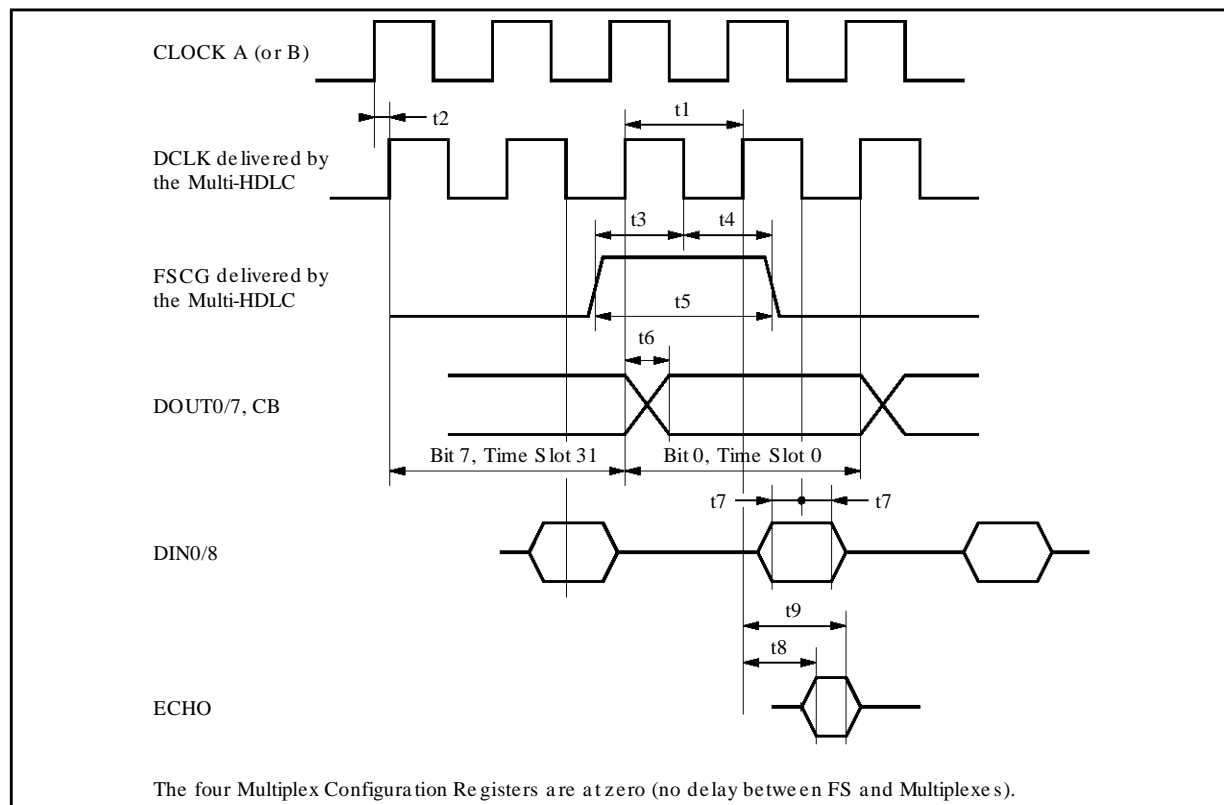Figure 28 : Synchronization Signals received by the *Multi-HDLC*


5464-30LEPS

| Symbol | Parameter  | Min.           | Typ.       | Max.           | Unit     |
|--------|--|----------------|------------|----------------|----------|
| t1     | Clock Period if 4096kHz<br>Clock Period if 2048kHz | Id CLOCKA or B | 244<br>488 | Id CLOCKA or B | ns<br>ns |
| t2     | Delay between CLOCK A or B and DCLK (30pF)         |                | 5          | 30             | ns       |
| t3     | Set-up Time FS/DCLK                                | 20             |            | t1-20          | ns       |
| t4     | Hold Time FS/DCLK                                  | 20             |            |                | ns       |
| t5     | Duration FS  | 244            |            | 125000-244     | ns       |
| t6     | DCLK to Data 50pF<br>DCLK to Data 100pF            |                |            | 50<br>100      | ns       |
| t7     | Set-up Time Data/DCLK                              | 20             |            |                | ns       |
| t7     | Hold Time Data/DCLK                                | 20             |            |                | ns       |
| t8     | Set-up Echo/DCLK (rising edge)                     |                |            | 155            | ns       |
| t9     | Hold Time Echo/DCLK (rising edge)                  | 205            |            |                | ns       |

V - CLOCK TIMING (continued)

V.3 - GCI Interface

Figure 29 : GCI Synchro Signal delivered by the *Multi-HDLC*

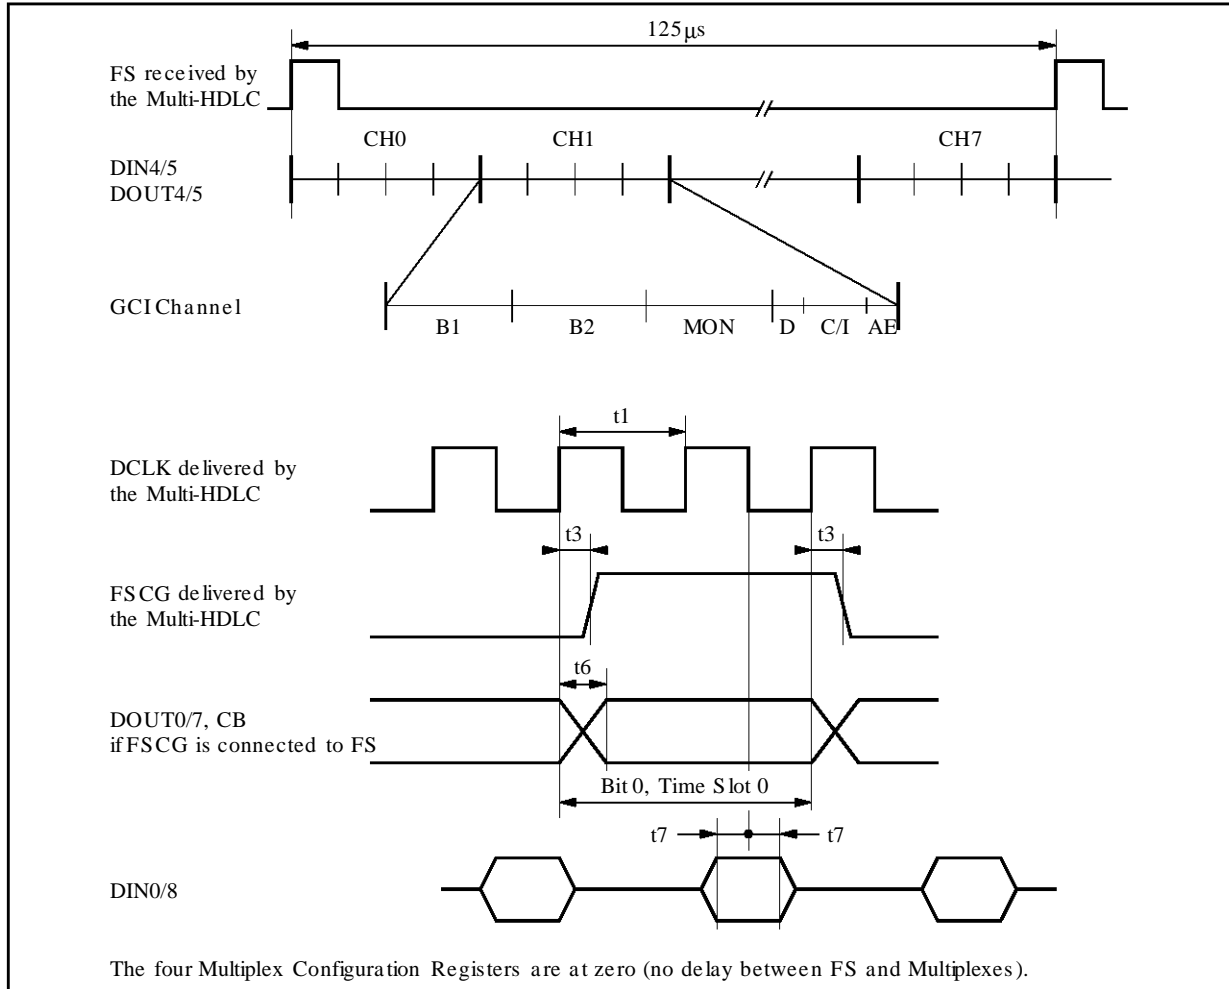


| Symbol | Parameter  | Min.          | Typ.       | Max.          | Unit     |
|--------|--|---------------|------------|---------------|----------|
| t1     | Clock Period if 4096kHz<br>Clock Period if 2048kHz | CLOCKA/B Tmin | 244<br>488 | CLOCKA/B Tmax | ns<br>ns |
| t3     | DCLK to FSCG                                       |               |            | 20            | ns       |
| t5     | Duration FS  |               | 244        | 125000-244    | ns       |
| t6     | DCLK to Data 50pF<br>DCLK to Data 100pF            |               |            | 50<br>100     | ns<br>ns |
| t7     | Set-up Time Data/DCLK                              | 20            |            |               | ns       |
| t7     | Hold Time Data/DCLK                                | 20            |            |               | ns       |



## V - CLOCK TIMING (continued)

## V.4 - V\* Interface

Figure 30 : V\* Synchronization Signal delivered by the Multi-HDLC

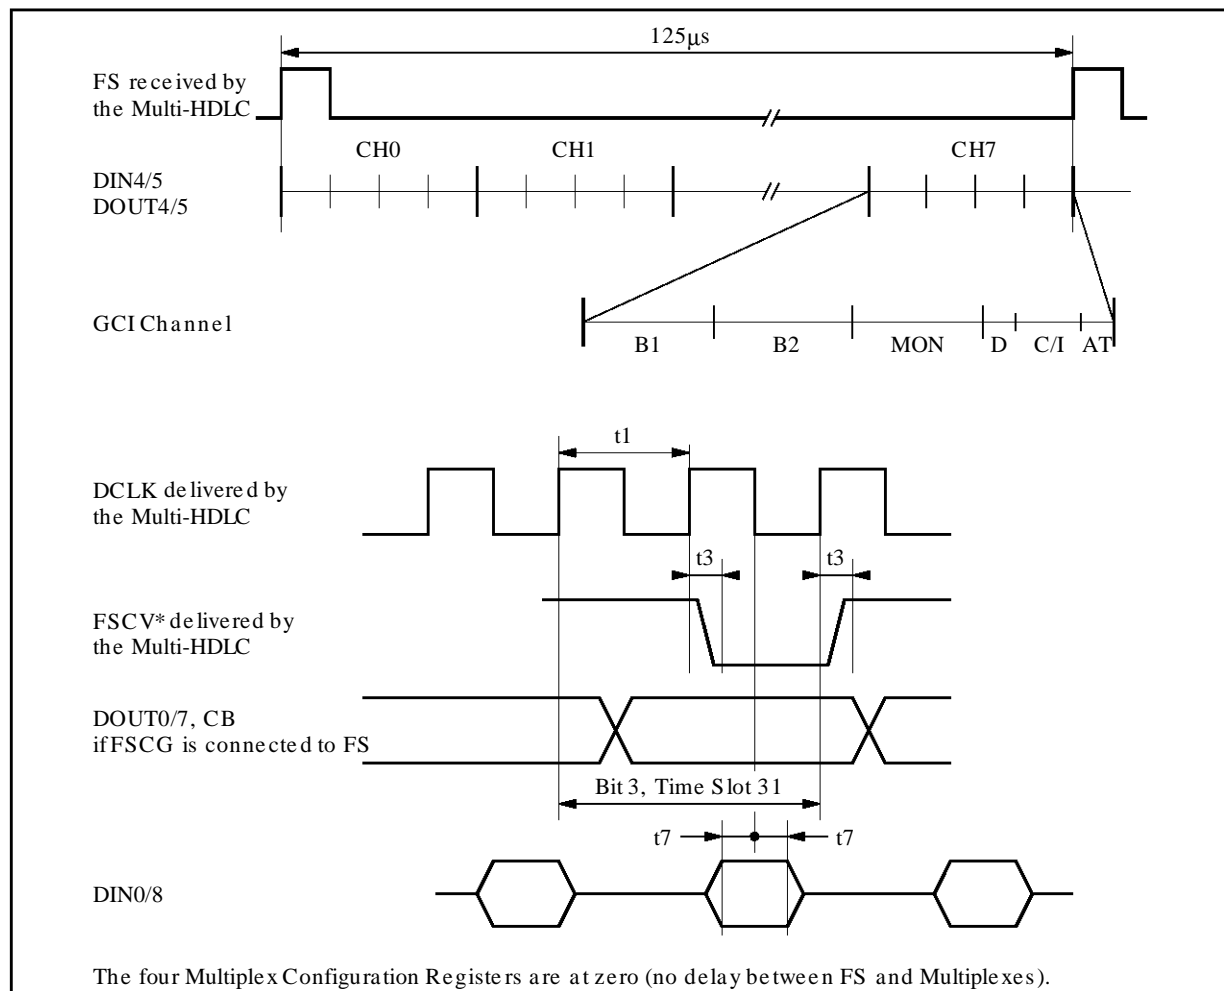


5464-32.EPS

| Symbol | Parameter                                 | Min. | Typ. | Max.      | Unit     |
|--------|---|------|------|-----------|----------|
| t1     | Clock Period 4096kHz                      |      | 244  |           | ns       |
| t3     | DCLK to FSCV*                             |      |      | 20        | ns       |
| t5     | Duration FSCV*                            |      | 244  |           | ns       |
| t6     | Clock to Data 50pF<br>Clock to Data 100pF |      |      | 50<br>100 | ns<br>nS |
| t7     | Set-up Time Data/DCLK                     | 20   |      |           | ns       |
| t7     | Hold Time Data/DCLK                       | 20   |      |           | ns       |

## VI - MEMORY TIMING


## VI.1 - Dynamic Memories

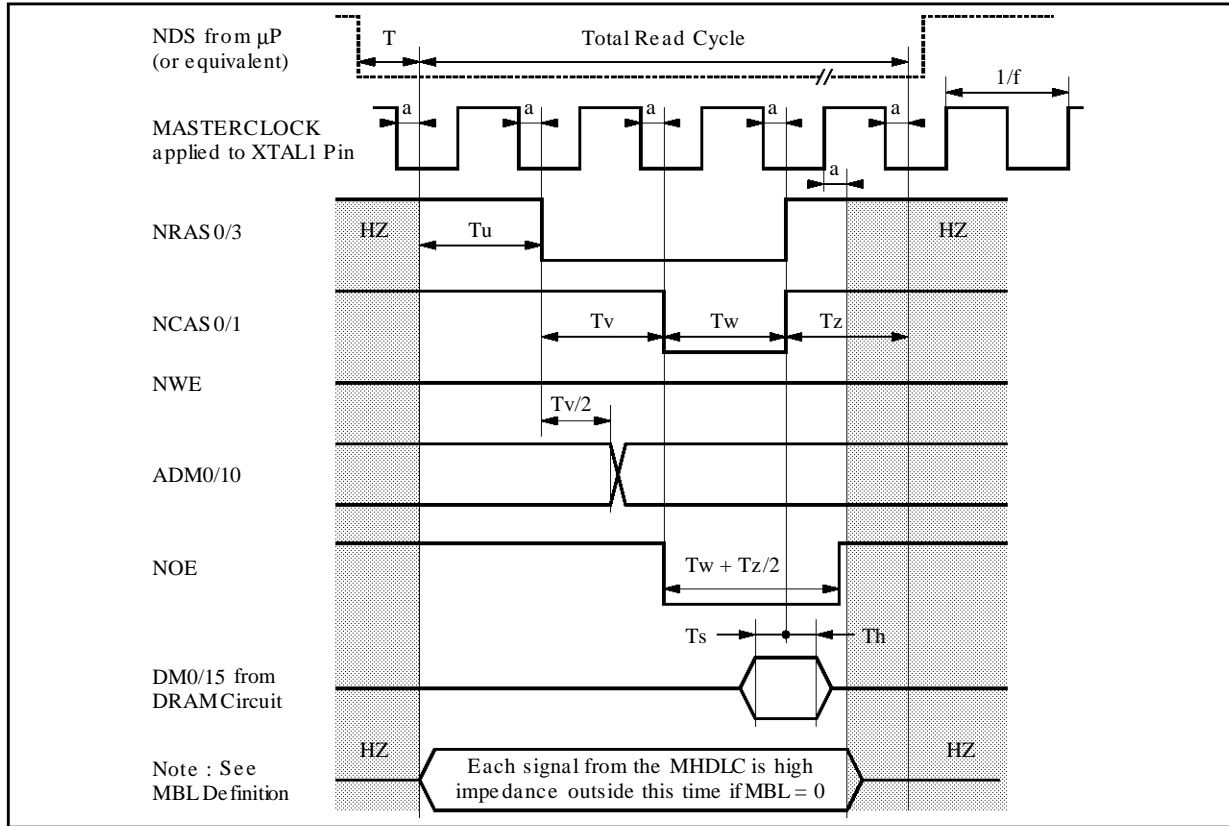Figure 31 : Dynamic Memory Read Signals from the *Multi-HDLC*

5464-33.EPS

| Symbol | Parameter   | Min. | Typ. | Max. | Unit |
|--------|---|------|------|------|------|
| T      | Delay between Data Strobe from the mP and beginning of cycle                    | 2/f  |      |      |      |
| a      | Delay between Masterclock and Edge of each signal delivered by the MHDLC (30pF) |      | 20   |      | ns   |
| Tw     | Delay between NCAS Falling Edge and NCAS rising Edge                            | 1/f  |      | 2/f  | ns   |
| Tz     | Delay between NCAS Rising Edge and end of cycle                                 | 1/f  |      | 2/f  | ns   |
| Ts     | Set-up Time Data /NCAS Rising Edge  | 20   |      |      | ns   |
| Th     | Hold Time Data/NCAS Rising Edge   | 0    |      |      | ns   |

## VI - MEMORY TIMING (continued)

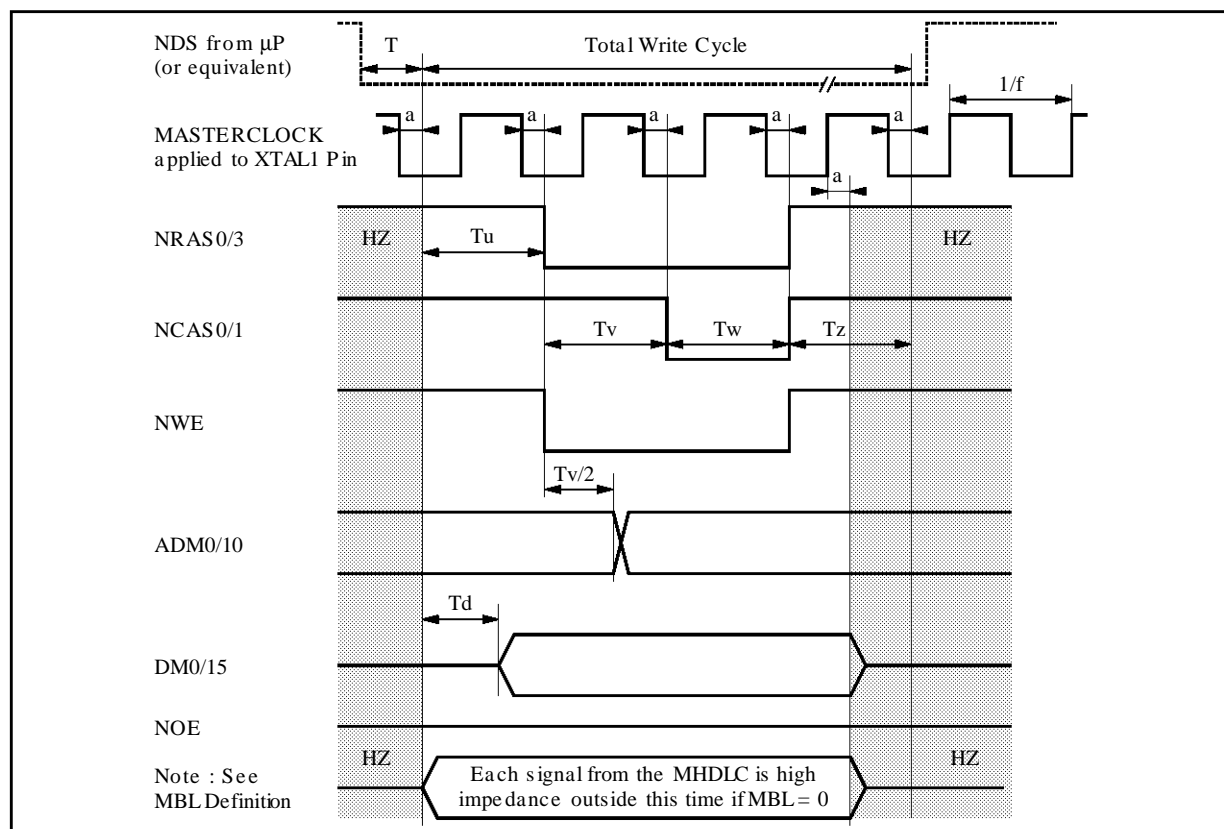Figure 32 : Dynamic Memory Write Signals from the *Multi-HDLC*

5464-34.EPS


| Symbol  | Parameter  | Min.   | Typ. | Max.  | Unit |
|---------|--|--------|------|-------|------|
| $1/f$   | $f$ : Masterclock Frequency                            | 32     |      | 33    | MHz  |
| $T_u$   | Delay between beginning of cycle and NRAS Falling Edge | $1/f$  |      | $2/f$ | ns   |
| $T_v$   | Delay between NRAS Falling Edge and NCAS Falling Edge  | $1/f$  |      | $2/f$ | ns   |
| $T_w$   | Delay between NCAS Falling Edge and NWE Rising Edge    | $1/f$  |      | $2/f$ | ns   |
| $T_z$   | Delay between NWE Rising Edge and end of cycle         | $1/f$  |      | $2/f$ | ns   |
| $T_v/2$ | Delay between NRAS Falling Edge and address change     | $1/2f$ |      | $1/f$ | ns   |
| $T_d$   | Data Valid after beginning of cycle (30 pF)            | $1/f$  |      | $1/f$ | ns   |

**Note :** Total Cycle :  $T_u + T_v + T_w + T_z$

## VI - MEMORY TIMING (continued)

## VI.2 - Static Memories


Figure 33 : Static Memory Read Signals from the Multi-HDLC

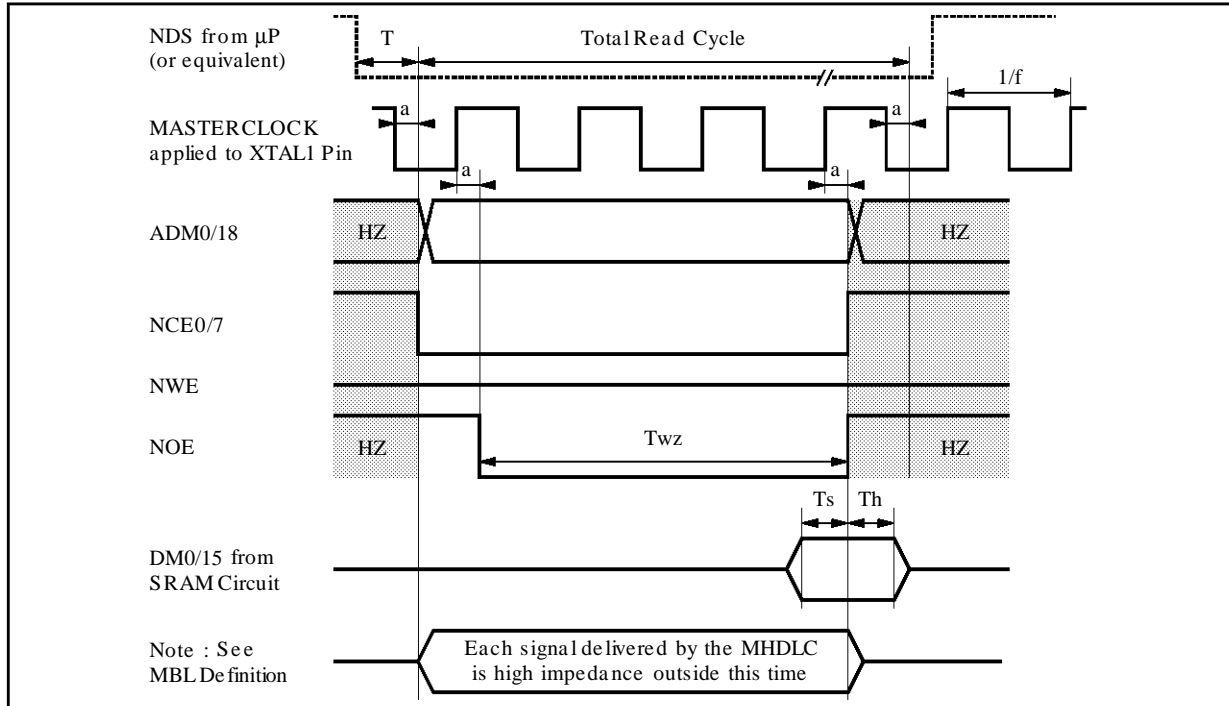

| Symbol | Parameter   | Min. | Typ. | Max. | Unit |
|--------|---|------|------|------|------|
| T      | Delay between Data Strobe delivered by the mP and beginning of cycle            | 2/f  |      |      |      |
| 1/f    | f: Masterclock frequency  |      |      |      |      |
|        | Total read cycle: Twz + 1/f   |      |      |      |      |
| a      | Delay between Masterclock and Edge of each signal delivered by the MHDLC (30pF) |      | 20   |      | ns   |
| Twz    | NOE width   | 1/f  |      | 4/f  | ns   |
| Ts     | Set-up Time Data /NOE Rising Edge   | 20   |      |      | ns   |
| Th     | Hold Time Data /NOE Rising Edge   | 0    |      | 1/f  | ns   |

## VI - MEMORY TIMING (continued)

Figure 34 : Static Memory Write Signals from the Multi-HDLC

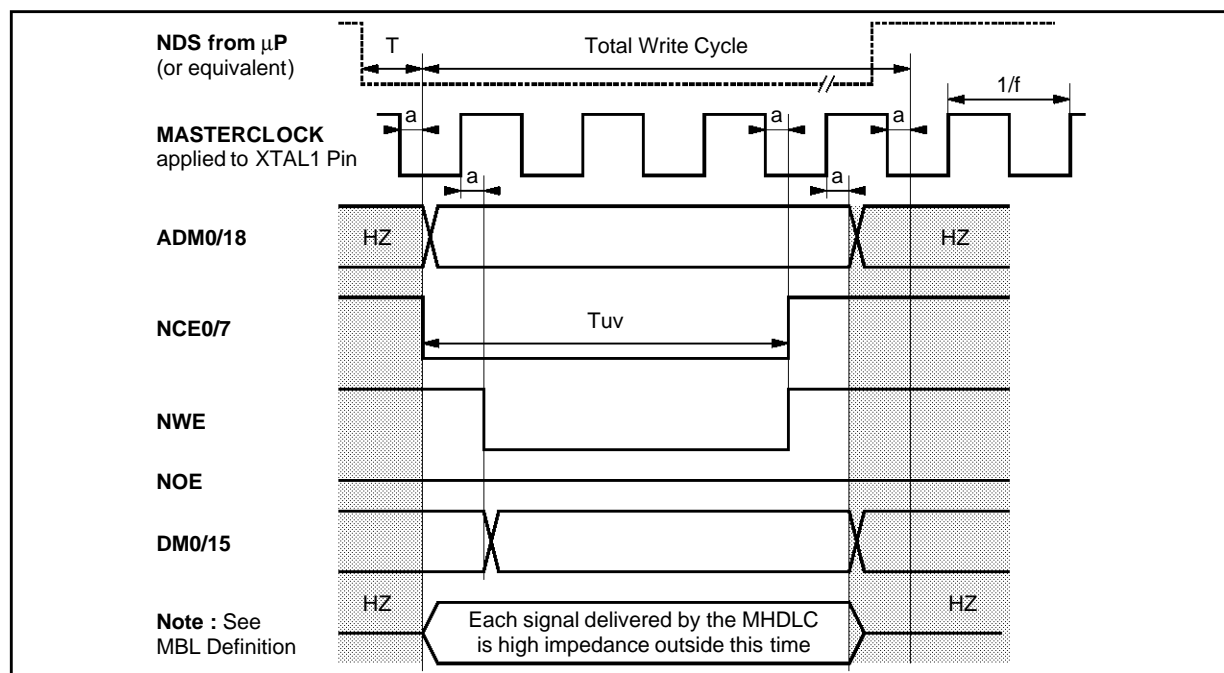


| Symbol | Parameter   | Min.  | Typ. | Max.  | Unit |
|--------|---|-------|------|-------|------|
| T      | Delay between Data Strobe delivered by the $\mu P$ and beginning of cycle       | $2/f$ |      |       |      |
| $1/f$  | f : Masterclock frequency   |       |      |       |      |
| a      | Delay between Masterclock and Edge of each signal delivered by the MHDLC (30pF) |       | 20   |       | ns   |
| Tuv    | NCE width   | $1/f$ |      | $4/f$ | ns   |

**Note :** Total Write Cycle :  $T_{uv} + 1/f$

## VII - MICROPROCESSOR TIMING

## VII.1 - ST9 Family MOD0=1, MOD1=0, MOD2=0

Figure 35 : ST9 Read Cycle

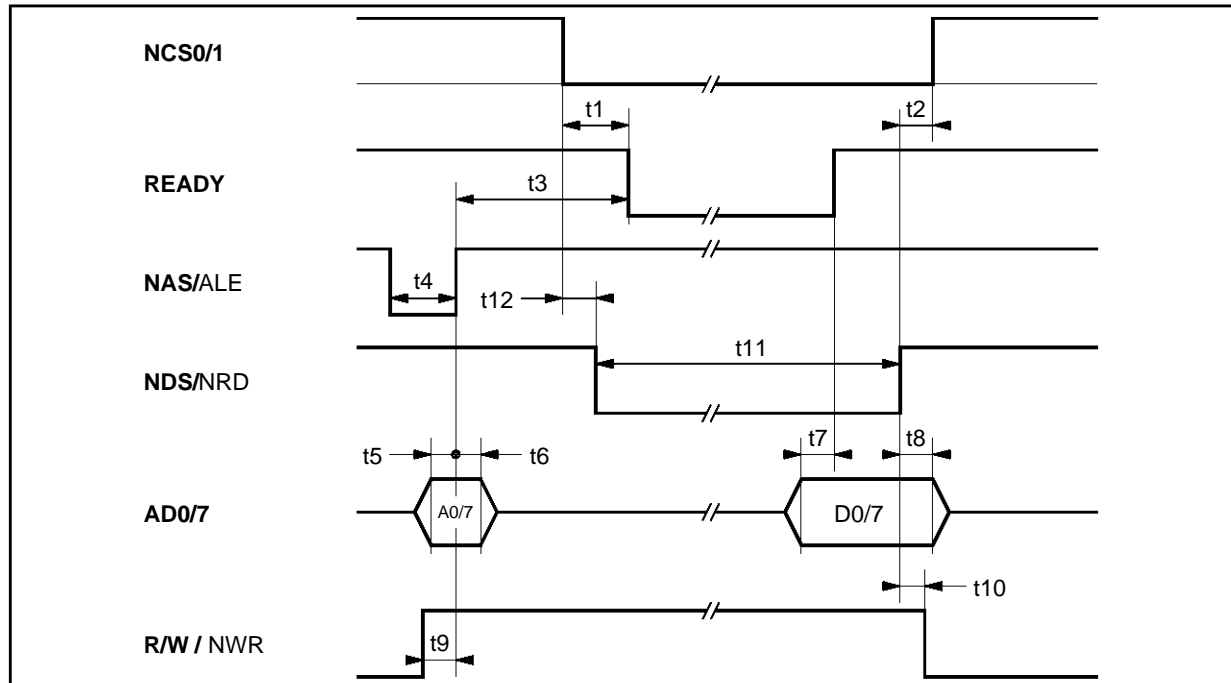


5464-37:EPS

| Symbol | Parameter   | Min. | Typ. | Max. | Unit |
|--------|---|------|------|------|------|
| t1     | Delay Ready / Chip Select (if $t_3 > t_1$ ), (30pF) | 0    |      | 30   | ns   |
| t2     | Hold Time Chip Select /Data Strobe                  | 14   |      |      | ns   |
| t3     | Delay Ready / NAS (if $t_1 > t_3$ ), (30pF)         | 0    |      | 30   | ns   |
| t4     | Width NAS   | 20   |      |      | ns   |
| t5     | Set-up Time Address / NAS                           | 9    |      |      | ns   |
| t6     | Hold Time Address / NAS                             | 9    |      |      | ns   |
| t7     | Data Valid before Ready                             | 0    |      |      | ns   |
| t8     | Data Valid after Data Strobe (30pF)                 | 0    |      |      | ns   |
| t9     | Set-up Time R/W /NAS                                | 15   |      |      | ns   |
| t10    | Hold Time R/W / Data Strobe                         | 15   |      |      | ns   |
| t11    | Width NDS when immediate access                     | 50   |      |      | ns   |
| t12    | Delay NDS / NCS                                     | 5    |      |      | ns   |

## VII - MICROPROCESSOR TIMING (continued)

Figure 36 : ST9 Write Cycle

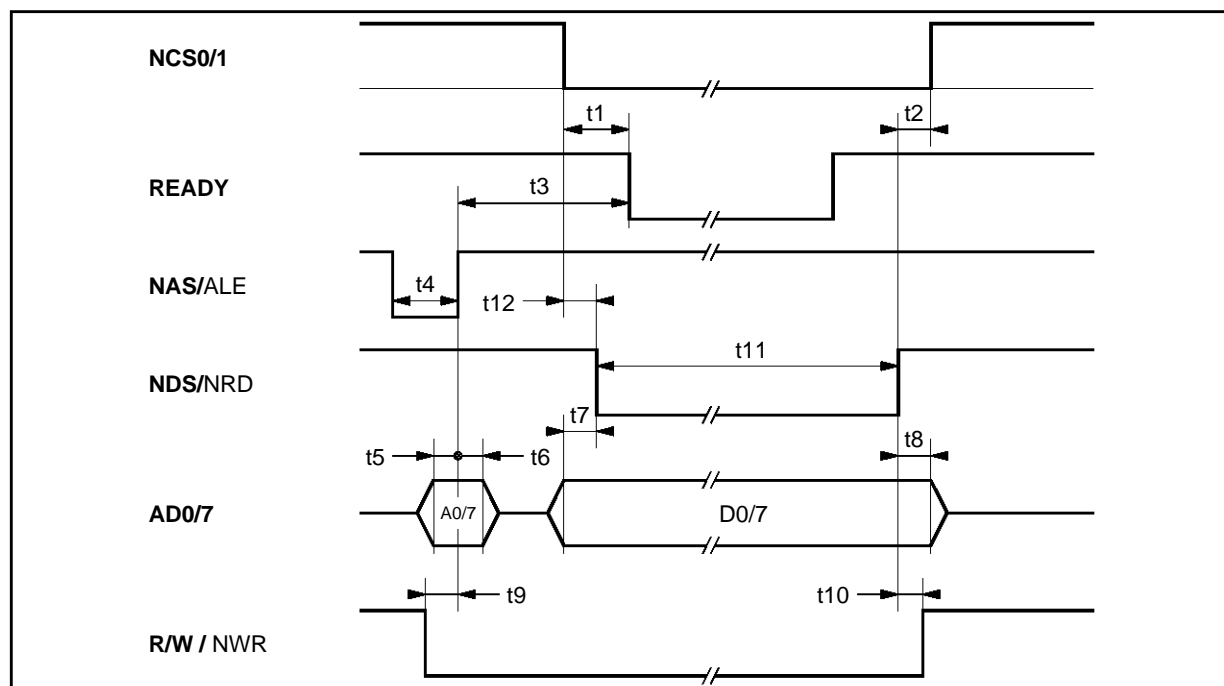


5464-38.EPS

| Symbol | Parameter   | Min. | Typ. | Max. | Unit |
|--------|---|------|------|------|------|
| t1     | Delay Ready / Chip Select (if $t_3 > t_1$ ), (30pF) | 0    |      | 30   | ns   |
| t2     | Hold Time Chip Select / Data Strobe                 | 14   |      |      | ns   |
| t3     | Delay Ready / NAS (if $t_1 > t_3$ ), (30pF)         | 0    |      | 30   | ns   |
| t4     | Width NAS   | 20   |      |      | ns   |
| t5     | Set-up Time Address / NAS                           | 9    |      |      | ns   |
| t6     | Hold Time Address / NAS                             | 9    |      |      | ns   |
| t7     | Set-up Time Data / Data Strobe                      | -15  |      |      | ns   |
| t8     | Hold Time Data / Data Strobe                        | 15   |      |      | ns   |
| t9     | Set-up Time R/W / NAS                               | 15   |      |      | ns   |
| t10    | Hold Time R/W / Data Strobe                         | 15   |      |      | ns   |
| t11    | Width NDS when immediate access                     | 50   |      |      | ns   |
| t12    | Delay NDS / NCS                                     | 5    |      |      | ns   |

## VII - MICROPROCESSOR TIMING (continued)

## VII.2 - 80C188 MOD0=1, MOD1=1, MOD2=0

Figure 37 : 80C188 Read Cycle

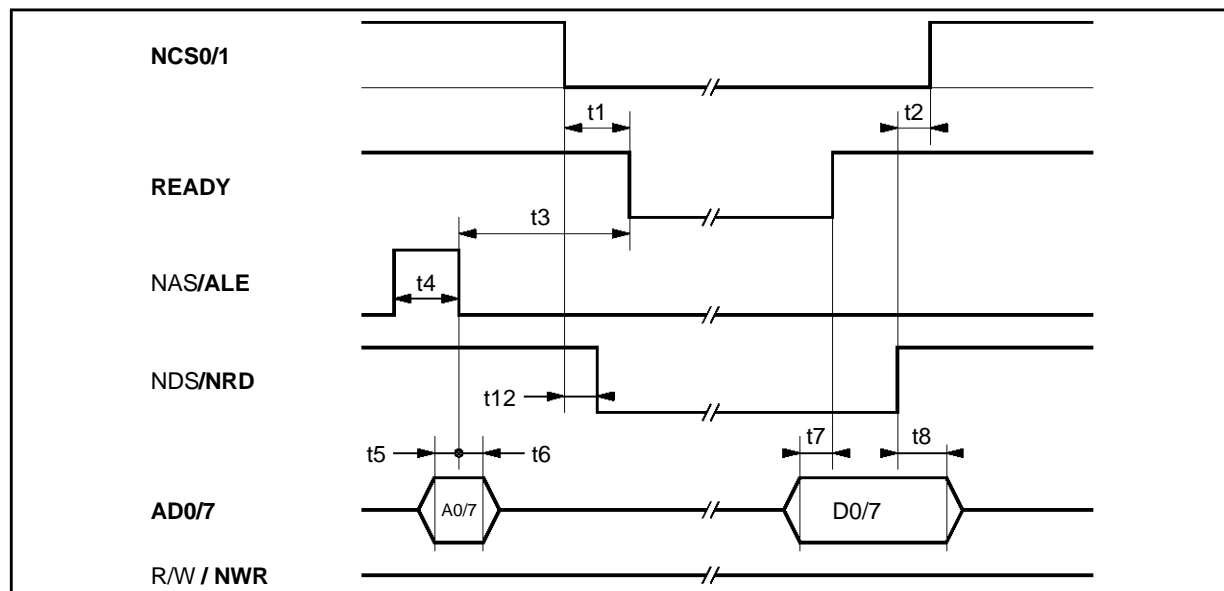


5464-39.EPS

| Symbol | Parameter   | Min. | Typ. | Max. | Unit |
|--------|---|------|------|------|------|
| t1     | Delay Ready / Chip Select (if $t_3 > t_1$ ), (30pF) | 0    |      | 20   | ns   |
| t2     | Hold Time Chip Select / NRD                         | 10   |      |      | ns   |
| t3     | Delay Ready / ALE (if $t_1 > t_3$ ), (30pF)         | 0    |      | 20   | ns   |
| t4     | Width ALE   | 20   |      |      | ns   |
| t5     | Set-up Time Address / ALE                           | 5    |      |      | ns   |
| t6     | Hold Time Address / ALE                             | 5    |      |      | ns   |
| t7     | Data Valid before Ready                             | 0    |      |      | ns   |
| t8     | Data Valid after NRD (30pF)                         | 0    |      |      | ns   |
| t12    | Delay NDS / NCS                                     | 0    |      |      | ns   |



## VII - MICROPROCESSOR TIMING (continued)

Figure 38 : 80C188 Write Cycle

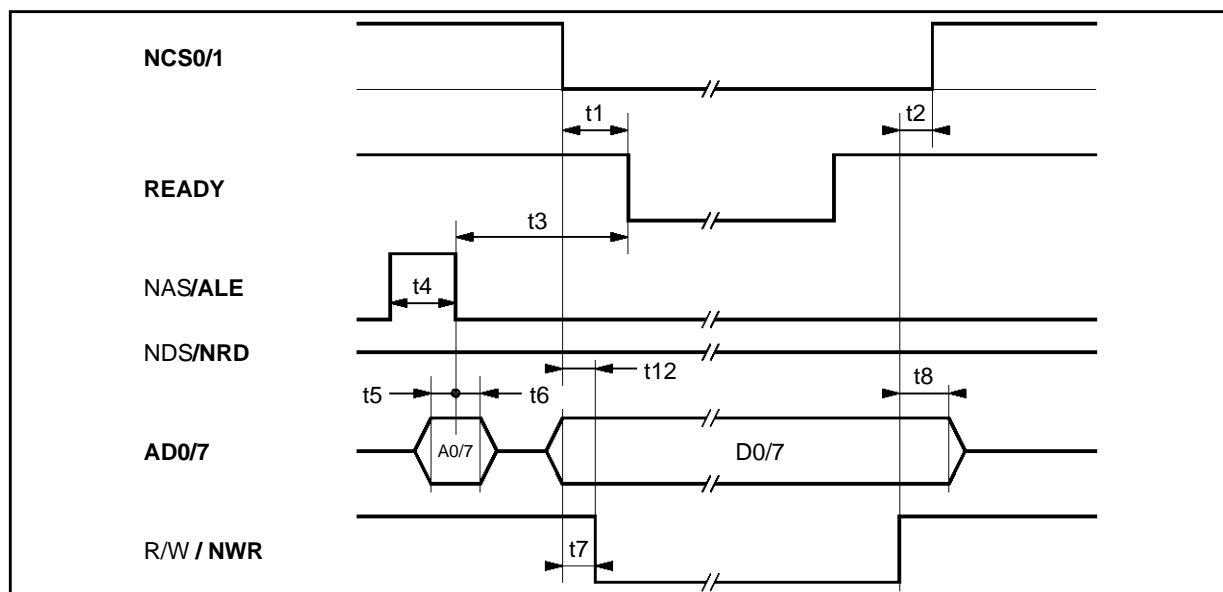


5464-40.EPS

| Symbol | Parameter   | Min. | Typ. | Max. | Unit |
|--------|---|------|------|------|------|
| t1     | Delay Ready / Chip Select (if $t_3 > t_1$ ), (30pF) | 0    |      | 20   | ns   |
| t2     | Hold Time Chip Select / NWR                         | 10   |      |      | ns   |
| t3     | Delay Ready / ALE (if $t_1 > t_3$ ), (30pF)         | 0    |      | 20   | ns   |
| t4     | Width ALE   | 20   |      |      | ns   |
| t5     | Set-up Time Address / ALE                           | 5    |      |      | ns   |
| t6     | Hold Time Address / ALE                             | 5    |      |      | ns   |
| t7     | Set-up Time Data / NWR                              | -15  |      |      | ns   |
| t8     | Hold Time Data / NWR                                | 15   |      |      | ns   |
| t12    | Delay NWR / NCS                                     | 0    |      |      | ns   |

## VII - MICROPROCESSOR TIMING (continued)

## VII.3 - 80C186 MOD0=1, MOD1=1, MOD2=1

Figure 39 : 80C186 Read Cycle

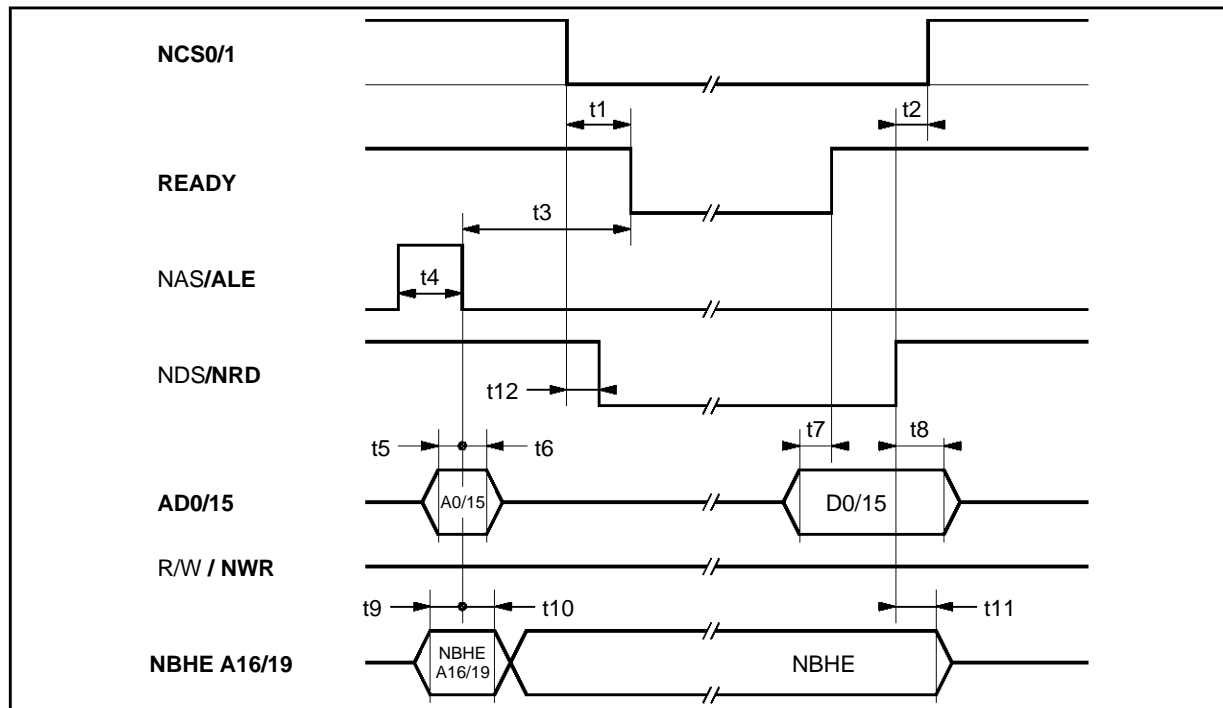


5464-41 EPS

| Symbol | Parameter                                      | Min. | Typ. | Max. | Unit |
|--------|--|------|------|------|------|
| t1     | Delay Ready / Chip Select (if t3 > t1), (30pF) | 0    |      | 20   | ns   |
| t2     | Hold Time Chip Select / NRD                    | 10   |      |      | ns   |
| t3     | Delay Ready / ALE (if t1 > t3), (30pF)         | 0    |      | 20   | ns   |
| t4     | Width ALE                                      | 20   |      |      | ns   |
| t5     | Set-up Time Address / ALE                      | 5    |      |      | ns   |
| t6     | Hold Time Address / ALE                        | 5    |      |      | ns   |
| t7     | Data Valid before Ready                        | -15  |      |      | ns   |
| t8     | Data Valid after NRD (30pF)                    | 0    |      |      | ns   |
| t9     | Set-up Time NBHE-Address A16/19 / ALE          | 5    |      |      | ns   |
| t10    | Hold Time Address A16/19 / NRD                 | 10   |      |      | ns   |
| t11    | Hold Time NBHE- / NRD                          | 10   |      |      | ns   |
| t12    | Delay NRD / NCS                                | 0    |      |      | ns   |

## VII - MICROPROCESSOR TIMING (continued)

Figure 40 : 80C186 Write Cycle

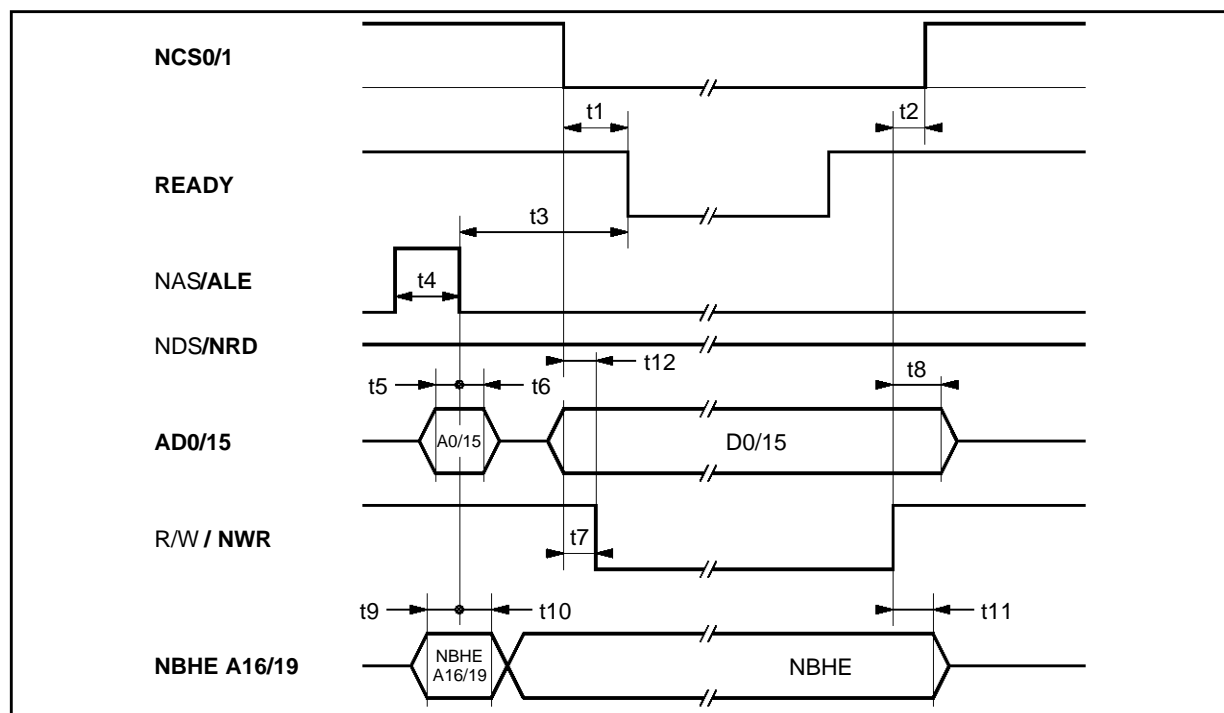


5464-42EPS

| Symbol | Parameter                                      | Min. | Typ. | Max. | Unit |
|--------|--|------|------|------|------|
| t1     | Delay Ready / Chip Select (if t3 > t1), (30pF) | 0    |      | 20   | ns   |
| t2     | Hold Time Chip Select / NWR                    | 10   |      |      | ns   |
| t3     | Delay Ready / ALE (if t1 > t3), (30pF)         | 0    |      | 20   | ns   |
| t4     | Width ALE                                      | 20   |      |      | ns   |
| t5     | Set-up Time Address / ALE                      | 5    |      |      | ns   |
| t6     | Hold Time Address / ALE                        | 5    |      |      | ns   |
| t7     | Set-up Time Data / NWR                         | -15  |      |      | ns   |
| t8     | Hold Time Data / NWR                           | 15   |      |      | ns   |
| t9     | Set-up Time NBHE-Address A16/19 / ALE          | 5    |      |      | ns   |
| t10    | Hold Time Address 16/19 / ALE                  | 10   |      |      | ns   |
| t11    | Hold Time NBHE- / NWR                          | 10   |      |      | ns   |
| t12    | Delay NWR / NCS                                | 0    |      |      | ns   |

## VII - MICROPROCESSOR TIMING (continued)

## VII.4 - 68000 MOD0=0, MOD1=0, MOD2=1

Figure 41 : 68000 Read Cycle

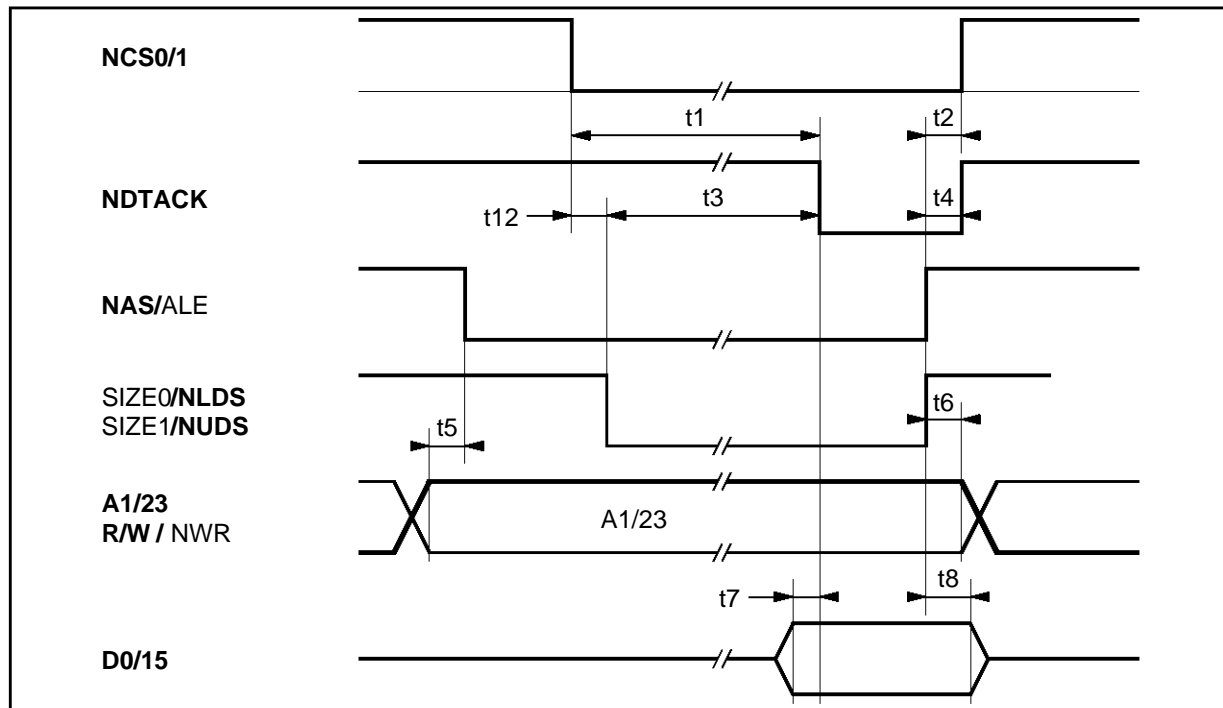


5464-43.EPS

| Symbol | Parameter  | Min. | Typ. | Max. | Unit     |
|--------|--|------|------|------|----------|
| t1     | Delay NDTACK / NCS0/1 (if $t3 > t1$ ), (30pF)<br>Delay when immediate access                 | 0    |      | 30   | ns<br>ns |
| t2     | Hold Time Chip Select / NLDS-NUDS  | 14   |      |      | ns       |
| t3     | Delay NDTACK / NLDS-NUDS Falling Edge (if $t1 > t3$ ), (30pF)<br>Delay when immediate access | 0    |      | 30   | ns<br>ns |
| t4     | Delay NDTACK / NLDS-NUDS Rising Edge   | 0    |      | 30   | ns       |
| t5     | Set-up Time Address / NAS  | 9    |      |      | ns       |
| t6     | Hold Time Address / NLDS-NUDS  | 9    |      |      | ns       |
| t7     | Data Valid before NDTACK Falling Edge (30pF)   | 0    |      |      | ns       |
| t8     | Data Valid after NLDS-NUDS Rising Edge (30pF)  | 0    |      |      | ns       |
| t12    | Delay NDS / NCS  | 0    |      |      | ns       |

## VII - MICROPROCESSOR TIMING (continued)

Figure 42 : 68000 Write Cycle

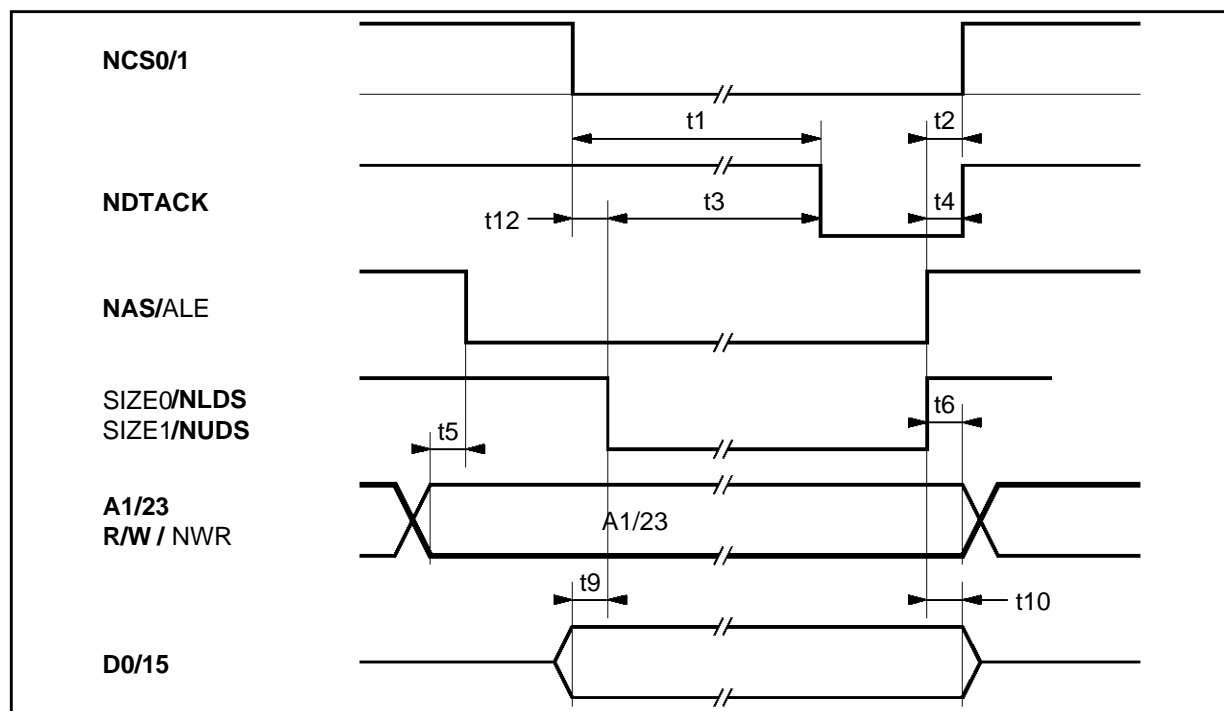


5464-44EPS

| Symbol | Parameter   | Min. | Typ. | Max. | Unit     |
|--------|---|------|------|------|----------|
| t1     | Delay NDTACK / NCS0/1 (if t3 > t1), (30pF)<br>Delay when immediate access                 | 0    |      | 30   | ns<br>ns |
| t2     | Hold Time Chip Select / NLDS-NUDS   | 14   |      |      | ns       |
| t3     | Delay NDTACK / NLDS-NUDS Falling Edge (if t1 > t3), (30pF)<br>Delay when immediate access | 0    |      | 30   | ns<br>ns |
| t4     | Delay NDTACK / NLDS-NUDS Rising Edge  |      |      |      | ns       |
| t5     | Set-up Time Address / NAS   | 9    |      |      | ns       |
| t6     | Hold Time Address / NLDS-NUDS   | 9    |      |      | ns       |
| t9     | Set-up Time Data / NLDS-NUDS  | 15   |      |      | ns       |
| t10    | Hold Time Data / NLDS-NUDS  | 15   |      |      | ns       |
| t12    | Delay NDS / NCS   | 0    |      |      | ns       |

VII - MICROPROCESSOR TIMING (continued)

VII.5 - Token Ring Timing


Figure 43 : Token Ring

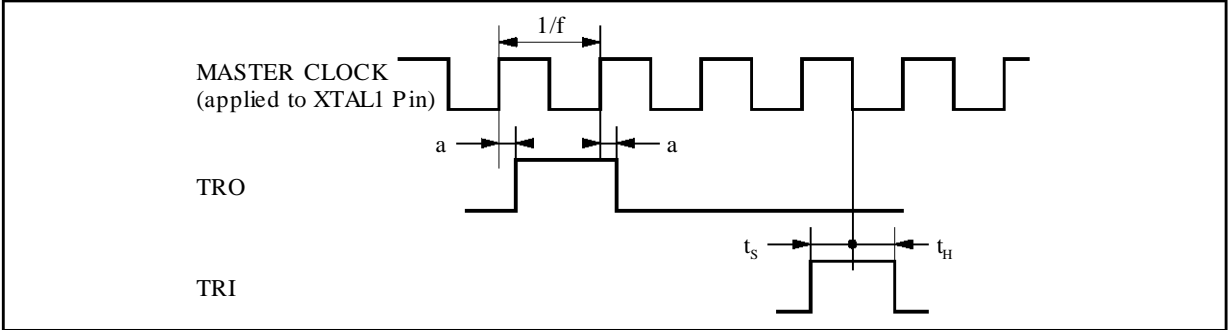

| Symbol | Parameter  | Min. | Typ.   | Max. | Unit |
|--------|--|------|--------|------|------|
| $1/f$  | $f$ : Masterclock frequency  |      | 32.768 |      | MHz  |
| $a$    | Delay between Masterclock Rising Edge and Edges of TRO Pulse delivered by the MHDLC (10pF) |      |        | 25   | ns   |
| $t_s$  | Set-up Time TRI/Masterclock Masterclock Falling Edge                                       | 5    |        |      | ns   |
| $t_H$  | Hold Time TRI/Masterclock Falling Edge   | 5    |        | 0    | ns   |

VII.6 - Master Clock Timing

Figure 44 : Master Clock

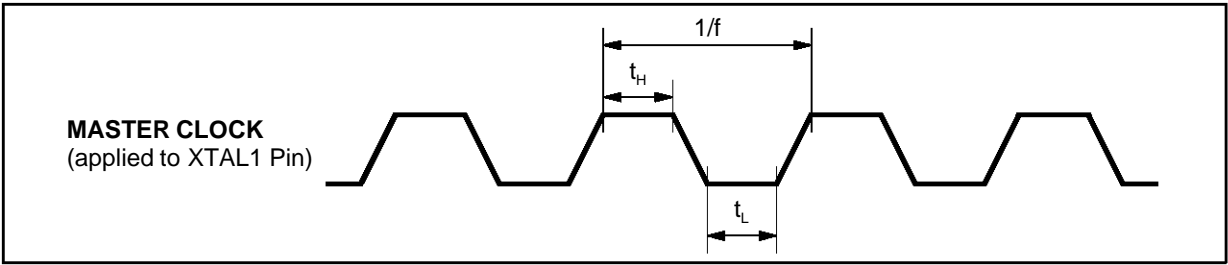

| Symbol | Parameter             | Min. | Typ.   | Max. | Unit |
|--------|-----------------------|------|--------|------|------|
| $f$    | Masterclock Frequency | 30   | 32.768 | 33   | MHz  |
| $1/f$  | Masterclock Period    | 30.3 | 30.5   | 33.3 | ns   |
| $t_H$  | Masterclock High      | 12   |        |      | ns   |
| $t_L$  | Masterclock Low       | 12   |        |      | ns   |

## VIII - INTERNAL REGISTERS

'Not used' bits (Nu) are accessible by the microprocessor but the use of these bits by software is not recommended.

'Reserved' bits are not implemented in the circuit. However, it is not recommended to use this address.

### VIII.1 - Identification and Dynamic Command Register - IDCR (00)H

| bit15 |     |     |     |     |     |    | bit8 |    | bit7 |    |    |    | bit 0 |    |    |
|-------|-----|-----|-----|-----|-----|----|------|----|------|----|----|----|-------|----|----|
| C15   | C14 | C13 | C12 | C11 | C10 | C9 | C8   | C7 | C6   | C5 | C4 | C3 | C2    | C1 | C0 |

When this register is read by the microprocessor, the circuit code C0/15 is returned. Reset has no effect on this register.

C0/3 indicates the version.

C4/7 indicates the revision.

C8/11 indicates the foundry.

C12/15 indicates the type.

Example : this code is (0010)H for the first sample.

When this register is written by the microprocessor then :

| bit15 |    |    |    |    |    |    | bit8 |    | bit7 |    |    |    | bit 0 |     |    |
|-------|----|----|----|----|----|----|------|----|------|----|----|----|-------|-----|----|
| Nu    | Nu | Nu | Nu | Nu | Nu | Nu | Nu   | Nu | Nu   | Nu | Nu | Nu | RSS   | WDR | TL |

TL : TOKEN LAUNCH

When TL is set to 1 by the microprocessor, the token pulse is launched from the TRO pin (Token Ring Output pin). This pulse is provided to the TRI pin (Token Ring Input pin) of the next circuit in the applications where several *Multi-HDLCs* are connected to the same shared memory.

WDR : WATCHDOG RESET.

When the bit 1 (WDR) of this register is set to 1 by the microprocessor, the watchdog counter is reset.

RSS : RESET SOFTWARE

When the bit 2 (RSS) of this register is set to 1 by the microprocessor, the circuit is reset (Same action as reset pin).

After writing this register, the values of these three bits return to the default value.

### VIII.2 - General Configuration - GCR (02)H

| bit15               |     |      |     |      |      |     | bit8 |      | bit7 |    |     |     | bit 0 |     |     |
|---------------------|-----|------|-----|------|------|-----|------|------|------|----|-----|-----|-------|-----|-----|
| Nu                  | MBL | AFAB | SCL | BSEL | SELB | CSD | HCL  | SYN1 | SYN0 | D7 | EVM | TSV | TRD   | PMA | WDD |
| After reset (0000)H |     |      |     |      |      |     |      |      |      |    |     |     |       |     |     |

WDD : Watch Dog Disable

WDD = 1, the Watch Dog is masked : WDO pin stays at "0".

WDD = 0, the Watch Dog generates an "1" on WDO pin if the microprocessor has not reset the Watch Dog during the duration programmed in Timer Register.

PMA : Priority Memory Access

PMA = 1, if the token ring has been launched it is captured and kept in order to authorize memory accesses.

PMA = 0, memory is accessible only if the token is present; after one memory access the token is re-launched from TRO pin of the current circuit to TRI pin of the next circuit.

TRD : Token Ring Disable

TRD = 1, if the token has been launched, the token ring is stopped and destroyed ; memory accesses are not possible. The token will not appear on TRO pin.

TRD = 0, the token ring is authorized ; when the token will be launched, it will appear on TRO pin.

**VIII - INTERNAL REGISTERS** (continued)

**TSV** : Time Stamping Validated  
 TSV = 1, the time stamping counter becomes a free binary counter and counts down from 65535 to 0 in step of 250ms (Total = 16384ms). So if an event occurs when the counter indicates A and if the next event occurs when the counter indicates B then :  $t = (A-B) \times 250\text{ms}$  is the time which has passed between the two events which have been stored in memory by the Interrupt Controller (for Rx C/I and Rx MON CHANNEL only).  
 TSV = 0, the counter becomes a decimal counter. The Timer Register and this decimal counter constitute a Watch Dog or a Timer.

**EVM** : EXTERNAL VCXO MODE  
 EVM=1, VCXO Synchronization Counter is divided by 32.  
 EVM=0, VCXO Synchronization Counter is divided by 30.

**D7** : HDLC connected to MATRIX  
 D7 = 1, the transmit HDLC is connected to matrix input 7, the DIN7 signal is ignored.  
 D7 = 0, the DIN7 signal is taken into account by the matrix, the transmit HDLC is ignored by the matrix.

**SYN0/1**: SYNCHRONIZATION

SYN0/1 : these two bits define the signal applied on FRAMEA/B inputs. For more details, see "Synchronization signals delivered by the system. 7.1.

| SYN1 | SYN0 | Signal applied on FRAMEA/B inputs                             |
|------|------|---|
| 0    | 0    | SYInterface   |
| 0    | 1    | GCI Interface (the signal defines the first bit of the frame) |
| 1    | 0    | Vstar Interface (the signal defines thrid bit of the frame)   |
| 1    | 1    | Not used  |

**HCL** : HIGH BIT CLOCK  
 This bit defines the signal applied on CLOCKA/B inputs.  
 HCL = 1, bit clock signal is at 8192kHz  
 HCL = 0, bit clock signal is at 4096kHz

**CSD** : Clock Supervision Deactivation  
 CSD = 1, the lack of selected clock is not seen by the microprocessor; INT1 is masked.  
 CSD = 0, when the selected clock disappears the INT1 pin goes to 5V, 250ms after this disappearance.

**SELB** : SELECT B  
 SELB = 1, FRAME B and CLOCK B must be selected.  
 SELB = 0, FRAME A and CLOCK A must be selected.

**BSEL** : B SELECTED (this bit is read only)  
 BSEL = 1, FRAME B and CLOCK B are selected.  
 BSEL = 0, FRAME A and CLOCK A are selected.

**SCL** : Single Clock  
 This bit defines the signal delivered by DCLK output pin.  
 SCL = 1, Data Clock is at 2048kHz.  
 SCL = 0, Data Clock is at 4096kHz.

**AFAB** : Advanced Frame A/B Signal  
 AFAB = 1, the advance of Frame A Signal and Frame B Signal is 0.5 bit time versus the signal frame A (or B) drawn in Figure 27.  
 AFAB = 0, Frame A Signal and Frame B Signal are in accordance with the clock timing (see : Synchronization signals delivered by the Figure 27).



**VIII - INTERNAL REGISTERS (continued)**

MBL : Memory Bus Low impedance

MBL = 1, the shared memory bus is at low impedance between two memory cycles.

The memory bus includes Control bits, Data bits, Address bits. One *Multi-HDLC* is connected to the shared memory.

MBL = 0, the shared memory bus is at high impedance between two memory cycles.

Several Multi-HDLCs can be connected to the shared memory. One pull up resistor is recommended on each wire.

**VIII.3 - Input Multiplex Configuration Register 0 - IMCR0 (04)H**

|                                 |      |        |        |      |      |        |        |      |      |        |        |       |      |        |        |
|---------------------------------|------|--------|--------|------|------|--------|--------|------|------|--------|--------|-------|------|--------|--------|
| bit15                           |      |        |        | bit8 |      |        |        | bit7 |      |        |        | bit 0 |      |        |        |
| LP3                             | DEL3 | ST(3)1 | ST(3)0 | LP2  | DEL2 | ST(2)1 | ST(2)0 | LP1  | DEL1 | ST(1)1 | ST(1)0 | LP0   | DEL0 | ST(0)1 | ST(0)0 |
| After reset (0000) <sub>H</sub> |      |        |        |      |      |        |        |      |      |        |        |       |      |        |        |

See definition in next Paragraph.

**VIII.4 - Input Multiplex Configuration Register 1 - IMCR1 (06)H**

|                                 |      |        |        |      |      |        |        |      |      |        |        |       |      |        |        |
|---------------------------------|------|--------|--------|------|------|--------|--------|------|------|--------|--------|-------|------|--------|--------|
| bit15                           |      |        |        | bit8 |      |        |        | bit7 |      |        |        | bit 0 |      |        |        |
| LP7                             | DEL7 | ST(7)1 | ST(7)0 | LP6  | DEL6 | ST(6)1 | ST(6)0 | LP5  | DEL5 | ST(5)1 | ST(5)0 | LP4   | DEL4 | ST(4)1 | ST(4)0 |
| After reset (0000) <sub>H</sub> |      |        |        |      |      |        |        |      |      |        |        |       |      |        |        |

ST(i)0 : STEP0 for each Input Multiplex  $i(0 \leq i \leq 7)$ , delayed or not.

ST(i)1 : STEP1 for each Input Multiplex  $i(0 \leq i \leq 7)$ , delayed or not.

DEL(i); : DELAYED Multiplex  $i(0 \leq i \leq 7)$ .

| DEL (i) | ST (i) 1 | ST (i) 2 | STEP for each Input Multiplex 0/7 delayed or not  |
|---------|----------|----------|---|
| X       | 0        | 0        | Each received bit is sampled at 3/4 bit-time without delay.<br>First bit of the frame is defined by Frame synchronization Signal. |
| 1       | 0        | 1        | Each received bit is sampled with 1/2 bit-time delay.   |
| 1       | 1        | 0        | Each received bit is sampled with 1 bit-time delay.   |
| 1       | 1        | 1        | Each received bit is sampled with 2 bit-time delay.   |
| 0       | 0        | 1        | Each received bit is sampled with 1/2 bit-time advance.   |
| 0       | 1        | 0        | Each received bit is sampled with 1 bit-time advance  |
| 0       | 1        | 1        | Each received bit is sampled with 2 bit-time advance.   |

When IMTD = 0 (bit of SMCR), DEL = 1 is not taken into account by the circuit.

LP (i) : LOOPBACK 0/7

LPi = 1, Output Multiplex i is put instead of Input Multiplex i ( $0 \leq i \leq 7$ ). LOOPBACK is transparent or not in accordance with OMVi (bit of Output Multiplex Configuration Register).

LPi = 0, Normal case, Input Multiplex i ( $0 \leq i \leq 7$ ) is taken into account.

N.B. If DIN4 and DIN5 are GCI Multiplexes : then ST(4)1 = ST(4)0 = 0 and ST(5)1 = ST(5)0 = 0 normally.

**VIII.5 - Output Multiplex Configuration Register 0 - OMCRO (08)H**

|                                 |      |        |        |      |      |        |        |      |      |        |        |       |      |        |        |
|---------------------------------|------|--------|--------|------|------|--------|--------|------|------|--------|--------|-------|------|--------|--------|
| bit15                           |      |        |        | bit8 |      |        |        | bit7 |      |        |        | bit 0 |      |        |        |
| OMV3                            | DEL3 | ST(3)1 | ST(3)0 | OMV2 | DEL2 | ST(2)1 | ST(2)0 | OMV1 | DEL1 | ST(1)1 | ST(1)0 | OMV0  | DEL0 | ST(0)1 | ST(0)0 |
| After reset (0000) <sub>H</sub> |      |        |        |      |      |        |        |      |      |        |        |       |      |        |        |

See definition in next Paragraph.

## VIII - INTERNAL REGISTERS (continued)

## VIII.6 - Output Multiplex Configuration Register 1 - OMCR1 (0A)H

|                                 |      |        |        |      |      |        |        |      |      |        |        |       |      |        |        |
|---------------------------------|------|--------|--------|------|------|--------|--------|------|------|--------|--------|-------|------|--------|--------|
| bit15                           |      |        |        | bit8 |      |        |        | bit7 |      |        |        | bit 0 |      |        |        |
| OMV7                            | DEL7 | ST(7)1 | ST(7)0 | OMV6 | DEL6 | ST(6)1 | ST(6)0 | OMV5 | DEL5 | ST(5)1 | ST(5)0 | OMV4  | DEL4 | ST(4)1 | ST(4)0 |
| After reset (0000) <sub>H</sub> |      |        |        |      |      |        |        |      |      |        |        |       |      |        |        |

ST(i)0 : STEP0 for each Output Multiplex i( $0 \leq i \leq 7$ ), delayed or not.

ST(i)1 : STEP1 for each Output Multiplex i( $0 \leq i \leq 7$ ), delayed or not.

DEL(i); : DELAYED Multiplex i( $0 \leq i \leq 7$ ).

| DEL (i) | ST (i) 1 | ST (i) 2 | STEP for each Output Multiplex 0/7 delayed or not   |
|---------|----------|----------|---|
| X       | 0        | 0        | Each bit is transmitted on the rising edge of the double clock without delay. Bit 0 is defined by Frame synchronization Signal. |
| 1       | 0        | 1        | Each bit is transmitted with 1/2 bit-time delay.  |
| 1       | 1        | 0        | Each bit is transmitted with 1 bit-time delay.  |
| 1       | 1        | 1        | Each bit is transmitted with 2 bit-time delay.  |
| 0       | 0        | 1        | Each bit is transmitted with 1/2 bit-time advance.  |
| 0       | 1        | 0        | Each bit is transmitted with 1 bit-time advance   |
| 0       | 1        | 1        | Each bit is transmitted with 2 bit-time advance.  |

When IMTD = 0 (bit of SMCR), DEL = 0 is not taken into account by the circuit.

OMV (i): Output Multiplex Validated 0/7

OMVi = 1, condition to have DOUTi pin active ( $0 \leq i \leq 7$ ).

OMVi = 0, DOUTi pin is High Impedance continuously ( $0 \leq i \leq 7$ ).

N.B. If DIN4 and DIN5 are GCI Multiplexes : then ST(4)1 = ST(4)0 = 0 and ST(5)1 = ST(5)0 = 0 normally.

## VIII.7 - Switching Matrix Configuration Register - SMCR (0C)H

|                                 |    |    |    |      |    |    |    |      |    |     |     |       |     |     |      |
|---------------------------------|----|----|----|------|----|----|----|------|----|-----|-----|-------|-----|-----|------|
| bit15                           |    |    |    | bit8 |    |    |    | bit7 |    |     |     | bit 0 |     |     |      |
| Nu                              | Nu | Nu | Nu | Nu   | Nu | Nu | Nu | Nu   | ME | SGC | SAV | SGV   | TS1 | TS0 | IMTD |
| After reset (0000) <sub>H</sub> |    |    |    |      |    |    |    |      |    |     |     |       |     |     |      |

IMTD : Increased Minimum Throughput Delay

When SI = 0 (bit of CMDR, variable delay mode) :

IMTD = 1, the minimum delay through the matrix memory is three time slots whatever the selected TDM output.

IMTD = 0, the minimum delay through the matrix memory is two time slots whatever the selected TDM output.

TS0 : Tristate 0

TS0 = 1, the DOUT0/3 and DOUT6/7 pins are tristate : "0" is at low impedance, "1" is at low impedance and the third state is high impedance.

TS0 = 0, the DOUT0/3 and DOUT6/7 pins are open drain : "0" is at low impedance, "1" is at high impedance.

TS1 : Tristate 1

TS1 = 1, the DOUT4/5 pins are tristate : "0" is at low impedance, "1" is at low impedance and the third state is high impedance.

TS1 = 0, the DOUT4/5 pins are open drain : "0" is at low impedance, "1" is at high impedance.

SGV : Pseudo Random Sequence Generator Validated

SGV = 1, PRS Generator is validated. The Pseudo Random Sequence is transmitted during the related time slot(s).

SGV = 0, PRS Generator is reset. "0" are transmitted during the related time slot.

SAV : Pseudo Random Sequence analyzer Validated

SAV = 1, PRS analyzer is validated.

SAV = 0, PRS analyzer is reset.

SGC : Pseudo Random Sequence Generator Corrupted

When SGC bit goes from 0 to 1, one bit of sequence transmitted is corrupted.

When the corrupted bit has been transmitted, SGC bit goes from 1 to 0 automatically.

**VIII - INTERNAL REGISTERS** (continued)

ME : MESSAGE ENABLE

ME = 1 The contents of Connection Memory is output on DOUT0/7 continuously.

ME = 0 The contents of Connection Memory acts as an address for the Data Memory.

Nu : Not used.

**VIII.8 - Connection Memory Data Register - CMDR (0E)H**

| CONTROL REGISTER (CTLR)         |    |      |      |     |      |      |      | SOURCE REGISTER (SRCR) |     |     |       |       |       |       |       |
|---------------------------------|----|------|------|-----|------|------|------|------------------------|-----|-----|-------|-------|-------|-------|-------|
| bit15                           |    |      |      |     |      |      | bit8 | bit7                   |     |     |       |       |       | bit 0 |       |
| Nu                              | PS | PRSA | PRSG | INS | OTSV | LOOP | SI   | IM2                    | IM1 | IM0 | ITS 4 | ITS 3 | ITS 2 | ITS 1 | ITS 0 |
| After reset (0000) <sub>H</sub> |    |      |      |     |      |      |      |                        |     |     |       |       |       |       |       |

This 16 bit register is constituted by two registers :

SOURCE REGISTER (SRCR) and CONTROL REGISTER (CTLR) respectively 8 bits and 7 bits.

**SOURCE REGISTER (SRCR)** has two use modes depending on CM (part of CMAR).

CM = 1, access to connection memory (read or write)

- PRSG = 0, ITS 0/4 and IM0/2 bits are defined hereafter :

ITS 0/4 : Input time slot 0/4 define ITS<sub>x</sub> with :  $0 \leq x \leq 31$ ;

IM0/2 : Input Time Division Multiplex 0/2 define ITDM<sub>p</sub> with :  $0 \leq p \leq 7$ .

- PRSG = 1, the Pseudo Random Sequence Generator is validated, SRCR is not significant.

CM = 0, access to data memory (read only). SRC is the data register of the data memory.

**CONTROL REGISTER (CTLR)** defines each Output Time Slot OTS<sub>y</sub> of each Output Time Division Multiplex OTDM<sub>q</sub> :

SI : SEQUENCE INTEGRITY

SI = 1, the delay is always :  $(31 - ITS_x) + 32 + OTS_y$  (constant delay).

SI = 0, the delay is minimum to pass through the data memory (variable delay).

LOOP : LOOPBACK per channel relevant if two connections has been established (bidirectional or not).

LOOP = 1, OTS<sub>y</sub>, OTDM<sub>q</sub> is taken into account instead of ITS<sub>y</sub>, ITDM<sub>q</sub>.

OTSV = 1, transparent Mode LOOPBACK.

OTSV = 0, not Transparent Mode LOOPBACK.

OTSV : OUTPUT TIME SLOT VALIDATED

OTSV = 1, OTS<sub>y</sub> OTDM<sub>q</sub> is enabled.

OTSV = 0, OTS<sub>y</sub> OTDM<sub>q</sub> is High Impedance.

(OTS<sub>y</sub> : Output Time slot with  $0 \leq y \leq 31$ ; OTDM<sub>q</sub> : Output Time Division Multiplex with  $0 \leq q \leq 7$ ).

INS : INSERT

INS = 1 The transfer from PRS Generator or Connection Memory to DOUT0/7 is validated.

INS = 0 The transfer from Data Memory to DOUT0/7 is validated.

PRSG : Pseudo Random Sequence Generator

This bit has effect only if INS = 1.

If PRSG = 1, Pseudo Random Sequence Generator delivers eight bits belonging to the same Sequence. Hyperchannel at  $n \times 64$  Kb/s is possible.

If PRSG = 0, Connection Memory delivers eight bits D0/7.

PRSA : Pseudo Random Sequence analyzer

If PRSA = 1, PRS analyzer is enabled during OTS<sub>y</sub> OTDM<sub>q</sub> and receives data :

INS = 0, data comes from Data Memory.

INS = 1 AND PRSG=1, Data comes from PRS Generator (Test Mode).

If PRSA = 0, PRS analyzer is disabled during OTS<sub>y</sub> OTDM<sub>q</sub>.

PS : Programmable Synchronization

If PS = 1, Programmable Synchronization Signal Pin is at "1" during the bit time defined by OTS<sub>y</sub> and OTDM<sub>q</sub>.

For OTS<sub>y</sub> and OTDM<sub>q</sub> with  $y = q = 0$ , PSS pin is at "1" during the first bit of the frame defined by the Frame synchronization Signal (FS).

If PS = 0, PSS Pin is at "0" during the bit time defined by OTS<sub>y</sub> and OTDM<sub>q</sub>.

**VIII - INTERNAL REGISTERS** (continued)**VIII.9 - Connection Memory Address Register - CMAR (10)H**

| ACCESS MODE REGISTER (AMR)      |    |    |      |     |    |    | DESTINATION REGISTER (DSTR) |      |     |     |      |      |      |       |      |
|---------------------------------|----|----|------|-----|----|----|-----------------------------|------|-----|-----|------|------|------|-------|------|
| bit15                           |    |    |      |     |    |    | bit8                        | bit7 |     |     |      |      |      | bit 0 |      |
| Nu                              | Nu | TC | CACL | CAC | Nu | CM | READ                        | OM2  | OM1 | OM0 | OTS4 | OTS3 | OTS2 | OTS1  | OTS0 |
| After reset (0800) <sub>H</sub> |    |    |      |     |    |    |                             |      |     |     |      |      |      |       |      |

This 16 bit register is constituted by two registers : DESTINATIONREGISTER (DSTR) and ACCESSMODE REGISTER (AMR) respectively 8 bits and 6 bits.

**Remark :** It is mandatory for this specific register to write successively :

- first DSTR
- then AMR

**DESTINATION REGISTER (DSTR)**

When DSTR Register is written by the microprocessor, a memory access is launched. DSTR has two use modes depending on CM (bit of CMAR).

CM = 1, access to connection memory (read or write) ;

When CM = 1, OTS 0/4 and OM 0/2 bits are defined hereafter :

OTS 0/4 : Output time slot 0/4 define OTS<sub>y</sub> with :  $0 \leq y \leq 31$ ,

OM0/2 : Output Time Division Multiplex 0/2 define OTDM<sub>q</sub> with :  $0 \leq q \leq 7$ .

- CAC = CACL = 0, DSTR is the Address Register of the Connection Memory;
- CAC or CACL = 1, DSTR is used to indicate the current address for the Connection Memory ; its contents is assigned to the outputs.

CM = 0, access to data memory (read only) ;

- DSTR is the Address Register of the Data Memory; its contents is assigned to the inputs.

**ACCESS MODE REGISTER (AMR)**

**READ :** READ MEMORY

READ = 1, Read Connection Memory (or Data Memory in accordance with CM).

READ = 0, Write Connection Memory.

**CM :** CONNECTION MEMORY

CM = 1, Write or Read Connection Memory in accordance with READ.

CM = 0, Read only Data Memory (READ = 0 has no effect).

**CAC :** CYCLICAL ACCESS

CAC = 1

if Write Connection Memory, an automatic data write from Connection Memory Data Register (CMDR) up to 256 locations of Connection Memory occurs. The first address is indicated by the register DSTR, the last is (FF)<sub>H</sub>.

if Read Connection Memory, an automatic transfer of data from the location indicated by the register (DSTR) into Connection Memory Data Register (CMDR) after reading by the microprocessor occurs. The last location is (FF)<sub>H</sub>.

CAC = 0, Write and Read Connection Memory in the normal way.

**CACL :** CYCLICAL ACCESS LIMITED

CACL = 1

If Write Connection Memory, an automatic data write from Connection Memory Data Register (CMDR) up to 32 locations of Connection Memory occurs. The first location is indicated by OTS 0/4bits of the register (DSTR) related to OTDM<sub>q</sub> as defined by OM0/2 occurs. The last location is q +1 F(H).

If Read Connection Memory, an automatic transfer of data from Connection Memory into Connection Memory Data Register (CMDR) after reading this last by the microprocessor occurs. The first location is indicated by OTS 0/4 bits of the register (DSTR) related to OTDM<sub>q</sub> as defined by OM0/2. The last location is q +1 F(H).

CACL = 0, Write and Read Connection Memory in the normal way.

**VIII - INTERNAL REGISTERS** (continued)

TC : Transparent Connection

TC = 1, if READ = 0 :

CAC = 0 and CACL = 0. The DSTR bits are taken into account instead of SRCR bits. SRCR bits are ignored (Destination and Source are identical). The contents of Input time slot i - Input multiplex j is switched into Output time slot i - Output multiplex j.

CAC = 0 and CACL = 1. Up to 32 "Transparent Connections" are set up.

CAC = 1 and CACL = 0. Up to 256 "Transparent Connections" are set up.

TC = 0, Write and Read Connection Memory in the normal way.

**VIII.10 - Sequence Fault Counter Register - SFCR (12)H**

| bit15                           |     |     |     | bit8 |     |    |    | bit7 |    |    |    | bit 0 |    |    |    |
|---------------------------------|-----|-----|-----|------|-----|----|----|------|----|----|----|-------|----|----|----|
| F15                             | F14 | F13 | F12 | F11  | F10 | F9 | F8 | F7   | F6 | F5 | F4 | F3    | F2 | F1 | F0 |
| After reset (0000) <sub>H</sub> |     |     |     |      |     |    |    |      |    |    |    |       |    |    |    |

This register is read only.

When this register is read by the microprocessor, this register is reset (0000)<sub>H</sub>.

F0/15 : FAULT0/15

Number of faults detected by the Pseudo Random Sequence analyzer if the analyzer has been validated and has recovered the receive sequence.

When the Fault Counter Register reaches (FFFF)<sub>H</sub> it stays at its maximum value.

**VIII.11 - Time Slot Assigner Address Register - TAAR (14)H**

| bit15                           |     |     |     | bit8 |      |    |     | bit7 |   |   |   | bit 0 |   |   |   |
|---------------------------------|-----|-----|-----|------|------|----|-----|------|---|---|---|-------|---|---|---|
| TS4                             | TS3 | TS2 | TS1 | TS0  | READ | Nu | HDI | r    | e | s | e | r     | v | e | d |
| After reset (0100) <sub>H</sub> |     |     |     |      |      |    |     |      |   |   |   |       |   |   |   |

READ : READ MEMORY

READ = 1, Read Time slot Assigner Memory.

READ = 0, Write Time slot Assigner Memory.

TS0/4 : TIME SLOTS0/4

These five bits define one of 32 time slots in which a channel is set-up or not.

HDI : HDLC INIT

HDI = 1, TSA Memory, Tx HDLC, Tx DMA, Rx HDLC, Rx DMA and GCI controllers are reset within 250ms. An automate writes data from Time slot Assigner Data Register (TADR) (except CH0/4 bits) into each TSA Memory location. If the microprocessor reads Time slot Assigner Memory after HDLC INIT, CH0/4 bits of Time slot Assigner Data Register are identical to TS0/4 bits of Time slot Assigner Address Register.

HDI = 0, Normal state.

N.B. After software reset (bit 2 of IDCR Register) or pin reset the automate above-mentioned is working. The automate is stopped when the microprocessor writes TAAR Register with HDI = 0.

**VIII - INTERNAL REGISTERS** (continued)**VIII.12 - Time Slot Assigner Data Register - TADR (16)H**

| bit15                           |     |    |    |    | bit8 |    |    |    |    | bit7 |     |     |     |     | bit 0 |  |  |  |  |
|---------------------------------|-----|----|----|----|------|----|----|----|----|------|-----|-----|-----|-----|-------|--|--|--|--|
| V11                             | V10 | V9 | V8 | V7 | V6   | V5 | V4 | V3 | V2 | V1   | CH4 | CH3 | CH2 | CH1 | CH0   |  |  |  |  |
| After reset (0000) <sub>H</sub> |     |    |    |    |      |    |    |    |    |      |     |     |     |     |       |  |  |  |  |

CH0/4 : CHANNEL0/4

These five bits define one of 32 channels associated to TIME SLOT defined by the previous Register (TAAR).

V1/8 : VALIDATION

The logical channel CHx is constituted by each subchannel 1 to 8 and validated by V1/8 bit

V9 : VALIDATION SUBCHANNEL

V 9 = 1, each V1/8 bit is taken into account once every 250ms.

In transmit direction, data is transmitted consecutively during the time slot of the current frame and during the same time slot of the next frame. Id est.: the same data is transmitted in two consecutive frames.

In receive direction, HDLC controller fetches data during the time slot of the current frame and ignores data during the same time slot of the next frame.

V 9 = 0, each V1/8 bit is taken into account once every 125ms.

V10 : DIRECT MHDLC ACCESS

If V10 = 1, the Rx HDLC Controller receives data issued from DIN8 input during the current time slot (bits validated by V1/8) and DOUT6 output transmits data issued from the Tx HDLC Controller.

If V10 = 0, the Rx HDLC Controller receives data issued from the matrix output 7 during the current time slot ; DOUT6 output delivers data issued from the matrix output 6 during the same current time slot.

N.B : If D7 = 1, (see "General Configuration Register GCR (02)H") the Tx HDLC controller is connected to matrix input 7 continuously so the HDLC frames can be sent to any DOUT (i.e. DOUT0 to DOUT7).

V11 : VALIDATION of CB pin

This bit is not taken into account if CSMA = 1 (HDLC Transmit Command Register).

if CSMA = 0 :

V11 = 1, Contention Bus pin is validated and Echo pin (which is an input) is not taken into account.

V11 = 0, Contention Bus pin is high impedance during the current time slot (This pin is an open drain output).

**VIII.13 - HDLC Transmit Command Register - HTCR (18)H**

| bit15                           |     |     |     |     | bit8 |    |    |     |      | bit7 |   |    |    |    | bit 0 |  |  |  |  |
|---------------------------------|-----|-----|-----|-----|------|----|----|-----|------|------|---|----|----|----|-------|--|--|--|--|
| CH4                             | CH3 | CH2 | CH1 | CH0 | READ | Nu | CF | PEN | CSMA | NCRC | F | P1 | P0 | C1 | C0    |  |  |  |  |
| After reset (0000) <sub>H</sub> |     |     |     |     |      |    |    |     |      |      |   |    |    |    |       |  |  |  |  |

READ : READ COMMAND MEMORY

READ = 1, READ COMMAND MEMORY.

READ = 0, WRITE COMMAND MEMORY.

CH0/4 : These five bits define one of 32 channels.

**VIII - INTERNAL REGISTERS** (continued)**C1/C0 : COMMAND BITS**

| <b>C1</b> | <b>C0</b> | <b>Commands Bits</b>   |
|-----------|-----------|--|
| 0         | 0         | ABORT ; if this command occurs during the current frame, HDLC Controller transmits seven "1" immediately, afterwards HDLC Controller transmits "1" or flag in accordance with F bit, generates an interrupt and waits new command such as START or CONTINUE.<br>If this command occurs after transmitting a frame, HDLC Controller generates an interrupt and waits a new command such as START or CONTINUE. |
| 0         | 1         | START ; Tx DMA Controller is now going to transfer first frame from buffer related to initial descriptor. The initial descriptor address is provided by the Initiate Block located in external memory.   |
| 1         | 0         | CONTINUE ; Tx DMA Controller is now going to transfer next frame from buffer related to next descriptor. The next descriptor address is provided by the previous descriptor from which the related frame had been already transmitted.   |
| 1         | 1         | HALT ; after transmitting frame, HDLC Controller transmits "1" or flag in accordance with F bit, generates an interrupt and is waiting new command such as START or CONTINUE.  |

**P0/1 : PROTOCOL BITS**

| <b>P1</b> | <b>P0</b> | <b>Transmission Mode</b>  |
|-----------|-----------|---|
| 0         | 0         | HDLC  |
| 0         | 1         | Transparent Mode 1 (per byte) ; the fill character defined in FCR Register is taken into account.     |
| 1         | 0         | Transparent Mode 2 (per byte) ; the fill character defined in FCR Register is not taken into account. |
| 1         | 1         | Reserved  |

**F : Flag**

F = 1 ; flags are transmitted between closing flag of current frame and opening flag of next frame.  
F = 0 ; "1" are transmitted between closing flag of current frame and opening flag of next frame.

**NCRC : CRC NOT TRANSMITTED**

NCRC = 1, the CRC is not transmitted at the end of the frame.  
NCRC = 0, the CRC is transmitted at the end of the frame.

**CSMA : Carrier Sense Multiple Access with Contention Resolution**

CSMA = 1, CB output and the Echo Bit are taken into account during this channel transmission by the Tx HDLC.

CSMA = 0, CB output and the Echo Bit are defined by V11 (see " Time slot Assigner Data Register TADR (16)H").

**PEN : CSMA PENALTY significant if CSMA = 1**

PEN = 1, the penalty value is 1 ; a transmitter which has transmitted a frame correctly will count (PRI +1) logic one received from Echo pin before transmitting next frame. (PRI, priority class 8 or 10 given by the buffer descriptor related to the frame).

PEN = 0, the penalty value is 2 ; a transmitter which has transmitted a frame correctly will count (PRI +2) logic one received from Echo pin before transmitting next frame. (PRI, priority class 8 or 10 given by the transmit descriptor related to the frame).

**CF : Common flag**

CF = 1, the closing flag of previous frame and opening flag of next frame are identical if the next frame is ready to be transmitted.

CF = 0, the closing flag of previous frame and opening flag of next frame are distinct.



**VIII - INTERNAL REGISTERS** (continued)**VIII.14 - HDLC Receive Command Register - HRCR (1A)H**

|                                 |     |     |     |     |      |      |      |      |       |     |    |    |    |    |    |
|---------------------------------|-----|-----|-----|-----|------|------|------|------|-------|-----|----|----|----|----|----|
| bit15                           |     |     |     |     | bit8 |      | bit7 |      | bit 0 |     |    |    |    |    |    |
| CH4                             | CH3 | CH2 | CH1 | CH0 | READ | AR21 | AR20 | AR11 | AR10  | CRC | Nu | P1 | P0 | C1 | C0 |
| After reset (0000) <sub>H</sub> |     |     |     |     |      |      |      |      |       |     |    |    |    |    |    |

READ : READ COMMAND MEMORY  
 READ = 1, READ COMMAND MEMORY.  
 READ = 0, WRITE COMMAND MEMORY.

CH0/4 : These five bits define one of 32 channels.

C1/C0 : COMMAND

| C1 | C0 | Commands Bits   |
|----|----|---|
| 0  | 0  | ABORT ; if this command occurs during receiving a current frame, HDLC Controller stops the reception, generates an interrupt and waits new command such as START or CONTINUE. If this command occurs after receiving a frame, HDLC Controller generates an interrupt and waits a new command such as START or CONTINUE. |
| 0  | 1  | START ; Rx DMA Controller is now going to transfer first frame into buffer related to the initial descriptor. The initial descriptor address is provided by the Initiate Block located in external memory.  |
| 1  | 0  | CONTINUE ; Rx DMA Controller is now going to transfer next frame into buffer related to next descriptor. The next descriptor address is provided by the previous descriptor from which the related frame had been already received.   |
| 1  | 1  | HALT ; after receiving frame, HDLC Controller stops the reception, generates an interrupt and waits a new command such as START or CONTINUE.  |

P0/1 : PROTOCOL BITS

| P1 | P0 | Transmission Mode   |
|----|----|---|
| 0  | 0  | HDLC  |
| 0  | 1  | Transparent Mode 1 (per byte) ; the fill character defined in FCR Register is taken into account.     |
| 1  | 0  | Transparent Mode 2 (per byte) ; the fill character defined in FCR Register is not taken into account. |
| 1  | 1  | Reserved  |

CRC : CRC stored in external memory  
 CRC = 1, the CRC is stored at the end of the frame in external memory.  
 CRC = 0, the CRC is not stored into external memory.

AR10 : Address Recognition 10  
 AR10 = 1, First byte after opening flag of received frame is compared to AF0/7 bits of AFRDR. If the first byte received and AF0/7 bits are not identical the frame is ignored.  
 AR10 = 0, First byte after opening flag of received frame is not compared to AF0/7 bits of AFRDR Register.

AR11 : Address Recognition 11  
 AR11 = 1, First byte after opening flag of received frame is compared to all "1"s. If the first byte received is not all "1"s the frame is ignored.  
 AR11 = 0, First byte after opening flag of received frame is not compared to all "1"s.

AR20 : Address Recognition 20  
 AR20 = 1, Second byte after opening flag of received frame is compared to AF8/15 bits of AFRDR Register. If the second byte received and AF8/15 bits are not identical the frame is ignored.  
 AR20 = 0, Second byte after opening flag of received frame is not compared to AF8/15 bits of AFRDR Register.



**VIII - INTERNAL REGISTERS** (continued)

AR21 : Address Recognition 21

AR21 = 1, Second byte after opening flag of received frame is compared to all "1"s. If the Second byte received is not all "1"s the frame is ignored.

AR21 = 0, Second byte after opening flag of received frame is not compared to all "1"s.

| Second Byte |      | First Byte |      | Conditions to Receive a Frame   |
|-------------|------|------------|------|---|
| AR21        | AR20 | AR11       | AR10 |   |
| 0           | 0    | 0          | 0    | Each frame is received without condition.   |
| 0           | 0    | 0          | 1    | Only value of the first received byte must be equal to that of AF0/7 bits.  |
| 0           | 0    | 1          | 0    | Only value of the first received byte must be equal to all "1"s.  |
| 0           | 0    | 1          | 1    | The value of the first received byte must be equal either to that of AF0/7 or to all "1"s.  |
| 0           | 1    | 0          | 0    | Only value of the second received byte must be equal to that of AF8/15 bits.  |
| 0           | 1    | 0          | 1    | The value of the first received byte must be equal to that of AF0/7 bits and the value of the second received byte must be equal to that of AF8/15 bits.                              |
| 0           | 1    | 1          | 0    | The value of first received byte is must be equal to all "1"s and the value of second received byte must be equal to that of AF8/15 bits.   |
| 0           | 1    | 1          | 1    | The value of the first received byte must be equal either to that of AF0/7 or to all "1"s and the value of the second received byte must be equal to that of AF8/15 bits.             |
| 1           | 0    | 0          | 0    | Only the value of the second received byte must be equal to all "1"s.   |
| 1           | 0    | 0          | 1    | The value of the first received byte must be equal to that of AF0/7 bits and the value of the second received byte must be equal to all "1"s.   |
| 1           | 0    | 1          | 0    | The value of the first received byte must be equal to all "1"s and the value of the second received byte must be equal to "1" also.   |
| 1           | 0    | 1          | 1    | The value of the first received byte must be equal either to that of AF0/7 or to "1" and the value of the second received byte must be equal to all "1"s.                             |
| 1           | 1    | 0          | 0    | The value of the second received byte must be equal either to that of AF8/15 or to all "1"s.  |
| 1           | 1    | 0          | 1    | The value of the first received byte must be equal to that of AF0/7 bits and the value of the second received byte must be equal either to that of AF8/15 or to all "1"s.             |
| 1           | 1    | 1          | 0    | The value of the first received byte must be equal to "1" and the value of the second received byte must be equal either to that of AF8/15 or to all "1"s.                            |
| 1           | 1    | 1          | 1    | The value of the first received byte must be equal either to that of AF0/7 or to "1" and the value of the second received byte must be equal either to that of AF8/15 or to all "1"s. |

**VIII.15 - Address Field Recognition Address Register - AFRAR (1C)H**

|                                 |     |     |     |     |      |    |      |   |       |   |   |   |   |   |   |
|---------------------------------|-----|-----|-----|-----|------|----|------|---|-------|---|---|---|---|---|---|
| bit15                           |     |     |     |     | bit8 |    | bit7 |   | bit 0 |   |   |   |   |   |   |
| CH4                             | CH3 | CH2 | CH1 | CHO | READ | Nu | Nu   | r | e     | s | e | r | v | e | d |
| After reset (0000) <sub>H</sub> |     |     |     |     |      |    |      |   |       |   |   |   |   |   |   |

The write operation is launched when AFRAR is written by the microprocessor.

READ : READ ADDRESS FIELD RECOGNITION MEMORY

READ=1, READ AFR MEMORY.

READ=0, WRITE AFR MEMORY.

CH0/4 : These five bits define one of 32 channels in reception

**VIII - INTERNAL REGISTERS** (continued)**VIII.16 - Address Field Recognition Data Register - AFRDR (1E)H**

| bit15                           |      |      |      |      |      |     |     | bit8 |     | bit7 |     |     |     | bit 0 |     |
|---------------------------------|------|------|------|------|------|-----|-----|------|-----|------|-----|-----|-----|-------|-----|
| AF15                            | AF14 | AF13 | AF12 | AF11 | AF10 | AF9 | AF8 | AF7  | AF6 | AF5  | AF4 | AF3 | AF2 | AF1   | AF0 |
| After reset (0001) <sub>H</sub> |      |      |      |      |      |     |     |      |     |      |     |     |     |       |     |

AF0/15 : ADDRESS FIELD BITS

AF0/7 ; First byte received; AF8/15: Second byte received.

These two bytes are stored into Address Field Recognition Memory when AFRAR is written by the microprocessor.

**VIII.17 - Fill Character Register - FCR (20)H**

| bit15                           |   |   |   |   |   |   |   | bit8 |     | bit7 |     |     |     | bit 0 |     |
|---------------------------------|---|---|---|---|---|---|---|------|-----|------|-----|-----|-----|-------|-----|
| r                               | e | s | e | r | v | e | d | FC7  | FC6 | FC5  | FC4 | FC3 | FC2 | FC1   | FC0 |
| After reset (0000) <sub>H</sub> |   |   |   |   |   |   |   |      |     |      |     |     |     |       |     |

FC0/7 : FILL CHARACTER (eight bits)

In Transparent Mode M1, two messages are separated by FILL CHARACTERS and the detection of one FILL CHARACTER marks the end of a message.

**VIII.18 - GCI Channels Definition Register 0 - GCIR0 (22)H**

The definitions of x and y indices are the same for GCIR0, GCIR1, GCIR2, GCIR3 :

- $0 \leq x \leq 7$ , 1 of 8 GCI CHANNELS belonging to the same multiplex TDM4 or TDM5
- $y = 0$ , TDM4 is selected
- $y = 1$ , TDM5 is selected.

| bit15                           |       |      |      | bit8  |       |      |      | bit7          |       |      |      | bit 0 |       |      |      |
|---------------------------------|-------|------|------|-------|-------|------|------|---------------|-------|------|------|-------|-------|------|------|
| ANA11                           | VCI11 | V*11 | VM11 | ANA10 | VCI10 | V*10 | VM10 | ANA01         | VCI01 | V*01 | VM01 | ANA00 | VCI00 | V*00 | VM00 |
| TDM5                            |       |      |      | TDM4  |       |      |      | TDM5          |       |      |      | TDM4  |       |      |      |
| GCI CHANNEL 1                   |       |      |      |       |       |      |      | GCI CHANNEL 0 |       |      |      |       |       |      |      |
| After reset (0000) <sub>H</sub> |       |      |      |       |       |      |      |               |       |      |      |       |       |      |      |

VM<sub>xy</sub> : VALIDATION of MONITOR CHANNEL<sub>x</sub>, MULTIPLEX<sub>y</sub> :

When this bit is at 1, monitor channel xy is validated.

When this bit is at 0, monitor channel xy is not validated.

On line to reset (if necessary) one MON channel which had been selected previously VM<sub>xy</sub> must be put at 0 during 125ms before reselecting this channel. Deselecting one MON channel during 125ms resets this MON channel.

V\*<sub>xy</sub> : VALIDATION of V Star<sub>x</sub>, MULTIPLEX<sub>y</sub>

When this bit is at 1, V Star protocol is validated if VM<sub>xy</sub>=1.

When this bit is at 0, GCI Monitor protocol is validated if VM<sub>xy</sub>=1.

VC<sub>xy</sub> : VALIDATION of Command/Indicate CHANNEL<sub>x</sub>, MULTIPLEX<sub>y</sub>

When this bit is at 1, Command/Indicate channelxy is validated.

When this bit is at 0, Command/Indicate channelxy is not validated.

It is necessary to let VC<sub>xy</sub> at "0" during 125ms to initiate the Command/Indicate channel.

AN<sub>Axy</sub> : ANALOG APPLICATION

When this bit is at 1, Primitive has 6 bits if C/I<sub>xy</sub> is validated.

When this bit is at 0, Primitive has 4 bits if C/I<sub>xy</sub> is validated.

**VIII - INTERNAL REGISTERS** (continued)**VIII.19 - GCI Channels Definition Register 1 - GCIR1 (24)H**

| bit15                           |       |      |      | bit8  |       |      |      | bit7          |       |      |      | bit 0 |       |      |      |
|---------------------------------|-------|------|------|-------|-------|------|------|---------------|-------|------|------|-------|-------|------|------|
| ANA31                           | VCI31 | V*31 | VM31 | ANA30 | VCI30 | V*30 | VM30 | ANA21         | VCI21 | V*21 | VM21 | ANA20 | VCI20 | V*20 | VM20 |
| TDM5                            |       |      |      | TDM4  |       |      |      | TDM5          |       |      |      | TDM4  |       |      |      |
| GCI CHANNEL 3                   |       |      |      |       |       |      |      | GCI CHANNEL 2 |       |      |      |       |       |      |      |
| After reset (0000) <sub>H</sub> |       |      |      |       |       |      |      |               |       |      |      |       |       |      |      |

For definition see GCI Channels Definition Register above.

**VIII.20 - GCI Channels Definition Register 2 - GCIR2 (26)H**

| bit15                           |       |      |      | bit8  |       |      |      | bit7          |       |      |      | bit 0 |       |      |      |
|---------------------------------|-------|------|------|-------|-------|------|------|---------------|-------|------|------|-------|-------|------|------|
| ANA51                           | VCI51 | V*51 | VM51 | ANA50 | VCI50 | V*50 | VM30 | ANA41         | VCI41 | V*41 | VM41 | ANA40 | VCI40 | V*40 | VM40 |
| TDM5                            |       |      |      | TDM4  |       |      |      | TDM5          |       |      |      | TDM4  |       |      |      |
| GCI CHANNEL 5                   |       |      |      |       |       |      |      | GCI CHANNEL 4 |       |      |      |       |       |      |      |
| After reset (0000) <sub>H</sub> |       |      |      |       |       |      |      |               |       |      |      |       |       |      |      |

For definition see GCI Channels Definition Register above.

**VIII.21 - GCI Channels Definition Register 3 - GCIR3 (28)H**

| bit15                           |       |      |      | bit8  |       |      |      | bit7          |       |      |      | bit 0 |       |      |      |
|---------------------------------|-------|------|------|-------|-------|------|------|---------------|-------|------|------|-------|-------|------|------|
| ANA71                           | VCI71 | V*71 | VM71 | ANA70 | VCI70 | V*70 | VM70 | ANA61         | VCI61 | V*61 | VM61 | ANA60 | VCI60 | V*60 | VM60 |
| TDM5                            |       |      |      | TDM4  |       |      |      | TDM5          |       |      |      | TDM4  |       |      |      |
| GCI CHANNEL 7                   |       |      |      |       |       |      |      | GCI CHANNEL 6 |       |      |      |       |       |      |      |
| After reset (0000) <sub>H</sub> |       |      |      |       |       |      |      |               |       |      |      |       |       |      |      |

For definition see GCI Channels Definition Register above.

**VIII - INTERNAL REGISTERS** (continued)**VIII.22 - Transmit Command / Indicate Register - TCIR (2A)H**

| bit15                           |    |     |     |     |      | bit8 |   | bit7 |    | bit 0 |    |    |    |    |    |
|---------------------------------|----|-----|-----|-----|------|------|---|------|----|-------|----|----|----|----|----|
| 0                               | G0 | CA2 | CA1 | CA0 | READ | 0    | 0 | Nu   | Nu | C6    | C5 | C4 | C3 | C2 | C1 |
| After reset (00FF) <sub>H</sub> |    |     |     |     |      |      |   |      |    |       |    |    |    |    |    |

When this register is written by the microprocessor, these different bits mean :

**READ** : READ C/I MEMORY

READ = 1, READ C/I MEMORY.

READ = 0, WRITE C/I MEMORY.

**CA 0/2** : TRANSMIT COMMAND/INDICATE MEMORY ADDRESS

CA 0/2 : These bits define one of eight Command/Indicate Channels.

**G0** : This bit defines one of two GCI multiplexes.

G0 = 0, TDM4 is selected.

G0 = 1, TDM5 is selected.

**C6/1** : New Primitive to be transmitted

C6 is transmitted first if ANA = 1.

C4 is transmitted first if ANA = 0.

The New Primitive is taken into account by the transmitter after writing bits 8 to 15 (if 8 bit microprocessor).

**Transmit Command/Indicate Register** (after reading)

| bit15 |    |     |     |     |      | bit8 |    | bit7 |     | bit 0 |    |    |    |    |    |
|-------|----|-----|-----|-----|------|------|----|------|-----|-------|----|----|----|----|----|
| 0     | G0 | CA2 | CA1 | CA0 | READ | Nu   | Nu | PT1  | PT0 | C6    | C5 | C4 | C3 | C2 | C1 |

When this register is read by the microprocessor, these different bits mean :

**READ** : READ C/I MEMORY

READ = 1, READ C/I MEMORY.

READ = 0, WRITE C/I MEMORY.

**CA 0/2** : TRANSMIT C/I ADDRESS

CA 0/2 : These bits define one of eight Command/Indicate Channels.

**G0** : This bit defines one of two GCI multiplexes.

G0 = 0, TDM4 is selected.

G0 = 1, TDM5 is selected.

**C6/1** : Last Primitive transmitted.

**PT0/1** : Status bits

| P1 | P0 | Primitive Status                                    |
|----|----|---|
| 0  | 0  | Primitive has not been transmitted yet.             |
| 0  | 1  | Primitive has been transmitted once.                |
| 1  | 0  | Primitive has been transmitted twice.               |
| 1  | 1  | Primitive has been transmitted three times or more. |

**VIII - INTERNAL REGISTERS** (continued)**VIII.23 - Transmit Monitor Address Register - TMAR (2C)H**

| bit15                           |    |     |     |     | bit8 |    |    |    | bit7 |     |      |   | bit 0 |   |    |
|---------------------------------|----|-----|-----|-----|------|----|----|----|------|-----|------|---|-------|---|----|
| 0                               | G0 | MA2 | MA1 | MA0 | READ | Nu | Nu | Nu | Nu   | TIV | FABT | L | NOB   | 0 | Nu |
| After reset (000F) <sub>H</sub> |    |     |     |     |      |    |    |    |      |     |      |   |       |   |    |

When this register is written by the microprocessor, these different bits mean :

- READ** : READ MON MEMORY  
 READ=1, READ MON MEMORY.  
 READ=0, WRITE MON MEMORY.
- MA 0/2** : TRANSMIT MONITOR ADDRESS  
 MA 0/2 :These bits define one of eight Monitor Channel if validated.
- G0** : This bit defines one of two GCI multiplexes.  
 G0 = 0, TDM4 is selected.  
 G0 = 1, TDM5 is selected.
- NOB** : NUMBER OF BYTE to be transmitted  
 NOB = 1, One byte to transmit.  
 NOB = 0, Two bytes to transmit.
- L** : Last byte  
 L = 1, the word (or the byte) located in the Transmit Monitor Data Register (TMDR) is the last.  
 L = 0, the word (or the byte) located in the Transmit Monitor Data Register (TMDR) is not the last.
- FABT** : FABT = 1, the current message is aborted by the transmitter.
- TIV** : Timer interrupt is Validated  
 TIV = 1, Time Out alarm generates an interrupt when the timer has expired.  
 TIV = 0, Time Out alarm is masked.

If 8 bit microprocessor the Data (TMDR Register) is taken into account by the transmitter after writing bits 8 to 15 of this register.

**Transmit Monitor Address Register** (after reading)

| bit15 |    |     |     |     | bit8 |    |    |    | bit7 |    |     |   | bit 0 |     |      |
|-------|----|-----|-----|-----|------|----|----|----|------|----|-----|---|-------|-----|------|
| 0     | G0 | MA2 | MA1 | MA0 | READ | Nu | Nu | Nu | Nu   | TO | ABT | L | NOBT  | EXE | IDLE |

When this register is read by the microprocessor, these different bits mean :

READ, MA0/2, G0 have same definition as already described for the write register cycle.

- IDLE** : When this bit is at "1", IDLE (all 1's) is transmitted during the channel validation.
- EXE** : EXECUTED  
 When this status bit is at "1", the command written previously by the microprocessor has been executed and a new word can be stored in the Transmit Monitor Data Register (TMDR) by the microprocessor.  
 When this bit is at "0", the command written previously by the microprocessor has not yet been executed.
- NOBT** : NUMBER OF BYTE which has been transmitted.  
 NOBT = 1, the first byte is transmitting.  
 NOBT = 0, the second byte is transmitting, the first byte has been transmitted.
- L** : Last byte ; this L bit is the L bit which has been written by the microprocessor.
- ABT** : ABORT  
 ABT=1, the remote receiver has aborted the current message.
- TO** : Time Out one millisecond  
 TO = 1, the remote receiver has not acknowledged the byte which has been transmitted one millisecond ago.

**VIII - INTERNAL REGISTERS (continued)****VIII.24 - Transmit Monitor Data Register - TMDR (2E)H**

|                                 |     |     |     |     |     |     |     |      |     |      |     |       |     |     |     |  |
|---------------------------------|-----|-----|-----|-----|-----|-----|-----|------|-----|------|-----|-------|-----|-----|-----|--|
| bit15                           |     |     |     |     |     |     |     | bit8 |     | bit7 |     | bit 0 |     |     |     |  |
| M18                             | M17 | M16 | M15 | M14 | M13 | M12 | M11 | M08  | M07 | M06  | M05 | M04   | M03 | M02 | M01 |  |
| After reset (FFFF) <sub>H</sub> |     |     |     |     |     |     |     |      |     |      |     |       |     |     |     |  |

M08/01: First Monitor Byte to transmit. M08 bit is transmitted first.

M18/11: Second Monitor Byte to transmit if NOB = 0 (bit of TMAR). M18 bit is transmitted first.

**VIII.25 - Transmit Monitor Interrupt Register - TMIR (30)H**

|                                 |      |      |      |      |      |      |      |      |      |      |       |      |      |      |      |
|---------------------------------|------|------|------|------|------|------|------|------|------|------|-------|------|------|------|------|
| bit15                           |      |      |      |      |      |      | bit8 |      | bit7 |      | bit 0 |      |      |      |      |
| TDM5                            |      |      |      |      |      |      | TDM4 |      |      |      |       |      |      |      |      |
| MI71                            | MI61 | MI51 | MI41 | MI31 | MI21 | MI11 | MI01 | MI70 | MI60 | MI50 | MI40  | MI30 | MI20 | MI10 | MI00 |
| After reset (0000) <sub>H</sub> |      |      |      |      |      |      |      |      |      |      |       |      |      |      |      |

When the microprocessor read this register, this register is reset (0000)<sub>H</sub>.

MI<sub>xy</sub> : Transmit Monitor Channel x Interrupt, Multiplex y with :

0 ≤ x ≤ 7, 1 of 8 GCI CHANNELS belonging to the same multiplex TDM4 or TDM5

y = 0, GCI CHANNEL belongs to the multiplex TDM4 and y = 1 to TDM5.

MI<sub>xy</sub> = 1 when :

- a word has been transmitted and pre-acknowledged by the Transmit Monitor Channel xy (In this case the Transmit Monitor Data Register (TMDR) is available to transmit a new word) or
- the message has been aborted by the remote receive Monitor Channel or
- the Timer has reached one millisecond (in accordance with TIV bit of TMAR) by IM3 bit of IMR.

When MI<sub>xy</sub> goes to "1", the Interrupt MTX bit of IR is generated. Interrupt MTX can be masked.

**VIII.26 - Memory Interface Configuration Register - MICR (32)H**

|                                 |     |     |     |     |     |     |     |      |   |      |   |       |   |   |     |  |
|---------------------------------|-----|-----|-----|-----|-----|-----|-----|------|---|------|---|-------|---|---|-----|--|
| bit15                           |     |     |     |     |     |     |     | bit8 |   | bit7 |   | bit 0 |   |   |     |  |
| P41                             | P40 | P31 | P30 | P21 | P20 | P11 | P10 | Z    | W | V    | U | T     | S | R | REF |  |
| After reset (E400) <sub>H</sub> |     |     |     |     |     |     |     |      |   |      |   |       |   |   |     |  |

REF : MEMORY REFRESH

REF = 1, DRAM REFRESH is validated,

REF = 0, DRAM REFRESH is not validated.

R,S,T : These three bits define the external RAM circuit organization (1word=2bytes)

The cycle duration is always 15.625ms (512 periods of the clock applied on XTAL1 pin).

| T | S | R |   | If refresh         |
|---|---|---|---|--------------------|
| 0 | 0 | 0 | 128K x 8 SRAM circuit (up to 512K words)          |                    |
| 0 | 0 | 1 | 512K x 8 SRAM circuit (up to 512K words)          |                    |
| 0 | 1 | 0 | 256K x 16 DRAM circuit (up to 1M word)            | 512 cycles / 8ms   |
| 0 | 1 | 1 | 1M x 4 (or 16) bits DRAM circuit (up to 4M words) | 1024 cycles / 16ms |
| 1 | 0 | 0 | 4M x 4 (or 16) bits DRAM circuit (up to 8M words) | 2048 cycles / 32ms |
| 1 | 0 | 1 | 101 to 111 not used (this writing is forbidden)   |                    |

The cycle duration is always 15.625ms (512 periods of the clock applied on XTAL1 Pin).

## VIII - INTERNAL REGISTERS (continued)

U,V,W,Z : These four bits define the different signals delivered by the MHDLC.

**First Case :** the external RAM circuit is DRAM (T = 1 or S = 1)

- U defines the time  $T_u$  comprised between beginning of cycle and falling edge of NRAS :  
U = 1,  $T_u = 60\text{ns}$  - U = 0,  $T_u = 30\text{ns}$
- V defines the time  $T_v$  comprised between falling edge of NRAS and falling edge of NCAS :  
V = 1,  $T_v = 60\text{ns}$  - V = 0,  $T_v = 30\text{ns}$
- W defines the time  $T_w$  comprised between falling edge of NCAS and rising edge of NCAS :  
W = 1,  $T_w = 60\text{ns}$  - W = 0,  $T_w = 30\text{ns}$
- Z defines the time  $T_z$  comprised between rising edge of NCAS and end of cycle :  
Z = 1,  $T_z = 60\text{ns}$  - Z = 0,  $T_z = 30\text{ns}$

The total cycle is  $T_u + T_v + T_w + T_z$ .

The different output signals are high impedance during 15ns before the end of each cycle.

**Second Case :** the external RAM circuit is SRAM (T = 0 or S = 0)

- U and V define a part of write cycle for SRAM : the time  $T_{uv}$  comprised between falling edge and rising edge of NCE. The total of write cycle is :  $15\text{ns} + T_{uv} + 15\text{ns}$ .

| V | U | $T_{uv}$ |
|---|---|----------|
| 0 | 0 | 30ns     |
| 0 | 1 | 60ns     |
| 1 | 0 | 90ns     |
| 1 | 1 | 120ns    |

- W and Z define a part of read cycle for SRAM : the time  $T_{wz}$  comprised between falling edge of NOE and rising edge of NOE. The total of read cycle is :  $T_{wz} + 30\text{ns}$

| Z | W | $T_{wz}$ |
|---|---|----------|
| 0 | 0 | 30ns     |
| 0 | 1 | 60ns     |
| 1 | 0 | 90ns     |
| 1 | 1 | 120ns    |

N.B. The different output signals are high impedance during 15ns before the end of each cycle. On the outside of each (DRAM or SRAM) cycle all the outputs are high impedance or not in accordance with MBL bit (see "MBL : Memory Bus Low impedance").

## Memory

| bit15                           |      |      |      |      |      | bit8 |      | bit7 |   | bit 0 |   |   |   |   |     |
|---------------------------------|------|------|------|------|------|------|------|------|---|-------|---|---|---|---|-----|
| P4E1                            | P4E0 | P3E1 | P3E0 | P2E1 | P2E0 | P1E1 | P1E0 | Z    | W | V     | U | T | S | R | REF |
| After reset (E400) <sub>H</sub> |      |      |      |      |      |      |      |      |   |       |   |   |   |   |     |

P1 E0/1 : PRIORITY 1 for entity defined by E0/1

P2 E0/1 : PRIORITY 2 for entity defined by E0/1

P3 E0/1 : PRIORITY 3 for entity defined by E0/1

P4 E0/1 : PRIORITY 4 for entity defined by E0/1

Entity definition :

| E1 | E0 | Entity               |
|----|----|----------------------|
| 0  | 0  | Rx DMA Controller    |
| 0  | 1  | Microprocessor       |
| 1  | 0  | Tx DMA Controller    |
| 1  | 1  | Interrupt Controller |

**VIII - INTERNAL REGISTERS** (continued)

PRIORITY 5 is the last priority for DRAM Refresh if validated. DRAM Refresh obtains PRIORITY 0 (the first priority) automatically when the first half cycle is spend without access to memory.

After reset (E400)<sub>H</sub>, the Rx DMA Controller has the PRIORITY 1  
the Microprocessor has the PRIORITY 2  
the Tx DMA Controller has the PRIORITY 3  
the Interrupt Controller has the PRIORITY 4  
the DRAM Refresh has the PRIORITY 5

**VIII.27 - Initiate Block Address Register - IBAR (34)H**

|                                 |     |     |     |      |     |     |     |      |     |     |     |       |     |    |    |
|---------------------------------|-----|-----|-----|------|-----|-----|-----|------|-----|-----|-----|-------|-----|----|----|
| bit15                           |     |     |     | bit8 |     |     |     | bit7 |     |     |     | bit 0 |     |    |    |
| A23                             | A22 | A21 | A20 | A19  | A18 | A17 | A16 | A15  | A14 | A13 | A12 | A11   | A10 | A9 | A8 |
| After reset (0000) <sub>H</sub> |     |     |     |      |     |     |     |      |     |     |     |       |     |    |    |

A8/23 : Address bits. These 16 bits are the segment address bits of the Initiate Block (A8 to A23 for the external memory). The offset is zero (A0 to A7 = "0").

The Initiate Block Address (IBA) is :

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|
| 23  |     |     |     | 8   |     |     |     | 7   |     |     |     | 0   |     |    |    |
| A23 | A22 | A21 | A20 | A19 | A18 | A17 | A16 | A15 | A14 | A13 | A12 | A11 | A10 | A9 | A8 |
|     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |

The 23 more significant bits define one of 8 Megawords. (One word comprises two bytes.)

The least significant bit defines one of two bytes when the microprocessor selects one byte.

**VIII.28 - Interrupt Queue Size Register - IQSR (36)H**

|                                 |   |   |   |      |   |   |   |      |     |     |     |       |     |     |     |
|---------------------------------|---|---|---|------|---|---|---|------|-----|-----|-----|-------|-----|-----|-----|
| bit15                           |   |   |   | bit8 |   |   |   | bit7 |     |     |     | bit 0 |     |     |     |
| r                               | e | s | e | r    | v | e | d | HS2  | HS1 | HS0 | MS2 | MS1   | MS0 | CS1 | CS0 |
| After reset (0000) <sub>H</sub> |   |   |   |      |   |   |   |      |     |     |     |       |     |     |     |

CS0/1 : Command/Indicate Interrupt Queue Size

These two bits define the size of Command/Indicate Interrupt Queue in external memory.

The location is IBA + 256 + HDLC Queue size + Monitor Channel Queue Size (see The Initiate Block Address (IBA)).

MS0/2 : Monitor Channel Interrupt Queue Size

These three bits define the size of Monitor Channel Interrupt Queue in external memory.

The location is IBA + 256 + HDLC Queue size.

HS0/2 : HDLC Interrupt Queue Size

These three bits define the size of HDLC status Interrupt Queue in external memory for each channel.

The location is IBA+256 (see The Initiate Block Address (IBA))

| HS2 | HS1 | HS0 | HDLC Queue Size | MS2 | MS1 | MS0 | MON Queue Size | CS1 | CS0 | C/I Queue Size |
|-----|-----|-----|-----------------|-----|-----|-----|----------------|-----|-----|----------------|
| 0   | 0   | 0   | 128 words       | 0   | 0   | 0   | 128 words      | 0   | 0   | 64 words       |
| 0   | 0   | 1   | 256 words       | 0   | 0   | 1   | 256 words      | 0   | 1   | 128 words      |
| 0   | 1   | 0   | 384 words       | 0   | 1   | 0   | 384 words      | 1   | 0   | 192 words      |
| 0   | 1   | 1   | 512 words       | 0   | 1   | 1   | 512 words      | 1   | 1   | 256 words      |
| 1   | 0   | 0   | 640 words       | 1   | 0   | 0   | 640 words      |     |     |                |
| 1   | 0   | 1   | 768 words       | 1   | 0   | 1   | 768 words      |     |     |                |
| 1   | 1   | 0   | 896 words       | 1   | 1   | 0   | 896 words      |     |     |                |
| 1   | 1   | 1   | 1024 words      | 1   | 1   | 1   | 1024 words     |     |     |                |



**VIII - INTERNAL REGISTERS** (continued)**VIII.29 - Interrupt Register - IR (38)H**

| bit15                           |    |      |      |     |            |             |           | bit8       |           | bit7       |      |     |     |       |      | bit 0 |  |
|---------------------------------|----|------|------|-----|------------|-------------|-----------|------------|-----------|------------|------|-----|-----|-------|------|-------|--|
| Nu                              | Nu | SFCO | PRSR | TIM | INT<br>FOV | INT<br>FWAR | Tx<br>FOV | Tx<br>FWAR | Rx<br>FOV | Rx<br>FWAR | ICOV | MTX | MRX | C/IRX | HDLC |       |  |
| After reset (0000) <sub>H</sub> |    |      |      |     |            |             |           |            |           |            |      |     |     |       |      |       |  |

This register is read only.

When this register is read by the microprocessor, this register is reset (0000)<sub>H</sub>.

If not masked, each bit at "1" generates "1" on INT0 pin.

- HDLC** : HDLC INTERRUPT  
HDLC = 1, Tx HDLC or Rx HDLC has generated an interrupt. The status is in the HDLC queue.
- C/IRX** : Command/Indicate Rx Interrupt  
C/IRX = 1, Rx Commande/Indicate has generated an interrupt. The status is in the HDLC queue.
- MRX** : Rx MONITOR CHANNEL INTERRUPT  
MRX = 1, one Rx MONITOR CHANNEL has generated an interrupt. The status is in the Rx Monitor Channel queue.
- MTX** : Tx MONITOR CHANNEL INTERRUPT  
MTX = 1, one or several Tx MONITOR CHANNELS have generated an interrupt. Transmit Monitor Interrupt Register (TMIR) indicates the Tx Monitor Channels which have generated this interrupt.
- ICOV** : INTERRUPT CIRCULAR OVERLOAD  
ICOV = 1, One of three circular interrupt memories is completed.
- RxFWAR** : Rx DMA CONTROLLER FIFO WARNING  
RxFWAR = 1, Rx DMA CONTROLLER has generated an interrupt, its fifo is 3/4 completed.
- RxFOV** : Rx DMA CONTROLLER FIFO OVERLOAD  
RxFOV = 1, Rx DMA CONTROLLER has generated an interrupt, it cannot transfer data from Rx HDLC to external memory, its fifo is completed.
- TxFWAR** : Tx DMA CONTROLLER FIFO WARNING  
TxFWAR = 1, Tx DMA CONTROLLER has generated an interrupt, its fifo is 3/4 completed.
- TxFOV** : Tx DMA CONTROLLER FIFO OVERLOAD  
TxFOV = 1, Tx DMA CONTROLLER has generated an interrupt, it cannot transfer data from Tx HDLC to external memory, its fifo is completed.
- INTFWAR** : INTERRUPT CONTROLLER FIFO WARNING  
INTFWAR = 1, INTERRUPT CONTROLLER has generated an interrupt, its fifo is 3/4 completed.
- INTFOV** : INTERRUPT CONTROLLER FIFO OVERLOAD  
INTFOV = 1, INTERRUPT CONTROLLER has generated an interrupt, it cannot transfer status from DMA and GCI controllers to external memory, its internal fifo is completed.
- TIM** : TIMER  
TIM = 1, the programmable timer has generated an interrupt.
- PRSR** : Pseudo Random Sequence Recovered  
PRSR = 1, the Pseudo Random Sequence transmitted by the generator has been recovered by the analyzer.
- SFCO** : Sequence Fault Counter Overload  
SFCO = 1, the Fault Counter has reached the value FFFF(H).

**VIII - INTERNAL REGISTERS** (continued)**VIII.30 - Interrupt Mask Register - IMR (3A)H**

| bit15                           |    |      |      | bit8 |      |     |     | bit7 |     |     |     | bit 0 |     |     |     |
|---------------------------------|----|------|------|------|------|-----|-----|------|-----|-----|-----|-------|-----|-----|-----|
| Nu                              | Nu | IM13 | IM12 | IM11 | IM10 | IM9 | IM8 | IM7  | IM6 | IM5 | IM4 | IM3   | IM2 | IM1 | IM0 |
| After reset (FFFF) <sub>H</sub> |    |      |      |      |      |     |     |      |     |     |     |       |     |     |     |

IM13/0 : INTERRUPT MASK 0/7

When IM0 = 1, HDLC bit is masked.

When IM1 = 1, C/IRX bit is masked.

When IM2 = 1, MRX bit is masked.

When IM3 = 1, MTX bit is masked.

When IM4 = 1, ICOV bit is masked

When IM5 = 1, RxFWAR bit is masked.

When IM6 = 1, RxFOV bit is masked.

When IM7 = 1, TxFWAR bit is masked.

When IM8 = 1, TxFOV bit is masked.

When IM9 = 1, INTFWAR bit is masked.

When IM10 = 1, INTFOV bit is masked.

When IM11 = 1, TIM bit is masked.

When IM12 = 1, PRSR bit is masked.

When IM13 = 1, SFCO bit is masked.

**VIII.31 - Time Register - TIMR (3C)H**

| bit15                                    |    |    |    | bit8       |     |     |     | bit7 |     |     |     | bit 0 |     |               |     |
|--|----|----|----|------------|-----|-----|-----|------|-----|-----|-----|-------|-----|---------------|-----|
| S3                                       | S2 | S1 | S0 | MS9        | MS8 | MS7 | MS6 | MS5  | MS4 | MS3 | MS2 | MS1   | MS0 | MM1           | MM0 |
| 0 to 5s                                  |    |    |    | 0 to 999ms |     |     |     |      |     |     |     |       |     | 0 to 3x0.25ms |     |
| After reset (0800) <sub>H</sub> id 512ms |    |    |    |            |     |     |     |      |     |     |     |       |     |               |     |

This programmable register indicates the time at the end of which the Watch Dog delivers logic "1" on the pin WDO (which is an output) but only if the microprocessor does not reset the counter assigned (with the help of WDR bit of IDCR Identification and Dynamic Command Register) during the time defined by the Timer Register.

The Timer Register and its counter can be used as a time base by the microprocessor. An interrupt (TIM) is generated at each period defined by the Timer Register if the microprocessor does not reset the counter with the help of WDR (bit of IDCR).

When TSV=1{Time Stamping Validated (GCR)} this programmable register is not used.

**VIII.32 - Test Register - TR (3E)H**

| bit15 |  |  |  | bit8 |  |  |  | bit7 |  |  |  | bit 0 |  |  |  |
|-------|--|--|--|------|--|--|--|------|--|--|--|-------|--|--|--|
|       |  |  |  |      |  |  |  |      |  |  |  |       |  |  |  |

T15/0 : Test bits 0/15

These bits are reserved for the test of the circuit in production

## IX - EXTERNAL REGISTERS

These registers are located in shared memory. Initiate Block Address Register (IBAR) gives the Initiate Block Address (IBA) in shared memory (see Register IBAR(34)H on Page 73).

'Not used' bits (Nu) are accessible by the microprocessor but the use of these bits by software is not recommended.

### IX.1 - Initialization Block in External Memory

|              |   | Descriptor Address |                                       |      |           |
|--------------|---|--------------------|---------------------------------------|------|-----------|
| Channel      |   | Address            | bit15                                 | bit8 | bit7 bit0 |
| CH 0         | T | IBA+00             | Not used                              |      | TDA High  |
|              |   | IBA+02             | Transmit Descriptor Address (TDA Low) |      |           |
|              | R | IBA+04             | Not used                              |      | RDA High  |
|              |   | IBA+06             | Receive Descriptor Address (RDA Low)  |      |           |
| CH1          | T | IBA+08             | Not used                              |      | TDA High  |
|              |   | IBA+10             | Transmit Descriptor Address (TDA Low) |      |           |
|              | R | IBA+12             | Not used                              |      | RDA High  |
|              |   | IBA+14             | Receive Descriptor Address (RDA Low)  |      |           |
| CH 2 to CH30 |   | IBA+16 to IBA+246  |                                       |      |           |
| CH 31        | T | IBA+248            | Not used                              |      | TDA High  |
|              |   | IBA+250            | Transmit Descriptor Address (TDA Low) |      |           |
|              | R | IBA+252            | Not used                              |      | RDA High  |
|              |   | IBA+254            | Receive Descriptor Address (RDA Low)  |      |           |

When Direct Memory Access Controller receives Start from one of 64 channels, it reads initialization block immediately to know the first address of the first descriptor for this channel.

Bit 0 of Transmit Descriptor Address (TDA Low) and bit 0 of Receive Descriptor Address (RDA Low), are at ZERO mandatory. This Least Significant Bit is not used by DMA Controller, The shared memory is always a 16 bit memory for the DMA Controller.

N.B. If several descriptors are used to transmit one frame then before transmitting frame, DMA Controller stores the address of the first Transmit Descriptor Address into this Initialization Block.

**IX - EXTERNAL REGISTERS** (continued)**IX.2 - Receive Descriptor**

This receive descriptor is located in shared memory. The quantity of descriptors is limited by the memory size only.

|        |   |     |     |      |                                |    |   |   |                    |   |   |   |   |   |   |   |
|--------|---|-----|-----|------|--------------------------------|----|---|---|--------------------|---|---|---|---|---|---|---|
|        | 15  | 14  | 13  | 12   | 11                             | 10 | 9 | 8 | 7                  | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| RDA+00 |   |     | IBC | EOQ  | Size Of the Buffer (SOB)       |    |   |   |                    |   |   |   |   |   |   | 0 |
| RDA+02 | Not used                                      |     |     |      |                                |    |   |   | RBA High (8 bits)  |   |   |   |   |   |   |   |
| RDA+04 | Receive Buffer Address Low (16 bits)          |     |     |      |                                |    |   |   |                    |   |   |   |   |   |   |   |
| RDA+06 | Not used                                      |     |     |      |                                |    |   |   | NRDA High (8 bits) |   |   |   |   |   |   |   |
| RDA+08 | Next Receive Descriptor Address Low (16 bits) |     |     |      |                                |    |   |   |                    |   |   |   |   |   |   |   |
| RDA+10 | FR  | ABT | OVF | FCRC | Number of Bytes Received (NBR) |    |   |   |                    |   |   |   |   |   |   |   |

The 5 first words located in shared memory to RDA+00 from RDA+08 are written by the microprocessor and read by the DMAC only. The 6th word located in shared memory in RDA+10 is written by the DMAC only during the frame reception and read by the microprocessor.

**SOB** : Size Of the Buffer associated to descriptor up to 2048 words (1 word = 2 bytes).  
If SOB = 0, DMAC goes to next descriptor.

**RBA** : Receive Buffer Address. LSB of RBA Low is at Zero mandatory.

**RDA** : Receive Descriptor Address.

**NRDA** : Next Receive Descriptor Address. LSB of NRDA Low is at Zero mandatory.

**NBR** : Number of Bytes Received (up to 4096).

**IX.2.1 - Bits written by the Microprocessor only**

**IBC** : Interrupt if the buffer has been completed.  
IBC=1, the DMAC generates an interrupt if the buffer has been completed.

**EOQ** : End Of Queue.  
EOQ=1, the DMAC stops immediately its reception generates an interrupt (HDLC = 1 in IR) and waits a command from the HRCR (HDLC Receive Command Register).  
EOQ=0, the DMAC continues.

**IX.2.2 - Bits written by the Rx DMAC only**

| FR | ABT | OVF | FCRC | Definition  |
|----|-----|-----|------|---|
| 1  | 0   | 0   | 0    | The frame has been received without error. The end of frame is in this buffer.  |
| 1  | 0   | 0   | 1    | The frame has been received with false CRC.   |
| 0  | 0   | 0   | 0    | If NBR is different to 0, the buffer related to this descriptor is completed. The end of frame is not in this buffer. |
| 0  | 0   | 0   | 0    | If NBR is equal to 0, the Rx DMAC is receiving a frame.   |
| 0  | 1   | 0   | 0    | ABORT. The received frame has been aborted by the remote transmitter or the local microprocessor.                     |
| 0  | 1   | 1   | 0    | OVERFLOW of FIFO. The received frame has been aborted.  |
| 0  | 1   | 0   | 1    | The received frame had not an integer of bytes.   |

**IX.2.3 - Receive Buffer**

Each receive buffer is defined by its receive descriptor.

The maximum size of the buffer is 2048 words (1 word=2 bytes)

|             |  |   |
|-------------|--|---|
|             | 15   | 0 |
| RBA         | First Buffer Location  |   |
|             |  |   |
| RBA + SOB-2 | Last Location Available = Recive Buffer Address (RBA) + Size Of the Buffer (SOB-2) |   |

**IX - EXTERNAL REGISTERS** (continued)**IX.3 - Transmit Descriptor**

This transmit descriptor is located in shared memory. The quantity of descriptors is limited by the memory size only.

|        | 15   | 14  | 13  | 12  | 11                                      | 10 | 9        | 8   | 7                  | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|--|-----|-----|-----|---|----|----------|-----|--------------------|---|---|---|---|---|---|---|
| TDA+00 | BINT   | BOF | EOF | EOQ | Number of Bytes to be Transmitted (NBT) |    |          |     |                    |   |   |   |   |   |   |   |
| TDA+02 | Not used                                       |     |     |     |   |    | CRC<br>C | PRI | TBA High (8 bits)  |   |   |   |   |   |   |   |
| TDA+04 | Transmit Buffer Address Low (16 bits)          |     |     |     |   |    |          |     |                    |   |   |   |   |   |   |   |
| TDA+06 | Not used                                       |     |     |     |   |    |          |     | NTDA High (8 bits) |   |   |   |   |   |   |   |
| TDA+08 | Next Transmit Descriptor Address Low (16 bits) |     |     |     |   |    |          |     |                    |   |   |   |   |   |   |   |
| TDA+10 | CFT  | ABT | UND |     |   |    |          |     |                    |   |   |   |   |   |   |   |

The 5 first words located in shared memory to TDA+00 from TDA+08 are written by the microprocessor and read by the DMAC only. The 6th word located in shared memory in TDA+10 is written by the DMAC only during the frame reception and read by the microprocessor.

NBT : Number of Bytes to be transmitted (up to 4096).

TBA : Transmit Buffer Address. LSB of TBA Low is at Zero mandatory.

TDA : Transmit Descriptor Address.

NTDA : Next Transmit Descriptor Address. LSB of NTDA Low is at Zero mandatory.

**IX.3.1 - Bits written by the Microprocessor only**

BINT : Interrupt at the end of the frame or when the buffer is become empty.

BINT = 1,

if EOF = 1 the DMAC generates an interrupt when the frame has been transmitted ;

if EOF = 0 the DMAC generates an interrupt when the buffer is become empty.

BINT = 0, the DMAC does not generate an interrupt during the transmission of the frame.

BOF : Beginning Of Frame

BOF = 1, the transmit buffer associated to this transmit descriptor contains the beginning of frame.

BOF = 0, the transmit buffer associated to this transmit descriptor does not contain the beginning of frame.

EOF : End Of Frame

EOF = 1, the transmit buffer associated to this transmit descriptor contains the end of frame.

EOF = 0, the transmit buffer associated to this transmit descriptor does not contain the end of frame.

EOQ : End Of Queue

EOQ = 1, the DMAC stops immediately its transmission, generates an interrupt (HDLC = 1 in IR) and waits a command from the HTCR (HDLC Transmit Command Register).

EOQ = 0, the DMAC continues.

CRCC : CRC Corrupted

CRCC = 1, at the end of this frame the CRC will be corrupted by the Tx HDLC Controller.

PRI : Priority Class 8 or 10

PRI = 1, if CSMA/CR is validated for this channel, the priority class is 8.

PRI = 0, if CSMA/CR is validated for this channel the priority class is 10.

(see Register CSMA)

**IX - EXTERNAL REGISTERS** (continued)**IX.3.2 - Bits written by the Rx DMAC only**

- CFT** : Frame correctly transmitted  
 CFT = 1, the Frame has been correctly transmitted.  
 CFT = 0, the Frame has not been correctly transmitted.
- ABT** : Frame Transmitting Aborted  
 ABT = 1, the frame has been aborted by the microprocessor during the transmission.  
 ABT = 0, the microprocessor has not aborted the frame during the transmission.
- UND** : Underrun  
 UND = 1, the transmit FIFO has not been fed correctly during the transmission.  
 UND = 0, the transmit FIFO has been fed correctly during the transmission.

**IX.3.3 - Transmit Buffer**

Each transmit buffer is defined by its transmit descriptor.  
 The maximum size of the buffer is 2048 words (1 word=2 bytes)

|  |                        |   |
|--|------------------------|---|
|  | 15                     | 0 |
| TBA  | First Word to Transmit |   |
|  |                        |   |
| TBA + x ;<br>NBT is odd : x = NBT - 1<br>NBT is even : x = NBT - 2 | Last Word to Transmit  |   |

**IX.4 - Receive & Transmit HDLC Frame Interrupt**

| bit15 |   |    |    |    |    |    | bit8 |   | bit7 |   |         | bit 0 |      |     |          |  |  |
|-------|---|----|----|----|----|----|------|---|------|---|---------|-------|------|-----|----------|--|--|
| NS    | 0 | Tx | A4 | A3 | A2 | A1 | A0   | 0 | 0    | 0 | CFT/CFR | BE/BF | HALT | EOQ | RRLF/ERF |  |  |

This word is located in the HDLC interrupt queue ; IQSR Register indicates the size of this HDLC interrupt queue located in the external memory.

- NS** : New Status.  
 Before writing the features of event in the external memory the Interrupt Controller reads the NS bit :  
 if NS = 0, the Interrupt Controller puts this bit at '1' when it writes the status word of the frame which has been transmitted or received.  
 if NS = 1, the Interrupt Controller puts ICOV bit at '1' to generate an interrupt (IR Register).  
 When the microprocessor has read the status word, it puts this bit at '0' to acknowledge the new status. This location becomes free for the Interrupt Controller.

**Transmitter**

- Tx** : Tx = 1, Transmitter
- A4/0** : Tx HDLC Channel 0 to 31
- RRLF** : Ready to Repeat Last Frame  
 In consequence of event such as Abort Command HDLC, Controller is waiting Start or Continue.
- EOQ** : End of Queue  
 The Transmit DMA Controller (or the Receive DMA Controller) has encountered the current Descriptor with EOQ at "1". DMA Controller is waiting "Continue" from microprocessor.
- HALT** : The Transmit DMA Controller has received HALT from the microprocessor; it is waiting "Continue" from microprocessor.
- BE** : Buffer Empty  
 If BINT bit of Transmit Descriptor is at '1', the Transmit DMA Controller puts BE at "1" when the buffer has been emptied.
- CFT** : Correctly Frame Transmitted  
 A frame has been transmitted. This status is provided only if BINT bit of Transmit Descriptor is at '1'. CFT is located in the last descriptor if several descriptors are used to define a frame.

**IX - EXTERNAL REGISTERS (continued)****Receiver**

- Tx** : Tx = 0, Receiver
- A4/0** : Rx HDLC Channel 0 to 31
- ERF** : Error detected on Received Frame  
An error such as CRC not correct, Abort, Overflow has been detected.
- EOQ** : End of Queue  
The receive DMA Controller has encountered the current receive Descriptor with EOQ at "1".  
DMA Controller is waiting "Continue" from microprocessor.
- HALT** : The Receive DMA Controller has received HALT or ABORT (on the outside of frame) from the microprocessor; it is waiting "Continue" from the microprocessor.
- BE** : Buffer Filled  
If IBC bit of Receiver Descriptor is at '1', the Receive DMA Controller puts BF at "1" when it has filled the current buffer with data from the received frame.
- CFR** : Correctly Frame Received  
A receive frame is ended with a correct CRC. The end of the frame is located in the last descriptor if several Descriptors.

**IX.5 - Receive Command / Indicate Interrupt****IX.5.1 - Receive Command / Indicate Interrupt when TSV = 0**

Time Stamping not validated (bit of GCR Register)

| bit15 |    |    |    | bit8 |    |    |    | bit7 |    |    |    | bit 0 |    |    |    |
|-------|----|----|----|------|----|----|----|------|----|----|----|-------|----|----|----|
| NS    | Nu | Nu | Nu | G0   | A2 | A1 | A0 | Nu   | Nu | C6 | C5 | C4    | C3 | C2 | C1 |

This word is located in the Command/Indicate interrupt queue ; IQSR Register indicates the size of this interrupt queue located in the external memory.

- NS** : New Status.  
Before writing the features of event in the external memory the Interrupt Controller reads the NS bit :  
if NS = 0, the Interrupt Controller puts this bit at '1' when it writes the new primitive which has been received.  
if NS = 1, the Interrupt Controller puts ICOV bit at '1' to generate an interrupt (IR Register).  
When the microprocessor has read the status word, it puts this bit at '0' to acknowledge the new status. This location becomes free for the Interrupt Controller.
- G0** : G0 = 0, GCI 0 corresponding to DIN4 input and DOUT4 output.  
G0 = 1, GCI 1 corresponding to DIN5 input and DOUT5 output.
- A2/0** : COMMAND/INDICATE Channel 0 to 7 being owned by GCI 0 or GCI 1
- C6/1** : New Primitive received twice consecutively

**IX - EXTERNAL REGISTERS** (continued)**IX.5.2 - Receive Command / Indicate Interrupt when TSV = 1**

Time Stamping validated (bit of GCR Register)

| bit15 |     |     |     | bit8 |     |    |    | bit7 |    |    |    | bit 0 |    |    |    |
|-------|-----|-----|-----|------|-----|----|----|------|----|----|----|-------|----|----|----|
| NS    | Nu  | Nu  | Nu  | G0   | A2  | A1 | A0 | Nu   | Nu | C6 | C5 | C4    | C3 | C2 | C1 |
| T15   | T14 | T13 | T12 | T11  | T10 | T9 | T8 | T7   | T6 | T5 | T4 | T3    | T2 | T1 | T0 |

These two words are located in the Command/Indicate interrupt queue ; IQSR Register indicates the size of this interrupt queue located in the external memory.

- NS** : New Status.  
Before writing the features of event in the external memory the Interrupt Controller reads the NS bit :  
if NS = 0, the Interrupt Controller puts this bit at '1' when it writes the new primitive which has been received.  
if NS = 1, the Interrupt Controller puts ICOV bit at '1' to generate an interrupt (IR Register).  
When the microprocessor has read the status word, it puts this bit at '0' to acknowledge the new status. This location becomes free for the Interrupt Controller.
- G0** : G0 = 0, GCI 0 corresponding to DIN4 input and DOUT4 output.  
G0 = 1, GCI 1 corresponding to DIN5 input and DOUT5 output.
- A2/0** : COMMAND/INDICATE Channel 0 to 7 being owned by GCI 0 or GCI 1
- C6/1** : New Primitive received twice consecutively
- T15/0** : Binary counter value when a new primitive is occurred.

**IX.6 - Receive Monitor Interrupt****IX.6.1 - Receive Monitor Interrupt when TSV = 0**

TSV : Time Stamping not Validated (bit of GCR Register)

| bit15 |     |     |     | bit8 |     |     |     | bit7 |    |    |    | bit 0 |    |    |    |
|-------|-----|-----|-----|------|-----|-----|-----|------|----|----|----|-------|----|----|----|
| NS    |     |     |     | G0   | A2  | A1  | A0  |      |    |    |    | ODD   | A  | F  | L  |
| M18   | M17 | M16 | M15 | M14  | M13 | M12 | M11 | M8   | M7 | M6 | M5 | M4    | M3 | M2 | M1 |

These two words are transferred into the Monitor interrupt queue ; IQSR Register indicates the size of this interrupt queue located in the external memory.

- NS** : New Status.  
Before writing the features of event in the external memory the Interrupt Controller reads the NS bit :  
if NS = 0, the Interrupt Controller stores two new bytes M1/8 and M11/18 then puts NS bit at '1' when it writes the status of these two bytes which has been received.  
if NS = 1, the Interrupt Controller puts ICOV bit at '1' to generate an interrupt (IR Register).
- G0** : G0 = 0, GCI 0 corresponding to DIN4 input and DOUT4 output.  
G0 = 1, GCI 1 corresponding to DIN5 input and DOUT5 output.
- L** : Last byte  
L = 1, the following word contains the Last byte of message if ODD = 1, the previous word contains the Last byte of message if ODD = 0.  
L = 0, the following word and the previous word does not contains the Last byte of message.
- F** : First byte  
F = 1, the following word contains the First byte of message.  
F = 0, the following word does not contain the First byte of message.
- A** : Abort  
A = 1, Received message has been aborted.



**IX - EXTERNAL REGISTERS (continued)**

ODD : Odd byte number

ODD = 1, one byte has been written in the following word.

ODD = 0, two bytes have been written in the following word.

In case of V\* protocol ODD,A,F,L bits are respectively 1,0,1,1.

M1/8 : New Byte received twice consecutively if GCI Protocol has been validated.

Byte received once if V\* Protocol has been validated.

M11/18 : Next new Byte received twice consecutively if GCI Protocol has been validated.

This byte is at "1" in case of V\* protocol.

**IX.6.2 - Receive Monitor Interrupt when TSV = 1**

TSV : Time Stamping Validated (bit of GCR Register)

| bit15 |     |     |     | bit8 |     |     |     | bit7 |    |    |    | bit 0 |    |    |    |
|-------|-----|-----|-----|------|-----|-----|-----|------|----|----|----|-------|----|----|----|
| NS    |     |     |     | G0   | A2  | A1  | A0  |      |    |    |    | ODD   | A  | F  | L  |
| M18   | M17 | M16 | M15 | M14  | M13 | M12 | M11 | M8   | M7 | M6 | M5 | M4    | M3 | M2 | M1 |
| T15   | T14 | T13 | T12 | T11  | T10 | T9  | T8  | T7   | T6 | T5 | T4 | T3    | T2 | T1 | T0 |
| 0     | 0   | 0   | 0   | 0    | 0   | 0   | 0   | 0    | 0  | 0  | 0  | 0     | 0  | 0  | 0  |

These four words are located in the Monitor interrupt queue ; IQSR Register indicates the size of this interrupt queue located in the external memory.

NS : New Status.

Before writing the features of event in the external memory the Interrupt Controller reads the NS bit :

if NS = 0, the Interrupt Controller stores two new bytes M1/8 and M11/18 then puts NS bit at '1' when it writes the status of these two bytes which has been received.

if NS = 1, the Interrupt Controller puts ICOV bit at '1' to generate an interrupt (IR Register).

G0 : G0 = 0, GCI 0 corresponding to DIN4 input and DOUT4 output.

G0 = 1, GCI 1 corresponding to DIN5 input and DOUT5 output.

L : Last byte

L = 1, the following word contains the Last byte of message.

L = 0, the Last byte of message is not the following word.

F : First byte

F=1, the following word contains the First byte of message.

F=0, the First byte of message is not the following word.

A : Abort

A=1, Received message has been aborted.

ODD : Odd byte number

ODD = 1, one byte has been written in the following word.

ODD = 0, two bytes have been written in the following word.

M1/8 : New Byte received twice consecutively if GCI Protocol has been validated.


Byte received once if V\* Protocol has been validated.

M11/18 : Next new Byte received twice consecutively if GCI Protocol has been validated.

This byte is at "1" in case of V\* protocol.

T15/0 : Binary counter value when a new primitive is occurred.

**X - PACKAGE MECHANICAL DATA**  
160 PINS - PLASTIC QUAD FLAT PACK

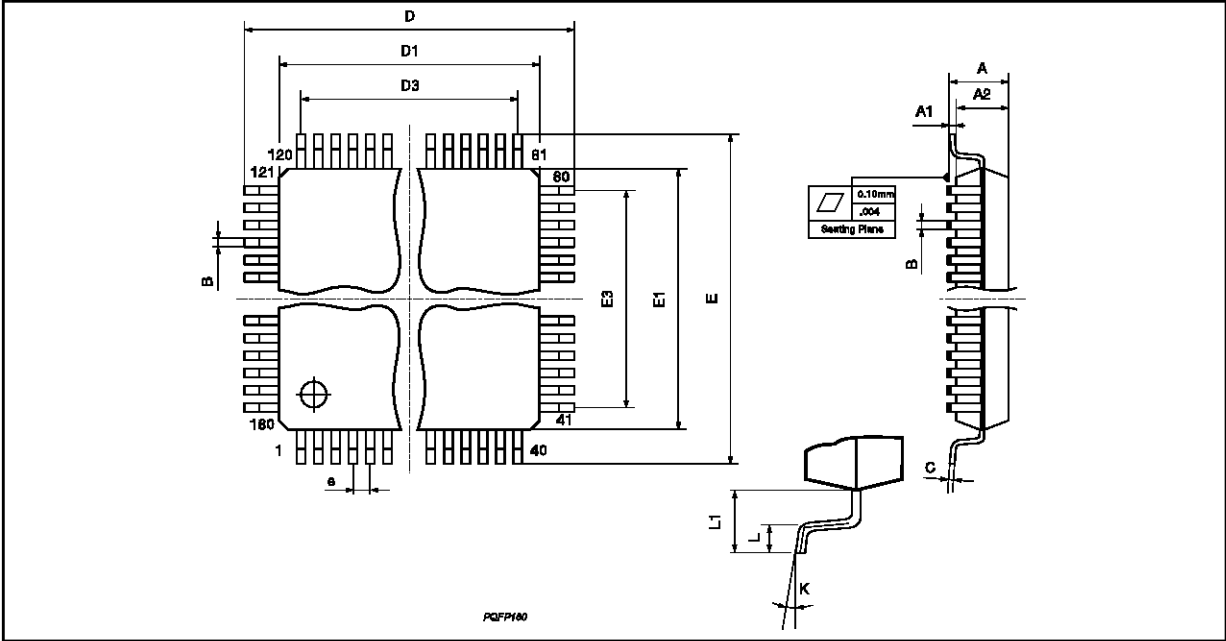

| Dimensions | Millimeters          |       |       | Inches |        |        |
|------------|----------------------|-------|-------|--------|--------|--------|
|            | Min.                 | Typ.  | Max.  | Min.   | Typ.   | Max.   |
| A          |                      |       | 4.07  |        |        | 0.160  |
| A1         | 0.25                 |       |       | 0.010  |        |        |
| A2         | 3.17                 | 3.42  | 3.67  | 0.125  | 0.135  | 0.144  |
| B          | 0.22                 |       | 0.38  | 0.009  |        | 0.015  |
| C          | 0.13                 |       | 0.23  | 0.005  |        | 0.009  |
| D          | 30.95                | 31.20 | 31.45 | 1.219  | 1.228  | 1.238  |
| D1         | 27.90                | 28.00 | 28.10 | 1.098  | 1.102  | 1.106  |
| D3         |                      | 25.35 |       |        | 0.998  |        |
| e          |                      | 0.65  |       |        | 0.026  |        |
| E          | 30.95                | 31.20 | 31.45 | 1.219  | 1.228  | 1.238  |
| E1         | 27.90                | 28.00 | 28.10 | 1.098  | 1.102  | 1.106  |
| E3         |                      | 25.35 |       |        | 0.998  |        |
| L          | 0.65                 | 0.80  | 0.95  | 0.026  | 0.0315 | 0.0374 |
| L1         |                      | 1.60  |       |        | 0.063  |        |
| K          | 0° (Min.), 7° (Max.) |       |       |        |        |        |

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No licence is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectronics.

© 1997 SGS-THOMSON Microelectronics - All Rights Reserved

Purchase of I<sup>2</sup>C Components of SGS-THOMSON Microelectronics, conveys a license under the Philips I<sup>2</sup>C Patent. Rights to use these components in a I<sup>2</sup>C system, is granted provided that the system conforms to the I<sup>2</sup>C Standard Specifications as defined by Philips.

**SGS-THOMSON Microelectronics GROUP OF COMPANIES**

Australia - Brazil - Canada - China - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco  
The Netherlands - Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A.