




1: LED yellow

2: LED green

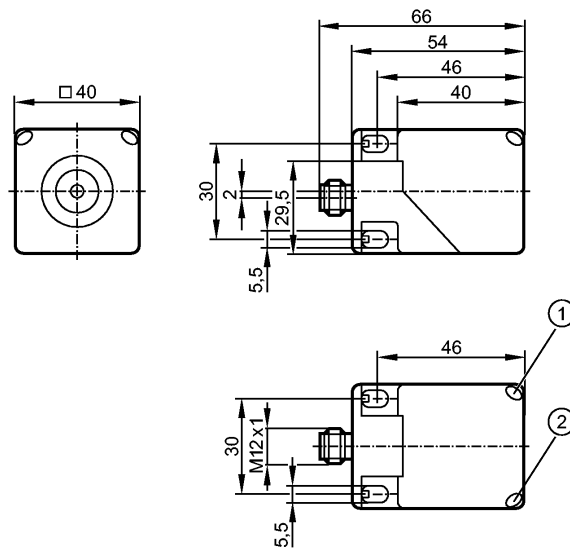

Made in Germany

Product characteristics

Inductive sensor

Rectangular, plastics

Connector

Sensing face in 5 positions selectable

gold-plated contacts

Sensing range 20 mm; [f] flush mountable

Electrical data

Electrical design	DC PNP
Operating voltage [V]	10...36 DC
Current consumption [mA]	< 20
Protection class	II
Reverse polarity protection	yes

Outputs

Output function	normally open
Voltage drop [V]	< 2.5
Leakage current [mA]	< 0.1
Current rating [mA]	200
Short-circuit protection	pulsed
Overload protection	yes
Switching frequency [Hz]	100

Range

Sensing range [mm]	20
Operating distance [mm]	0...16.2

Accuracy / deviations

Correction factors	mild steel = 1 / stainless steel approx. 0.7 / brass approx. 0.4 / Al approx. 0.4 / Cu approx. 0.3
Hysteresis [% of Sr]	1...20

IMC3020BBPKG/US-100-DPS

Inductive sensors

Environment

Ambient temperature	[°C]	-25...70
Protection		IP 67

Tests / approvals

EMC	EN 61000-4-2 ESD: 8 kV CD / 6 kV AD EN 61000-4-3 HF radiated: 10 V/m (80...1000 MHz) EN 61000-4-4 Burst: 2 kV EN 61000-4-5 Surge: 0.5 kV (line to line, Ri: 20hm) EN 61000-4-6 HF conducted: 10 V (0.15...80 MHz) EN 55011: class B
MTTF	[Years] 1590

Mechanical data

Mounting		flush mountable
Housing materials		PA (polyamide)
Weight	[kg]	0.144


Displays / operating elements

Output status indication	LED	yellow
Operation	LED	green

Electrical connection

Connection		M12 connector; rotatable, locking, gold-plated contacts
------------	--	---

Wiring



Remarks

Remarks		cULus - Class 2 source required
Pack quantity	[piece]	1