

## SUPER-SMALL PACKAGE CMOS VOLTAGE REGULATOR **S-817 Series**

The S-817 is an ultra compact 3-Pin positive voltage regulator developed using CMOS technology.

Housing into a miniaturized  $2.0 \times 2.1$  mm SC-82AB package, the S-817 offers key advantages for small, portable applications.

The S-817 allows many types of output capacitors including ceramic capacitors and ensures highly-stable operations at light load as low as  $1 \mu\text{A}$ .

### ■ Features

- Ultra-low current consumption: Operating current: Typ.  $1.2 \mu\text{A}$ , Max.  $2.5 \mu\text{A}$
- Output voltage:  $1.1$  to  $6.0 \text{ V}$ , selectable in  $0.1 \text{ V}$  steps.
- Output voltage accuracy:  $\pm 2.0\%$
- Output current:  $50 \text{ mA}$  capable ( $3.0 \text{ V}$  output product,  $V_{\text{IN}}=5 \text{ V}$ )<sup>\*1</sup>  
 $75 \text{ mA}$  capable ( $5.0 \text{ V}$  output product,  $V_{\text{IN}}=7 \text{ V}$ )<sup>\*1</sup>
- Dropout voltage: Typ.  $160 \text{ mV}$  ( $V_{\text{OUT}} = 5.0 \text{ V}$ ,  $I_{\text{OUT}} = 10 \text{ mA}$ )
- Low ESR capacitor (e.g., a ceramic capacitor of  $0.1 \mu\text{F}$  or more) can be used as an output capacitor.
- Short circuit protection for: Series A
- Excellent Line Regulation: Stable operation at light load of  $1 \mu\text{A}$

\*1. Attention should be paid to the power dissipation of the package when the output current is large.

### ■ Applications


- Power source for battery-powered devices
- Power source for personal communication devices
- Power source for home electric/electronic appliances

### ■ Package

| Package name          | Drawing code |         |         |         |
|-----------------------|--------------|---------|---------|---------|
|                       | Package      | Tape    | Reel    | Zigzag  |
| SC-82AB               | NP004-A      | NP004-A | NP004-A | —       |
| SOT-23-5              | MP005-A      | MP005-A | MP005-A | —       |
| SOT-89-3              | UP003-A      | UP003-A | UP003-A | —       |
| TO-92 (Bulk)          | YS003-B      | —       | —       | —       |
| TO-92 (Tape and reel) | YF003-A      | YF003-A | YF003-A | —       |
| TO-92 (Tape and ammo) | YF003-A      | YZ003-C | —       | YZ003-C |


■ **Block Diagrams**

**1. S-817A Series**

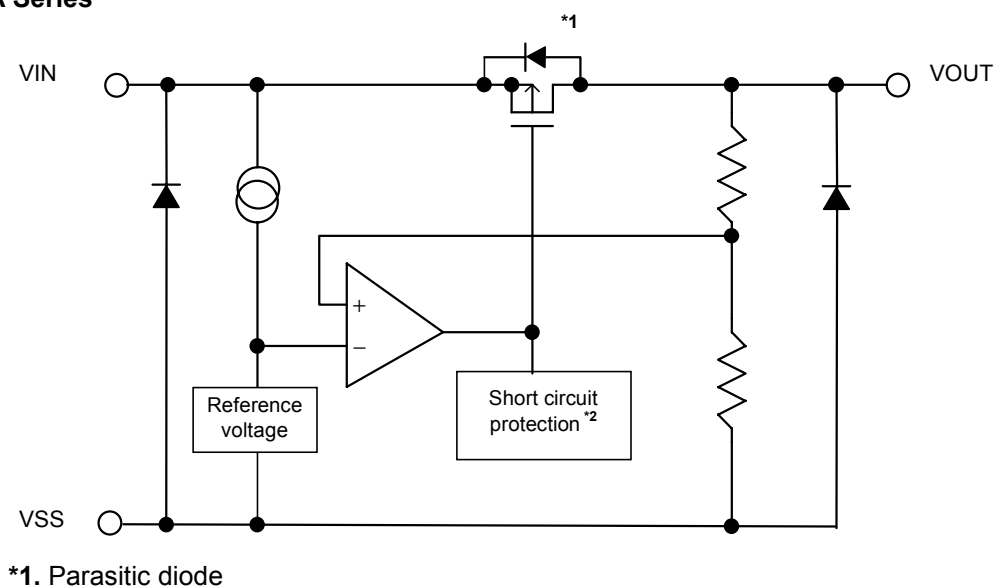

**Figure 1**

**2. S-817B Series**

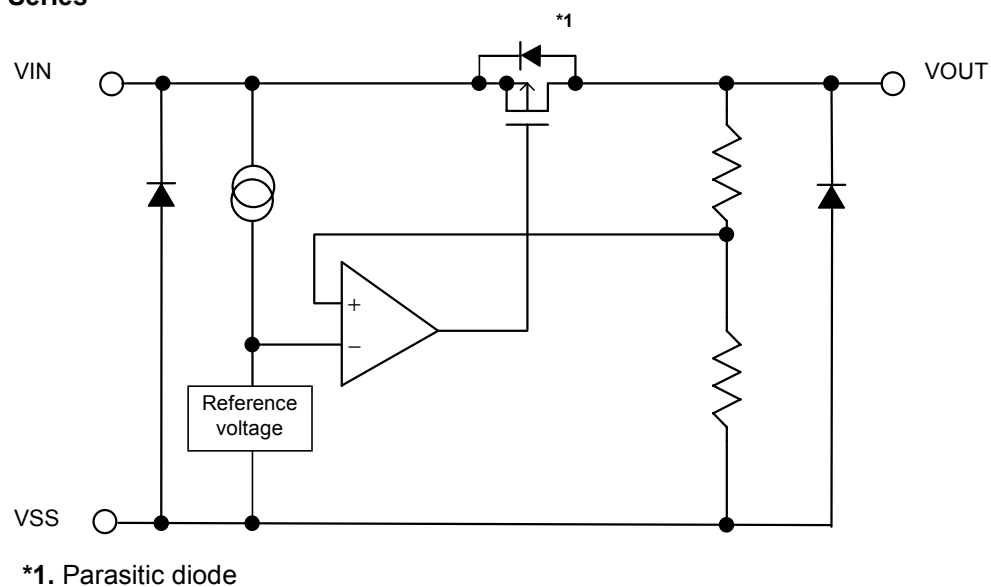


**Figure 2**

## ■ Product Code Structure

### 1. Product name


#### 1.1 Package SC-82A, SOT-23-5 & SOT-89-3

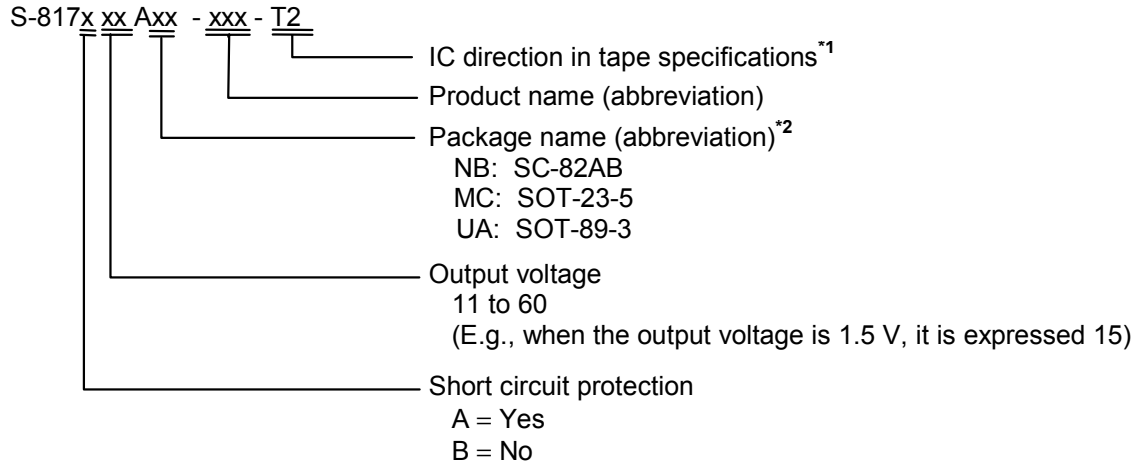

<sup>\*1</sup>. Refer to the specifications at the end of this book.

<sup>\*2</sup>. Refer to the "Product name list".

#### 1.2 Package TO-92

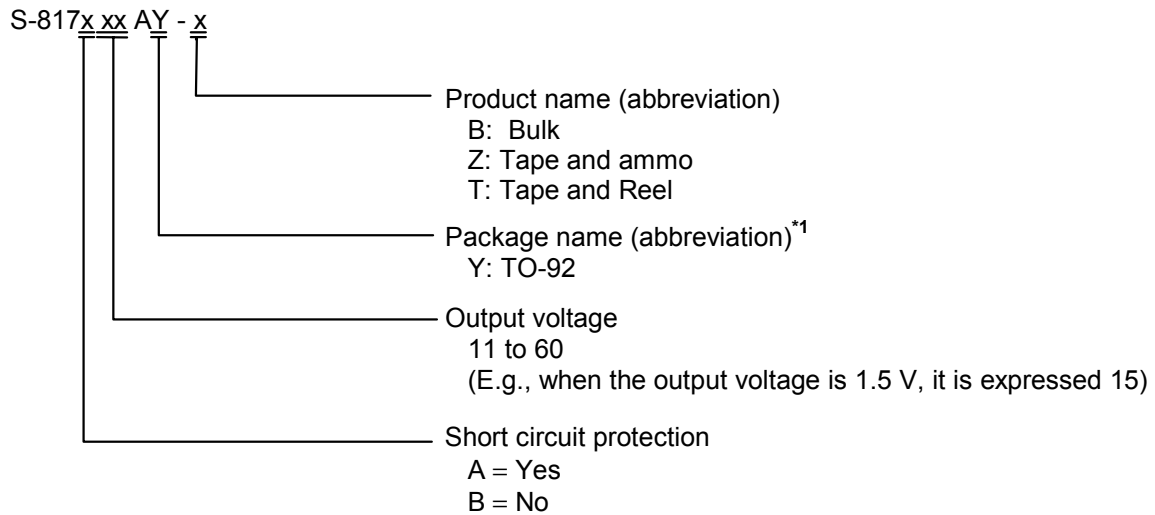

<sup>\*1</sup>. Refer to the "Product name list".

## 2. Product name list

### 2.1 S-817A series

**Table 1**

| Output voltage    | SC-82AB            | SOT-23-5       |
|-------------------|--------------------|----------------|
| 1.1 V $\pm$ 2.0 % | S-817A11ANB-CUA-T2 | —              |
| 1.2 V $\pm$ 2.0 % | S-817A12ANB-CUB-T2 | —              |
| 1.3 V $\pm$ 2.0 % | S-817A13ANB-CUC-T2 | —              |
| 1.4 V $\pm$ 2.0 % | S-817A14ANB-CUD-T2 | S-817A14AMC-T2 |
| 1.5 V $\pm$ 2.0 % | S-817A15ANB-CUE-T2 | —              |
| 1.6 V $\pm$ 2.0 % | S-817A16ANB-CUF-T2 | S-817A16AMC-T2 |
| 1.7 V $\pm$ 2.0 % | —                  | —              |
| 1.8 V $\pm$ 2.0 % | S-817A18ANB-CUH-T2 | —              |
| 1.9 V $\pm$ 2.0 % | S-817A19ANB-CUI-T2 | —              |
| 2.0 V $\pm$ 2.0 % | S-817A20ANB-CUJ-T2 | —              |
| 2.1 V $\pm$ 2.0 % | S-817A21ANB-CUK-T2 | —              |
| 2.2 V $\pm$ 2.0 % | S-817A22ANB-CUL-T2 | —              |
| 2.4 V $\pm$ 2.0 % | S-817A24ANB-CUN-T2 | —              |
| 2.5 V $\pm$ 2.0 % | S-817A25ANB-CUO-T2 | —              |
| 2.6 V $\pm$ 2.0 % | S-817A26ANB-CUP-T2 | —              |
| 2.7 V $\pm$ 2.0 % | S-817A27ANB-CUQ-T2 | —              |
| 2.8 V $\pm$ 2.0 % | S-817A28ANB-CUR-T2 | —              |
| 2.9 V $\pm$ 2.0 % | S-817A29ANB-CUS-T2 | —              |
| 3.0 V $\pm$ 2.0 % | S-817A30ANB-CUT-T2 | —              |
| 3.2 V $\pm$ 2.0 % | S-817A32ANB-CUV-T2 | —              |
| 3.3 V $\pm$ 2.0 % | S-817A33ANB-CUW-T2 | —              |
| 3.4 V $\pm$ 2.0 % | —                  | —              |
| 3.5 V $\pm$ 2.0 % | S-817A35ANB-CUY-T2 | —              |
| 3.6 V $\pm$ 2.0 % | S-817A36ANB-CUZ-T2 | —              |
| 3.7 V $\pm$ 2.0 % | S-817A37ANB-CVA-T2 | —              |
| 3.8 V $\pm$ 2.0 % | —                  | —              |
| 4.0 V $\pm$ 2.0 % | S-817A40ANB-CVD-T2 | —              |
| 4.2 V $\pm$ 2.0 % | S-817A42ANB-CVF-T2 | —              |
| 4.3 V $\pm$ 2.0 % | S-817A43ANB-CVG-T2 | —              |
| 4.5 V $\pm$ 2.0 % | S-817A45ANB-CVI-T2 | —              |
| 4.8 V $\pm$ 2.0 % | S-817A48ANB-CVL-T2 | —              |
| 5.0 V $\pm$ 2.0 % | S-817A50ANB-CVN-T2 | —              |
| 5.2 V $\pm$ 2.0 % | —                  | —              |
| 5.3 V $\pm$ 2.0 % | —                  | —              |
| 5.6 V $\pm$ 2.0 % | S-817A56ANB-CVT-T2 | —              |
| 6.0 V $\pm$ 2.0 % | —                  | —              |

**Remark** Please contact the SII marketing department for products with an output voltage over than those specified above.

## 2.2 S-817B series


**Table 2**

| Output voltage    | SOT-23-5           | SOT-89-3           | TO-92 <sup>*1</sup> |
|-------------------|--------------------|--------------------|---------------------|
| 1.1 V $\pm$ 2.0 % | S-817B11AMC-CWA-T2 | S-817B11AUA-CWA-T2 | S-817B11AY-x        |
| 1.2 V $\pm$ 2.0 % | S-817B12AMC-CWB-T2 | S-817B12AUA-CWB-T2 | —                   |
| 1.3 V $\pm$ 2.0 % | S-817B13AMC-CWC-T2 | —                  | —                   |
| 1.5 V $\pm$ 2.0 % | S-817B15AMC-CWE-T2 | S-817B15AUA-CWE-T2 | S-817B15AY-x        |
| 1.6 V $\pm$ 2.0 % | S-817B16AMC-CWF-T2 | S-817B16AUA-CWF-T2 | —                   |
| 1.7 V $\pm$ 2.0 % | S-817B17AMC-CWG-T2 | —                  | —                   |
| 1.8 V $\pm$ 2.0 % | S-817B18AMC-CWH-T2 | S-817B18AUA-CWH-T2 | —                   |
| 1.9 V $\pm$ 2.0 % | —                  | S-817B19AUA-CWI-T2 | —                   |
| 2.0 V $\pm$ 2.0 % | S-817B20AMC-CWJ-T2 | S-817B20AUA-CWJ-T2 | —                   |
| 2.2 V $\pm$ 2.0 % | S-817B22AMC-CWL-T2 | —                  | —                   |
| 2.5 V $\pm$ 2.0 % | S-817B25AMC-CWO-T2 | S-817B25AUA-CWO-T2 | S-817B25AY-x        |
| 2.7 V $\pm$ 2.0 % | —                  | S-817B27AUA-CWQ-T2 | —                   |
| 2.8 V $\pm$ 2.0 % | S-817B28AMC-CWR-T2 | —                  | —                   |
| 3.0 V $\pm$ 2.0 % | S-817B30AMC-CWT-T2 | S-817B30AUA-CWT-T2 | S-817B30AY-x        |
| 3.3 V $\pm$ 2.0 % | S-817B33AMC-CWW-T2 | S-817B33AUA-CWW-T2 | S-817B33AY-x        |
| 3.5 V $\pm$ 2.0 % | S-817B35AMC-CWY-T2 | S-817B35AUA-CWY-T2 | —                   |
| 3.6 V $\pm$ 2.0 % | —                  | S-817B36AUA-CWZ-T2 | —                   |
| 3.7 V $\pm$ 2.0 % | S-817B37AMC-CXA-T2 | S-817B37AUA-CXA-T2 | S-817B37AY-x        |
| 3.8 V $\pm$ 2.0 % | S-817B38AMC-CXB-T2 | S-817B38AUA-CXB-T2 | —                   |
| 4.0 V $\pm$ 2.0 % | S-817B40AMC-CXD-T2 | S-817B40AUA-CXD-T2 | S-817B40AY-x        |
| 4.2 V $\pm$ 2.0 % | S-817B42AMC-CXF-T2 | —                  | —                   |
| 4.3 V $\pm$ 2.0 % | —                  | S-817B43AUA-CXG-T2 | —                   |
| 4.5 V $\pm$ 2.0 % | —                  | S-817B45AUA-CXI-T2 | —                   |
| 5.0 V $\pm$ 2.0 % | S-817B50AMC-CXN-T2 | S-817B50AUA-CXN-T2 | S-817B50AY-x        |
| 5.2 V $\pm$ 2.0 % | —                  | S-817B52AUA-CXP-T2 | S-817B52AY-x        |
| 5.3 V $\pm$ 2.0 % | —                  | S-817B53AUA-CXQ-T2 | —                   |
| 5.6 V $\pm$ 2.0 % | —                  | S-817B56AUA-CXT-T2 | —                   |
| 6.0 V $\pm$ 2.0 % | —                  | S-817B60AUA-CXX-T2 | S-817B60AY-x        |


**\*1.** X changes according to the packing form in TO-92. Standard forms are B; Bulk and Z; Zigzag (tape and ammo).

**Remark** Please contact the SII marketing department for products with an output voltage over than those specified above.


## ■ Pin Configuration

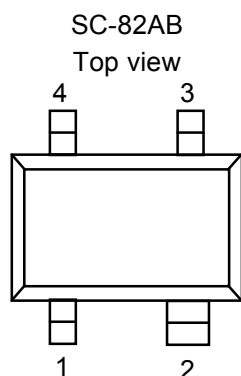


**Figure 3**



**Figure 4**



**Figure 5**



**Figure 6**

**Table 3**

| Pin No. | Symbol           | Description        |
|---------|------------------|--------------------|
| 1       | VSS              | GND pin            |
| 2       | VIN              | Input voltage pin  |
| 3       | VOUT             | Output voltage pin |
| 4       | NC <sup>*1</sup> | No connection      |

<sup>\*1</sup>. The NC pin is electrically open.  
The NC pin can be connected to VIN or VSS,

**Table 4**

| Pin No. | Symbol           | Description        |
|---------|------------------|--------------------|
| 1       | VSS              | GND pin            |
| 2       | VIN              | Input voltage pin  |
| 3       | VOUT             | Output voltage pin |
| 4       | NC <sup>*1</sup> | No connection      |
| 5       | NC <sup>*1</sup> | No connection      |

<sup>\*1</sup>. The NC pin is electrically open.  
The NC pin can be connected to VIN or VSS,

**Table 5**

| Pin No. | Symbol | Description        |
|---------|--------|--------------------|
| 1       | VSS    | GND pin            |
| 2       | VIN    | Input voltage pin  |
| 3       | VOUT   | Output voltage pin |

**Table 6**

| Pin No. | Symbol | Description        |
|---------|--------|--------------------|
| 1       | VSS    | GND pin            |
| 2       | VIN    | Input voltage pin  |
| 3       | VOUT   | Output voltage pin |

■ **Absolute Maximum Ratings**

**Table 7**

(Ta=25°C unless otherwise specified)

| Item                        | Symbol           | Absolute Maximum Rating                      |     | Units |
|-----------------------------|------------------|----------------------------------------------|-----|-------|
| Input voltage               | V <sub>IN</sub>  | V <sub>SS</sub> -0.3 to V <sub>SS</sub> +12  |     | V     |
| Output voltage              | V <sub>OUT</sub> | V <sub>SS</sub> -0.3 to V <sub>IN</sub> +0.3 |     |       |
| Power dissipation           | P <sub>D</sub>   | SC-82AB                                      | 150 | mW    |
|                             |                  | SOT-23-5                                     | 250 |       |
|                             |                  | SOT-89-3                                     | 500 |       |
|                             |                  | TO-92                                        | 400 |       |
| Operating temperature range | T <sub>opr</sub> | -40 to +85                                   |     | °C    |
| Storage temperature range   | T <sub>stg</sub> | -40 to +125                                  |     |       |

**Caution** The absolute maximum ratings are rated values exceeding which the product could suffer physical damage. These values must therefore not be exceeded under any conditions.

■ **Electrical Characteristics**

**1. S-817A series**

**Table 8** (Ta=25°C unless otherwise specified)

| Item                                                 | Symbol                                            | Conditions                                                                                 | Min.                                                                    | Typ.                | Max.                       | Units    | Test circuits |
|------------------------------------------------------|---------------------------------------------------|--------------------------------------------------------------------------------------------|-------------------------------------------------------------------------|---------------------|----------------------------|----------|---------------|
| Output voltage <sup>*1</sup>                         | V <sub>OUT(E)</sub>                               | V <sub>IN</sub> =V <sub>OUT(S)</sub> +2 V, I <sub>OUT</sub> =10 mA                         | V <sub>OUT(S)</sub> × 0.98                                              | V <sub>OUT(S)</sub> | V <sub>OUT(S)</sub> × 1.02 | V        | 1             |
| Output current <sup>*2</sup>                         | I <sub>OUT</sub>                                  | V <sub>OUT(S)</sub> +2 V<br>≤ V <sub>IN</sub> ≤10 V                                        | 1.1 V ≤ V <sub>OUT(S)</sub> ≤ 1.9 V                                     | 20                  | —                          | —        | mA            |
|                                                      |                                                   |                                                                                            | 2.0 V ≤ V <sub>OUT(S)</sub> ≤ 2.9 V                                     | 35                  | —                          | —        |               |
|                                                      |                                                   |                                                                                            | 3.0 V ≤ V <sub>OUT(S)</sub> ≤ 3.9 V                                     | 50                  | —                          | —        |               |
|                                                      |                                                   |                                                                                            | 4.0 V ≤ V <sub>OUT(S)</sub> ≤ 4.9 V                                     | 65                  | —                          | —        |               |
|                                                      |                                                   |                                                                                            | 5.0 V ≤ V <sub>OUT(S)</sub> ≤ 6.0 V                                     | 75                  | —                          | —        |               |
| Dropout voltage <sup>*3</sup>                        | V <sub>drop</sub>                                 | I <sub>OUT</sub> = 10 mA                                                                   | 1.1 V ≤ V <sub>OUT(S)</sub> ≤ 1.4 V                                     | —                   | 0.92                       | 1.58     | V             |
|                                                      |                                                   |                                                                                            | 1.5 V ≤ V <sub>OUT(S)</sub> ≤ 1.9 V                                     | —                   | 0.58                       | 0.99     |               |
|                                                      |                                                   |                                                                                            | 2.0 V ≤ V <sub>OUT(S)</sub> ≤ 2.4 V                                     | —                   | 0.40                       | 0.67     |               |
|                                                      |                                                   |                                                                                            | 2.5 V ≤ V <sub>OUT(S)</sub> ≤ 2.9 V                                     | —                   | 0.31                       | 0.51     |               |
|                                                      |                                                   |                                                                                            | 3.0 V ≤ V <sub>OUT(S)</sub> ≤ 3.4 V                                     | —                   | 0.25                       | 0.41     |               |
|                                                      |                                                   |                                                                                            | 3.5 V ≤ V <sub>OUT(S)</sub> ≤ 3.9 V                                     | —                   | 0.22                       | 0.35     |               |
|                                                      |                                                   |                                                                                            | 4.0 V ≤ V <sub>OUT(S)</sub> ≤ 4.4 V                                     | —                   | 0.19                       | 0.30     |               |
|                                                      |                                                   |                                                                                            | 4.5 V ≤ V <sub>OUT(S)</sub> ≤ 4.9 V                                     | —                   | 0.18                       | 0.27     |               |
|                                                      |                                                   |                                                                                            | 5.0 V ≤ V <sub>OUT(S)</sub> ≤ 5.4 V                                     | —                   | 0.16                       | 0.25     |               |
|                                                      |                                                   |                                                                                            | 5.5 V ≤ V <sub>OUT(S)</sub> ≤ 6.0 V                                     | —                   | 0.15                       | 0.23     |               |
| Line regulation 1                                    | Δ V <sub>OUT1</sub>                               | V <sub>OUT(S)</sub> + 1 V ≤ V <sub>IN</sub> ≤ 10 V, I <sub>OUT</sub> = 1 mA                | —                                                                       | 5                   | 20                         | mV       |               |
| Line regulation 2                                    | Δ V <sub>OUT2</sub>                               | V <sub>OUT(S)</sub> + 1 V ≤ V <sub>IN</sub> ≤ 10 V, I <sub>OUT</sub> = 1 μA                | —                                                                       | 5                   | 20                         |          |               |
| Load regulation                                      | Δ V <sub>OUT3</sub>                               | V <sub>IN</sub> =V <sub>OUT(S)</sub> +2 V                                                  | 1.1 V ≤ V <sub>OUT(S)</sub> ≤ 1.9 V,<br>1 μA ≤ I <sub>OUT</sub> ≤ 10 mA | —                   | 5                          | 20       |               |
|                                                      |                                                   |                                                                                            | 2.0 V ≤ V <sub>OUT(S)</sub> ≤ 2.9 V,<br>1 μA ≤ I <sub>OUT</sub> ≤ 20 mA | —                   | 10                         | 30       |               |
|                                                      |                                                   |                                                                                            | 3.0 V ≤ V <sub>OUT(S)</sub> ≤ 3.9 V,<br>1 μA ≤ I <sub>OUT</sub> ≤ 30 mA | —                   | 20                         | 45       |               |
|                                                      |                                                   |                                                                                            | 4.0 V ≤ V <sub>OUT(S)</sub> ≤ 4.9 V,<br>1 μA ≤ I <sub>OUT</sub> ≤ 40 mA | —                   | 25                         | 65       |               |
|                                                      |                                                   |                                                                                            | 5.0 V ≤ V <sub>OUT(S)</sub> ≤ 6.0 V,<br>1 μA ≤ I <sub>OUT</sub> ≤ 50 mA | —                   | 35                         | 80       |               |
| Output voltage temperature coefficient <sup>*4</sup> | $\frac{\Delta V_{OUT}}{\Delta T_a \cdot V_{OUT}}$ | V <sub>IN</sub> = V <sub>OUT(S)</sub> + 1 V, I <sub>OUT</sub> = 10 mA<br>–40°C ≤ Ta ≤ 85°C | —                                                                       | ±100                | —                          | ppm / °C |               |
| Current consumption                                  | I <sub>SS</sub>                                   | V <sub>IN</sub> = V <sub>OUT(S)</sub> + 2 V, no load                                       | —                                                                       | 1.2                 | 2.5                        | μA       | 2             |
| Input voltage                                        | V <sub>IN</sub>                                   | —                                                                                          | —                                                                       | —                   | 10                         | V        | 1             |
| Short current limit                                  | I <sub>OS</sub>                                   | V <sub>IN</sub> = V <sub>OUT(S)</sub> + 2 V,<br>V <sub>OUT</sub> pin = 0 V                 | —                                                                       | 40                  | —                          | mA       | 3             |

\*1. V<sub>OUT(S)</sub>=Specified output voltage

V<sub>OUT(E)</sub>=Effective output voltage, i.e., the output voltage when fixing I<sub>OUT</sub>(=10 mA) and inputting V<sub>OUT(S)</sub>+2.0 V.

\*2. Output current at which output voltage becomes 95% of V<sub>OUT(E)</sub> after gradually increasing output current.

\*3. V<sub>drop</sub> = V<sub>IN1</sub>–(V<sub>OUT(E)</sub> × 0.98), where V<sub>IN1</sub> is the Input voltage at which output voltage becomes 98% of V<sub>OUT(E)</sub> after gradually decreasing input voltage.

\*4. Temperature change ratio for the output voltage [mV/°C] is calculated using the following equation.

$$\frac{\Delta V_{OUT}}{\Delta T_a} [\text{mV}/^\circ\text{C}] = V_{OUT(S)} [\text{V}] \times \frac{\Delta V_{OUT}}{\Delta T_a \cdot V_{OUT}} [\text{ppm}/^\circ\text{C}] \div 1000$$

Temperature change ratio for output voltage

Specified output voltage

Output voltage temperature coefficient

**2. S-817B series**

**Table 9**

(Ta=25°C unless otherwise specified)

| Item                                      | Symbol                                              | Conditions                                                                                 | Min.                                                                 | Typ.                | Max.                       | Units   | Test circuits |
|-------------------------------------------|-----------------------------------------------------|--------------------------------------------------------------------------------------------|----------------------------------------------------------------------|---------------------|----------------------------|---------|---------------|
| Output voltage *1                         | V <sub>OUT(E)</sub>                                 | V <sub>IN</sub> =V <sub>OUT(S)</sub> +2 V, I <sub>OUT</sub> =10 mA                         | V <sub>OUT(S)</sub> × 0.98                                           | V <sub>OUT(S)</sub> | V <sub>OUT(S)</sub> × 1.02 | V       | 1             |
| Output current *2                         | I <sub>OUT</sub>                                    | V <sub>OUT(S)</sub> +2 V ≤ V <sub>IN</sub> ≤ 10 V                                          | 1.1 V ≤ V <sub>OUT(S)</sub> ≤ 1.9 V                                  | 20                  | —                          | —       | mA            |
|                                           |                                                     |                                                                                            | 2.0 V ≤ V <sub>OUT(S)</sub> ≤ 2.9 V                                  | 35                  | —                          | —       |               |
|                                           |                                                     |                                                                                            | 3.0 V ≤ V <sub>OUT(S)</sub> ≤ 3.9 V                                  | 50                  | —                          | —       |               |
|                                           |                                                     |                                                                                            | 4.0 V ≤ V <sub>OUT(S)</sub> ≤ 4.9 V                                  | 65                  | —                          | —       |               |
|                                           |                                                     |                                                                                            | 5.0 V ≤ V <sub>OUT(S)</sub> ≤ 6.0 V                                  | 75                  | —                          | —       |               |
| Dropout voltage *3                        | V <sub>drop</sub>                                   | I <sub>OUT</sub> = 10 mA                                                                   | 1.1 V ≤ V <sub>OUT(S)</sub> ≤ 1.4 V                                  | —                   | 0.92                       | 1.58    | V             |
|                                           |                                                     |                                                                                            | 1.5 V ≤ V <sub>OUT(S)</sub> ≤ 1.9 V                                  | —                   | 0.58                       | 0.99    |               |
|                                           |                                                     |                                                                                            | 2.0 V ≤ V <sub>OUT(S)</sub> ≤ 2.4 V                                  | —                   | 0.40                       | 0.67    |               |
|                                           |                                                     |                                                                                            | 2.5 V ≤ V <sub>OUT(S)</sub> ≤ 2.9 V                                  | —                   | 0.31                       | 0.51    |               |
|                                           |                                                     |                                                                                            | 3.0 V ≤ V <sub>OUT(S)</sub> ≤ 3.4 V                                  | —                   | 0.25                       | 0.41    |               |
|                                           |                                                     |                                                                                            | 3.5 V ≤ V <sub>OUT(S)</sub> ≤ 3.9 V                                  | —                   | 0.22                       | 0.35    |               |
|                                           |                                                     |                                                                                            | 4.0 V ≤ V <sub>OUT(S)</sub> ≤ 4.4 V                                  | —                   | 0.19                       | 0.30    |               |
|                                           |                                                     |                                                                                            | 4.5 V ≤ V <sub>OUT(S)</sub> ≤ 4.9 V                                  | —                   | 0.18                       | 0.27    |               |
|                                           |                                                     |                                                                                            | 5.0 V ≤ V <sub>OUT(S)</sub> ≤ 5.4 V                                  | —                   | 0.16                       | 0.25    |               |
|                                           |                                                     |                                                                                            | 5.5 V ≤ V <sub>OUT(S)</sub> ≤ 6.0 V                                  | —                   | 0.15                       | 0.23    |               |
| Line regulation 1                         | Δ V <sub>OUT1</sub>                                 | V <sub>OUT(S)</sub> + 1 V ≤ V <sub>IN</sub> ≤ 10 V, I <sub>OUT</sub> = 1 mA                | —                                                                    | 5                   | 20                         | mV      |               |
| Line regulation 2                         | Δ V <sub>OUT2</sub>                                 | V <sub>OUT(S)</sub> + 1 V ≤ V <sub>IN</sub> ≤ 10 V, I <sub>OUT</sub> = 1 μA                | —                                                                    | 5                   | 20                         |         |               |
| Load regulation                           | Δ V <sub>OUT3</sub>                                 | V <sub>IN</sub> =V <sub>OUT(S)</sub> +2 V                                                  | 1.1 V ≤ V <sub>OUT(S)</sub> ≤ 1.9 V, 1 μA ≤ I <sub>OUT</sub> ≤ 10 mA | —                   | 5                          | 20      |               |
|                                           |                                                     |                                                                                            | 2.0 V ≤ V <sub>OUT(S)</sub> ≤ 2.9 V, 1 μA ≤ I <sub>OUT</sub> ≤ 20 mA | —                   | 10                         | 30      |               |
|                                           |                                                     |                                                                                            | 3.0 V ≤ V <sub>OUT(S)</sub> ≤ 3.9 V, 1 μA ≤ I <sub>OUT</sub> ≤ 30 mA | —                   | 20                         | 45      |               |
|                                           |                                                     |                                                                                            | 4.0 V ≤ V <sub>OUT(S)</sub> ≤ 4.9 V, 1 μA ≤ I <sub>OUT</sub> ≤ 40 mA | —                   | 25                         | 65      |               |
|                                           |                                                     |                                                                                            | 5.0 V ≤ V <sub>OUT(S)</sub> ≤ 6.0 V, 1 μA ≤ I <sub>OUT</sub> ≤ 50 mA | —                   | 35                         | 80      |               |
| Output voltage temperature coefficient *4 | $\frac{\Delta V_{OUT}}{\Delta T_a \bullet V_{OUT}}$ | V <sub>IN</sub> = V <sub>OUT(S)</sub> + 1 V, I <sub>OUT</sub> = 10 mA<br>−40°C ≤ Ta ≤ 85°C | —                                                                    | ±100                | —                          | ppm /°C |               |
| Current consumption                       | I <sub>SS</sub>                                     | V <sub>IN</sub> = V <sub>OUT(S)</sub> + 2 V, no load                                       | —                                                                    | 1.2                 | 2.5                        | μA      | 2             |
| Input voltage                             | V <sub>IN</sub>                                     | —                                                                                          | —                                                                    | —                   | 10                         | V       | 1             |

\*1. V<sub>OUT(S)</sub>=Specified output voltage

V<sub>OUT(E)</sub>=Effective output voltage, i.e., the output voltage when fixing I<sub>OUT</sub>(=10 mA) and inputting V<sub>OUT(S)</sub>+2.0 V.

\*2. Output current at which output voltage becomes 95% of V<sub>OUT(E)</sub> after gradually increasing output current.

\*3. V<sub>drop</sub> = V<sub>IN1</sub>−(V<sub>OUT(E)</sub> × 0.98), where V<sub>IN1</sub> is the Input voltage at which output voltage becomes 98% of V<sub>OUT(E)</sub> after gradually decreasing input voltage.

\*4. Temperature change ratio for the output voltage [mV/°C] is calculated using the following equation.


$$\frac{\Delta V_{OUT}}{\Delta T_a} [\text{mV}/^\circ\text{C}] = V_{OUT(S)} [\text{V}] \times \frac{\Delta V_{OUT}}{\Delta T_a \bullet V_{OUT}} [\text{ppm}/^\circ\text{C}] \div 1000$$

Temperature change ratio for output voltage


Specified output voltage

Output voltage temperature coefficient


■ **Test Circuits**

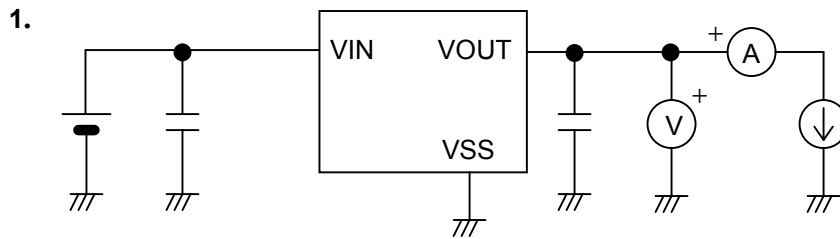

**Figure 7**

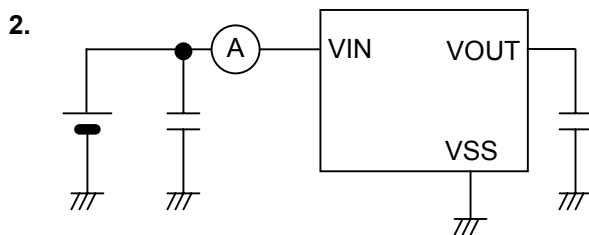


**Figure 8**

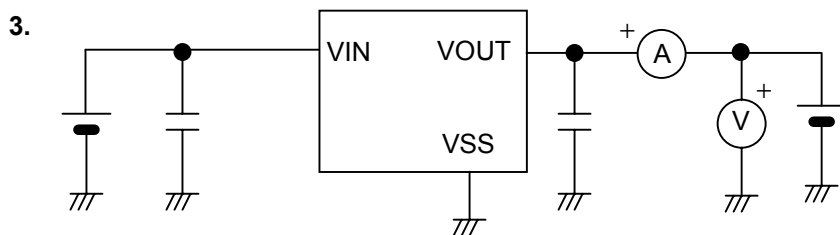

**Figure 9**

■ **Standard Circuit**

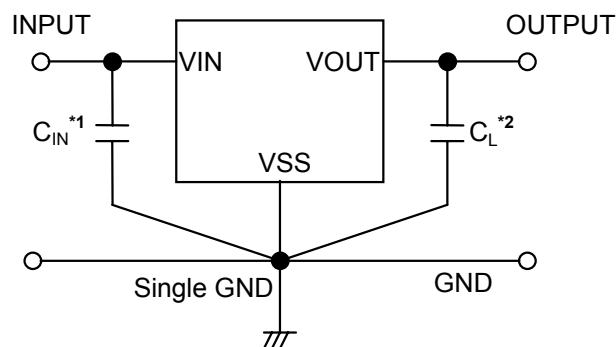

\*1.  $C_{IN}$  is a capacitor used to stabilize input.

\*2. A ceramic capacitor of 0.1  $\mu\text{F}$  or more can be used for  $C_L$ .

**Figure 10**

**Caution** The above connection diagram and constant will not guarantee successful operation.  
 Perform through evaluation using the actual application to set the constant.

## ■ Technical Terms

### 1. Low ESR

ESR is the abbreviation for Equivalent Series Resistance.

Low ESR output capacitors ( $C_L$ ) can be used in the S-817 Series.

### 2. Output voltage ( $V_{OUT}$ )

The accuracy of the output voltage is  $\pm 2.0\%$  guaranteed under the specified conditions for input voltage, which differs depending upon the product items, output current, and temperature.

**Caution** If the above conditions change, the output voltage value may vary and go out of the accuracy range of the output voltage. See the electrical characteristics and characteristics data for details.

### 3. Line regulations 1 and 2 ( $\Delta V_{OUT1}$ , $\Delta V_{OUT2}$ )

Indicate the input voltage dependencies of output voltage. That is, the values show how much the output voltage changes due to a change in the input voltage with the output current remained unchanged.

### 4. Load regulation ( $\Delta V_{OUT3}$ )

Indicates the output current dependencies of output voltage. That is, the values show how much the output voltage changes due to a change in the output current with the input voltage remained unchanged.

### 5. Dropout voltage ( $V_{drop}$ )


Indicates a difference between input voltage ( $V_{IN1}$ ) and output voltage when output voltage falls by 98% of  $V_{OUT(E)}$  by gradually decreasing the input voltage ( $V_{IN}$ ).

$$V_{drop} = V_{IN1} - [V_{OUT(E)} \times 0.98]$$

## 6. Temperature coefficient of output voltage $\left( \frac{\Delta V_{OUT}}{\Delta T_a \bullet V_{OUT}} \right)$

The output voltage lies in the shaded area in the whole operating temperature shown in Figure 11 when the temperature coefficient of the output voltage is  $\pm 100 \text{ ppm}/^\circ\text{C}$ .

**Ex. S-817A15A Typ.**

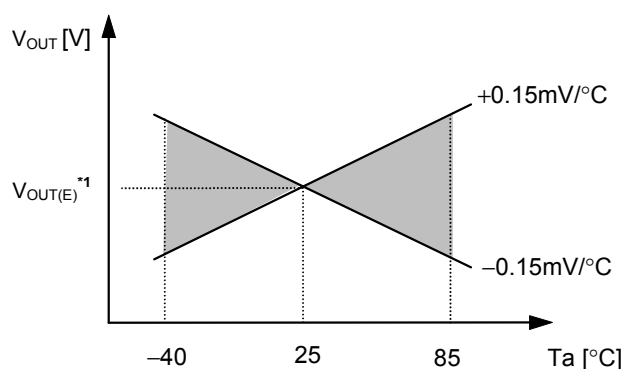

\*1.  $V_{OUT(E)}$  is the value of the output voltage measured at  $25^\circ\text{C}$ .

**Figure 11**

Temperature change ratio for output voltage  $[\text{mV}/^\circ\text{C}]$  is calculated by using the following equation.

$$\frac{\Delta V_{OUT}}{\Delta T_a} [\text{mV}/^\circ\text{C}] = V_{OUT(S)} [\text{V}] \times \frac{\Delta V_{OUT}}{\Delta T_a \bullet V_{OUT}} [\text{ppm}/^\circ\text{C}] \div 1000$$


Temperatures change ratio for output voltage

Specified output voltage

Output voltage temperature coefficient

## ■ Operation

### 1. Basic Operation

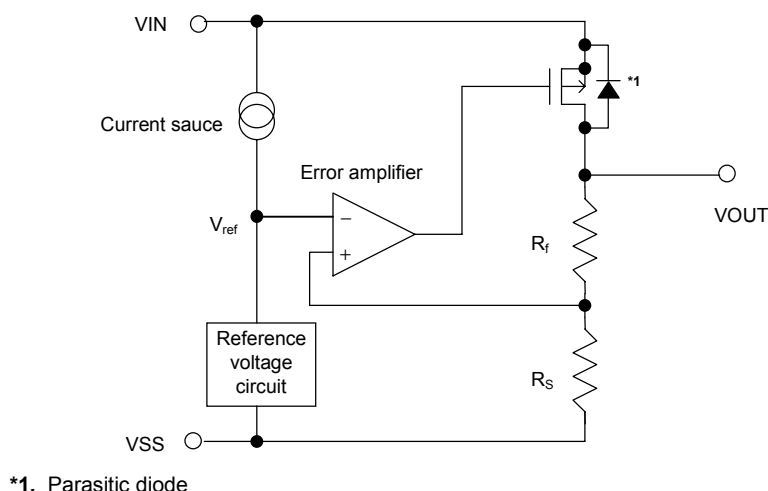

**Figure 12**

Figure 12 shows the block diagram of the S-817 series. The error amplifier compares a reference voltage  $V_{ref}$  with a part of the output voltage divided by the feedback resistors  $R_s$  and  $R_f$ , and supplies the gate voltage to the output transistor, necessary to ensure certain output voltage independent from change of input voltage and temperature.

### 2. Output Transistor

The S-817 series uses a P-channel MOS FET as the output transistor.

Be sure that  $V_{OUT}$  does not exceed  $V_{IN} + 0.3$  V to prevent the voltage regulator from being damaged due to inverse current flowing from VOUT pin through a parasitic diode to VIN pin.

### 3. Short Circuit Protection

The S-817A series incorporates a short circuit protection to protect the output transistor against short circuit between VOUT pin and VSS pin. Installation of the short-circuit protection which protects the output transistor against short-circuit between VOUT and VSS can be selected in the S-812C series. The short-circuit protection controls output current as shown in the typical characteristics, (1) Output Voltage versus Output Current, and suppresses output current at about 40 mA even if VOUT and VSS pins are short-circuited.

The short-circuit protection can not be a thermal protection at the same time. Attention should be paid to the Input voltage and the load current under the actual condition so as not to exceed the power dissipation of the package including the case for short-circuit.

When the output current is large and the difference between input and output voltage is large even if not shorted, the short-circuit protection may work and the output current is suppressed to the specified value. Products without short-circuit protection can provide comparatively large current by removing a short-circuit protection.

## ■ Selection of Output Capacitor ( $C_L$ )

To stabilize operation against variation in output load, a capacitor ( $C_L$ ) must be mounted between VOUT and VSS in the S-817 series because the phase is compensated with the help of the internal phase compensation circuit and the ESR of the output capacitor.

When selecting a ceramic or an OS capacitor, capacitance should be 0.1  $\mu\text{F}$  or more, and when selecting a tantalum or an aluminum electrolytic capacitor, capacitance should be 0.1  $\mu\text{F}$  or more and ESR 30  $\Omega$  or less.

When an aluminum electrolytic capacitor is used attention should be especially paid to since the ESR of the aluminum electrolytic capacitor increases at low temperature and possibility of oscillation becomes large.


Sufficient evaluation including temperature characteristics is indispensable.

Overshoot and undershoot characteristics differ depending upon the type of the output capacitor.

Refer to  $C_L$  dependencies in "Transient Response Characteristics".

## ■ Applied Circuits

### 1. Output Current Boosting Circuit

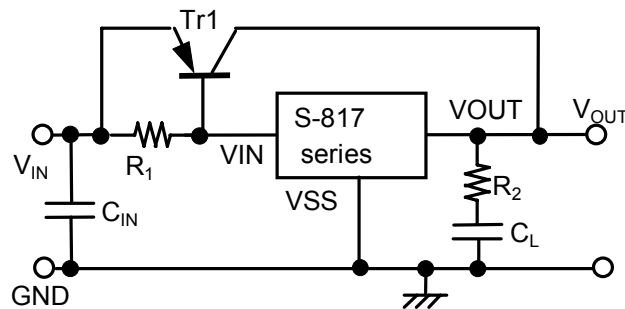

**Figure 13**

As shown in Figure 13, the output current can be boosted by externally attaching a PNP transistor. The base current of the PNP transistor is controlled so that output voltage  $V_{OUT}$  goes the voltage specified in the S-817 when base-emitter voltage  $V_{BE}$  necessary to turn on the PNP transistor is obtained between input voltage  $V_{IN}$  and S-817 power source pin VIN.

The following are tips and hints for selecting and ensuring optimum use of external parts

- PNP transistor Tr1:
  1. Set  $h_{FE}$  to approx. 100 to 400.
  2. Confirm that no problem occurs due to power dissipation under normal operation conditions.
- Resistor  $R_1$ :


Generally set  $R_1$  to  $1\text{ k}\Omega \div V_{OUT(S)}$  (the voltage specified in the S-817 Series) or more.
- Output capacitor  $C_L$ :

Output capacitor  $C_L$  is effective in minimizing output fluctuation at powering on or due to power or load fluctuation, but oscillation might occur. Always connect resistor  $R_2$  in series to output capacitor  $C_L$ .
- Resistor  $R_2$ : Set  $R_2$  to  $2\text{ }\Omega \times V_{OUT(S)}$  or more.
- DO NOT attach a capacitor between the S-817 power source VIN and GND pins or between base and emitter of the PNP transistor to avoid oscillation.
- To improve transient response characteristics of the output current boosting circuit shown in Figure 13, check that no problem occurs due to output fluctuation at powering on or due to power or load fluctuation under normal operating conditions.
- Pay attention to the short current limit circuit incorporated into the S-817 Series because it does not function as a shortcircuiting protection circuit for this boosting circuit.

The following graphs show the examples of input-output voltage characteristics ( $T_a=25^\circ\text{C}$ , typ.) in the output current boosting circuit:


**(1) S-817A11ANB/S-817B11AMC**

Tr1 : 2SA1213Y,  $R_1$  : 1 k $\Omega$ ,  $C_L$  : 10  $\mu\text{F}$ ,  
 $R_2$  : 2  $\Omega$

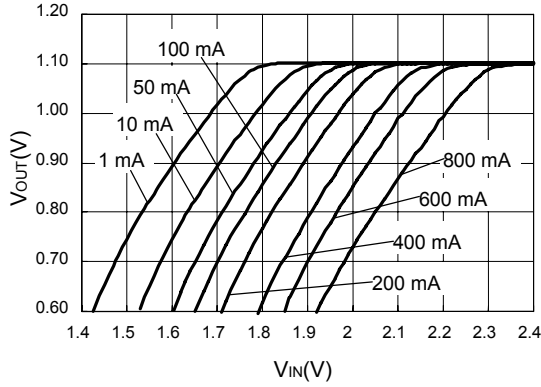

**(2) S-817A50ANB/S-817B50AMC**

Tr1 : 2SA1213Y,  $R_1$  : 200  $\Omega$ ,  $C_L$  : 10  $\mu\text{F}$ ,  
 $R_2$  : 10  $\Omega$

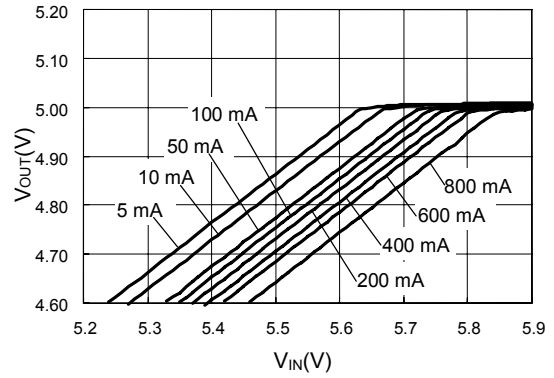

**2. Constant Current Circuit**

**(1) Constant Current Circuit**

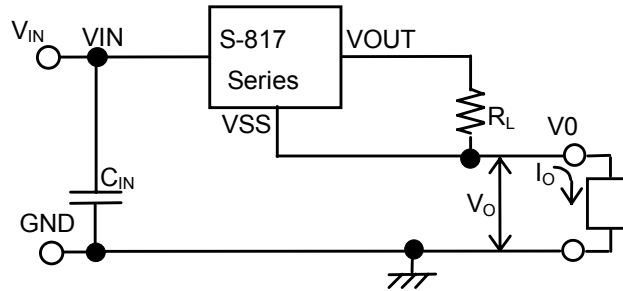


Figure 14

**(2) Constant Current Boosting Circuit**

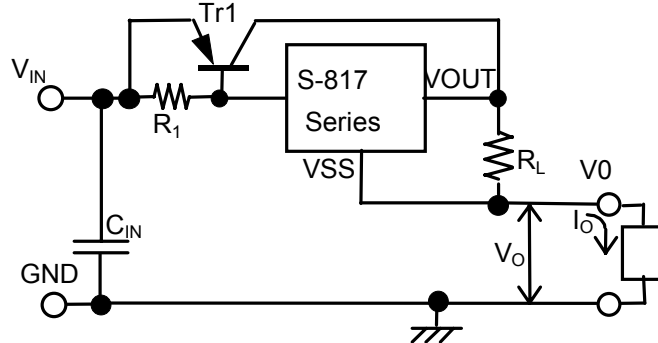


Figure 15

The S-817 Series can be configured as a constant current circuit. See Figure 14 & 15.

Constant amperage  $I_O$  is calculated using the following equation ( $V_{OUT(E)}$ : Effective output voltage):


$$I_O = (V_{OUT(E)} \div R_L) + I_{SS}$$

Please note that it is impossible to set constant amperage  $I_O$  in case of circuit (1) of Figure 14 to the value exceeding the drive ability of the S-817.


However, circuit (2) of Figure 15 is an example to set constant amperage to the value exceeding the drive ability of the S-817. Circuit (2) incorporates a current boosting circuit. The maximum input voltage of the constant current circuit is the value obtained by adding 10 V to voltage  $V_O$  of the device. It is not recommended to attach a capacitor between the S-817 power source  $V_{IN}$  and  $V_{SS}$  pins or between output  $V_{OUT}$  and  $V_{SS}$  pins because rush current flows at powering on. An example of input voltage between  $V_{IN}$  and  $V_O$  in circuit (2) vs.  $I_O$  current characteristics

$V_{IN}$ ,  $V_O$  pins, Input voltage -  $I_O$  current

S-817A11ANB, S-817B11AMC, Tr : 2SK1213Y,  $R_1$  : 1 k $\Omega$ ,  $V_O$ =2 V

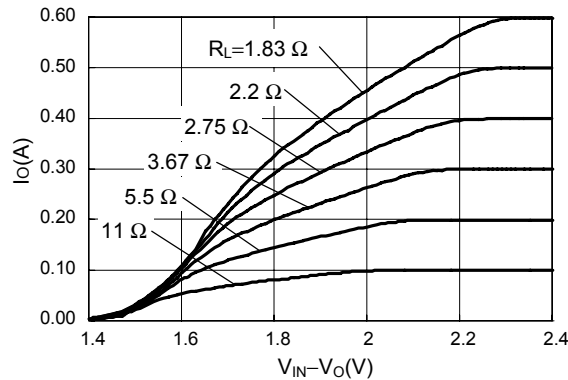

### 3. Output Voltage Adjustment Circuit

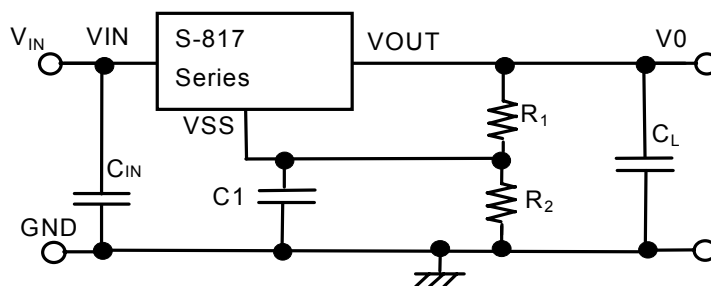

**Figure 16**

The output voltage can be boosted by using the configuration shown in Figure 16. The output Voltage  $V_O$  can be calculated using the following equation ( $V_{OUT(E)}$ :Effective output voltage):

$$V_O = V_{OUT(E)} \times (R_1 + R_2) \div R_1 + R_2 \times I_{SS}$$

Set  $R_1$  and  $R_2$  to high values of resistance so as not to be affected by current consumption  $I_{SS}$ . Capacitor  $C_1$  is effective in minimizing output fluctuation at powering on or due to power or load fluctuation. Determine the optimum value on your actual device. But it is not also recommended to attach a capacitor between the S-817 power source  $V_{IN}$  and  $V_{SS}$  pins or between output  $V_{OUT}$  and  $V_{SS}$  pins because output fluctuation or oscillation at powering on might occur. As shown in figure 16, a capacitor must be mounted between  $V_{IN}$  and GND, and between  $V_{OUT}$  and GND.

### ■ Precautions


- Design wiring patterns for  $V_{IN}$ ,  $V_{OUT}$  and GND pins to hold low impedance.  
When mounting an output capacitor between the  $V_{OUT}$  and  $V_{SS}$  pins ( $C_L$ ) and a capacitor for stabilizing the input between  $V_{IN}$  and  $V_{SS}$  pins ( $C_{IN}$ ), the distance from the capacitor to the  $V_{OUT}$  pin and to the  $V_{SS}$  pin should be as short as possible.
- Note that output voltage may be increased at low load current of less than 1  $\mu A$ .
- To prevent oscillation, it is recommended to use the external parts under the following conditions.  
Output capacitor ( $C_L$ ): 0.1  $\mu F$  or more  
Equivalent Series Resistance (ESR): 30  $\Omega$  or less  
Input series resistance ( $R_{IN}$ ): 10  $\Omega$  or less
- A voltage regulator may oscillate when power source impedance is high and input capacitor is low or not connected.
- The application condition for input voltage and load current should not exceed the package power dissipation.
- SII claims no responsibility for any and all disputes arising out of or in connection with any infringement of the products including this IC upon patents owned by a third party.
- Do not apply an electrostatic discharge to this IC that exceeds the performance ratings of the built-in electrostatic protection circuit.

■ **Typical Operating Characteristics**


**(1) Output Voltage vs. Output Current (when load current increases)**

**(a) S-817A Series**


S-817A11A(Ta=25°C)

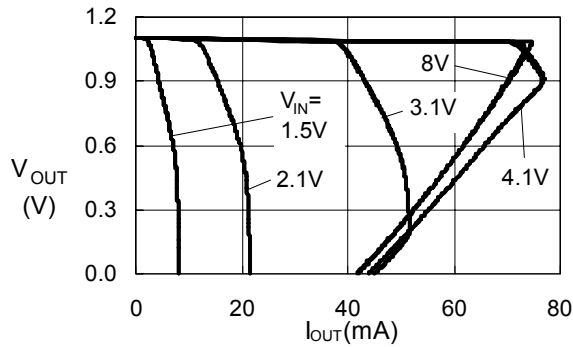


S-817A20A(Ta=25°C)

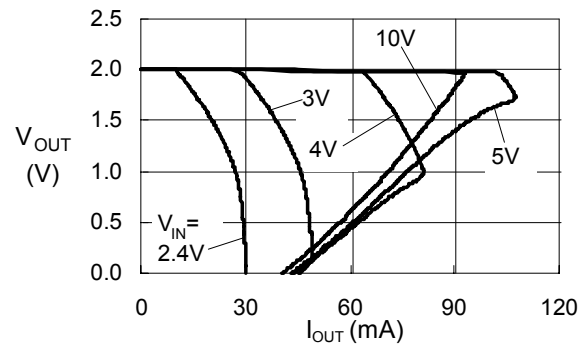

S-817A30A(Ta=25°C)

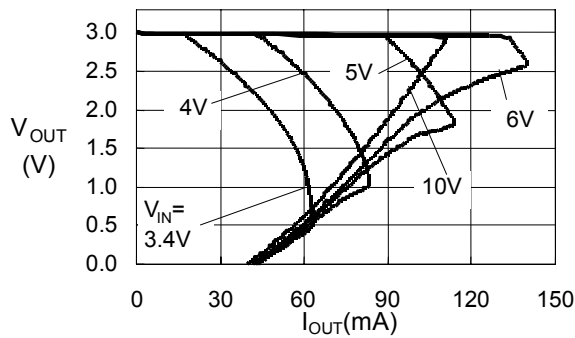


S-817A50A(Ta=25°C)

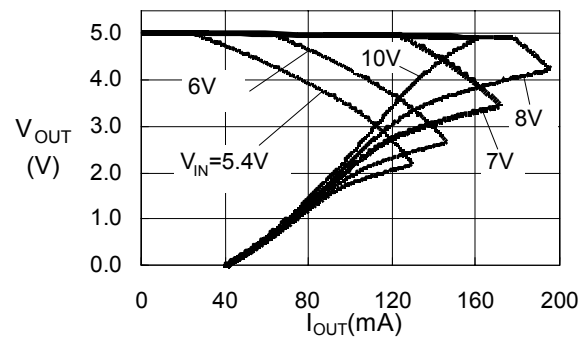


**(b) S-817B series**


S-817B11A(Ta=25°C)

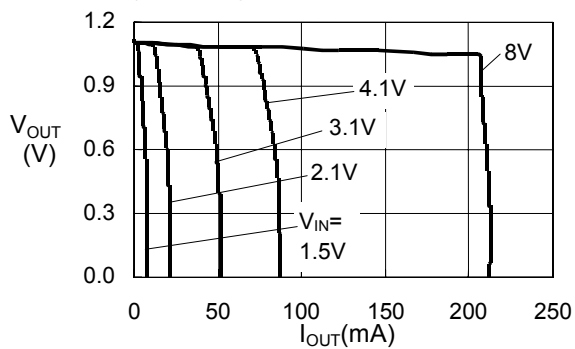


S-817B20A(Ta=25°C)

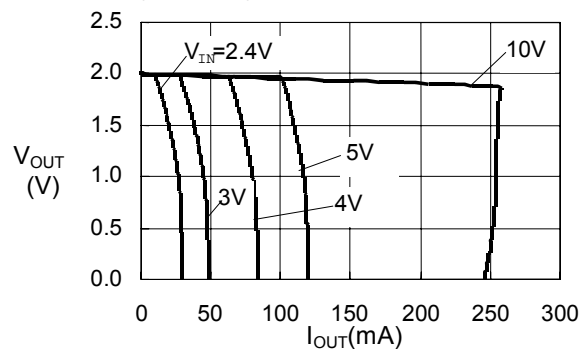

S-817B30A(Ta=25°C)

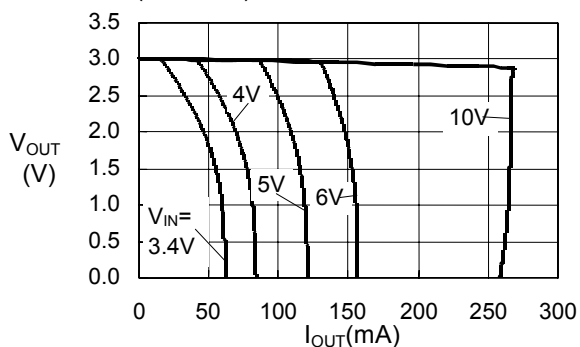


S-817B50A(Ta=25°C)

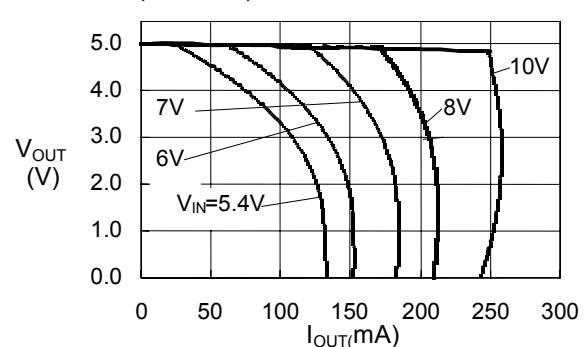


**(2) Output Voltage vs. Input Voltage**


S-817A11A/S-817B11A( $T_a=25^\circ\text{C}$ )

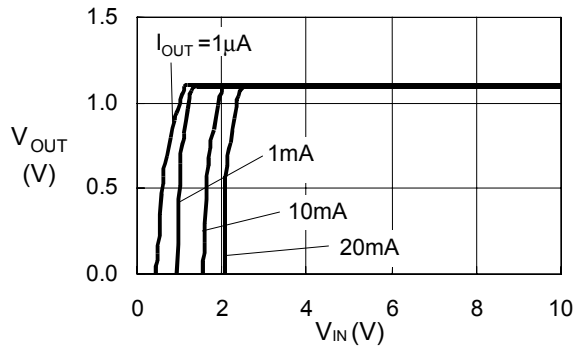


S-817A20A/S-817B20A( $T_a=25^\circ\text{C}$ )

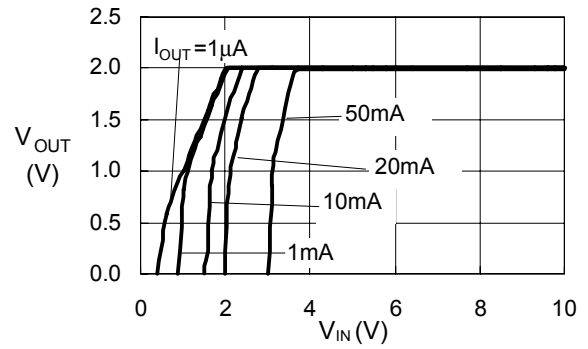





S-817A30A/S-817B30A( $T_a=25^\circ\text{C}$ )

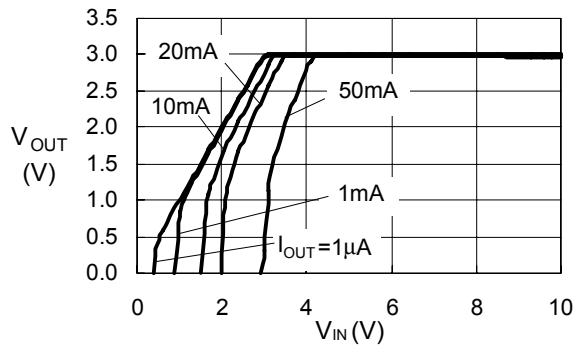





S-817A50A/S-817B50A( $T_a=25^\circ\text{C}$ )

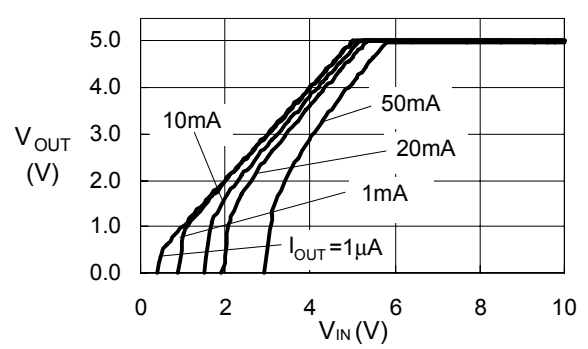

**(3) Maximum Output Current vs. Input Voltage**  
**(a) S-817A Series**

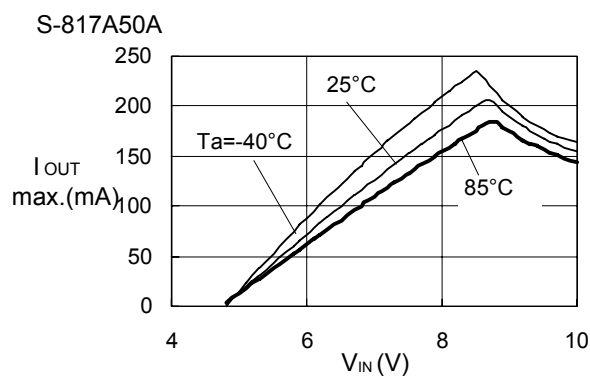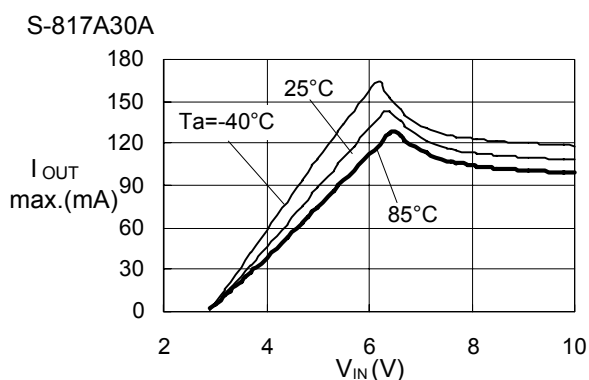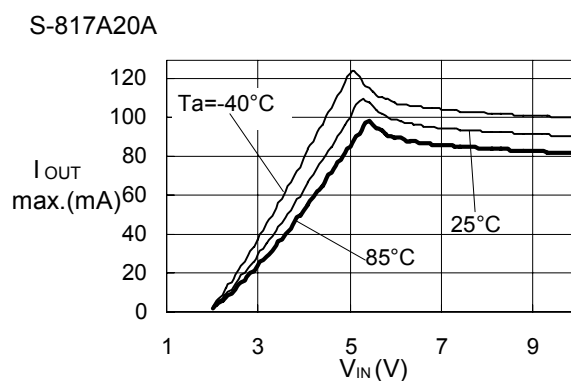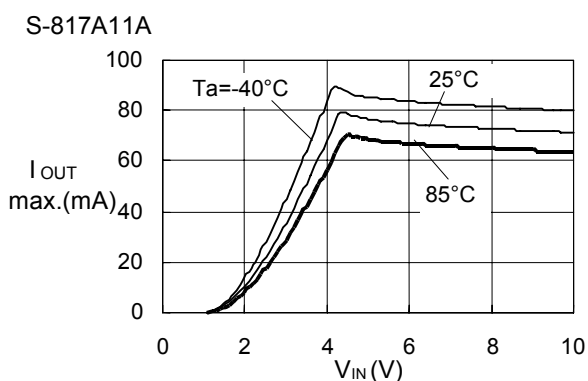


**(b) S-817B Series**

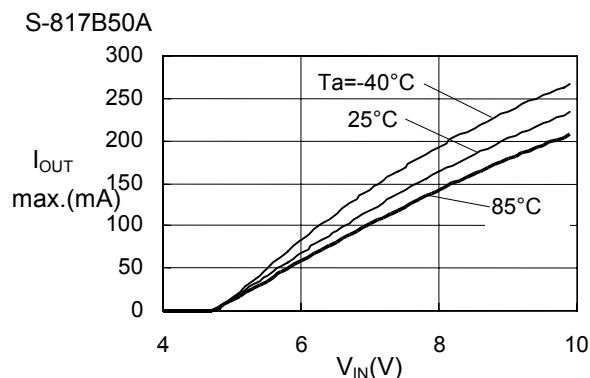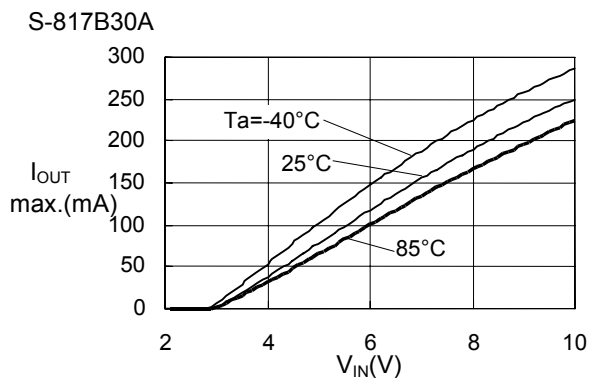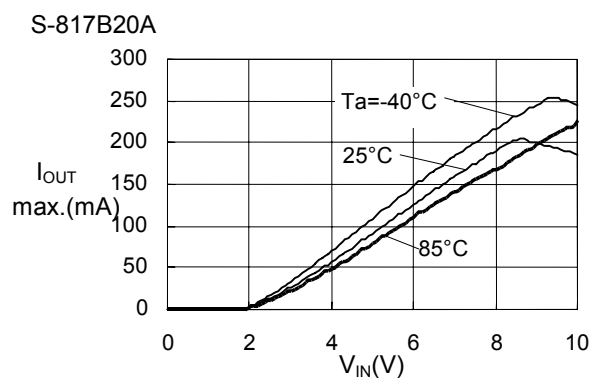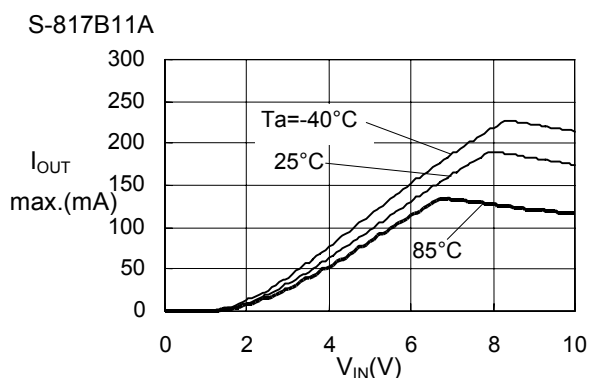


**(4) Dropout Voltage vs. Output Current**


S-817A11A/S-817B11A

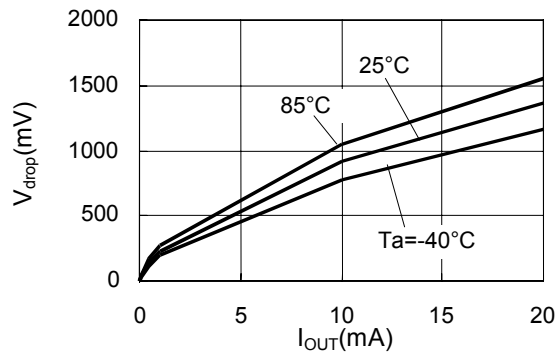


S-817A20A/S-817B20A

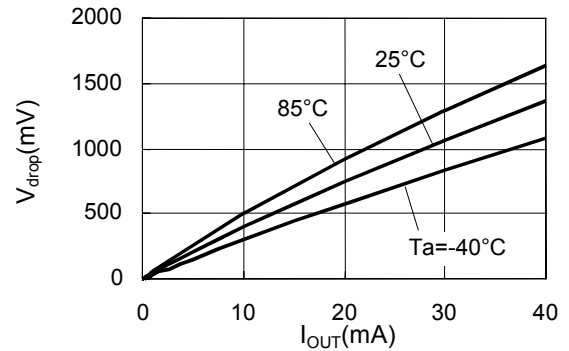

S-817A30A/S-817B30A

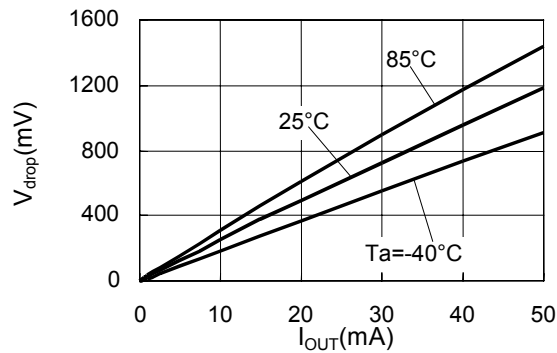


S-817A50A/S-817B50A

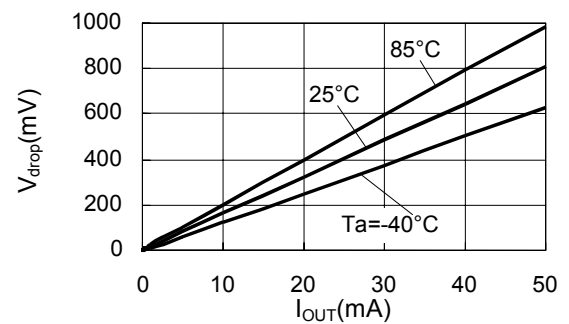


**(5) Output Voltage vs. Ambient Temperature**


S-817A11A/S-817B11A  $V_{IN}=3.1\text{V}, I_{OUT}=10\text{mA}$

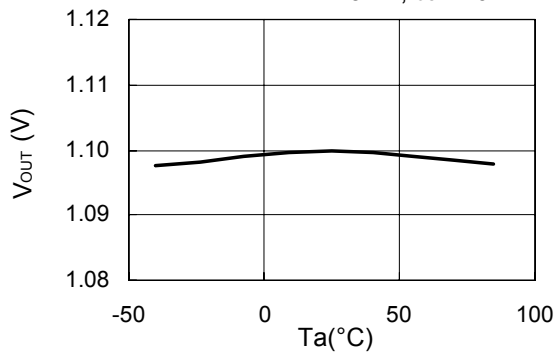


S-817A20A/S-817B20A  $V_{IN}=4\text{V}, I_{OUT}=10\text{mA}$

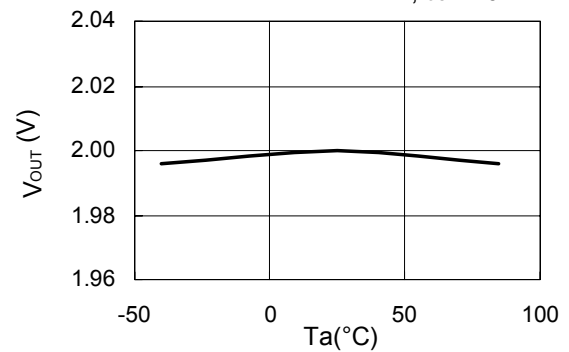

S-817A30A/S-817B30A  $V_{IN}=5\text{V}, I_{OUT}=10\text{mA}$

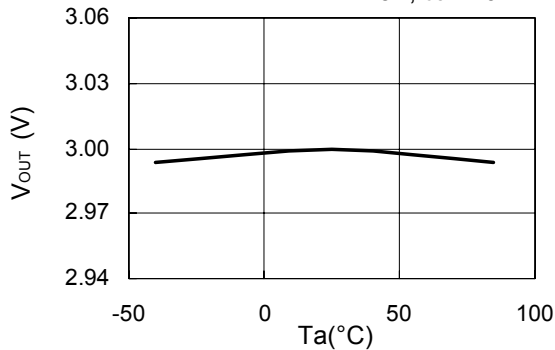


S-817A50A/S-817B50A  $V_{IN}=7\text{V}, I_{OUT}=10\text{mA}$

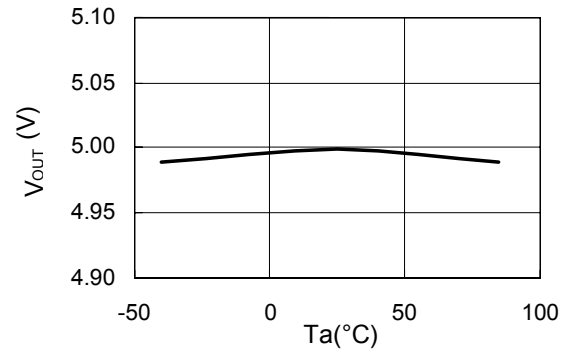


**(6) Line Regulation 1 vs. Ambient Temperature**

S-817A11/20/30/50A  
 S-817B11/20/30/50A  $V_{IN}=V_{OUT(S)}+1V \leftrightarrow 10V, I_{OUT}=1mA$

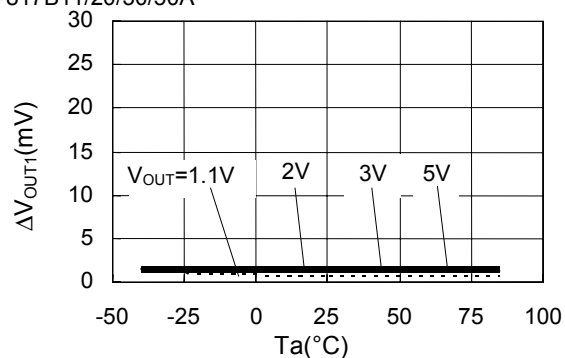


**(7) Line Regulation 2 vs. Ambient Temperature**

S-817A11/20/30/50A  
 S-817B11/20/30/50A  $V_{IN}=V_{OUT(S)}+1V \leftrightarrow 10V, I_{OUT}=1\mu A$

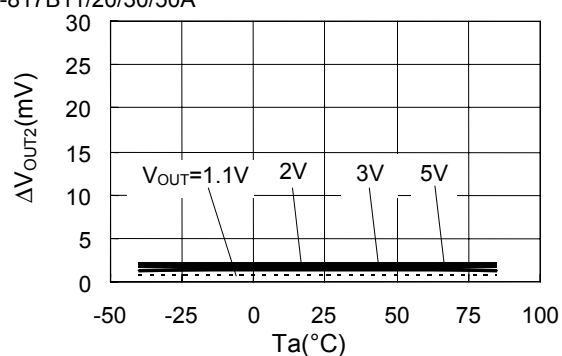


**(8) Load Regulation vs. Ambient Temperature**

S-817A11/20/30/50A  
 S-817B11/20/30/50A  $V_{IN}=V_{OUT(S)}+2V, I_{OUT}=1\mu A \leftrightarrow I_{OUT}$

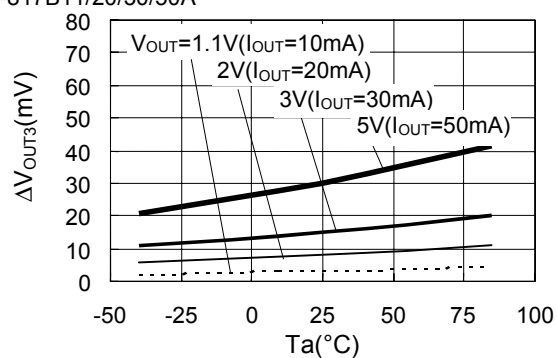


**(9) Current Consumption vs. Input Voltage**


S-817A11A/S-817B11A

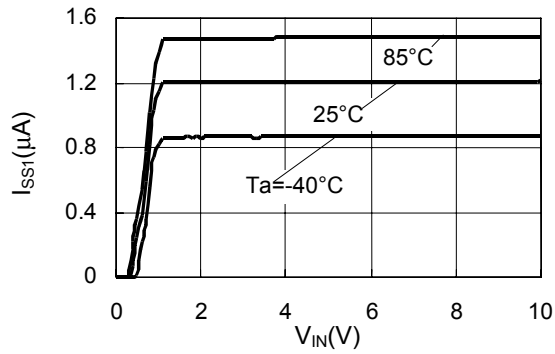


S-817A20A/S-817B20A

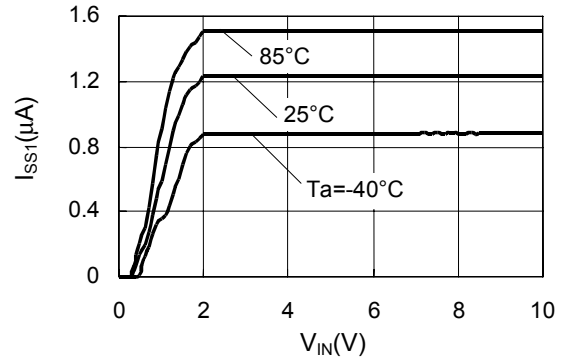

S-817A30A/S-817B30A

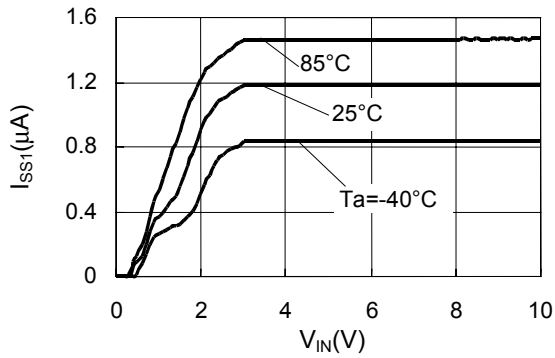


S-817A50A/S-817B50A

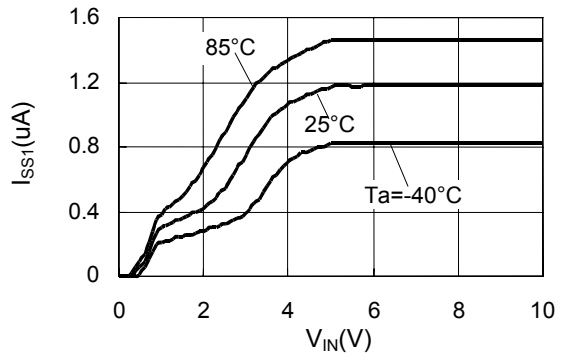


REFERENCE DATA


■ Transient Response Characteristics (Typical data:  $T_a=25^\circ\text{C}$ )

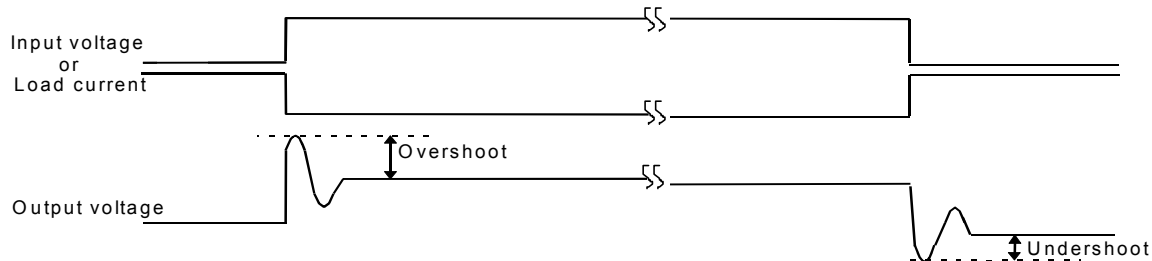


(1) At powering on S-817A30A (when using a ceramic capacitor,  $C_L=1\ \mu\text{F}$ )

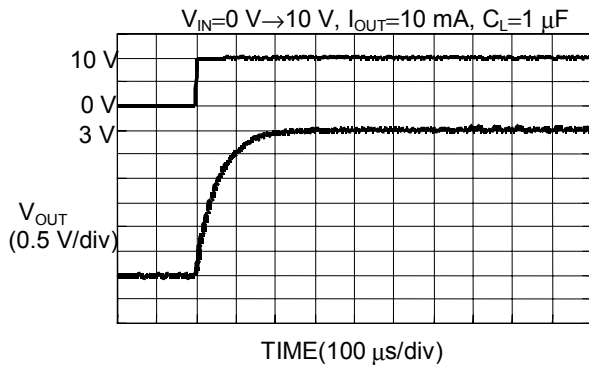


Load dependencies of overshoot at powering on

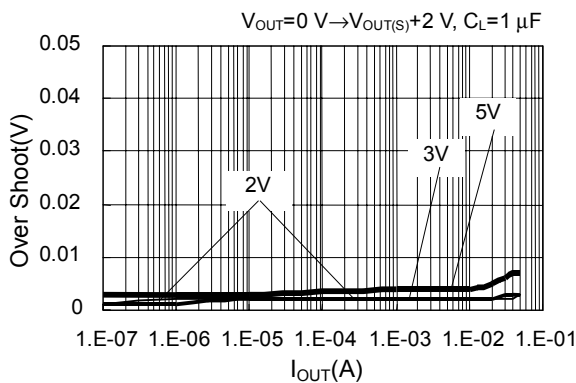


$C_L$  dependencies of overshoot at powering on

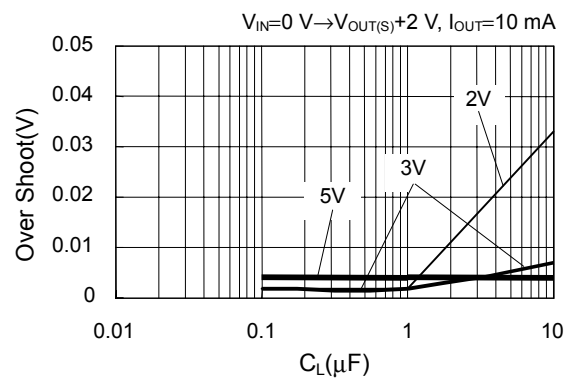


$V_{\text{DD}}$  dependencies of overshoot at powering on

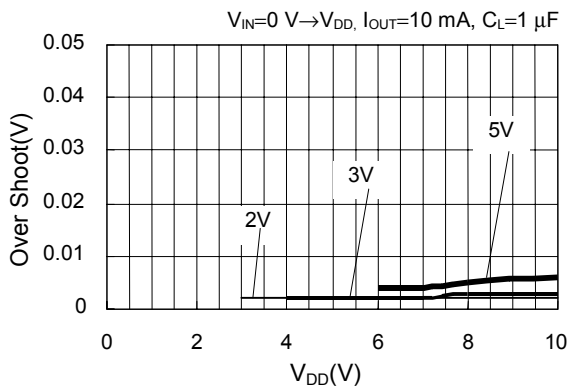


" $T_a$ " dependencies of overshoot at powering on

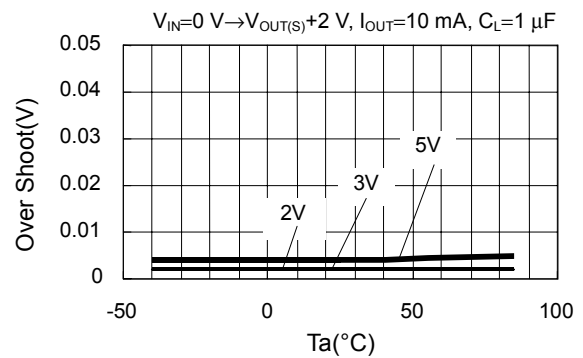


**(2) At powering on S-817B30A (when using a ceramic capacitor,  $C_L=1\ \mu\text{F}$ )**

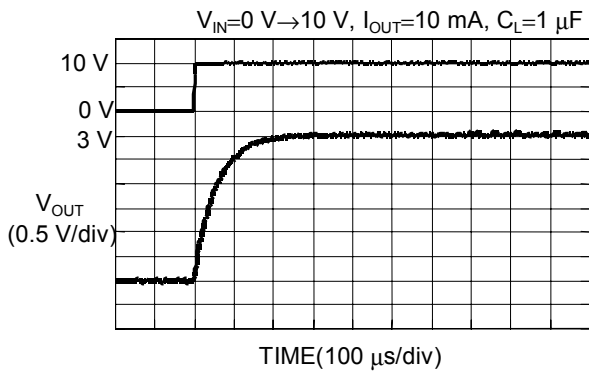


Load dependencies of overshoot at powering on

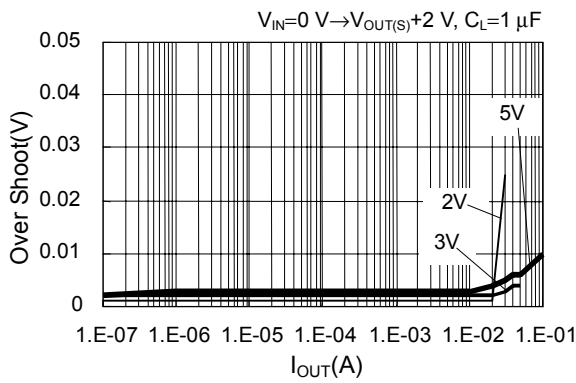


$C_L$  dependencies of overshoot at powering on

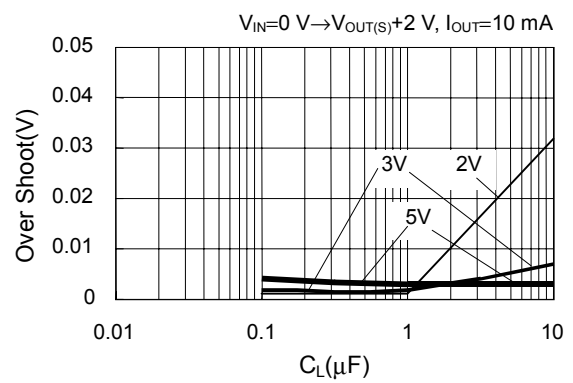


$V_{DD}$  dependencies of overshoot at powering on

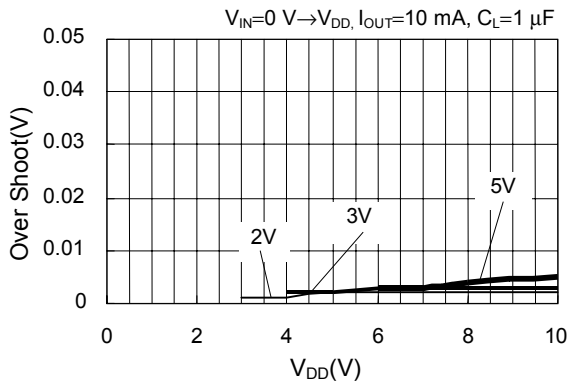


"Ta" dependencies of overshoot at powering on

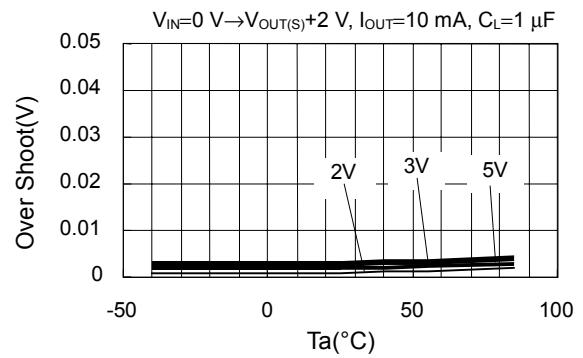


**(3) Power fluctuation S-817A30A (when using a ceramic capacitor,  $C_L=1\ \mu\text{F}$ )**

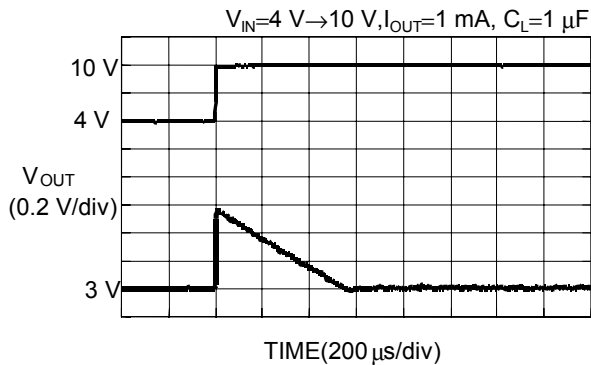


Load dependencies of overshoot at power fluctuation

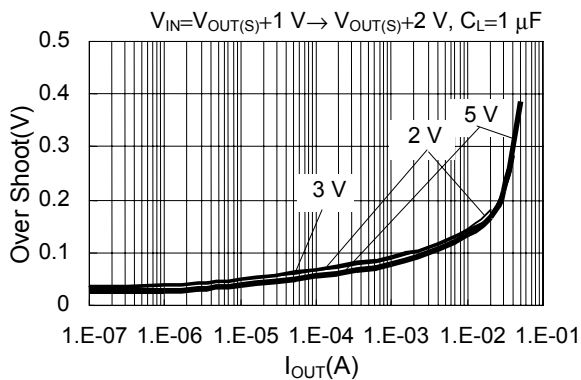


$C_L$  dependencies of overshoot at power fluctuation

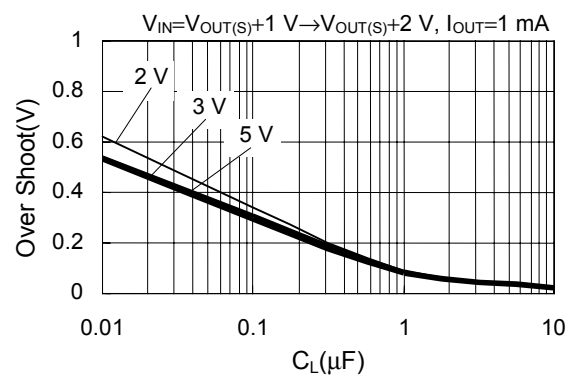


$V_{DD}$  dependencies of overshoot at power fluctuation

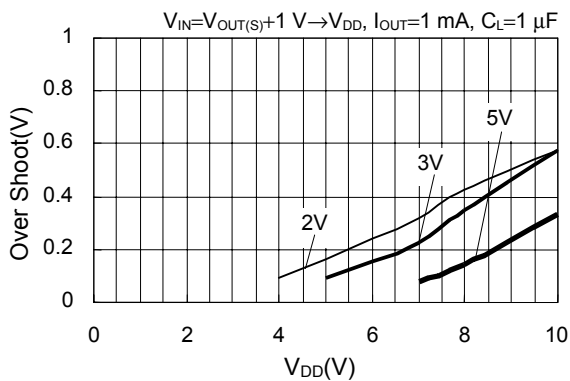


"Ta" dependencies of overshoot at power fluctuation

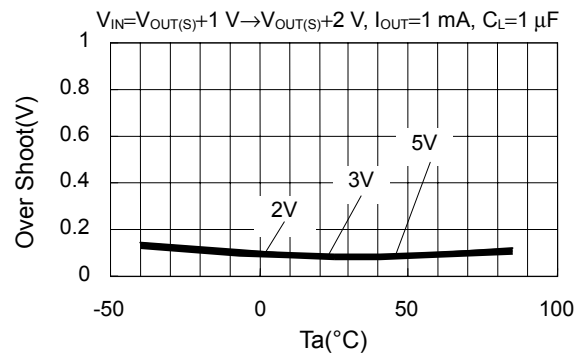


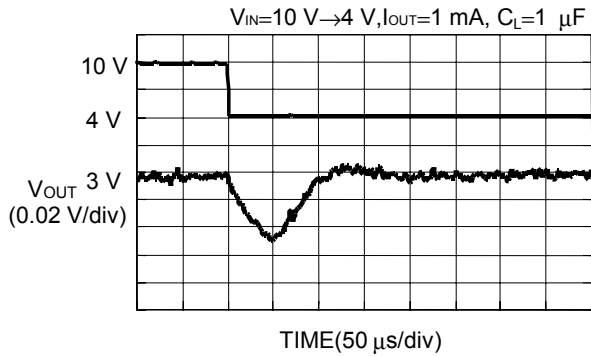


Load dependencies of undershoot at power fluctuation

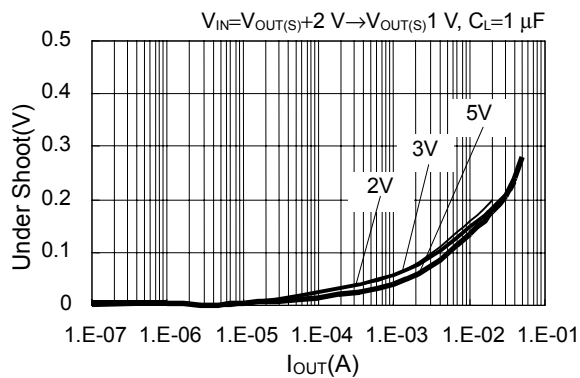


$C_L$  dependencies of undershoot at power fluctuation

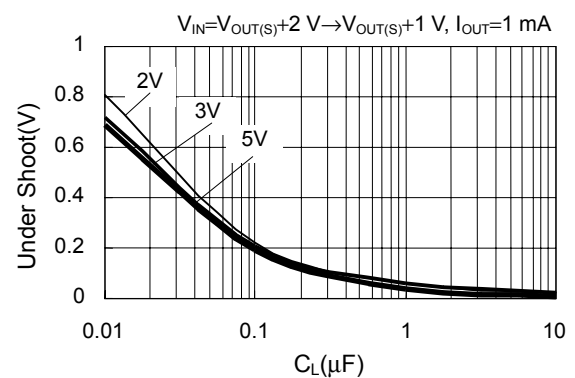

$V_{DD}$  dependencies of undershoot at power fluctuation

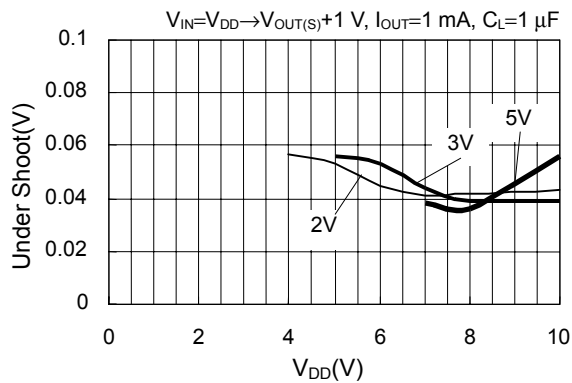


"Ta" dependencies of undershoot at power fluctuation

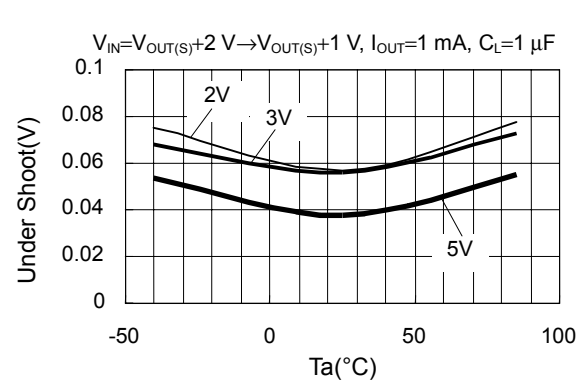


**(4) Load fluctuation S-817A30A/S-817B30A (when using a ceramic capacitor,  $C_L=1\ \mu\text{F}$ )**


$I_{OUT}=30\ \text{mA} \rightarrow 10\ \mu\text{A}$ ,  $V_{IN}=5\ \text{V}$ ,  $C_L=1\ \mu\text{F}$

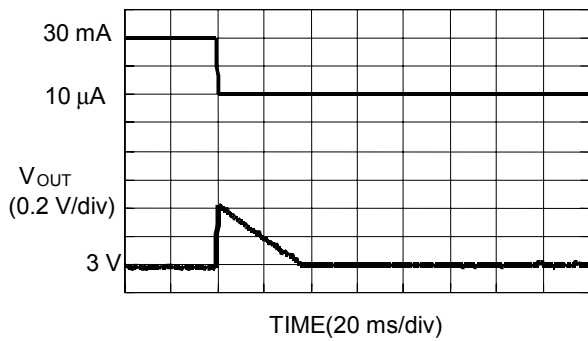


Load current dependencies of overshoot at load fluctuation

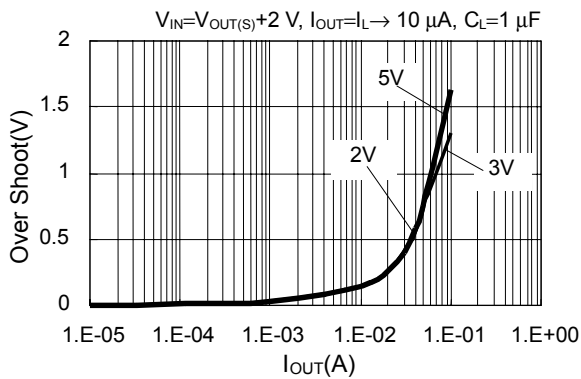


$C_L$  dependencies of overshoot at load fluctuation

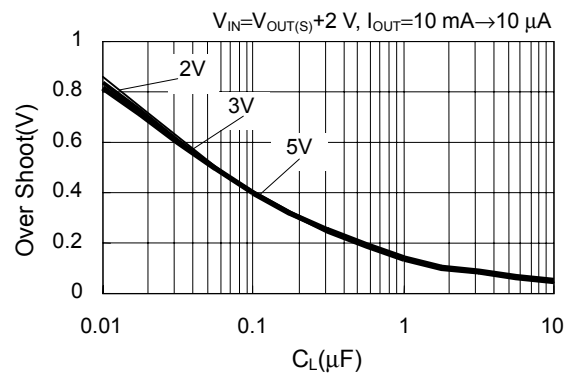


$V_{DD}$  dependencies of overshoot at load fluctuation

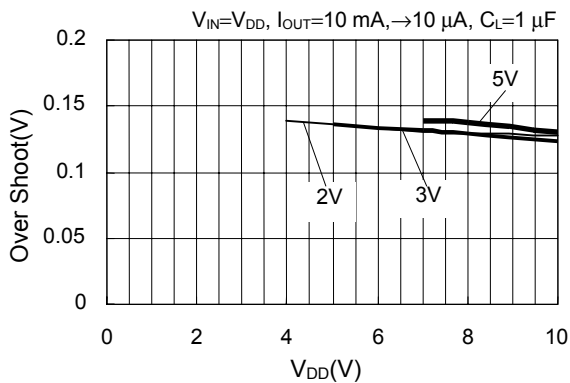


"Ta" dependencies of overshoot at load fluctuation

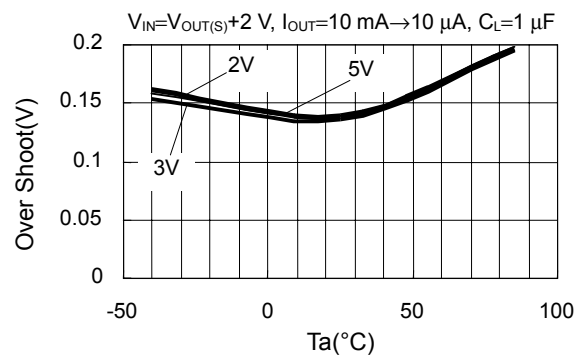


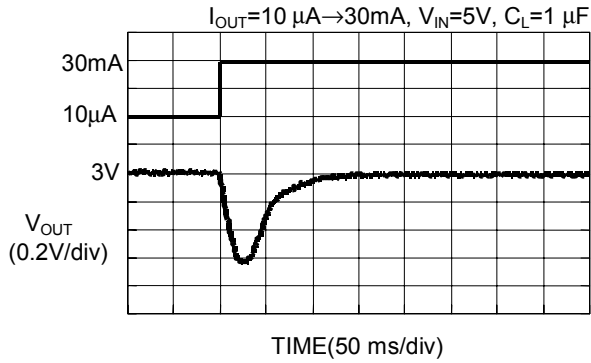


Load current dependencies of undershoot at load fluctuation

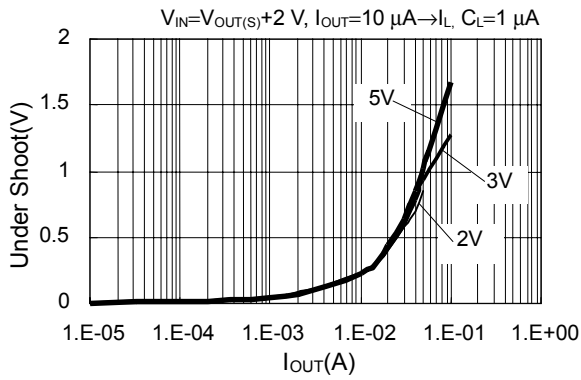


$C_L$  dependencies of undershoot at load fluctuation

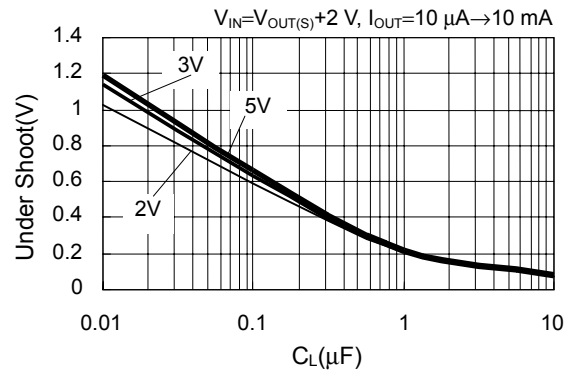


$V_{DD}$  dependencies of undershoot at load fluctuation

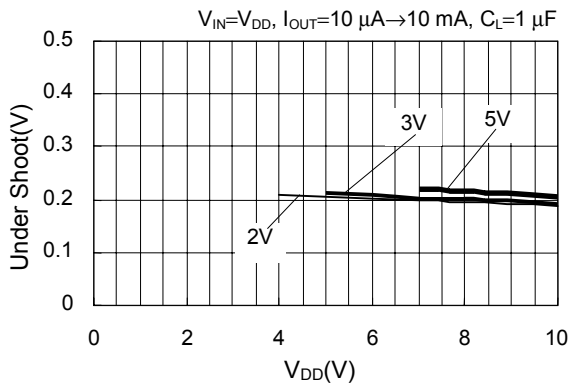


"Ta" dependencies of undershoot at load fluctuation

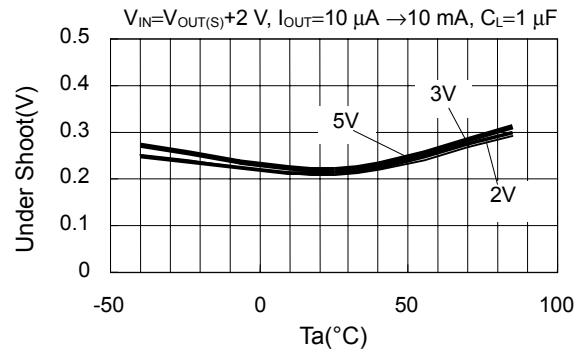

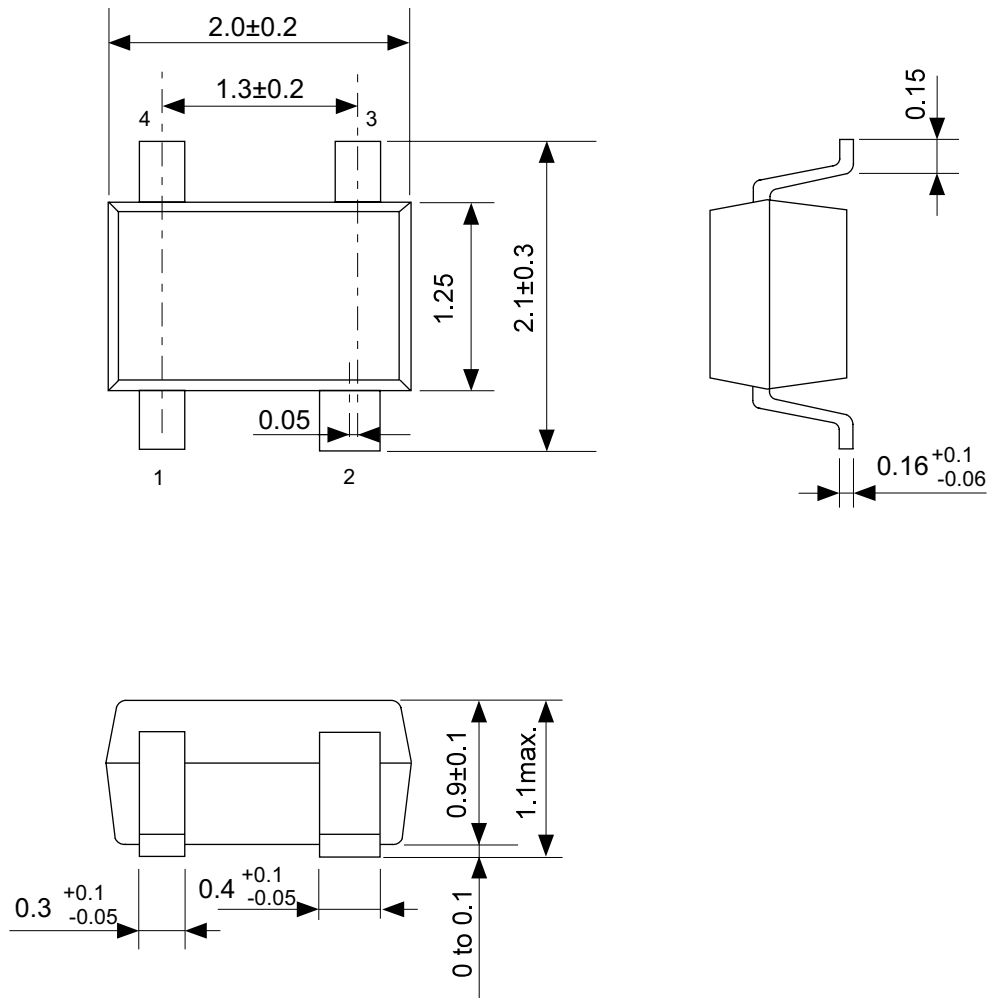


No. NP004-A-P-SD-1.1

|                        |                         |
|------------------------|-------------------------|
| TITLE                  | SC82AB-A-PKG Dimensions |
| No.                    | NP004-A-P-SD-1.1        |
| SCALE                  |                         |
| UNIT                   | mm                      |
|                        |                         |
| Seiko Instruments Inc. |                         |

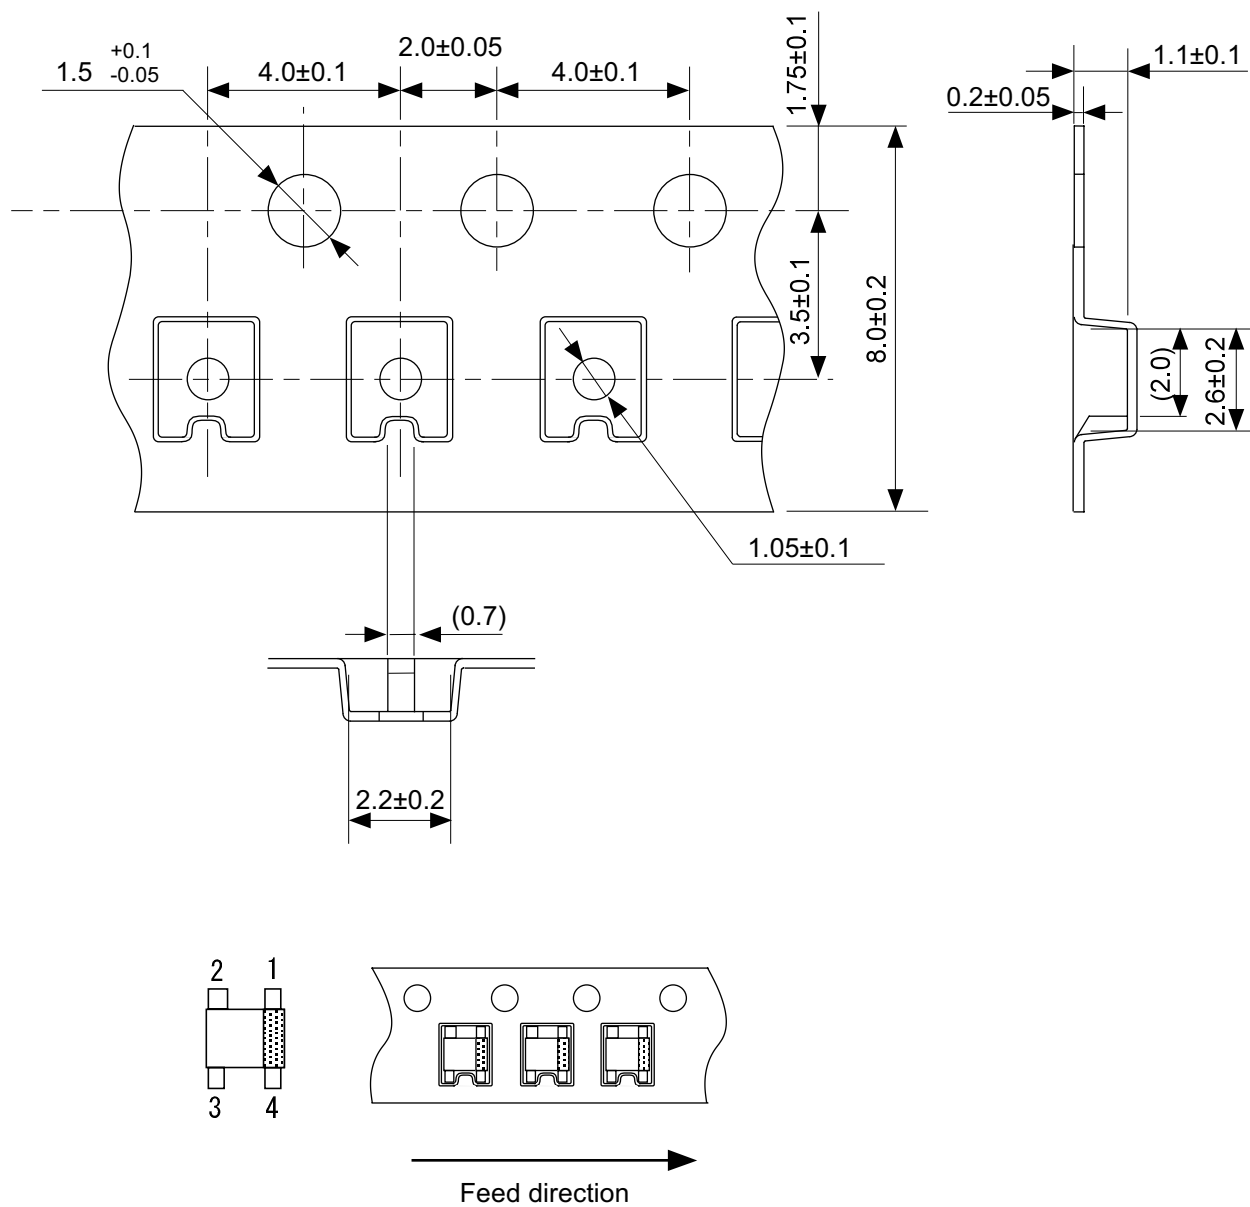


No. NP004-A-C-SD-2.1

|                        |                       |
|------------------------|-----------------------|
| TITLE                  | SC82AB-A-Carrier Tape |
| No.                    | NP004-A-C-SD-2.1      |
| SCALE                  |                       |
| UNIT                   | mm                    |
|                        |                       |
| Seiko Instruments Inc. |                       |

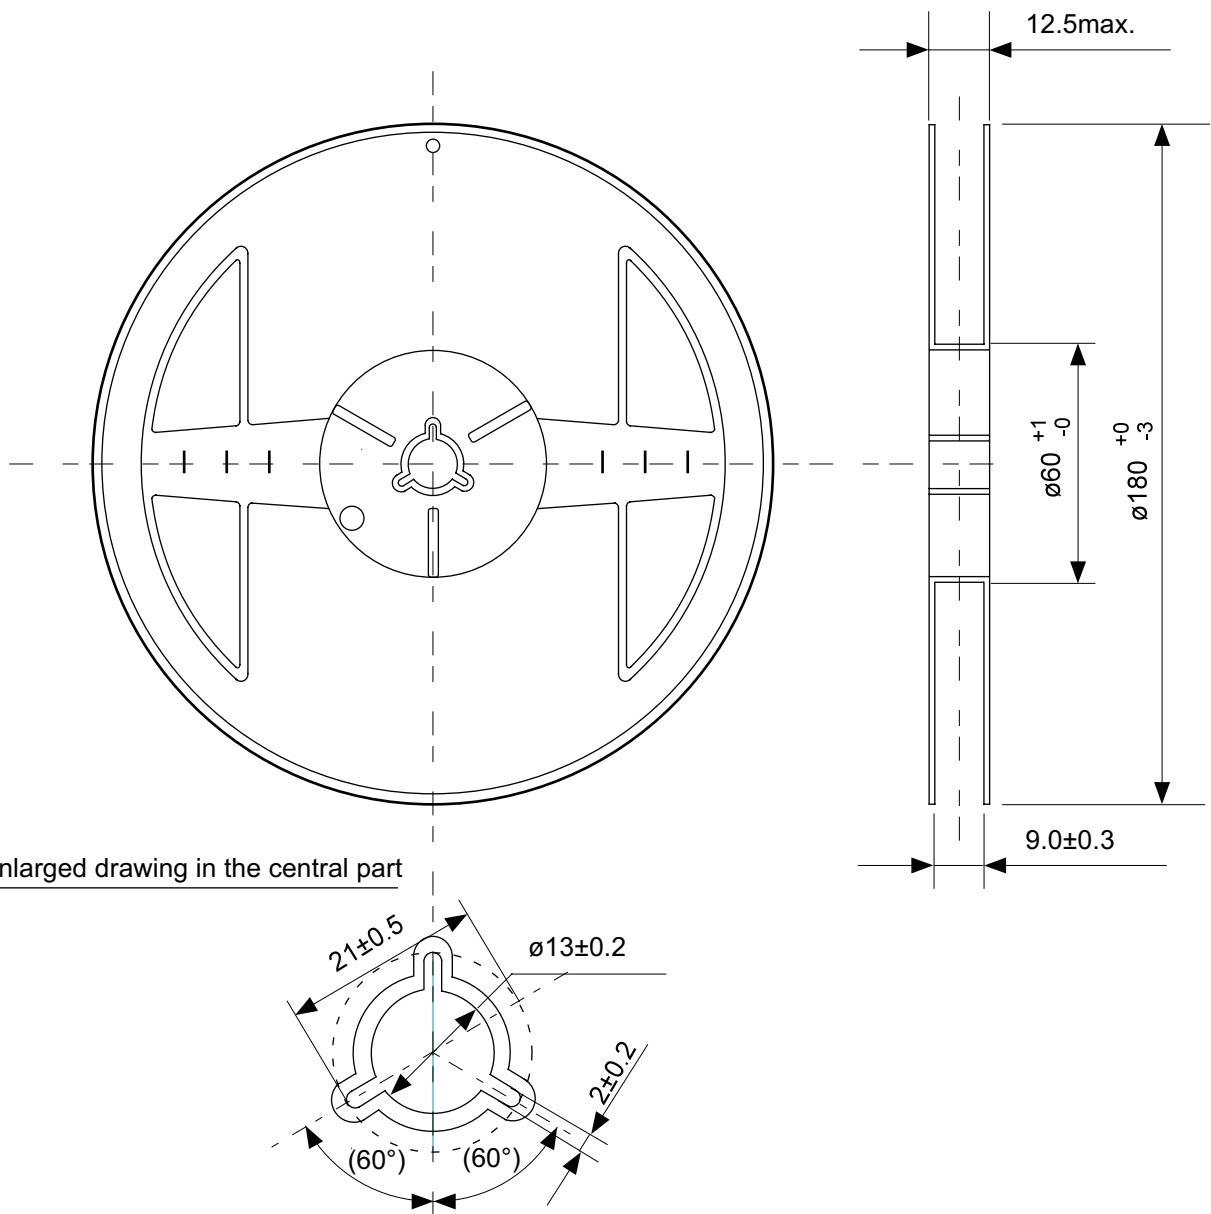



No. NP004-A-R-SD-1.1

|                        |                  |      |       |
|------------------------|------------------|------|-------|
| TITLE                  | SC82AB-A-Reel    |      |       |
| No.                    | NP004-A-R-SD-1.1 |      |       |
| SCALE                  |                  | QTY. | 3,000 |
| UNIT                   | mm               |      |       |
|                        |                  |      |       |
| Seiko Instruments Inc. |                  |      |       |

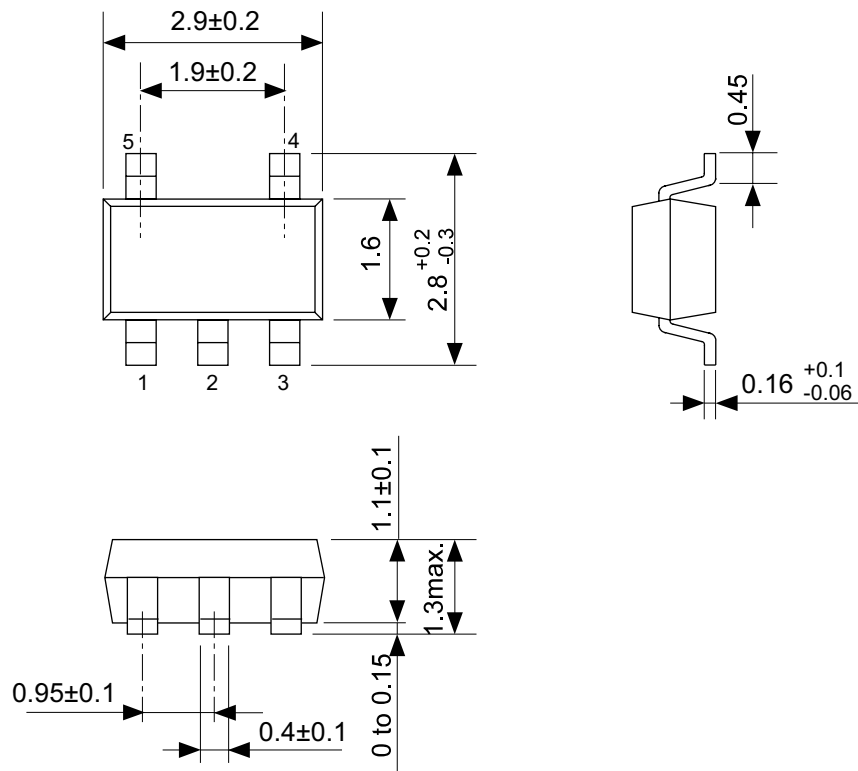


No. MP005-A-P-SD-1.2

|                        |                         |
|------------------------|-------------------------|
| TITLE                  | SOT235-A-PKG Dimensions |
| No.                    | MP005-A-P-SD-1.2        |
| SCALE                  |                         |
| UNIT                   | mm                      |
|                        |                         |
| Seiko Instruments Inc. |                         |

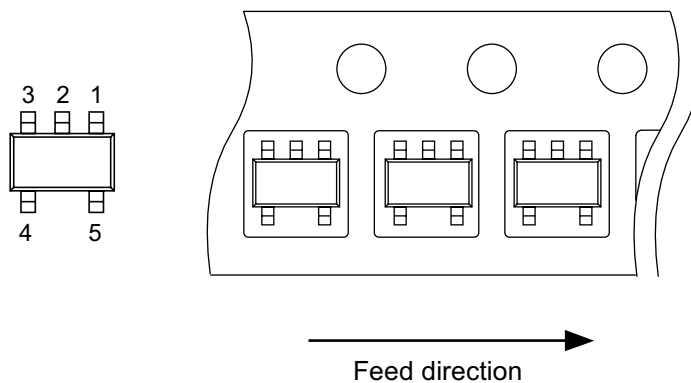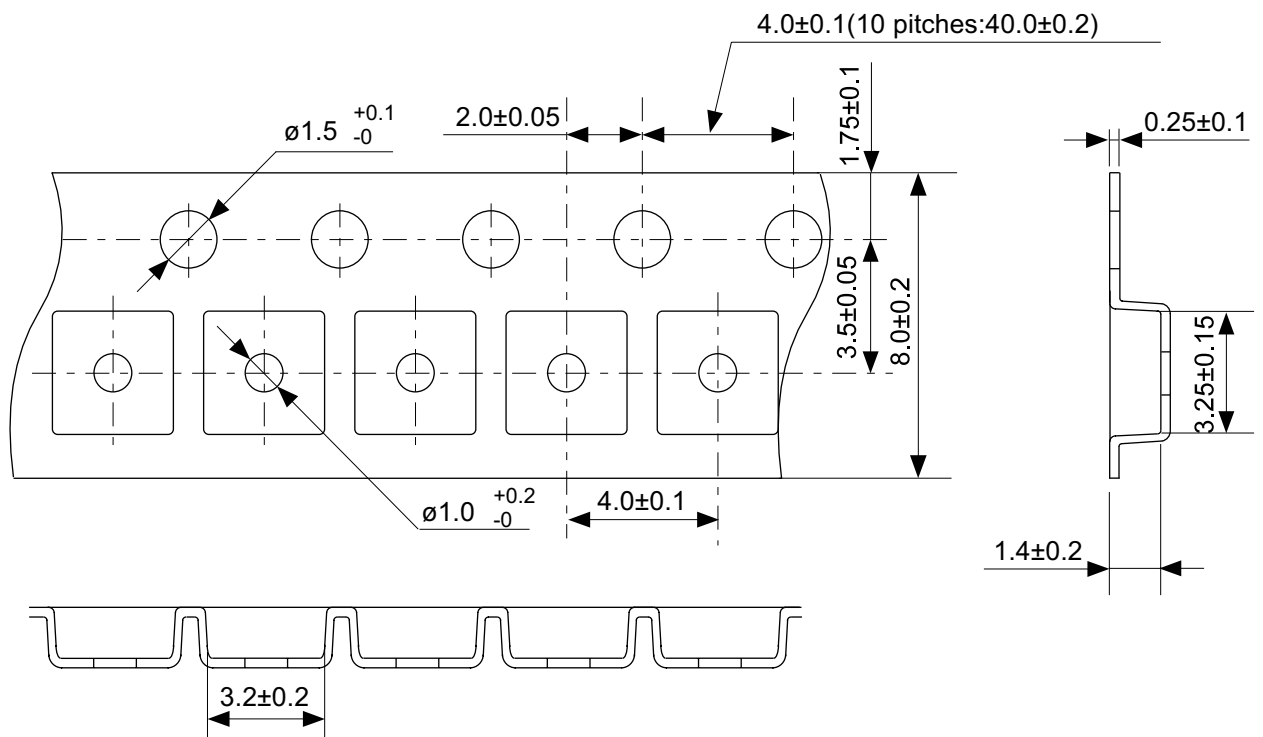


No. MP005-A-C-SD-2.1

|                        |                       |
|------------------------|-----------------------|
| TITLE                  | SOT235-A-Carrier Tape |
| No.                    | MP005-A-C-SD-2.1      |
| SCALE                  |                       |
| UNIT                   | mm                    |
|                        |                       |
| Seiko Instruments Inc. |                       |

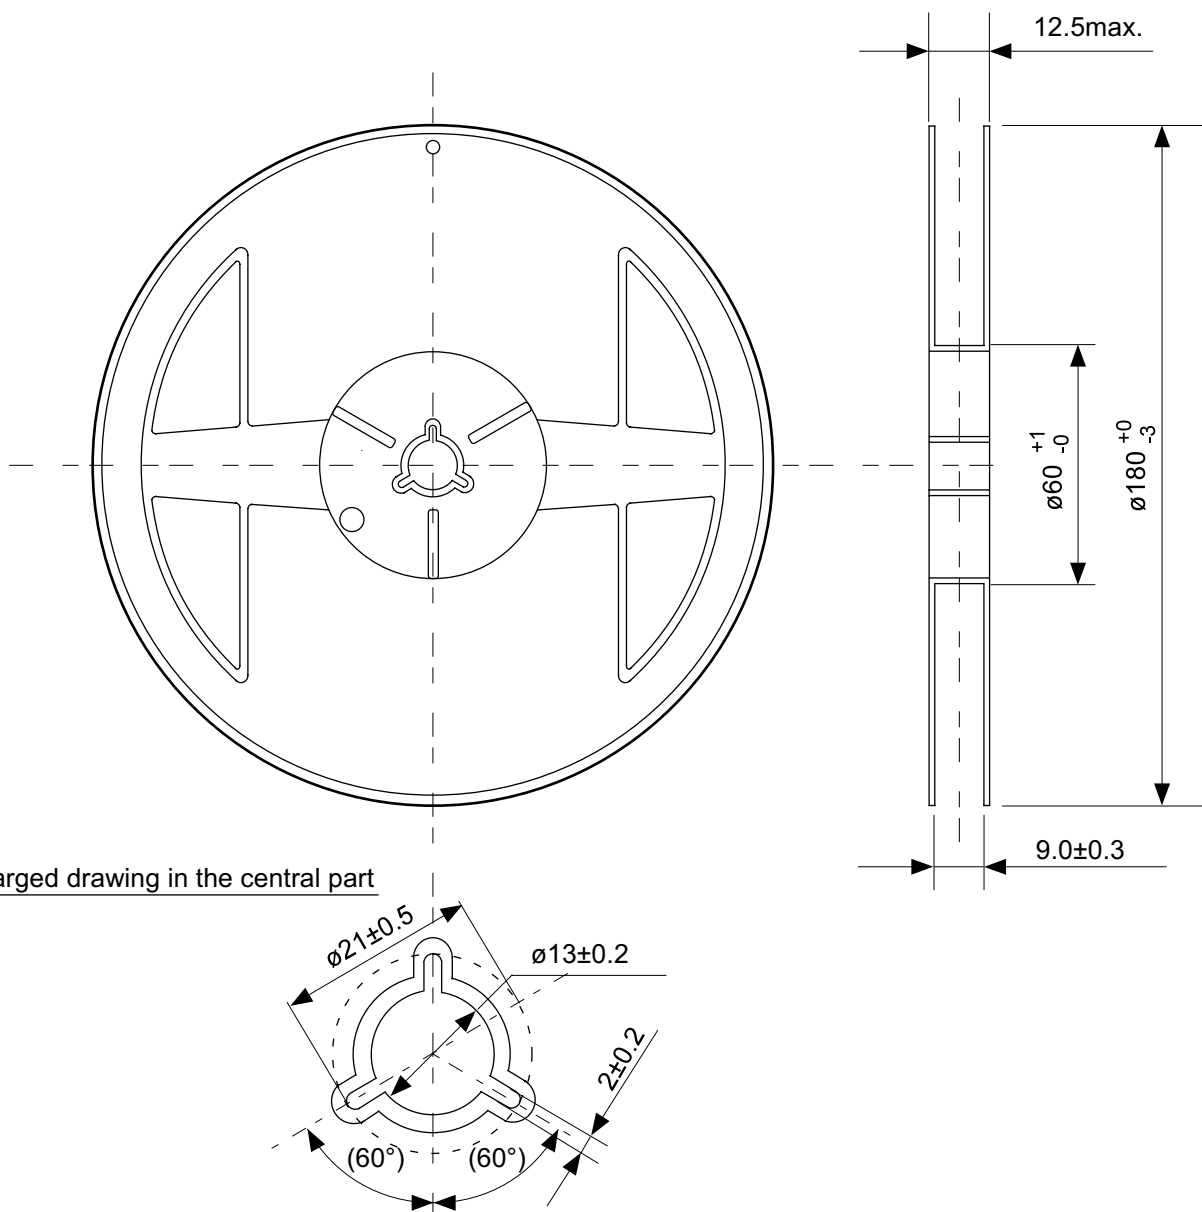



No. MP005-A-R-SD-1.1

|                        |                  |      |       |
|------------------------|------------------|------|-------|
| TITLE                  | SOT235-A-Reel    |      |       |
| No.                    | MP005-A-R-SD-1.1 |      |       |
| SCALE                  |                  | QTY. | 3,000 |
| UNIT                   | mm               |      |       |
|                        |                  |      |       |
| Seiko Instruments Inc. |                  |      |       |

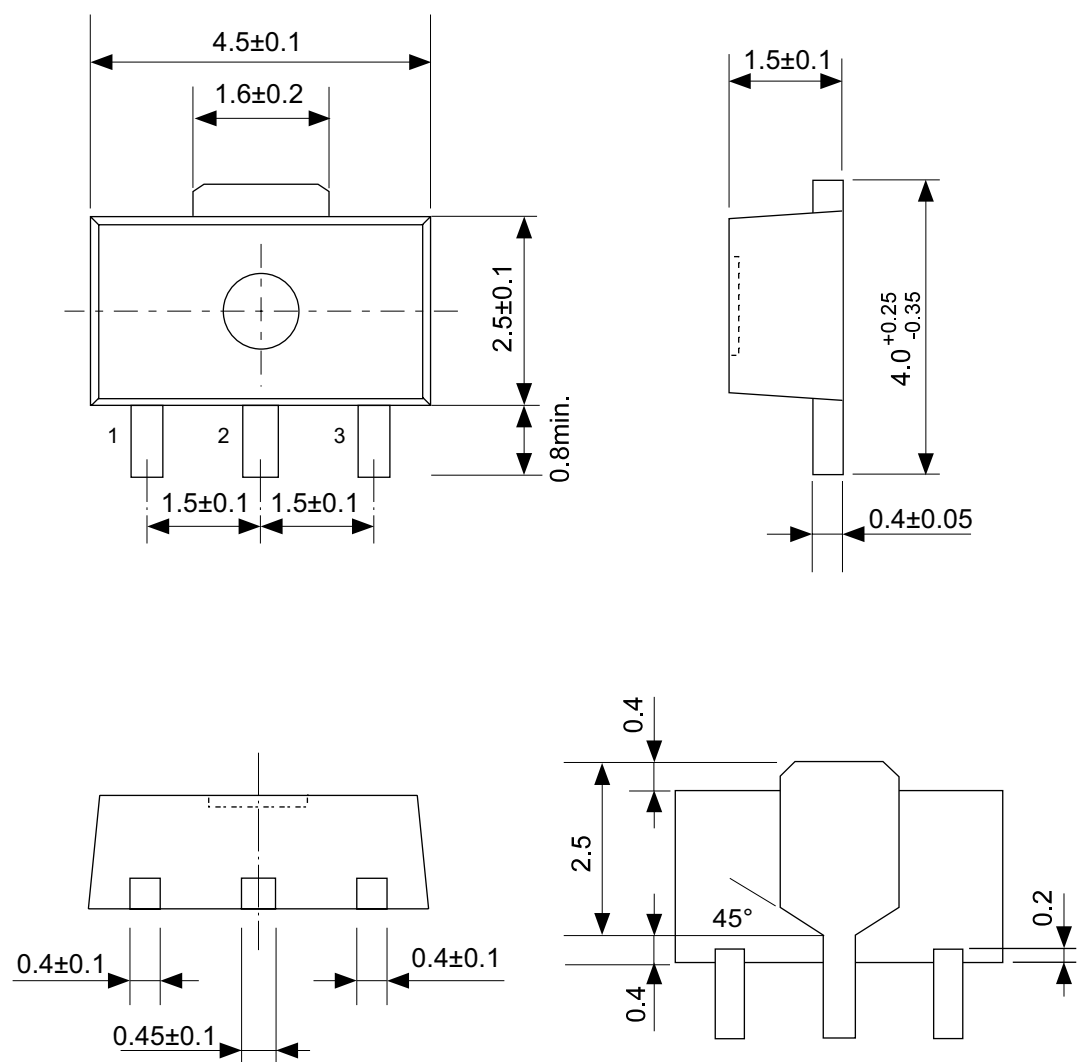

No. UP003-A-P-SD-1.1


|                        |                         |
|------------------------|-------------------------|
| TITLE                  | SOT893-A-PKG Dimensions |
| No.                    | UP003-A-P-SD-1.1        |
| SCALE                  |                         |
| UNIT                   | mm                      |
|                        |                         |
| Seiko Instruments Inc. |                         |

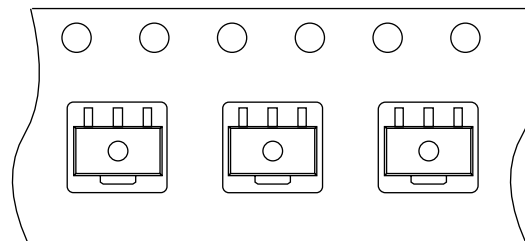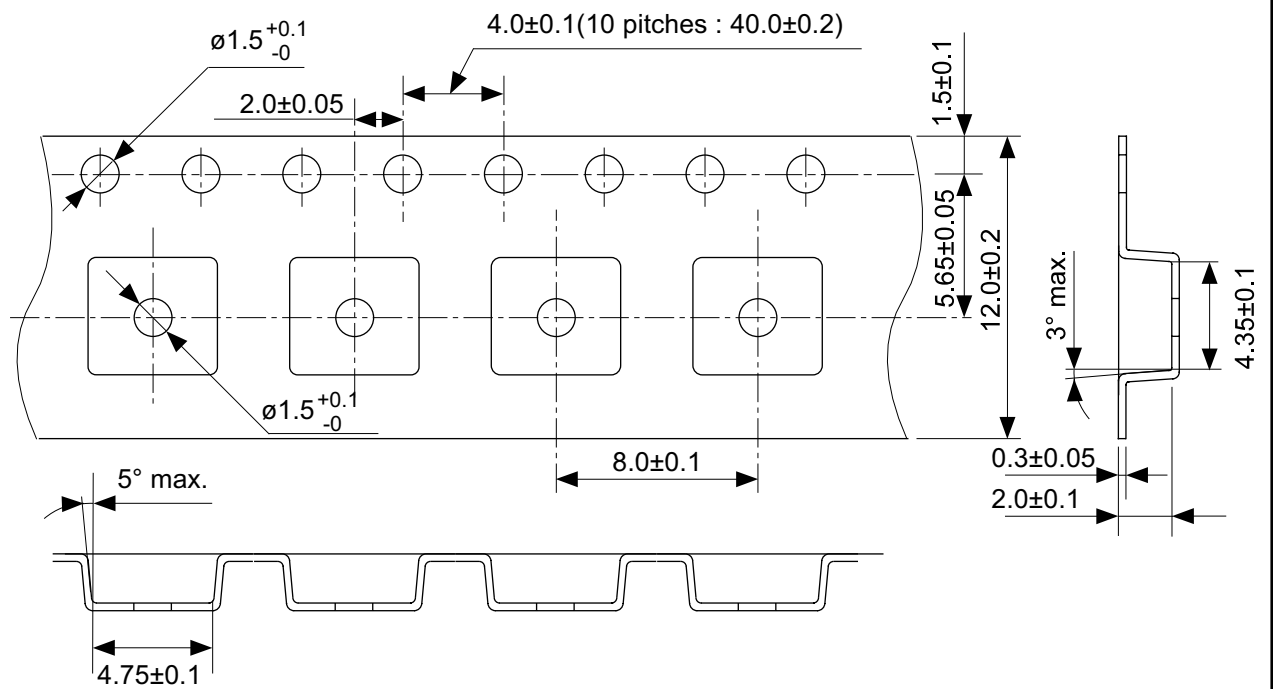

Feed direction

No. UP003-A-C-SD-1.1


|                        |                       |
|------------------------|-----------------------|
| TITLE                  | SOT893-A-Carrier Tape |
| No.                    | UP003-A-C-SD-1.1      |
| SCALE                  |                       |
| UNIT                   | mm                    |
|                        |                       |
| Seiko Instruments Inc. |                       |

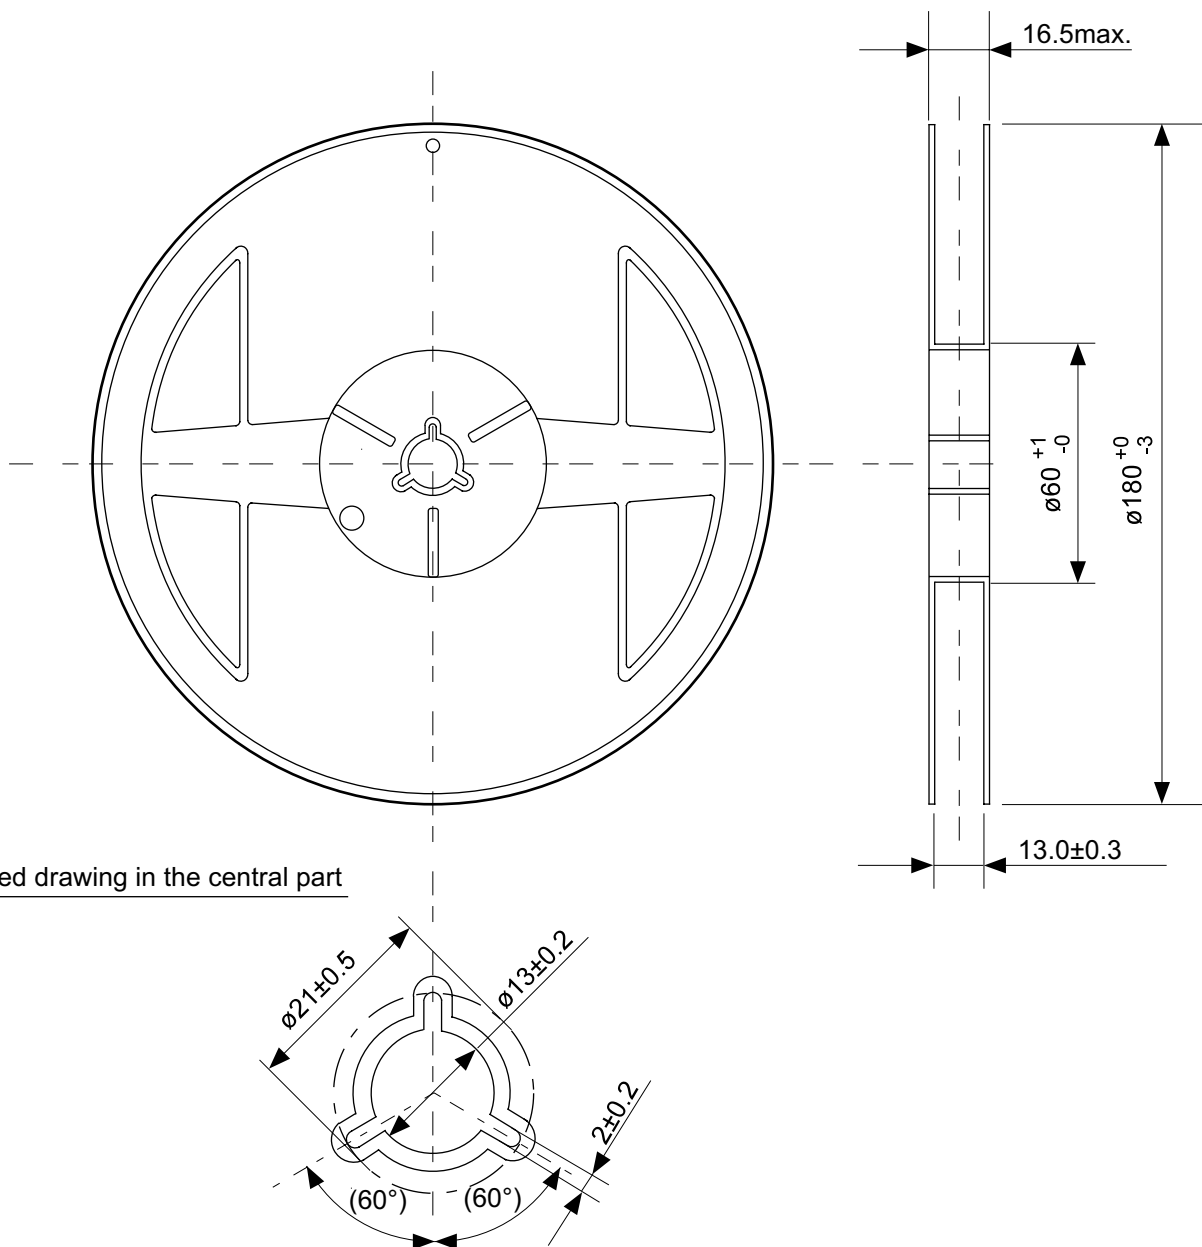

Enlarged drawing in the central part


No. UP003-A-R-SD-1.1

|                        |                  |      |       |
|------------------------|------------------|------|-------|
| TITLE                  | SOT893-A-Reel    |      |       |
| No.                    | UP003-A-R-SD-1.1 |      |       |
| SCALE                  |                  | QTY. | 1,000 |
| UNIT                   | mm               |      |       |
|                        |                  |      |       |
| Seiko Instruments Inc. |                  |      |       |

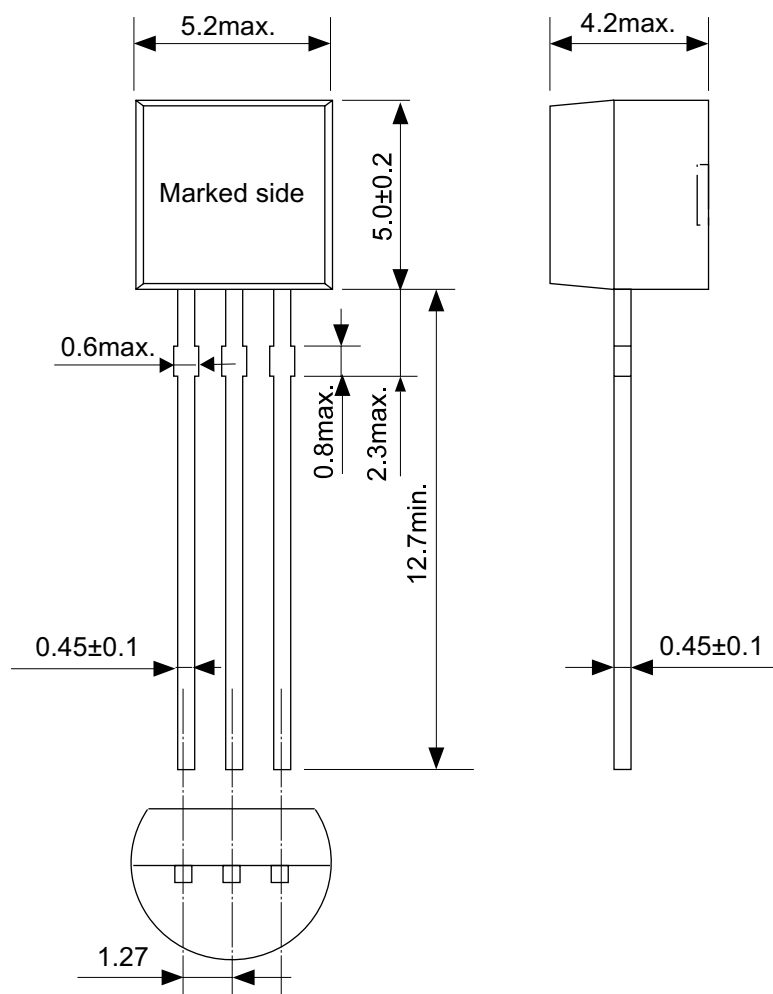



No. YS003-B-P-SD-1.1

|                        |                       |
|------------------------|-----------------------|
| TITLE                  | TO92-B-PKG Dimensions |
| No.                    | YS003-B-P-SD-1.1      |
| SCALE                  |                       |
| UNIT                   | mm                    |
|                        |                       |
| Seiko Instruments Inc. |                       |

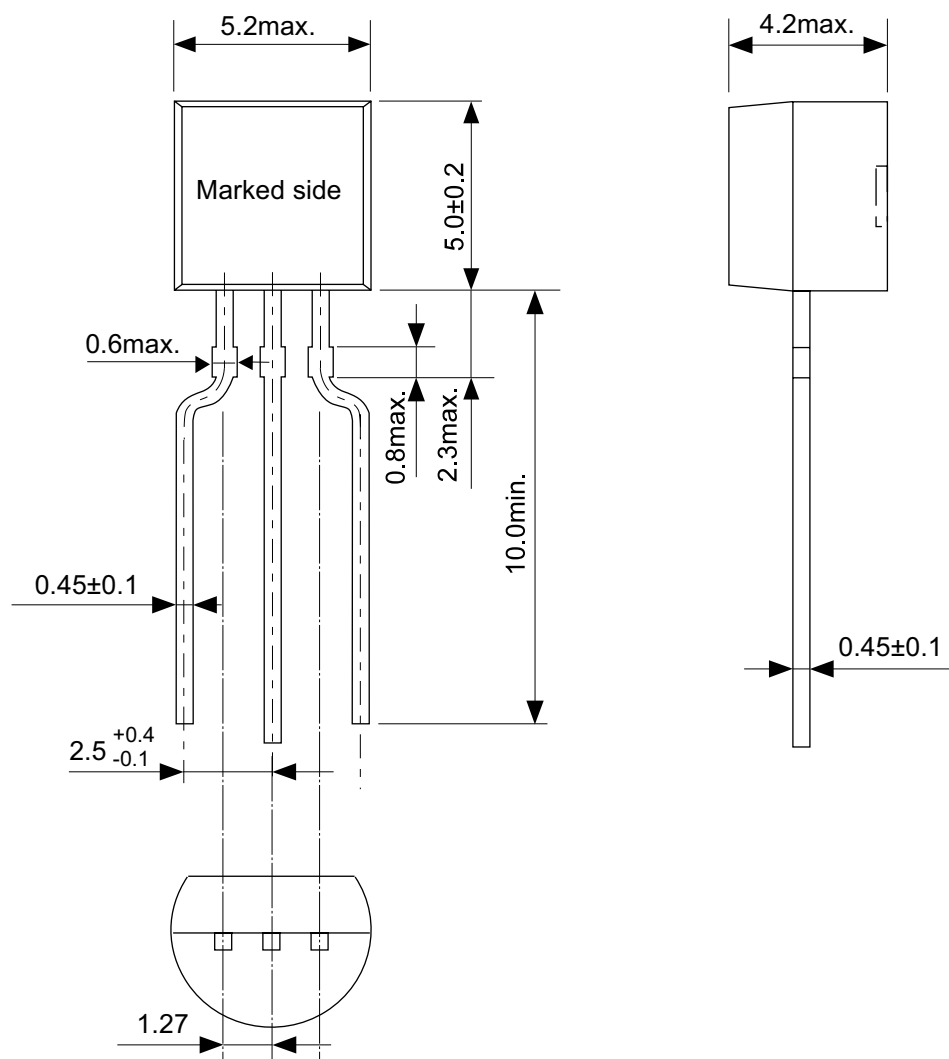


No. YF003-A-P-SD-1.1

|                        |                       |
|------------------------|-----------------------|
| TITLE                  | TO92-A-PKG Dimensions |
| No.                    | YF003-A-P-SD-1.1      |
| SCALE                  |                       |
| UNIT                   | mm                    |
|                        |                       |
| Seiko Instruments Inc. |                       |

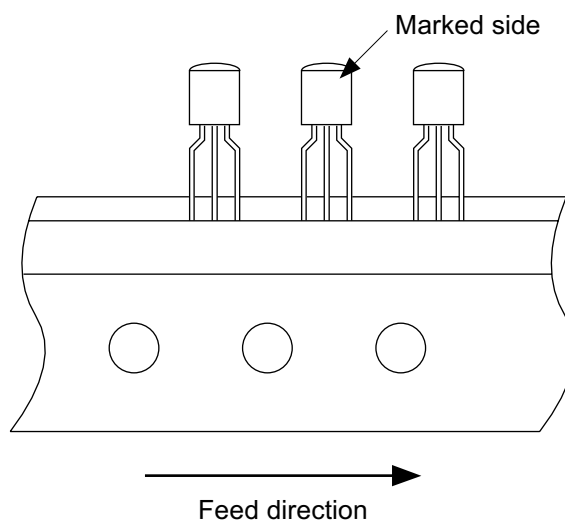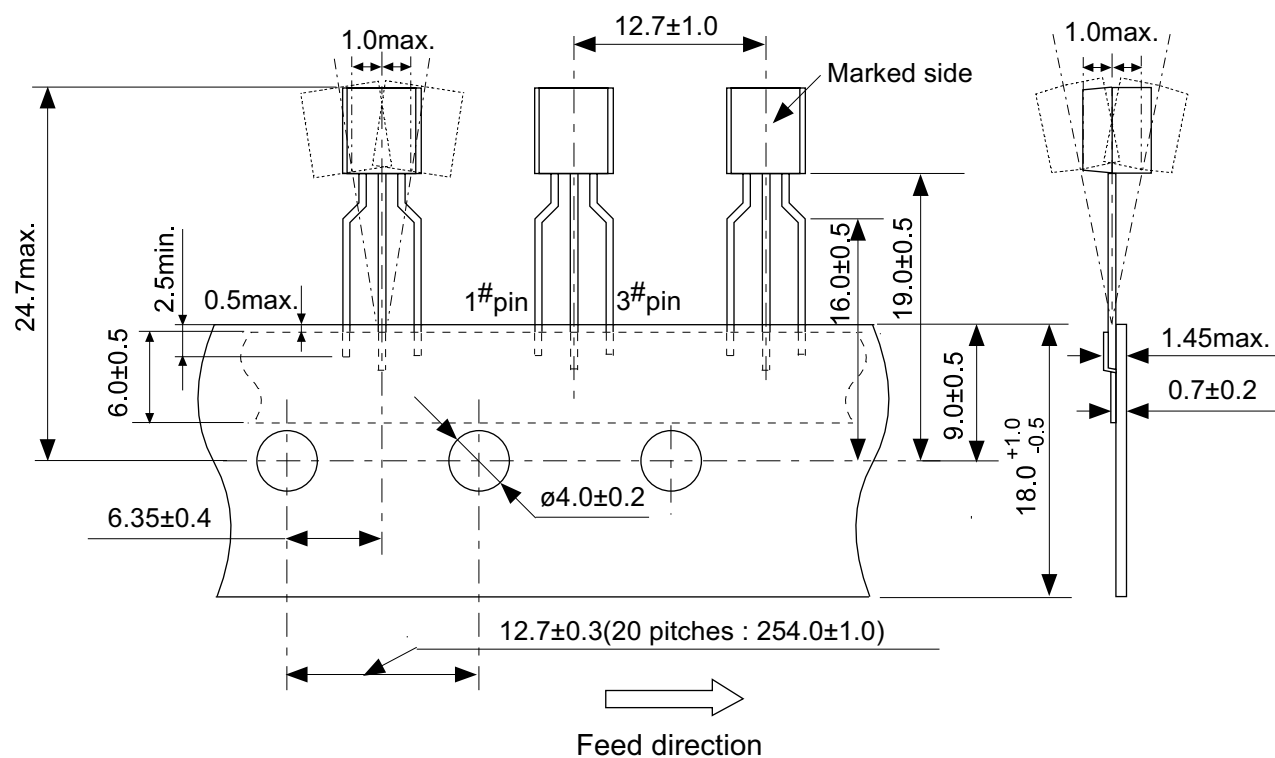


No. YF003-A-C-SD-4.1

|                        |                    |
|------------------------|--------------------|
| TITLE                  | TO92-A-Radial Tape |
| No.                    | YF003-A-C-SD-4.1   |
| SCALE                  |                    |
| UNIT                   | mm                 |
|                        |                    |
| Seiko Instruments Inc. |                    |

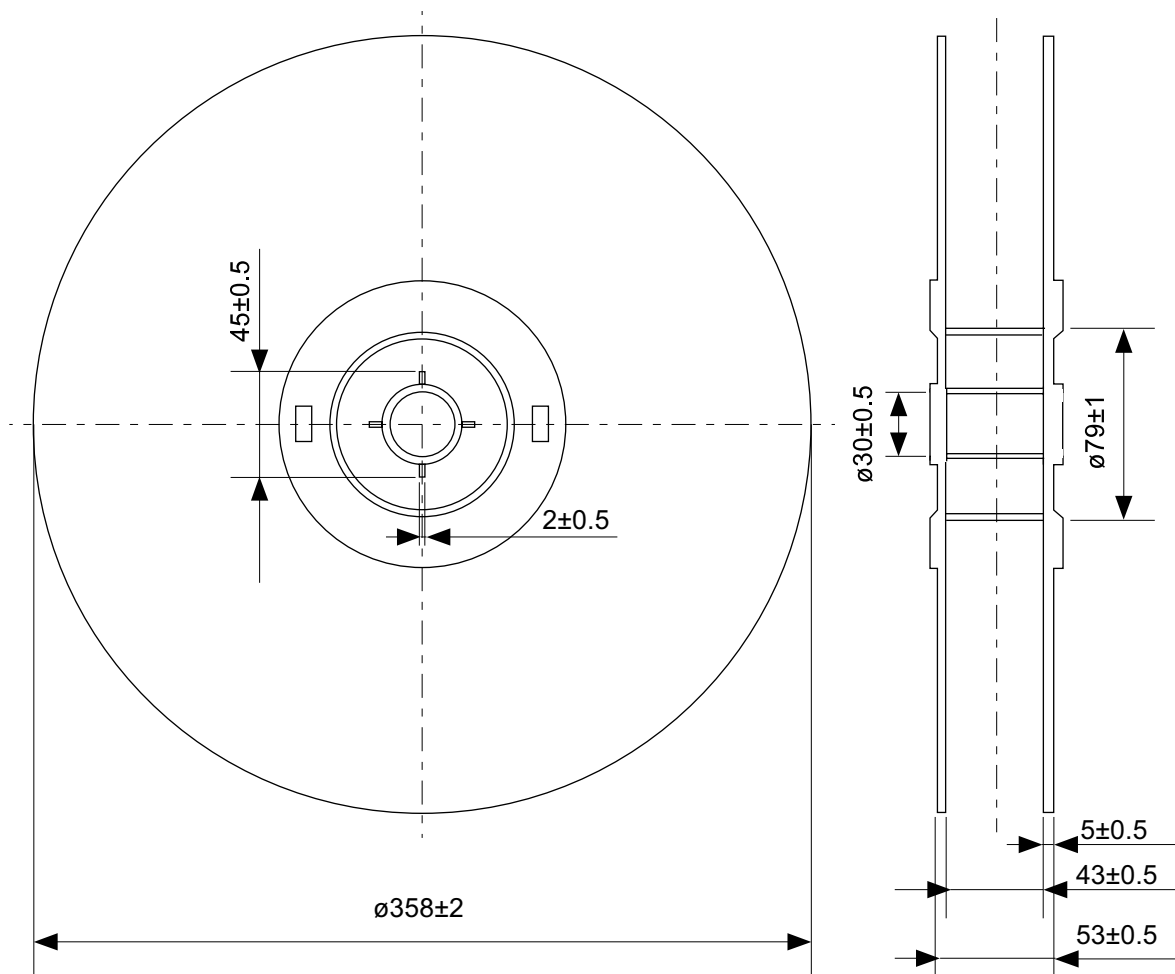


No. YF003-A-R-SD-2.1

|                        |                  |      |       |
|------------------------|------------------|------|-------|
| TITLE                  | TO92-A-Reel      |      |       |
| No.                    | YF003-A-R-SD-2.1 |      |       |
| SCALE                  |                  | QTY. | 2,000 |
| UNIT                   | mm               |      |       |
|                        |                  |      |       |
| Seiko Instruments Inc. |                  |      |       |

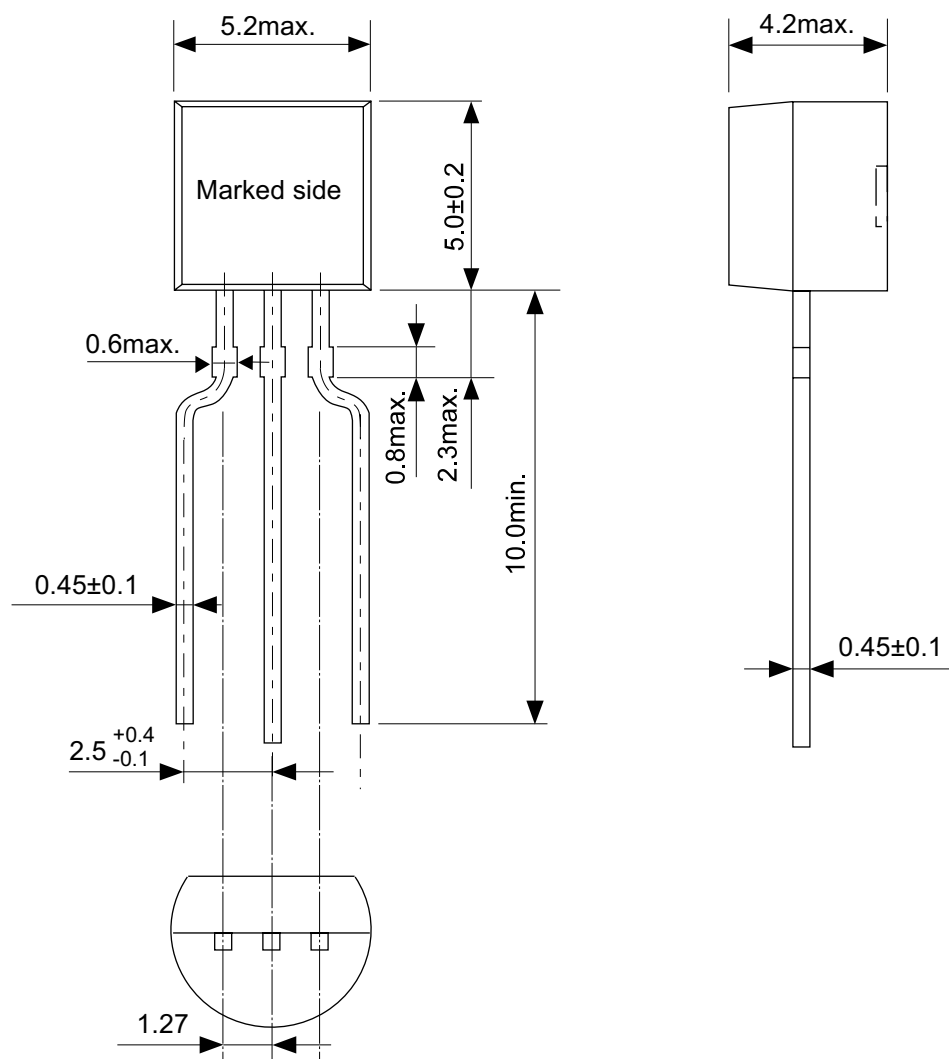

No. YF003-A-P-SD-1.1


|                        |                       |
|------------------------|-----------------------|
| TITLE                  | TO92-A-PKG Dimensions |
| No.                    | YF003-A-P-SD-1.1      |
| SCALE                  |                       |
| UNIT                   | mm                    |
|                        |                       |
| Seiko Instruments Inc. |                       |

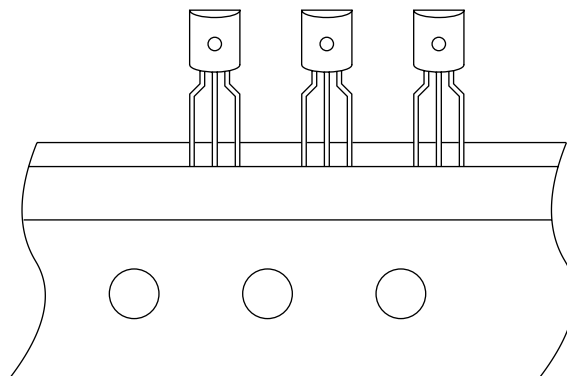


Feed direction

No. YZ003-C-C-SD-3.1

|                        |                    |
|------------------------|--------------------|
| TITLE                  | TO92-C-Radial Tape |
| No.                    | YZ003-C-C-SD-3.1   |
| SCALE                  |                    |
| UNIT                   | mm                 |
|                        |                    |
| Seiko Instruments Inc. |                    |

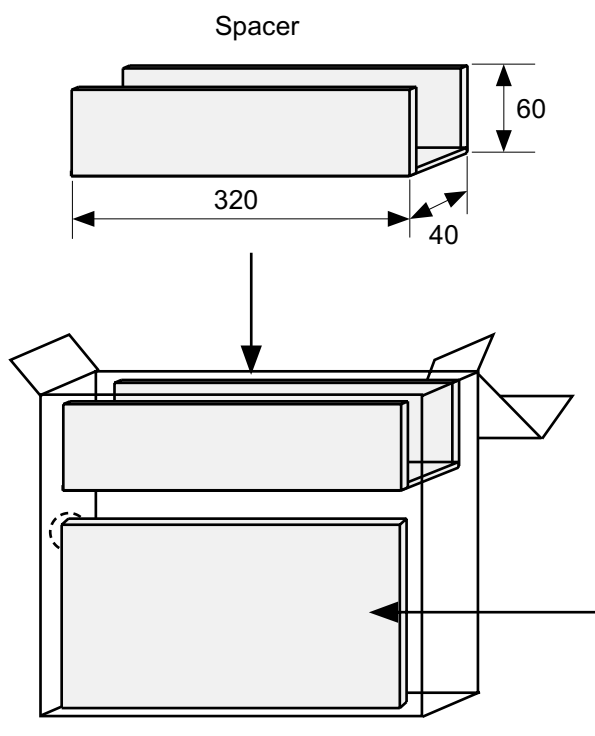

Space more than 4 strokes

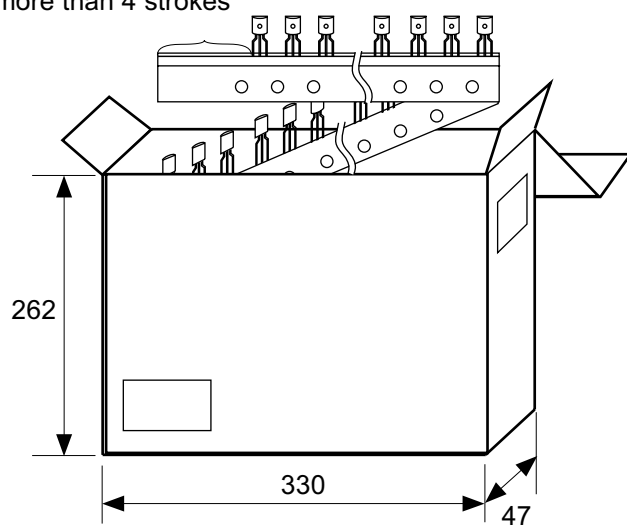

No. YZ003-C-Z-SD-2.1

|                        |                     |      |       |
|------------------------|---------------------|------|-------|
| TITLE                  | TO92-C-Ammo Packing |      |       |
| No.                    | YZ003-C-Z-SD-2.1    |      |       |
| SCALE                  |                     | QTY. | 2,500 |
| UNIT                   | mm                  |      |       |
|                        |                     |      |       |
| Seiko Instruments Inc. |                     |      |       |

- The information described herein is subject to change without notice.
- Seiko Instruments Inc. is not responsible for any problems caused by circuits or diagrams described herein whose related industrial properties, patents, or other rights belong to third parties. The application circuit examples explain typical applications of the products, and do not guarantee the success of any specific mass-production design.
- When the products described herein are regulated products subject to the Wassenaar Arrangement or other agreements, they may not be exported without authorization from the appropriate governmental authority.
- Use of the information described herein for other purposes and/or reproduction or copying without the express permission of Seiko Instruments Inc. is strictly prohibited.
- The products described herein cannot be used as part of any device or equipment affecting the human body, such as exercise equipment, medical equipment, security systems, gas equipment, or any apparatus installed in airplanes and other vehicles, without prior written permission of Seiko Instruments Inc.
- Although Seiko Instruments Inc. exerts the greatest possible effort to ensure high quality and reliability, the failure or malfunction of semiconductor products may occur. The user of these products should therefore give thorough consideration to safety design, including redundancy, fire-prevention measures, and malfunction prevention, to prevent any accidents, fires, or community damage that may ensue.