


ALPHANUMERIC INDEX — CROSS-REFERENCE (Continued)

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number	Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
MJE202	MJE210	MJE3055	3-904	MJE2801	MJE2801		3-902
MJE2020		TIP41	3-1083	MJE2801K		MJE2801 T	3-902
MJE2021		TIP41A	3-1083	MJE2801T	MJE2801T		3-902
MJE203		MJE3055	3-904	MJE29		TIP29	3-1071
MJE204		MJE3055	3-904	MJE2901	MJE2901		3-902
MJE205		MJE3055	3-904	MJE2901K		MJE2955T	3-904
MJE2050		MJE200	3-866	MJE2901T		MJE2955T	3-904
MJE2055		MJE3055	3-904	MJE2955	MJE2955		3-904
MJE205K		TIP41A	3-1083	MJE2955K		MJE2955T	3-904
MJE2090		TIP125	3-1098	MJE2955T	MJE2955T		3-904
MJE2091		TIP125	3-1098	MJE29A		TIP29A	3-1071
MJE2092		TIP126	3-1098	MJE29B		TIP29B	3-1071
MJE2093		TIP126	3-1098	MJE29C		TIP29C	3-1071
MJE210			3-866	MJE30		TIP30	3-1071
MJE2100		TIP120	3-1098	MJE3055	MJE3055		3-904
MJE2101		TIP120	3-1098	MJE3055K		MJE3055T	3-904
MJE2102		TIP121	3-1098	MJE3055T	MJE3055T		3-904
MJE2103		TIP121	3-1098	MJE30A		TIP30A	3-1071
MJE2150		MJE210	3-866	MJE30B		TIP30B	3-1071
MJE2160		TIP48	3-1087	MJE30C		TIP30C	3-1071
MJE220	MJE2360T	MJE181	3-862	MJE31		TIP31	3-1073
MJE221		MJE181	3-862	MJE31A		TIP31A	3-1073
MJE222		MJE181	3-862	MJE31B		TIP31B	3-1073
MJE223		MJE182	3-862	MJE31C		TIP31C	3-1073
MJE224		MJE182	3-862	MJE32		TIP32	3-1073
MJE225		MJE182	3-862	MJE32A		TIP32A	3-1073
MJE230		MJE171	3-862	MJE32B		TIP32B	3-1073
MJE231		MJE171	3-862	MJE32C		TIP32C	3-1073
MJE232		MJE171	3-862	MJE33		TIP41	3-1083
MJE233		MJE172	3-862	MJE3300		2N6037	3-135
MJE234		MJE172	3-862	MJE3301		2N6038	3-135
MJE235		MJE172	3-862	MJE3302		2N6039	3-135
MJE2360		MJE2360T	3-900	MJE3310		2N6034	3-135
MJE2360T			3-900	MJE3311		2N6035	3-135
MJE2361		MJE2361T	3-900	MJE3312		2N6036	3-135
MJE2361T			3-900	MJE3370		MJE3370	3-882
MJE2370		TIP32	3-1073	MJE3371		2N5193	3-89
MJE2371		TIP32A	3-1073	MJE33A		TIP41A	3-1083
MJE240	MJE240		3-870	MJE33B		TIP41B	3-1083
MJE241	MJE241		3-870	MJE33C		TIP41C	3-1083
MJE242	MJE243		3-870	MJE34		TIP42	3-1083
MJE243			3-870	MJE340	MJE340		3-876
MJE244			3-870	MJE340K		TIP48	3-1087
MJE2480	MJE244	TIP31	3-1073	MJE341	MJE341		3-878
MJE2481		TIP31A	3-1073	MJE341K		TIP47	3-1087
MJE2482							
MJE2483	MJE250	2N6121	3-154	MJE3439	MJE3439		3-908
MJE2490		2N6122	3-154	MJE344	MJE344		3-878
MJE2491		TIP32	3-1073	MJE3440	MJE3440		3-908
MJE2491		TIP32A	3-1073	MJE344K		TIP47	3-1087
MJE250			3-870	MJE345		MJE3439	3-908
MJE251	MJE251		3-870	MJE34A		TIP42A	3-1083
MJE252			3-870	MJE34B		TIP42B	3-1083
MJE2520		TIP31	3-1073	MJE34C		TIP42C	3-1083
MJE2521		TIP31A	3-1073	MJE350	MJE350		3-880
MJE2522		TIP31	3-1073	MJE3520		MJE520	3-886
MJE2523	MJE253	TIP31A	3-1073	MJE3521		2N5190	3-85
MJE253			3-870	MJE370	MJE370		3-882
MJE254		MJE253	3-870	MJE370K		TIP32	3-1073
MJE270			3-874	MJE371	MJE371		3-884
MJE271	MJE271		3-874	MJE371K		TIP32	3-1073

*Consult Motorola if a direct replacement is necessary.

TABLE 7 — PLASTIC TO-225 Type (Formerly TO-126 Type)

STYLE 1:
PIN 1. EMITTER
2. COLLECTOR
3. BASE



STYLE 3:
PIN 1. BASE
2. COLLECTOR
3. EMITTER

CASE 77-06

I _C Cont Amps Max	V _{CE(sus)} Volts Min	Device Type		h _{FE} Min/Max	@ I _C Amp	Resistive Switching			f _T MHz Min	P _D (Case) Watts @ 25°C
		NPN	PNP			t _s μs Max	t _f μs Max	@ I _C Amp		
0.3	250	MJE3440		40/160	0.02				15	15
	350	MJE3439		40/160	0.02				15	15
0.5	150	MJE341		25/200	0.05				15	20.8
	200	MJE344		30/300	0.05				15	20.8
	250	2N5655 BD157		30/250 30/240	0.1 0.05	3.5 typ	0.24 typ	0.1	10	20 20
	300	BD158 BD232 MJE340 2N5656	MJE350	30/240 20 min 30/240 30/250	0.05 0.15 0.05 0.1	3.5 typ	0.24 typ	0.1	10	20 20 20.8 20
	350	2N5657 BD159		30/250 30/240	0.1 0.05	3.5 typ	0.24 typ	0.1	10	20 20
1	40	2N4921	2N4918	20/100	0.5	0.6 typ	0.3 typ	0.5	3	30
	60	2N4922	2N4919	20/100	0.5	0.6 typ	0.3 typ	0.5	3	30
	80	2N4923	2N4920	20/100	0.5	0.6 typ	0.3 typ	0.5	3	30
1.5	45	BD165 BD135 BD135.6 BD135.10 BD135.16	BD166 BD136 BD136.6 BD136.10 BD136.16	15 min 40/250 40/100 63/160 100/250	0.5 0.15 0.15 0.15 0.15				6	20 12.5 12.5 12.5 12.5
	60	BD167 BD137 BD137.6 BD137.10 BD137.16	BD138 BD138.6 BD138.10 BD138.16	15 min 40/250 40/100 63/160 100/250	0.5 0.15 0.15 0.15 0.15				6	20 12.5 12.5 12.5 12.5
	80	BD169 BD139 BD139.6 BD139.10 BD139.16	BD140 BD140.6 BD140.10 BD140.16	15 min 40/250 40/100 63/160 100/250	0.5 0.15 0.15 0.15 0.15				6	20 12.5 12.5 12.5 12.5
	300	MJE13002•		5/25	1	4	0.7	1	5	40
	400	MJE13003•		5/25	1	4	0.7	1	5	40
2	45		BD234	25 min	1				3	25
	60	BD235	BD236	25 min	1				3	25
	80	BD237		25 min	1				3	25
	100	MJE270##	MJE271##	1.5k min	0.12				6	15
3	30	MJE520	MJE370	25 min	1					25
	40	MJE180	MJE170	50/250	0.1	0.6 typ	0.12 typ	0.1	50	12.5

• Case 77 (Style 3), # |h_{FE}| @ 1 MHz, ## Darlington

(continued)

MOTOROLA SEMICONDUCTOR TECHNICAL DATA

MJE3439 MJE3440

NPN SILICON HIGH-VOLTAGE POWER TRANSISTORS


... designed for use in line-operated equipment requiring high f_T .

- High DC Current Gain –
 $h_{FE} = 40-160$ @ $I_C = 20$ mA dc
- Current Gain - Bandwidth Product –
 $f_T = 15$ MHz (Min) @ $I_C = 10$ mA dc
- Low Output Capacitance –
 $C_{ob} = 10$ pF (Max) @ $f = 1.0$ MHz

0.3 AMPERE

POWER TRANSISTORS
NPN SILICON

250-350 VOLTS
15 WATTS





MAXIMUM RATINGS

Rating	Symbol	MJE3439	MJE3440	Unit
Collector-Emitter Voltage	V_{CEO}	350	250	Vdc
Collector-Base Voltage	V_{CB}	450	350	Vdc
Emitter-Base Voltage	V_{EB}	5.0		Vdc
Collector Current – Continuous	I_C	0.3		A dc
Base Current	I_B	150		mA dc
Total Power Dissipation @ $T_C = 25^\circ\text{C}$ Derate above 25°C	P_D	15 0.12		Watts W/ $^\circ\text{C}$
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +150		$^\circ\text{C}$

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	8.33	$^\circ\text{C/W}$

FIGURE 1 – POWER-TEMPERATURE DERATING CURVE

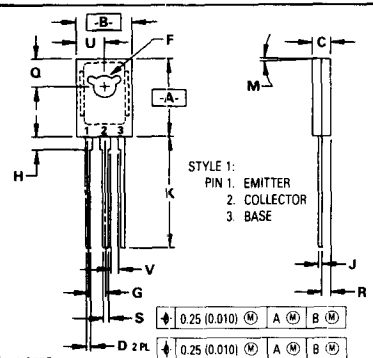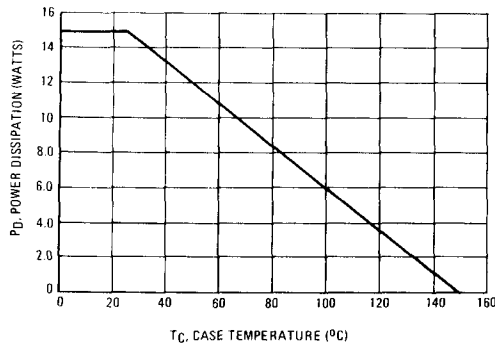

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	10.80	11.04	0.425	0.435
B	7.50	7.74	0.295	0.305
C	2.42	2.66	0.095	0.105
D	0.51	0.66	0.020	0.026
F	2.93	3.17	0.115	0.125
G	2.39 BSC		0.094 BSC	
H	1.27	2.41	0.050	0.095
J	0.39	0.63	0.015	0.025
K	14.61	16.63	0.575	0.655
M	3° TYP		3° TYP	
Q	3.76	4.01	0.148	0.158
R	1.15	1.39	0.045	0.055
S	0.64	0.88	0.025	0.035
U	3.69	3.93	0.145	0.155
V	1.02		0.040	


CASE 77-06
TO-225AA TYPE

MJE3439, MJE3440

ELECTRICAL CHARACTERISTICS ($T_C = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS				
Collector-Emitter Sustaining Voltage ($I_C = 5.0 \text{ mAdc}$, $I_B = 0$) $I_C = 50 \text{ mAdc}$, $I_B = 0$)	$V_{CE(sus)}$	350 250	— —	Vdc
Collector Cutoff Current ($V_{CE} = 300 \text{ Vdc}$, $I_B = 0$) ($V_{CE} = 200 \text{ Vdc}$, $I_B = 0$)	I_{CEO}	— —	20 50	μAdc
Collector Cutoff Current ($V_{CE} = 450 \text{ Vdc}$, $V_{EB(off)} = 1.5 \text{ Vdc}$) ($V_{CE} = 300 \text{ Vdc}$, $V_{EB(off)} = 1.5 \text{ Vdc}$)	I_{CEX}	— —	500 500	μAdc
Collector Cutoff Current ($V_{CB} = 350 \text{ Vdc}$, $I_E = 0$) ($V_{CB} = 250 \text{ Vdc}$, $I_E = 0$)	I_{CBO}	— —	20 20	μAdc
Emitter Cutoff Current ($V_{BE} = 5.0 \text{ Vdc}$, $I_C = 0$)	I_{EBO}	—	20	μAdc
ON CHARACTERISTICS				
DC Current Gain ($I_C = 2.0 \text{ mAdc}$, $V_{CE} = 10 \text{ Vdc}$) ($I_C = 20 \text{ mAdc}$, $V_{CE} = 10 \text{ Vdc}$)	h_{FE}	30 50	— 200	—
Collector-Emitter Saturation Voltage ($I_C = 50 \text{ mAdc}$, $I_B = 4.0 \text{ mAdc}$)	$V_{CE(sat)}$	—	0.5	Vdc
Base-Emitter Saturation Voltage ($I_C = 50 \text{ mAdc}$, $I_B = 4.0 \text{ mAdc}$)	$V_{BE(sat)}$	—	1.3	Vdc
Base-Emitter On Voltage ($I_C = 50 \text{ mAdc}$, $V_{CE} = 10 \text{ Vdc}$)	$V_{BE(on)}$	—	0.8	Vdc
DYNAMIC CHARACTERISTICS				
Current-Gain-Bandwidth Product ($I_C = 10 \text{ mAdc}$, $V_{CE} = 10 \text{ Vdc}$, $f = 5.0 \text{ MHz}$)	f_T	15	—	MHz
Output Capacitance ($V_{CB} = 10 \text{ Vdc}$, $I_E = 0$, $f = 1.0 \text{ MHz}$)	C_{ob}	—	10	pF
Small-Signal Current Gain ($I_C = 5.0 \text{ mAdc}$, $V_{CE} = 10 \text{ Vdc}$, $f = 1.0 \text{ kHz}$)	h_{fe}	25	—	—

FIGURE 2 — ACTIVE-REGION SAFE OPERATING AREA

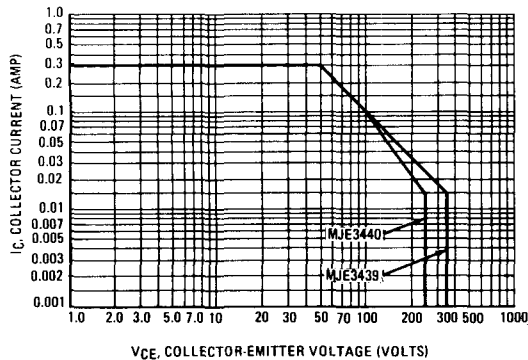

The Safe Operating Area Curves indicate I_C - V_{CE} limits below which the device will not enter secondary breakdown. Collector load lines for specific circuits must fall within the applicable Safe Area to avoid causing a catastrophic failure. To insure operation below the maximum T_J , power-temperature derating must be observed for both steady state and pulse power conditions.