


TOSHIBA Transistor Silicon PNP Epitaxial Type (PCT process) (Bias Resistor Built-in Transistor)

RN2972FS, RN2973FS


Switching, Inverter Circuit, Interface Circuit and
Driver Circuit Applications

- Two devices are incorporated into a fine pitch small mold (6-pin) package.
- Incorporating a bias resistor into a transistor reduces parts count. Reducing the parts count enables the manufacture of ever more compact equipment and lowers assembly cost.
- Complementary to RN1972FS, RN1973FS


Equivalent Circuit and Bias Resistor Values**Maximum Ratings (Ta = 25°C) (Q1, Q2 common)**

Characteristics	Symbol	Rating	Unit
Collector-base voltage	V _{CBO}	-20	V
Collector-emitter voltage	V _{CEO}	-20	V
Emitter-base voltage	V _{EBO}	-5	V
Collector current	I _C	-50	mA
Collector power dissipation	P _C (Note)	50	mW
Junction temperature	T _j	150	°C
Storage temperature range	T _{stg}	-55~150	°C





Note: Total rating




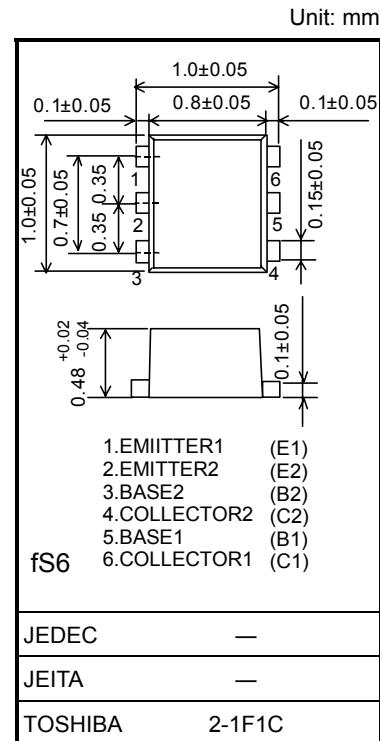




Weight: 0.001g (typ.)

**Equivalent Circuit
(top view)****Electrical Characteristics (Ta = 25°C) (Q1, Q2 common)**

Characteristics	Symbol	Test Condition	Min	Typ.	Max	Unit	
Collector cut-off current	I _{CB0}	V _{CB} = -20 V, I _E = 0	—	—	-100	nA	
Emitter cut-off current	I _{EBO}	V _{EB} = -5 V, I _C = 0	—	—	-100	nA	
DC current gain	h _{FE}	V _{CE} = -5 V, I _C = -1 mA	300	—	—		
Collector-emitter saturation voltage	V _{CE} (sat)	I _C = -5 mA, I _B = -0.25 mA	—	—	-0.15	V	
Collector output capacitance	C _{ob}	V _{CB} = -10 V, I _E = 0, f = 1 MHz	—	1.2	—	pF	
Input resistor	RN2972FS	R1	—	17.6	22	26.4	kΩ
	RN2973FS			37.6	47	56.4	

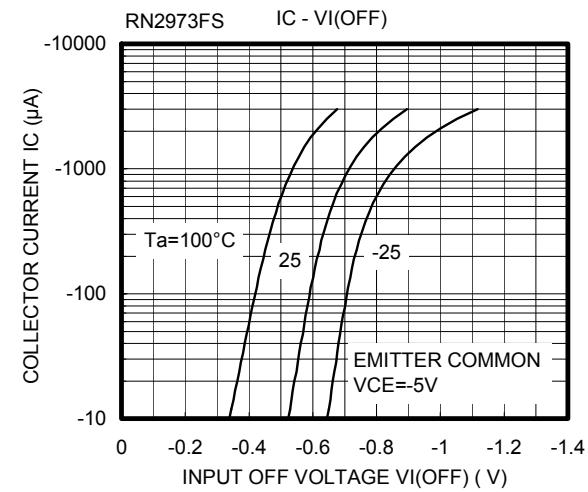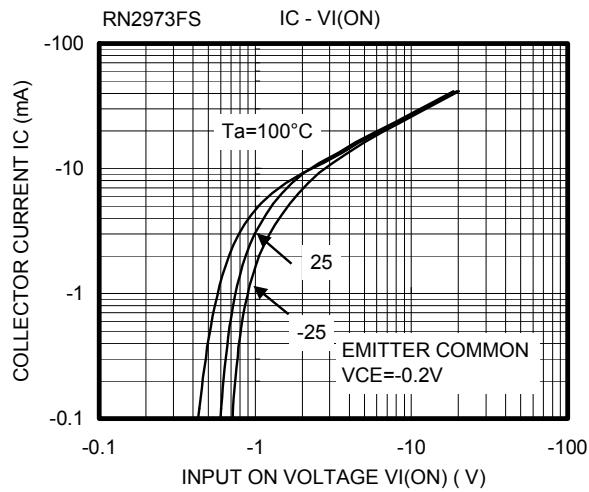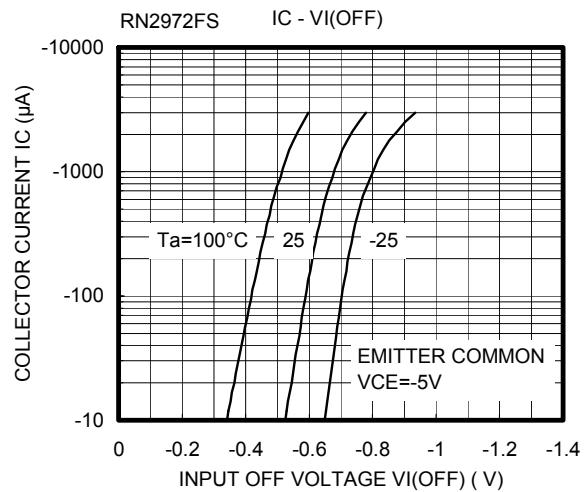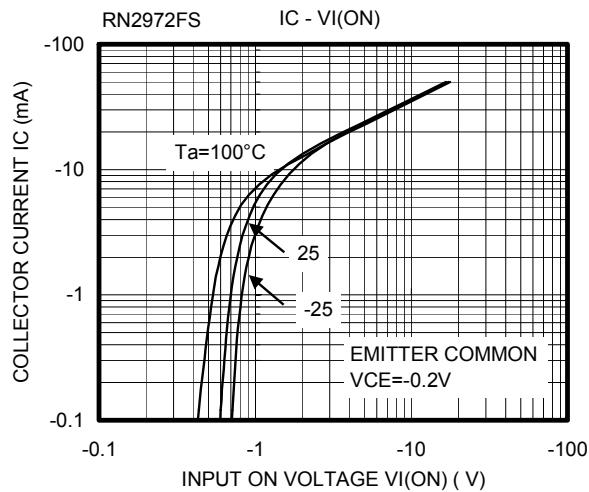

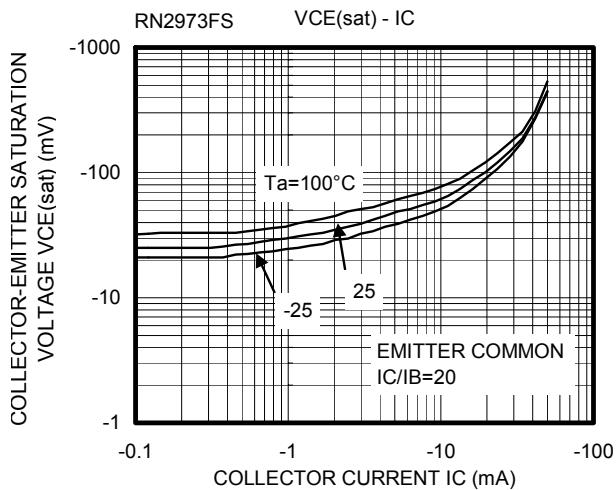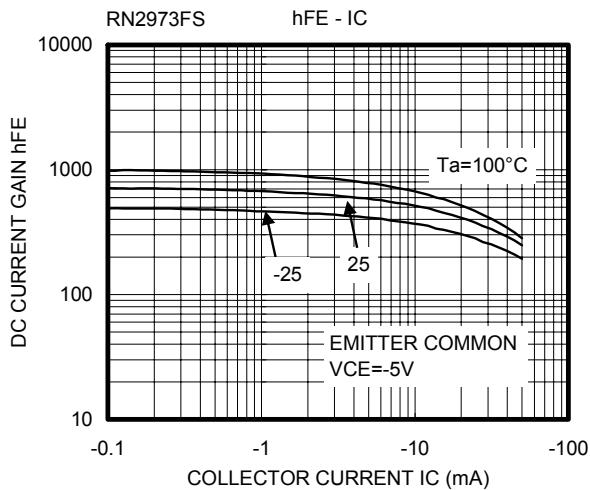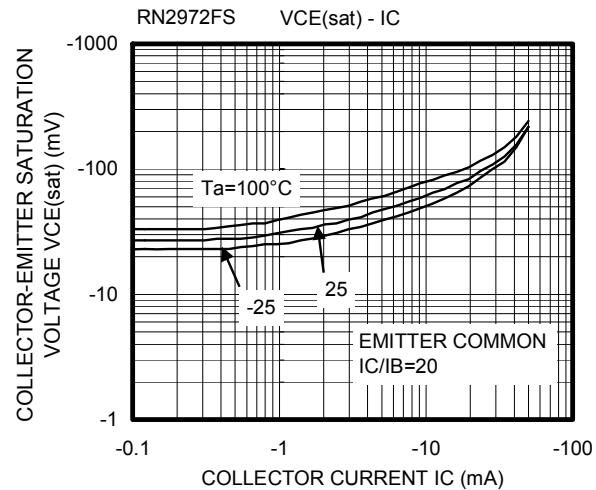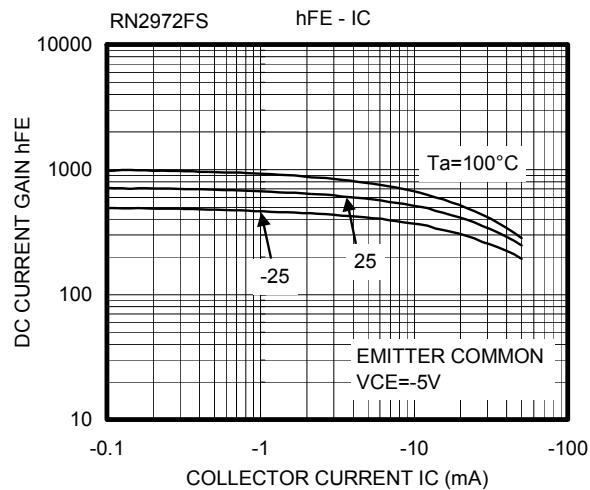

Type Name	Marking
RN2972FS	 <p>Diagram showing the marking for RN2972FS. The marking consists of a rectangle with the letters 'KH' in the center. Above the rectangle are three small squares labeled 6, 5, and 4 from left to right. Below the rectangle are three small squares labeled 1, 2, and 3 from left to right. An arrow points from the text 'Type name' to the 'KH' marking.</p>
RN2973FS	 <p>Diagram showing the marking for RN2973FS. The marking consists of a rectangle with the letters 'KJ' in the center. Above the rectangle are three small squares labeled 6, 5, and 4 from left to right. Below the rectangle are three small squares labeled 1, 2, and 3 from left to right. An arrow points from the text 'Type name' to the 'KJ' marking.</p>

HANDLING PRECAUTION

When handling individual devices (which are not yet mounted on a circuit board), be sure that the environment is protected against electrostatic discharge. Operators should wear anti-static clothing, and containers and other objects that come into direct contact with devices should be made of anti-static materials.

RESTRICTIONS ON PRODUCT USE

030619EAA

- The information contained herein is subject to change without notice.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of TOSHIBA or others.
- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- TOSHIBA products should not be embedded to the downstream products which are prohibited to be produced and sold, under any law and regulations.